

Banner appropriate to article type will appear here in typeset article

Scaling laws for planetary sediment transport from DEM-RANS numerical simulations

Thomas Pätz^{1,2†} and Orencio Durán³

¹Donghai Laboratory, 316021 Zhoushan, PR China

²Institute of Port, Coastal and Offshore Engineering, Ocean College, Zhejiang University, 316021 Zhoushan, PR China

³Department of Ocean Engineering, Texas A&M University, College Station, Texas 77843-3136, USA

(Received xx; revised xx; accepted xx)

We use an established discrete element method (DEM) Reynolds-averaged Navier–Stokes (RANS)-based numerical model to simulate non-suspended sediment transport across conditions encompassing almost seven orders of magnitude in the particle–fluid density ratio s , ranging from subaqueous transport ($s = 2.65$) to aeolian transport in the highly rarefied atmosphere of Pluto ($s = 10^7$), whereas previous DEM-based sediment transport studies did not exceed terrestrial aeolian conditions ($s \approx 2000$). Guided by these simulations and by experiments, we semi-empirically derive simple scaling laws for the cessation threshold and rate of equilibrium aeolian transport, both exhibiting a rather unusual $s^{1/3}$ -dependence. They constitute a simple means to make predictions of aeolian processes across a large range of planetary conditions. The derivation consists of a first-principle-based proof of the statement that, under relatively mild assumptions, the cessation threshold physics is controlled by only one dimensionless control parameter, rather than two expected from dimensional analysis. Crucially, unlike existing models, this proof does not resort to coarse-graining the particle phase of the aeolian transport layer above the bed surface. From the pool of existing models, only that by Pätz et al. (*J. Geophys. Res. Earth. Surf.* 126, e2020JF005859, 2021) is somewhat consistent with the combined numerical and experimental data. It captures the scaling of the cessation threshold and the $s^{1/3}$ -dependence of the transport rate, but fails to capture the latter’s superimposed grain size dependence. This hints at a lack of understanding of the transport rate physics and calls for future studies on this issue.

Key words:

1. Introduction

Aeolian (wind-driven) transport of non-suspended grains, including sand, ice and snow, is a ubiquitous phenomenon that leads to a rich variety of multiscale bedforms on Earth and other planetary bodies (Bourke *et al.* 2010; Kok *et al.* 2012; Diniega *et al.* 2017). As suggested by the presence of wind streaks and dunes, it may even occur in the very rarefied atmospheres

† Email address for correspondence: 0012136@zju.edu.cn

of Neptune's moon Triton (Sagan & Chyba 1990), Pluto (Telfer *et al.* 2018) and the comet 67P/Churyumov-Gerasimenko (Thomas *et al.* 2015; Jia *et al.* 2017).

Driven by fluid drag and gravity, most transported sand-sized and larger grains regularly interact with the bed surface as flow turbulence is too weak to suspend them. For denser fluids, such as water and most other liquids, this near-surface grain motion occurs in the form of rolling, sliding and small hops (*bedload*), whereas for lighter fluids, like most gases, grains move in more energetic hops (*saltation*). At equilibrium, the deposition of transported grains on the bed is exactly balanced by the entrainment of bed grains into the transport layer. The rate at which equilibrium aeolian transport takes place and the threshold wind speed below which it ceases constitute the two arguably most important statistical transport properties in the context of bedform formation and evolution in natural environments (Kok 2010a; Durán Vinent *et al.* 2019). In particular, in natural environments, topography inhomogeneities, strong turbulent fluctuations and a variety of wind-unrelated mechanisms to generate airborne grains, along with very long natural sediment fetches, can plausibly initiate transport and lead to equilibrium transport above the cessation threshold (Pächtz *et al.* 2020, section 3.3.3.4). This may even be true in environments where the aeolian transport initiation threshold for an idealised flat sediment bed is much larger than the cessation threshold, like potentially on Mars (Kok 2010a), Pluto (Telfer *et al.* 2018) and Saturn's moon Titan (Comola *et al.* 2022), as well as in Antarctica. In fact, although Antarctica's surface is covered by very cohesive (Pomeroy & Gray 1990) old snow and ice (cohesion increases the initiation threshold probably much more than the cessation threshold (Comola *et al.* 2019b, 2022; Pächtz *et al.* 2021; Besnard *et al.* 2022)), aeolian snow and ice transport occurs there even at relatively low wind speeds that are likely much below the initiation threshold (Leonard *et al.* 2011).

Since the highly random, collective motion of bed and transported grains eludes a rigorous analytical description, existing physical models of equilibrium aeolian transport have relied on drastically coarse-graining the particle phase of the aeolian transport layer above the bed surface (Ungar & Haff 1987; Andreotti 2004; Claudin & Andreotti 2006; Kok & Renno 2009; Kok 2010b; Durán *et al.* 2011; Berzi *et al.* 2016, 2017; Lämmel & Kroy 2017; Pächtz & Durán 2018a, 2020; Andreotti *et al.* 2021; Pächtz *et al.* 2021; Comola *et al.* 2022; Gunn & Jerolmack 2022). The most common modelling approach is to represent the grain motion by a single or multiple saltation trajectories. Depending on the number and kind of considered trajectories and the assumed outcome of grain–bed collisions, such models can yield fundamentally different scaling laws for the cessation threshold and/or equilibrium transport rate, with predictions varying by about an order of magnitude when applied to Martian-pressure atmospheric conditions (Pächtz *et al.* 2020; Gunn & Jerolmack 2022).

One reason for the strong variability of both existing cessation threshold and equilibrium transport rate predictions is a lack of consensus on the physical picture behind the cessation threshold. On the one hand, it has been modelled as an 'impact entrainment threshold' (Pächtz *et al.* 2020), the smallest wind velocity at which random captures of saltating grains by the bed can be compensated by the splash of bed grains due to grain–bed impacts (Andreotti 2004; Claudin & Andreotti 2006; Kok & Renno 2009; Kok 2010b; Andreotti *et al.* 2021; Comola *et al.* 2022). On the other hand, it has been modelled as a 'rebound threshold' (Pächtz *et al.* 2020), the smallest wind velocity required to replenish the energy saltating grains lose when rebounding with the bed, independent of grain capture and splash (Berzi *et al.* 2017; Pächtz *et al.* 2021; Gunn & Jerolmack 2022). We previously proposed and supported the hypothesis that both these dynamic thresholds play a role in saltation dynamics: the former as the dynamic threshold of continuous and the latter as the dynamic threshold of intermittent saltation and therefore as the actual cessation threshold (Pächtz & Durán 2018a; Pächtz *et al.* 2020, 2021). If true, this could have the unintended consequence that measurements of one are mistaken for the other dynamic threshold. For example, Pächtz *et al.* (2021) proposed that

the recent dynamic-threshold measurements in a low-pressure wind tunnel by Andreotti *et al.* (2021) may constitute data of the continuous-transport threshold, and not of the cessation threshold as the experimenters claimed. This would be problematic as these data have been used to develop new cessation threshold models and compare their predictive capabilities with those of older ones (Andreotti *et al.* 2021; Gunn & Jerolmack 2022).

Here, we show that, under relatively mild assumptions, one can obtain insights into the physics of the cessation threshold without resorting to coarse-graining the particle phase of the aeolian transport layer above the bed surface. In detail, if the bed surface can be considered as a flat boundary, with scale-free boundary conditions describing the outcome of grain–bed collisions, and the driving wind as a smooth inner turbulent boundary layer flow that interacts with grains via Stokes drag, then the threshold shear velocity, appropriately non-dimensionalised, is a function of only one dimensionless control parameter, rather than two expected from dimensional analysis (section 3). We confirm this prediction, and therefore its underlying assumptions, with numerical simulations using an existing discrete element method (DEM)-based numerical model (Durán *et al.* 2012, introduced in section 2) of equilibrium transport of cohesionless non-suspended sediments. The simulated transport conditions encompass almost seven orders of magnitude in the particle–fluid density ratio s , ranging from subaqueous transport ($s = 2.65$) to aeolian transport in the highly rarefied atmosphere of Pluto ($s = 10^7$), whereas previous DEM-based sediment transport studies did not exceed terrestrial aeolian conditions ($s \approx 2000$). We also use the simulation data to semi-empirically derive simple scaling laws for the cessation threshold and equilibrium transport rate, and to test existing models (section 3). The derived scaling laws are consistent with experimental data, except the dynamic-threshold measurements by Andreotti *et al.* (2021), in line with the aforementioned hypothesis that the latter constitute data of the continuous-transport threshold rather than the cessation threshold (discussed in more detail in section 4).

2. Numerical model

We use the numerical model of Durán *et al.* (2012), which couples a continuum Reynolds-averaged description of hydrodynamics with a DEM for the grain motion under gravity, buoyancy and fluid drag. The drag force is given by $\mathbf{F}_d = \frac{1}{8}\rho_f \pi d^2 C_d |\mathbf{u}_r| \mathbf{u}_r$, where ρ_f is the fluid density, d the median grain diameter, \mathbf{u}_r the fluid–grain velocity difference and

$$C_d = \left(\sqrt{\frac{Re_c}{|\mathbf{u}_r|d/\nu}} + \sqrt{C_d^\infty} \right)^2 \quad (2.1)$$

the drag coefficient, with ν the kinematic viscosity. Most simulations are carried out using the parameter values $Re_c = 24$ and $C_d^\infty = 0.5$, close to those for spherical grains (Camenen 2007), while a few simulations are carried out using different values (specified when done so) to test the effect of drag modifications, which may for example occur in very-low-pressure atmospheres due to drag rarefaction (Crowe *et al.* 2012). Spherical grains (10^4 – 10^5) with mild polydispersity are confined in a quasi-two-dimensional domain of length $\approx 10^3 d$, with periodic boundary conditions in the flow direction, and interact via normal repulsion (restitution coefficient $e = 0.9$) and tangential friction (contact friction coefficient $\mu_c = 0.5$). The bottom-most grain layer is glued on a bottom wall, while the top of the simulation domain is reflective but so high that it is never reached by transported grains. The Reynolds-averaged Navier–Stokes (RANS) equations are combined with a semi-empirical mixing length closure that accounts for the viscous sublayer of the turbulent boundary layer and ensures a smooth

hydrodynamic transition from high to low particle concentration at the bed surface:

$$\frac{dl_m}{dz} = \kappa \left[1 - \exp \left(-\sqrt{\frac{u_x l_m}{7\nu}} \right) \right], \quad (2.2)$$

where $l_m(z)$ is the height-dependent mixing length, $\kappa = 0.4$ the von Kármán constant and $u_x(z)$ the mean flow velocity field. This parametrisation quantitatively reproduces measurements of $u_x(z)$ in the absence of transport. Simulations with this numerical model are insensitive to e and, therefore, insensitive to viscous damping (Pächt & Durán 2018*a,b*). The simulations reproduce measurements of the rate and cessation threshold of terrestrial aeolian transport, and viscous and turbulent subaqueous transport (figures 1 and 3 of Pähtz & Durán (2018*a*) and figure 4 of Pähtz & Durán (2020)), height profiles of relevant equilibrium transport properties (figure 2 of Pähtz & Durán (2018*a*) and figure 6 of Durán *et al.* (2014*a*)) and aeolian ripple formation (Durán *et al.* 2014*b*).

2.1. Average of simulated quantities

We define two types of averages of a particle property A_p . Based on the spatial homogeneity of the simulations, the mass-weighted average of A_p over all particles within an infinitesimal vertical layer ($z, z + dz$) and all time steps (after reaching the steady state) is (Pächt & Durán 2018*b*)

$$\langle A \rangle(z) = \frac{\sum_{z_p \in (z, z+dz)} m_p A_p}{\sum_{z_p \in (z, z+dz)} m_p}, \quad (2.3)$$

where m_p and z_p are the particle mass and elevation, respectively. We also define the average of a vertical profile $\langle A \rangle(z)$ over the transport layer as (Pächt & Durán 2018*a*)

$$\bar{A} = \frac{\int_0^\infty \rho \langle A \rangle dz}{\int_0^\infty \rho dz}, \quad (2.4)$$

where ρ is the local particle concentration. The bed surface elevation $z = 0$ is defined as the elevation at which $p_g d\langle v_x \rangle / dz$ is maximal (Pächt & Durán 2018*b*), where $\langle v_x \rangle$ is the average grain velocity in the streamwise direction and $p_g(z) = -\int_z^\infty \rho \langle a_z \rangle dz'$ the normal-bed granular pressure, with \mathbf{a} the acceleration of grains by non-contact forces.

2.2. Calculation of transport rate and cessation threshold

We calculate the sediment transport rate Q as (Pächt & Durán 2018*b*)

$$Q = \int_{-\infty}^\infty \rho \langle v_x \rangle dz. \quad (2.5)$$

When Q vanishes, the grain-borne shear stress at the bed surface $\tau_g(0)$ also vanishes, with $\tau_g(z) = \int_z^\infty \rho \langle a_x \rangle dz'$ the grain-borne shear stress profile. We therefore extrapolate the cessation threshold value τ_t of the fluid shear stress τ at which Q vanishes using the approximate relation (Pächt & Durán 2018*b*)

$$\tau_g(0) = \tau - \tau_t, \quad (2.6)$$

where we treat τ_t as a fit parameter.

2.3. Dimensionless control parameters and rescaling of physical quantities

The average properties of equilibrium sediment transport are mainly determined by a few grain and environmental parameters: the grain and fluid density (ρ_p and ρ_f , respectively),

s	Ga
2.65	$[0.1^\dagger, 0.5^\dagger, 2^\dagger, 5^\dagger, 10^\dagger, 20^\dagger, 50^\dagger, 100^\dagger]$
1×10^1	$[20, 50]$
2×10^1	$[20, 50, 100]$
5×10^1	$[2, 5, 10, 20, 50, 100]$
1×10^2	$[0.1^\dagger, 0.5^\dagger, 2^\dagger, 5^\dagger, 10^\dagger, 20^\dagger, 50^\dagger, 100^\dagger]$
2×10^2	20
5×10^2	$[2, 5, 10, 20, 50, 100]$
1×10^3	10
2×10^3	$[0.1^\dagger, 0.5^\dagger, 1, 1.5, 1.7, 1.8, 2^\dagger, 5^\dagger, 10^\dagger, 20^\dagger, 50^\dagger, 100^\dagger]$
5×10^3	$[2, 5]$
1×10^4	$[2, 5]$
2×10^4	$[1, 2, 5]$
5×10^4	$[0.1, 0.5, 2, 3, 5, 10, 20, 50, 100]$
2.5×10^5	1 (simulations with larger Ga are unstable*)
1×10^7	0.2 (simulations with larger Ga are unstable*)

Table 1: Simulated particle–fluid-density ratios s and Galileo numbers Ga . *The condition $s = 2.5 \times 10^5$, $Ga = 1$ corresponds to a typical transport environment on Mars ($d \approx 100 \mu\text{m}$) and $s = 10^7$, $Ga = 0.2$ to a hypothetical transport environment on Pluto ($d \approx 200 \mu\text{m}$). Simulations with significantly larger respective values of Ga are unstable for these large- s conditions. We have been unable to fix this issue and do not know whether it has numerical or physical causes. The asterisk symbol, †, indicates conditions simulated in our previous studies (Pächt & Durán 2018a, 2020).

median grain diameter (d), kinematic fluid viscosity (ν), fluid shear velocity ($u_* \equiv \sqrt{\tau/\rho_f}$) and gravitational constant (g) or its buoyancy-reduced value $\tilde{g} \equiv (1 - \rho_f/\rho_p)g$ (for air, $\tilde{g} \approx g$). Physical quantities with a superscript ‘+’ are rescaled using units of ρ_p , \tilde{g} and ν . For example,

$$d^+ = \tilde{g}d/(\tilde{g}\nu)^{2/3}, \quad (2.7)$$

$$u_*^+ = u_*/(\tilde{g}\nu)^{1/3}, \quad (2.8)$$

$$Q^+ = Q/(\rho_p\nu). \quad (2.9)$$

As we show, this rescaling is well suited to describe the relevant physical processes underlying the cessation threshold scaling. A given environmental condition is fully determined by the values of three dimensionless numbers (Pächt & Durán 2020):

$$s \equiv \rho_p/\rho_f = 1/\rho_f^+, \quad (2.10)$$

$$Ga \equiv \sqrt{s\tilde{g}d^3}/\nu = \sqrt{s}d^{+3/2}, \quad (2.11)$$

$$\Theta \equiv u_*^2/(s\tilde{g}d) = u_*^{+2}/(sd^+). \quad (2.12)$$

Numerical simulations are carried out for various combinations of the particle–fluid density ratio s and Galileo number Ga , exceeding previously simulated conditions by almost four orders of magnitude in s (table 1), and for Shields numbers Θ ranging from weak conditions near its cessation threshold value Θ_t to intense conditions far above Θ_t .

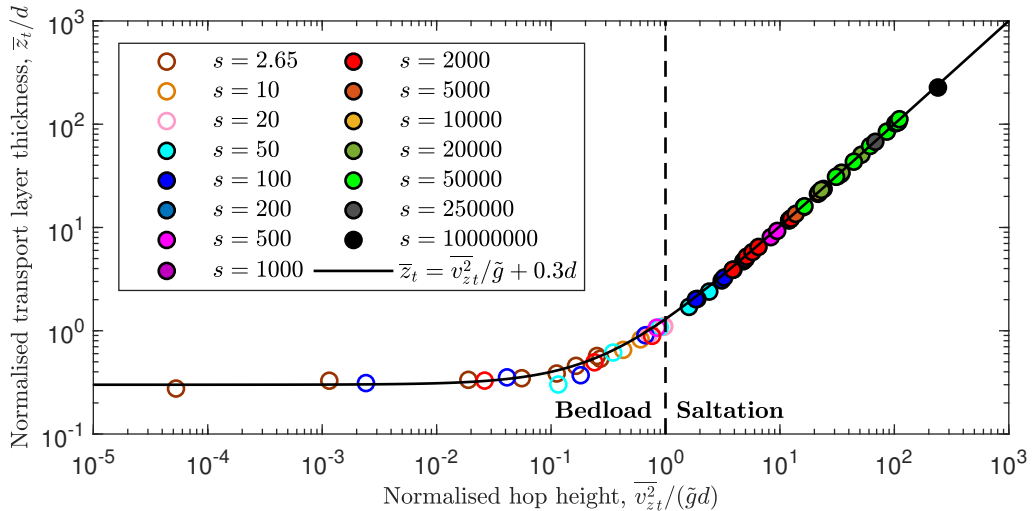


Figure 1: Transport layer thickness \bar{z}_t versus hop height $\overline{v_{z_t}^2}/\tilde{g}$, both relative to the grain size d . Symbols correspond to numerical simulations near the cessation threshold for various combinations of the density ratio s and Galileo number Ga (see table 1), with open and filled symbols indicating bedload and saltation conditions, respectively.

2.4. Sediment transport regimes for near-threshold conditions

Since the mixing length-based Reynolds-averaged description of hydrodynamics used in the numerical model neglects turbulent fluctuations around the mean turbulent flow, simulated sediment transport is always non-suspended. Near the cessation threshold (subscript t), non-suspended transport occurs as either bedload or saltation (see the introduction), which we distinguish through the criterion (Pächt & Durán 2018a)

$$\text{Transport regime} = \begin{cases} \text{bedload} & \text{if } \frac{\overline{v_{z_t}^2}}{\tilde{g}} < d \\ \text{saltation} & \text{if } \frac{\overline{v_{z_t}^2}}{\tilde{g}} \geq d \end{cases}. \quad (2.13)$$

The quantity $\overline{v_{z_t}^2}/\tilde{g}$ describes the contribution of hopping grains to the characteristic transport height of all transported grains \bar{z} , where the latter also include those that roll and slide. In particular, for saltation near the cessation threshold, $\overline{v_{z_t}^2}/\tilde{g} \approx \bar{z}_t$, whereas $\overline{v_{z_t}^2}/\tilde{g}$ is significantly smaller than \bar{z}_t for bedload transport (figure 1). Henceforth, $\overline{v_{z_t}^2}/\tilde{g}$ and \bar{z} are termed *hop height* and *transport layer thickness*, respectively, for simplicity.

3. Results

This section is organised as follows. First, it shows the data and scaling laws of the cessation threshold and equilibrium transport rate obtained from the simulations for the saltation regime (section 3.1). Second, it presents semi-empirical physical justifications of these laws, including a first-principle-based proof of the statement that, under relatively mild assumptions, the rescaled cessation threshold u_{*t}^+ is a function of only one dimensionless control parameter (section 3.2). Third, it tests existing models from the literature against the numerical data (section 3.3). Fourth, it provides semi-empirical generalisations of the scaling laws that bridge between the saltation and bedload regimes (section 3.4) and shows how they

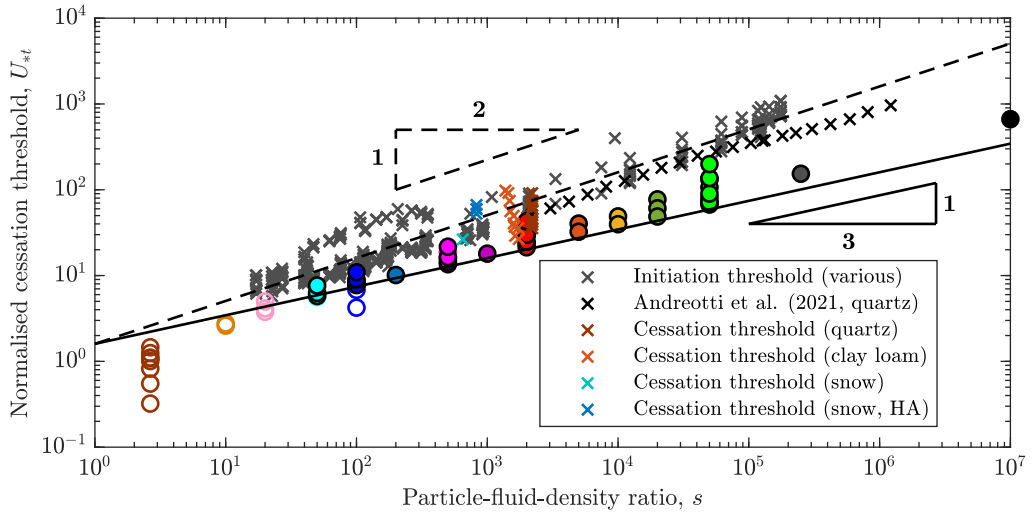


Figure 2: Cessation threshold shear velocity normalised using air-pressure- and grain-size-independent natural units $U_{*t} \equiv u_{*t}/(\mu g/\rho_p)^{1/3}$ versus density ratio s . Symbols that appear in the legend correspond to initiation (Greeley *et al.* 1976, 1980; Iversen & White 1982; Greeley *et al.* 1984; Burr *et al.* 2015, 2020; Swann *et al.* 2020) and cessation threshold measurements for aeolian transport of quartz (Bagnold 1937; Martin & Kok 2018; Zhu *et al.* 2019), clay loam (Chepil 1945) and snow at sea level (Sugiura *et al.* 1998) and high altitude (Clifton *et al.* 2006, HA). The dynamic-threshold measurements by Andreotti *et al.* (2021) may constitute data of the continuous-transport threshold rather than the cessation threshold (discussed in section 4). Symbols that do not appear in the legend correspond to numerical simulations for various combinations of s and the Galileo number Ga (see table 1 and figure 1), with open and filled symbols indicating bedload and saltation conditions, respectively (see figure 1 for the definition). The solid line corresponds to $U_{*t} \propto s^{1/3}$ and represents the lower bound for cessation and initiation thresholds of saltation.

are affected by modifications of the drag law (section 3.5), which may occur, for example, in highly rarefied atmospheres due to drag rarefaction.

3.1. Simulation data and scaling laws for saltation

3.1.1. Cessation threshold

Of the physical parameters affecting the shear velocity at the cessation threshold u_{*t} , the surface air pressure P varies most strongly with the planetary environment. Furthermore, for a given planetary environment, the grain size d is the most strongly varying relevant physical parameter. To isolate the effect of P on u_{*t} , we normalise u_{*t} in terms of relevant parameters that do neither depend on P nor on d , $U_{*t} \equiv u_{*t}/(\mu g/\rho_p)^{1/3}$ (using that the dynamic viscosity $\mu = \rho_f \nu$ does not depend on P), and compare it with the density ratio s , which incorporates the effect of P isolated from that of d .

For saltation, the simulations reveal a lower bound for U_{*t} scaling as $s^{1/3}$ (figure 2, filled circles). This is distinct from the classical scaling of the saltation initiation threshold with $s^{1/2}$ (Greeley *et al.* 1976, 1980; Iversen & White 1982; Greeley *et al.* 1984; Burr *et al.* 2015, 2020; Swann *et al.* 2020) (figure 2, gray crosses), which follows from a balance between flow-induced and resisting forces or torques acting in bed surface grains (Pächt *et al.* 2020). Roughly the same $s^{1/2}$ -scaling was also found for the dynamic-threshold measurements by Andreotti *et al.* (2021) carried out in a low-pressure wind tunnel (figure 2, black crosses). As

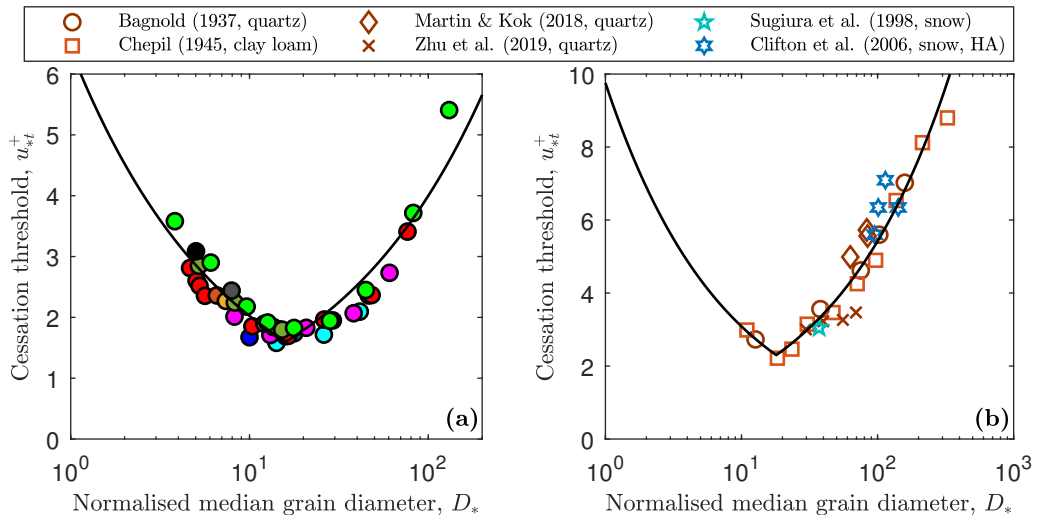


Figure 3: Rescaled cessation threshold shear velocity u_{*t}^+ versus normalised median grain diameter $D_* \equiv \sqrt{sd^+}$. Symbols in (a) correspond to numerical simulations of saltation (see figure 1 for the definition) for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1). Symbols in (b) correspond to experimental cessation threshold data (see legend) for terrestrial aeolian saltation of quartz (Bagnold 1937; Martin & Kok 2018; Zhu *et al.* 2019), clay loam (Chepil 1945) and snow at sea level (Sugiura *et al.* 1998) and high altitude (Clifton *et al.* 2006, HA). The solid lines correspond to (3.1), with $(D_*^{\min}, u_{*t}^{+\min}) = (16, 1.6)$ in (a) and $(D_*^{\min}, u_{*t}^{+\min}) = (18, 2.3)$ in (b).

mentioned in the introduction and discussed in more detail in section 4, these measurements may constitute data of the continuous-transport threshold rather than the cessation threshold.

In addition to its $s^{1/3}$ -scaling, U_{*t} varies with the normalised median grain diameter $D_* \equiv \sqrt{sd^+} = \sqrt{sd\tilde{g}/(\tilde{g}\nu)^{2/3}}$, described by the following relationship between the rescaled cessation threshold u_{*t}^+ (note that $u_{*t}^+ = U_{*t}/(s-1)^{1/3}$) and D_* :

$$u_{*t}^+ = u_{*t}^{+\min} \max \left[\left(\frac{D_*}{D_*^{\min}} \right)^{-1/2}, \left(\frac{D_*}{D_*^{\min}} \right)^{1/2} \right]. \quad (3.1)$$

It contains the parameters D_*^{\min} and $u_{*t}^{+\min}$, which denote the location and magnitude, respectively, of the minimum of the function $u_{*t}^+(D_*)$, corresponding to the lower bound of U_{*t} for saltation in figure 2. Equation (3.1) is consistent with the simulations (figure 3(a)) and experiments (figure 3(b)) for the saltation regime, though with slightly different parameter values: $(D_*^{\min}, u_{*t}^{+\min}) = (16, 1.6)$ versus $(D_*^{\min}, u_{*t}^{+\min}) = (18, 2.3)$, respectively. The associated relative change of u_{*t}^+ by $2.3/1.6 \approx 1.4$ is well within the typical systematic uncertainty of cessation threshold measurements. For example, Creyssels *et al.* (2009) reported $\Theta_t = 0.009$ for their terrestrial wind tunnel experiments ($d = 242 \mu\text{m}$), obtained from extrapolating transport rate measurements to vanishing transport using the transport rate model of Ungar & Haff (1987), whereas Pätz & Durán (2020) reported $\Theta_t = 0.0035$ for the very same data using a different transport rate model for the extrapolation, resulting in a relative change of $\sqrt{0.009/0.0035} \approx 1.6$.

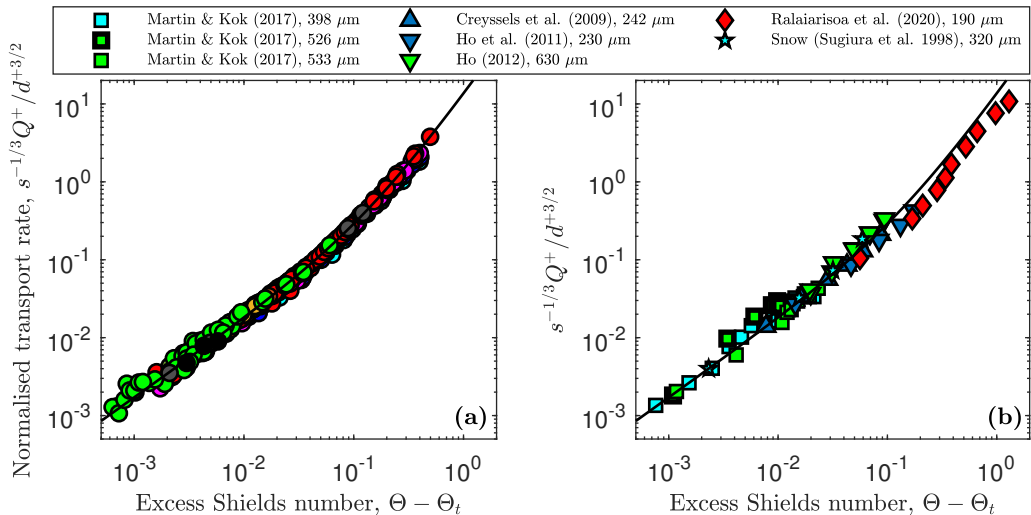


Figure 4: Normalised sediment transport rate $s^{-1/3}Q^+/d^{+3/2}$ versus Shields number in excess of the cessation threshold $\Theta - \Theta_t$. Symbols in (a) correspond to numerical simulations of saltation (see figure 1 for the definition) for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1) with $Ga\sqrt{s} > 81$, and Shields number Θ . Symbols in (b) correspond to measurements for different grain sizes (indicated in the legend) for terrestrial aeolian saltation of minerals (Creysseis *et al.* 2009; Ho *et al.* 2011; Ho 2012; Martin & Kok 2017; Ralaiairisoa *et al.* 2020) and snow (Sugiura *et al.* 1998). The values of Θ_t in (b) for a given experimental data set are obtained from extrapolating (3.2) to vanishing transport. Note that Ralaiairisoa *et al.* (2020) reported that transport may not have been completely in equilibrium in their experiments. The solid lines correspond to (3.2).

3.1.2. Equilibrium transport rate

The simulations of saltation and experiments reasonably collapse on the master curve (figure 4)

$$Q^+/d^{+3/2} = 1.7s^{1/3}(\Theta - \Theta_t) + 12s^{1/3}(\Theta - \Theta_t)^2 \quad (3.2)$$

if $Ga\sqrt{s} > 81$. The vast majority of planetary transport occurring in nature and most of the simulated saltation conditions satisfy this criterion. Note that $Ga\sqrt{s}$ can be interpreted as a Stokes-like number (Berzi *et al.* 2016), encoding the importance of grain inertia relative to viscous drag forcing, and controls the transition to viscous bedload (Pächtz *et al.* 2021).

3.2. Physical justifications of saltation scaling laws

3.2.1. First-principle-based proof that u_{*t}^+ is a function of only D_*

In general, the shear velocity at the cessation threshold u_{*t}^+ is a function of the five control parameters ρ_p , ρ_f , ν , \tilde{g} and d (Claudin & Andreotti 2006). These parameters involve three units (mass, length and time). According to the Π theorem (Barenblatt 1996), the physical system, and therefore any dimensionless system property such as u_{*t}^+ , is then controlled by two dimensionless numbers, for example the density ratio s and the normalised median grain diameter D_* :

$$u_{*t}^+ = f(s, D_*). \quad (3.3)$$

To determine the function f in (3.3), existing cessation threshold models have made various idealisations of the fluid-particle system (Claudin & Andreotti 2006; Kok 2010b; Berzi *et al.* 2016, 2017; Pähtz & Durán 2018a; Andreotti *et al.* 2021; Pähtz *et al.* 2021; Gunn

& Jerolmack 2022). In particular, they all drastically coarse-grain the particle phase of the aeolian transport layer above the bed surface, either by representing the entire grain motion by identical periodic saltation trajectories (Claudin & Andreotti 2006; Kok 2010*b*; Berzi *et al.* 2016, 2017; Pähtz & Durán 2018*a*; Andreotti *et al.* 2021; Pähtz *et al.* 2021; Gunn & Jerolmack 2022) or by an average motion behaviour (Kok 2010*b*; Pähtz & Durán 2018*a*) that is mathematically equivalent to an identical periodic trajectory representation (Pähtz *et al.* 2020).

Here, in contrast to previous models, we do not resort to any such coarse-graining. Instead, we idealise the system in the following comparably mild manner.

(i) We consider only buoyancy and Stokes drag as fluid–grain interactions, neglecting form drag contributions. This would be justified if relatively fast saltating grains dominated the near-threshold grain dynamics, since comparably faster grains exhibit comparably lower fluid-particle velocity differences and, thus, comparably less form drag relative to Stokes drag.

(ii) Due to the typically relatively small shear Reynolds numbers associated with planetary transport near the cessation threshold, $Ga\sqrt{\Theta}_t \lesssim 10$, we consider a smooth inner turbulent boundary layer mean flow velocity profile $u_x(z)$, neglecting hydrodynamically rough contributions (and turbulent fluctuations, which are also neglected in the numerical simulations).

(iii) Since vanishingly few grains are in motion sufficiently close to the cessation threshold, we neglect the feedback of the grain motion on the flow.

(iv) Since saltation trajectories are typically much larger than the grain size, we consider an idealised flat bed and assume that the zero level of the flow velocity coincides with the grain elevation at grain–bed impact ($z = 0$), neglecting the effect of the flow very near the bed surface to the overall grain motion.

(v) While we do not specify the distribution of grain lift-off velocities f_\uparrow and grain impact velocities f_\downarrow , we assume that the boundary conditions mapping f_\downarrow to f_\uparrow in the steady state are scale-free, as for grain–bed rebounds (Beladjine *et al.* 2007), neglecting the potential effect of \sqrt{gd} on grain–bed collisions. Most grains ejected by the splash of a grain impacting the bed with velocity v_\downarrow exhibit a velocity on the order of \sqrt{gd} and only the few grains corresponding to the upper-tail end of the distribution exhibit an ejection velocity proportional to $|v_\downarrow|$ (Lämmel *et al.* 2017). Hence, this assumption effectively means that grain–bed rebounds and/or rare extreme ejection events dominate the saltation dynamics relevant for the cessation threshold scaling.

Under the above assumptions, the equations of motion for a given grain are (Pähtz *et al.* 2021)

$$\dot{v}_z^+ = -1 - v_z^+/v_s^+, \quad (3.4)$$

$$\dot{v}_x^+ = (u_x^+ - v_x^+)/v_s^+, \quad (3.5)$$

$$u_x^+ = u_*^+ f_u(u_*^+ z^+), \quad (3.6)$$

where v^+ is the rescaled grain velocity, $v_s^+ = 4sd^{+2}/(3Re_c)$ the rescaled Stokes settling velocity (obtained from the high-viscosity limit of (2.1)), and $f_u(X)$ denotes a function describing u_x/u_* for an undisturbed smooth inner turbulent boundary layer. It obeys $f_u(X) = X$ within the viscous sublayer of the turbulent boundary layer ($X \lesssim 5$) and $f_u(X) \simeq \kappa^{-1} \ln(9X)$ within its log-layer ($X \gtrsim 30$). Extrapolated into the transitional buffer layer in between, both profiles would intersect at about $X = 11$, which is why $\delta_v = 11\nu/u_*$ is termed viscous-sublayer thickness.

Parametrised by v_s^+ and u_*^+ , (3.4)–(3.6) map f_\uparrow to f_\downarrow . Combined with the scale-free boundary conditions, mapping f_\downarrow back to f_\uparrow , they imply that the grain motion is fully determined by

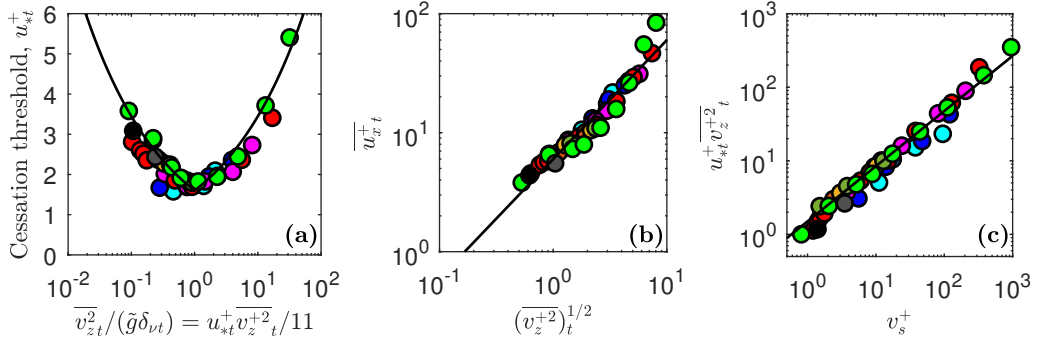


Figure 5: (a) Rescaled threshold shear velocity u_{*t}^+ versus ratio between hop height $\overline{v_{z_t}^2}/\tilde{g}$ and viscous-sublayer thickness $\delta_{vt} = 11\nu/u_{*t}$ near the cessation threshold. (b) Rescaled transport layer-averaged fluid velocity $\overline{u_{x_t}^+}$ versus $(\overline{v_{z_t}^+})^{1/2}$ near the cessation threshold. (c) Plot of $u_{*t}^+ \overline{v_{z_t}^{+2}}$ versus v_s^+ . Symbols correspond to numerical simulations of saltation (see figure 1 for the definition) for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1). The solid lines in (a), (c) and (b) correspond to (3.9), (3.10) and $u_{x_t}^+ = 6(\overline{v_{z_t}^+})^{1/2}$, respectively.

v_s^+ and u_*^+ . For a given v_s^+ , the cessation threshold u_{*t}^+ then corresponds to the smallest value of u_*^+ for which a solution of the combined system exists (Pächt *et al.* 2021). This implies that there is a function f mapping $D_* = \sqrt{18}v_s^+$ (valid for $Re_c = 24$, the standard case of non-rarefied drag) to u_{*t}^+ :

$$u_{*t}^+ = f(D_*). \quad (3.7)$$

In summary, the above assumptions simplify the general two-parametric dependence of u_{*t}^+ in (3.3) to the one-parametric dependence in (3.7), in agreement with (3.1).

3.2.2. Semi-empirical model of cessation threshold scaling

While the above analysis explains why $u_{*t}^+ = f(D_*)$ in (3.1), it does not yield the function f itself. Here, we derive the expression for f in (3.1) guided by the simulations. The latter show that the minimum $u_{*t}^{+\min}$ for saltation occurs when the hop height $\overline{v_{z_t}^2}/\tilde{g}$ is about equal to the viscous-sublayer thickness $\delta_{vt} = 11\nu/u_{*t}$ near the cessation threshold (figure 5(a)). This can be explained using the empirical, yet physically reasonable, simulation-supported proportionality between the average fluid velocity $\overline{u_{x_t}}$ and $(\overline{v_{z_t}^+})^{1/2}$ near the cessation threshold (figure 5(b)). In fact, averaging (3.6) over all grain trajectories and the transport layer, using the approximation $\overline{f_u(u_{*t}^+ z_t^+)}_t \approx f_u(u_{*t}^+ z_t^+)$, and using this proportionality approximately yields for saltation ($\overline{z_t^+} \approx \overline{v_{z_t}^{+2}}$, see figure 1):

$$u_{*t}^+ \propto \left[\frac{u_{*t}^+ \overline{v_{z_t}^{+2}}_t}{f_u^2(u_{*t}^+ \overline{v_{z_t}^{+2}}_t)} \right]^{1/3}. \quad (3.8)$$

Within the viscous sublayer ($u_{*t}^+ \overline{v_{z_t}^{+2}}_t \lesssim 5$), this relation simplifies to $u_{*t}^+ \propto (u_{*t}^+ \overline{v_{z_t}^{+2}}_t)^{-1/3}$ and within the log-layer approximately to $u_{*t}^+ \propto (u_{*t}^+ \overline{v_{z_t}^{+2}}_t)^{1/3}$, neglecting the logarithmic term. The crossover between the two power laws occurs about at $u_{*t}^+ \overline{v_{z_t}^{+2}}_t = 11$, that is, when the

hop height exceeds the viscous-sublayer thickness ($\overline{v_{z,t}^2}/\tilde{g} = \delta_{vt}$). Hence, the parabolic law

$$u_{*t}^+ = u_{*t}^{+\min} \max \left[\left(\frac{\overline{v_{z,t}^2}}{\tilde{g}\delta_{vt}} \right)^{-1/3}, \left(\frac{\overline{v_{z,t}^2}}{\tilde{g}\delta_{vt}} \right)^{1/3} \right] \quad (3.9)$$

fits the saltation data reasonably well (solid line in figure 5(a)).

Following from the analysis we have used to deduce (3.7), the grain kinematics near the cessation threshold, and thus $\overline{v_{z,t}^2}$, should be controlled by u_{*t}^+ or v_s^+ . Indeed, the simulations of saltation suggest the empirical relation (figure 5(c))

$$u_{*t}^+ \overline{v_{z,t}^2} = 1.5v_s^{+3/4}, \quad (3.10)$$

which leads to (3.1) with $D_*^{\min} = \sqrt{18}(11/1.5)^{2/3} \simeq 16$.

According to the above model, the grain size scaling of u_{*t}^+ in (3.1), despite being mathematically equivalent to the well-known cohesive ($u_{*t} \sim d^{-1/2}$, left branch) and cohesionless ($u_{*t} \sim d^{1/2}$, right branch) limits of the saltation initiation threshold (Shao & Lu 2000), follows purely from hydrodynamics rather than the onset of cohesion at small grain sizes.

3.2.3. Physics behind equilibrium transport rate scaling

Analytical, physical models of the equilibrium transport rate Q for aeolian saltation typically separate it into the mass of transported sediment per unit area of the bed M and its average streamwise velocity V through $Q = MV$. In most models, it is reasoned that the scaling of V is in one way or another linked to grain–bed collisions, and since the average outcome of grain–bed collisions should be roughly independent of the wind speed at equilibrium, V is taken as equal to its near-threshold value V_t (Ungar & Haff 1987; Durán *et al.* 2011; Kok *et al.* 2012; Berzi *et al.* 2016). However, it has been shown that, for sufficiently intense saltation, midair collisions significantly disturb grain trajectories (Carneiro *et al.* 2013; Pähtz & Durán 2020; Ralaiarisoa *et al.* 2020), leading to an additional additive term increasing as M^+/d^+ (Pähtz & Durán 2020):

$$Q^+ = M^+V_t^+(1 + c_M M^+/d^+), \quad (3.11)$$

where c_M is a constant parameter. It is not trivial to evaluate the scalings of M^+ and V_t^+ with the simulation data, since extracting M and V from DEM-based numerical transport simulations is ambiguous (Durán *et al.* 2012; Pähtz & Durán 2018*b*). One possible way is to define M as the mass M_0 of grains moving above the bed surface ($z = 0$) per unit bed area and V as their average streamwise velocity (Pähtz & Durán 2018*b*):

$$M \equiv \int_0^\infty \rho dz = M_0, \quad (3.12)$$

$$V \equiv \frac{\int_0^\infty \rho \langle v_x \rangle dz}{\int_0^\infty \rho dz} = \overline{v_x}. \quad (3.13)$$

This definition uses that most (but not all) sediment transport occurs at elevations $z > 0$, especially for saltation and, therefore, $M_0 \overline{v_x} = \int_0^\infty \rho \langle v_x \rangle dz \simeq \int_{-\infty}^\infty \rho \langle v_x \rangle dz = Q$ (Pähtz & Durán 2018*b*). Alternatively, one can define V as the mass flux-weighted average $\overline{v_x^q}$ of the streamwise velocity of all grains and M_q , the associated value of M , as $M_q \equiv Q/\overline{v_x^q}$ (Durán

et al. 2012):

$$M \equiv \frac{\left(\int_{-\infty}^{\infty} \rho \langle v_x \rangle dz\right)^2}{\int_{-\infty}^{\infty} \rho \langle v_x^2 \rangle dz} = M_q, \quad (3.14)$$

$$V \equiv \frac{\int_{-\infty}^{\infty} \rho \langle v_x^2 \rangle dz}{\int_{-\infty}^{\infty} \rho \langle v_x \rangle dz} = \overline{v_x}^q, \quad (3.15)$$

where $\overline{v_x}^q \equiv \frac{1}{Q} \int_{-\infty}^{\infty} \rho \langle v_x \cdot \rangle dz$.

For the above two definitions of M and V , the simulations are roughly described by scaling laws in which a comparably small part of the $s^{1/3}$ -scaling factor in (3.2) goes into M^+/d^+ and a comparably large part into $V_t^+/\sqrt{d^+}$ (figure 6). However, the exact partitioning of $s^{1/3}$ depends on the chosen definition (figures 6(a) and 6(b) versus figures 6(c) and 6(d)):

$$M_0^+ \propto s^{1/12} d^+(\Theta - \Theta_t), \quad \overline{v_{x_t}^+} \propto s^{1/4} \sqrt{d^+}, \quad (3.16)$$

$$M_q^+ \propto d^+(\Theta - \Theta_t), \quad \overline{v_{x_t}^+}^q \propto s^{1/3} \sqrt{d^+}. \quad (3.17)$$

The latter scaling is consistent with the prediction $M^+ \propto d^+(\Theta - \Theta_t)$ from physical models (Ungar & Haff 1987; Durán *et al.* 2011; Berzi *et al.* 2016; Pähz & Durán 2020) and with (3.2) when combined with (3.11). However, it means that $V_t^+ \propto s^{1/3} \sqrt{d^+}$, which is a highly unusual scaling, different from the existing models $V_t^+ \propto \sqrt{d^+}$ (Ungar & Haff 1987; Berzi *et al.* 2016) and $V_t^+ \propto u_{*t}^+$ (Durán *et al.* 2011; Kok *et al.* 2012; Pähz & Durán 2020).

3.3. Test of existing models against simulations of saltation

3.3.1. Test of cessation threshold models

The most important assumption that led to the simulation-supported statement that the rescaled cessation threshold u_{*t}^+ is solely controlled by the normalised median grain diameter D_* in section 3.2.1 is that of scale-free boundary conditions. The only existing cessation threshold model with scale-free boundary condition is that of Pähz *et al.* (2021), which we here compare with the most recent alternative, that of Gunn & Jerolmack (2022). The latter's most important feature is that it superimposes a Ga -dependent damping on the scale-free laws describing grain–bed rebounds, where the damping function is essentially fitted to agreement with experimental cessation threshold data. We find that, while the model of Pähz *et al.* (2021) captures the simulation data very well, the model of Gunn & Jerolmack (2022), with its drag and lift laws being modified to those employed in the simulations (i.e., (2.1) and no lift) for a fair comparison, is in very strong disagreement (figure 7). This is discussed in section 4.

3.3.2. Test of equilibrium transport rate models

The simulations of saltation are not or not well captured by the two most widely used physical models of the equilibrium aeolian transport rate: the model of Ungar & Haff (1987) and others (e.g., Jenkins & Valance 2014; Berzi *et al.* 2016), $Q^+/d^{+3/2} = f_1(\Theta - \Theta_t)$ (figure 8(a)) and the model of Durán *et al.* (2011) and others (Kok *et al.* 2012; Pähz & Durán 2020), $Q^+/(d^+ u_{*t}^+) = f_2(\Theta - \Theta_t)$ (figure 8(b)).

3.4. Generalised scaling laws across saltation and turbulent bedload

It is possible to semi-empirically generalise (3.1) to also include turbulent bedload conditions, defined by $s \lesssim 10$ and $D_* \gtrsim D_*^{\min}$ (equivalent to $Gas^{1/4} \gtrsim 64$, which ensures that transported

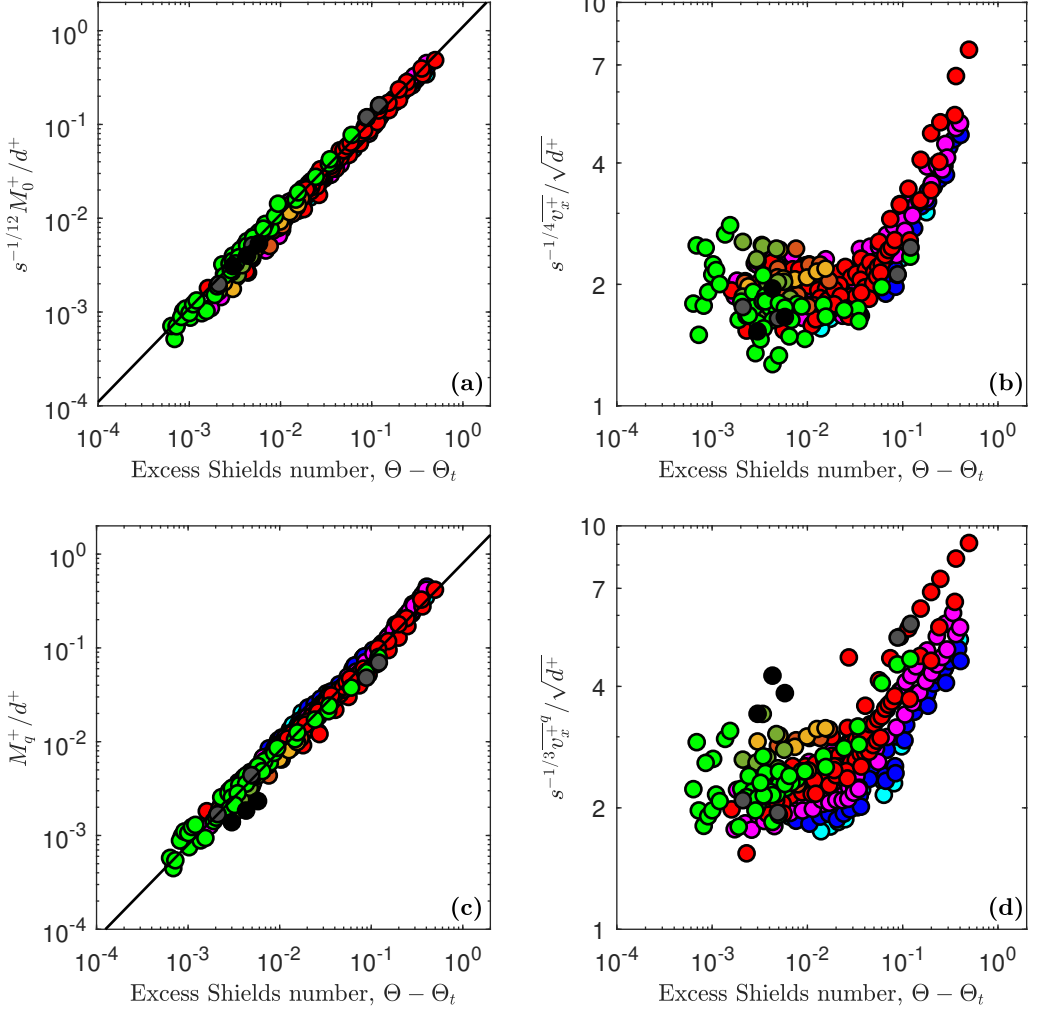


Figure 6: (a) and (c) Normalised transport loads $s^{-1/12}M_0^+/d^+$ and M_q^+/d^+ , using the definitions (3.12) and (3.14), respectively, of M ; and (b) and (d) normalised average streamwise grain velocities $s^{-1/4}\overline{v_x^+}/\sqrt{d^+}$ and $s^{-1/3}\overline{v_x^{+q}}/\sqrt{d^+}$, using the definition (3.13) and (3.15), respectively, of V versus Shields number in excess of the cessation threshold $\Theta - \Theta_t$. Symbols correspond to numerical simulations of saltation (see figure 1 for the definition) for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1) with $Ga\sqrt{s} > 81$, and Shields number Θ . The solid lines in (a) and (b) correspond to the left equations in (3.16) and (3.17), respectively.

grains significantly penetrate the log-layer; Pächt & Durán 2020). Turbulent bedload not only includes hopping grains but also rolling grains. The threshold shear velocity required to sustain a pure, very slow rolling motion along the bed surface scales as $u_{*t} \propto \sqrt{s\tilde{g}d}$ (Pächt *et al.* 2021), which corresponds to $u_{*t}^+ \propto s^{1/4}$ at the cessation threshold minimum $D_* = D_*^{\min}$. We find that the empirical relation $u_{*t}^+ = \sqrt{f_s}u_{*t}^{+\min}$, with $f_s \equiv (1 + \sqrt{10/s})^{-1}$, captures the transition from $u_{*t}^+ \propto s^{1/4}$ for $s \ll 10$ to $u_{*t}^+ = u_{*t}^{+\min}$ for $s \gg 10$ at $D_* = D_*^{\min}$. The resulting

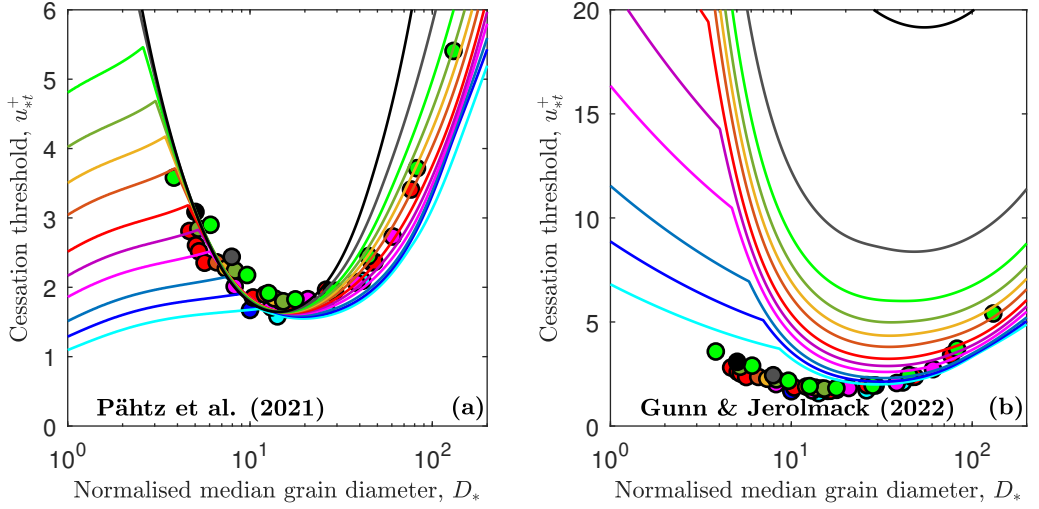


Figure 7: Evaluation of the cessation threshold models of (a) Pächt *et al.* (2021) and (b) Gunn & Jerolmack (2022), where the latter's drag and lift laws have been modified to those employed in the simulations for a fair comparison. Rescaled cessation threshold u_{*t}^+ versus normalised median grain diameter $D_* \equiv \sqrt{s}d^+$. Symbols correspond to numerical simulations of saltation (see figure 1 for the definition) for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1). The solid lines indicate the respective model predictions. Their color characterises s in accordance with the symbol color.

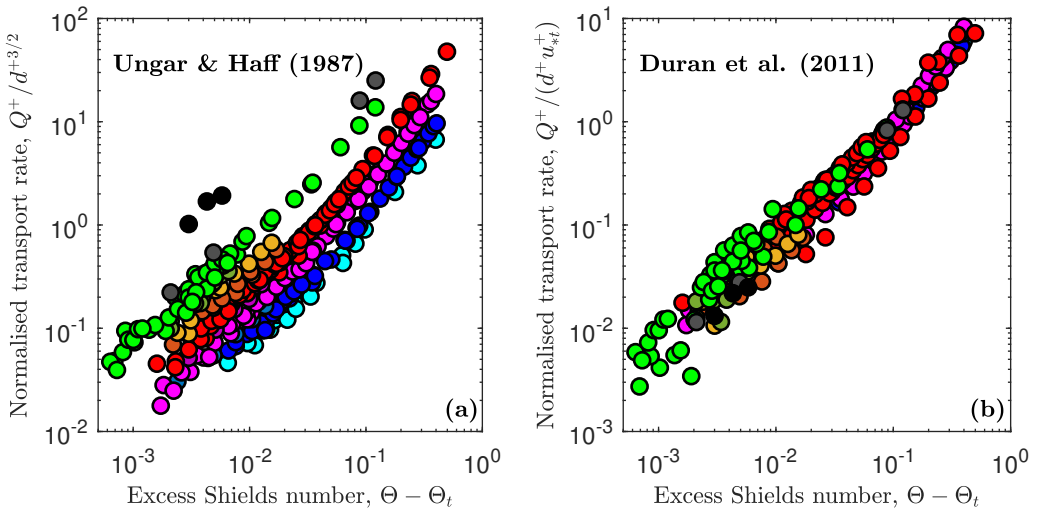


Figure 8: Evaluation of the physically based functional relationships for the sediment transport rate by Ungar & Haff (1987) and Durán *et al.* (2011). Normalised sediment transport rate (a) $Q^+/d^{+3/2}$ and (b) $Q^+/(d^+u_{*t}^+)$ versus Shields number in excess of the cessation threshold $\Theta - \Theta_t$. Symbols correspond to numerical simulations of saltation (see figure 1 for the definition) for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1) with $Ga\sqrt{s} > 81$, and Shields number Θ .

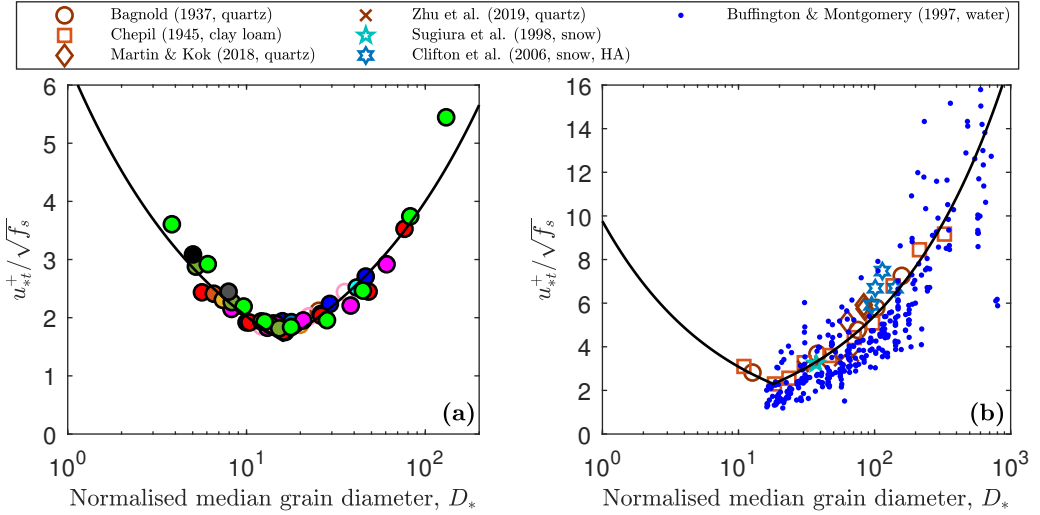


Figure 9: Bedload-corrected rescaled cessation threshold shear velocity $u_{*t}^+ / \sqrt{f_s}$ versus normalised median grain diameter $D_* \equiv \sqrt{s}d^+$. Symbols in (a) correspond to numerical simulations for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1) with $Ga\sqrt{s} > 81$, where open and filled symbols indicate bedload and saltation conditions, respectively (see figure 1 for the definition). Symbols in (b) correspond to experimental cessation threshold data (see the legend) for terrestrial aeolian saltation of quartz (Bagnold 1937; Martin & Kok 2018; Zhu *et al.* 2019), clay loam (Chepil 1945) and snow at sea level (Sugiura *et al.* 1998) and high altitude (Clifton *et al.* 2006, HA), and a compilation of experimental threshold data for subaqueous bedload (Buffington & Montgomery 1997). Only data with $Ga\sqrt{s} > 81$ are shown. The solid lines correspond to (3.1), with $(D_*^{\min}, u_{*t}^{+\min}) = (16, 1.6)$ in (a) and $(D_*^{\min}, u_{*t}^{+\min}) = (18, 2.3)$ in (b).

generalised cessation threshold equation is

$$u_{*t}^+ = \sqrt{f_s} u_{*t}^{+\min} \max \left[\left(\frac{D_*}{D_*^{\min}} \right)^{-1/2}, \left(\frac{D_*}{D_*^{\min}} \right)^{1/2} \right]. \quad (3.18)$$

It is consistent with the simulations and experiments across aeolian and fluvial transport conditions with $Ga\sqrt{s} \gtrsim 81$ (figure 9).

Furthermore, an empirical generalisation of (3.2) to turbulent bedload conditions is given by

$$Q^+ / d^{+3/2} = 1.7s^{1/3}(\Theta - \Theta_t) + 13f_s s^{1/3}(\Theta - \Theta_t)^2, \quad (3.19)$$

consistent with the simulations and experiments across aeolian and fluvial transport conditions with $Ga\sqrt{s} \gtrsim 81$ (figure 10).

Put together, (3.18) and (3.19) can be used to predict the equilibrium transport rate for arbitrary combinations of the density ratio s , Galileo number Ga and Shields number Θ with $Ga\sqrt{s} \gtrsim 81$ for non-rarefied drag. When compared with the simulations, these equations perform significantly better than the unified model of the cessation threshold and equilibrium transport rate of Pahltz *et al.* (2021) (figure 11). While the latter captures the $s^{1/3}$ -dependence of Q^+ , it fails to capture the d^+ -dependence of $Q^+ / s^{1/3}$ observed in the simulations.

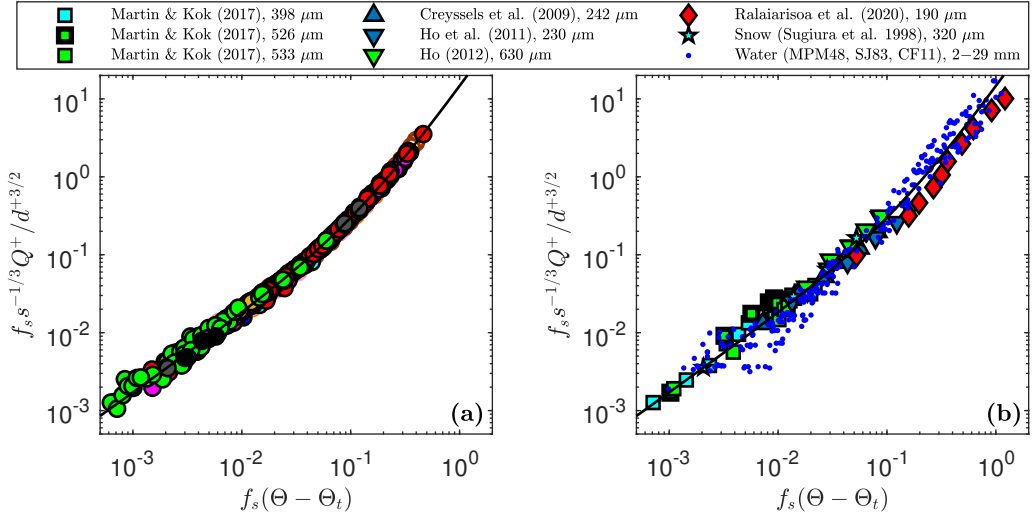


Figure 10: Bedload-corrected normalised sediment transport rate $f_s s^{-1/3} Q^+ / d^{+3/2}$ versus bedload-corrected Shields number in excess of the cessation threshold $f_s(\Theta - \Theta_t)$. Symbols in (a) correspond to numerical simulations for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1) with $Ga\sqrt{s} > 81$, and Shields number Θ , where open and filled symbols indicate bedload and saltation conditions, respectively (see figure 1 for the definition). Symbols in (b) correspond to measurements for different grain sizes (indicated in the legend) for terrestrial aeolian saltation of minerals (Creysseles *et al.* 2009; Ho *et al.* 2011; Ho 2012; Martin & Kok 2017; Ralaizarisoa *et al.* 2020) and snow (Sugiura *et al.* 1998), and subaqueous bedload (Meyer-Peter & Müller 1948; Smart & Jaeggi 1983; Capart & Fraccarollo 2011). We corrected the raw laboratory data by Smart & Jaeggi (1983) and Capart & Fraccarollo (2011) for sidewall drag using the method described in section 2.3 of Guo (2015) and for steep bed slopes using $u_*^2|_{\text{corrected}} = u_*^2 / f_\alpha$, with $f_\alpha \equiv 1 - \tan \alpha / 0.63$ (Pähtz *et al.* 2021). The values of Θ_t in (b) for a given experimental data set are obtained from extrapolating (3.19) to vanishing transport. Note that Ralaizarisoa *et al.* (2020) reported that transport may not have been completely in equilibrium in their experiments. The solid lines correspond to (3.19).

3.5. Effect of drag law and generalisation to drag in rarefied atmospheres

The analysis in section 3.2.1 suggests that the normalised median grain diameter $D_* \equiv \sqrt{s}d^+$ in (3.1) and (3.18) should be redefined as $D_* \equiv \sqrt{18\nu_s^+} = \sqrt{24s/Re_c}d^+$ (from (2.1)), which is equal to $\sqrt{s}d^+$ only in the case of non-rarefied drag ($Re_c = 24$). To test this prediction as well as the effect of the form drag coefficient C_d^∞ , we carried out additional simulations using $C_d^\infty = 0$ and $Re_c = [6, 24, 96]$ for a few saltation conditions. We find that these simulations, indeed, still satisfy (3.18) and therefore (3.1) when the redefined D_* is used (figure 12(a)). They also still satisfy (3.19) and therefore (3.2), which are not affected by the redefinition of D_* (figure 12(b)).

In rarefied atmospheres, the mean free path λ of the air molecules becomes comparable to the median grain diameter d , or the Knudsen number $Kn \equiv \lambda/d = \sqrt{\pi k/2s}/(c^+d^+)$ (Crowe *et al.* 2012), with $c^+ = c/(\tilde{g}\nu)^{1/3}$ the rescaled speed of sound and k the adiabatic exponent, comparable to unity. This leads to a Kn -dependent correction $f_{Kn} \equiv 1 + Kn[2.49 + 0.84 \exp(-1.74/Kn)]$ (Crowe *et al.* 2012) of Stokes drag via $Re_c = 24/f_{Kn}$. Note that typically $f_{Kn} \approx 1$ for $s \lesssim 10^6$. Hence, the results in figure 12 support that the following

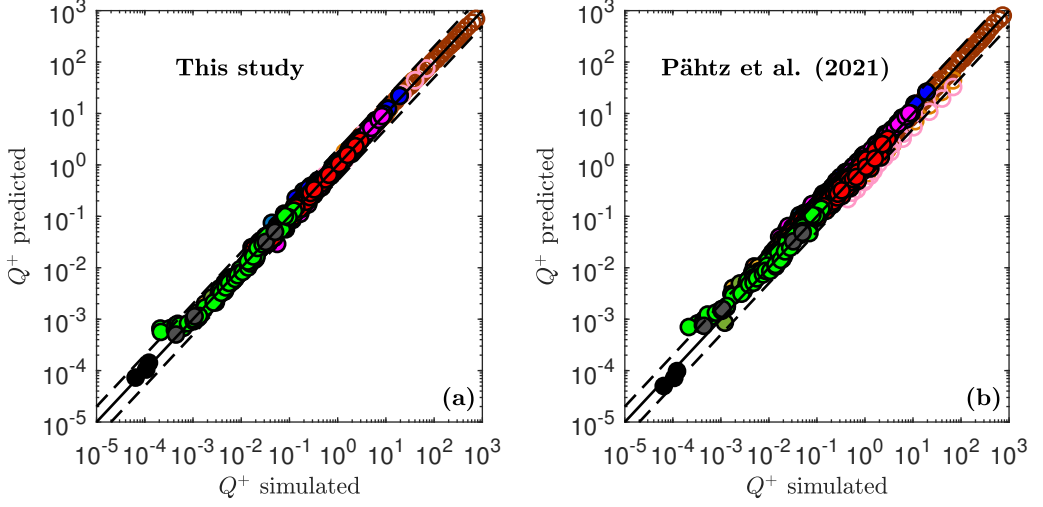


Figure 11: Predicted versus simulated sediment transport rate Q^+ . (a) Predictions by (3.1) with $(D_*^{\min}, u_{*t}^{+\min}) = (16, 1.6)$ and (3.19). (b) Predictions by the model of Pähtz *et al.* (2021). Symbols correspond to numerical simulations for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1) with $Ga\sqrt{s} > 81$, where open and filled symbols indicate bedload and saltation conditions, respectively (see figure 1 for the definition). The solid lines indicate perfect agreement. The dashed lines indicate a deviation by a factor of two.

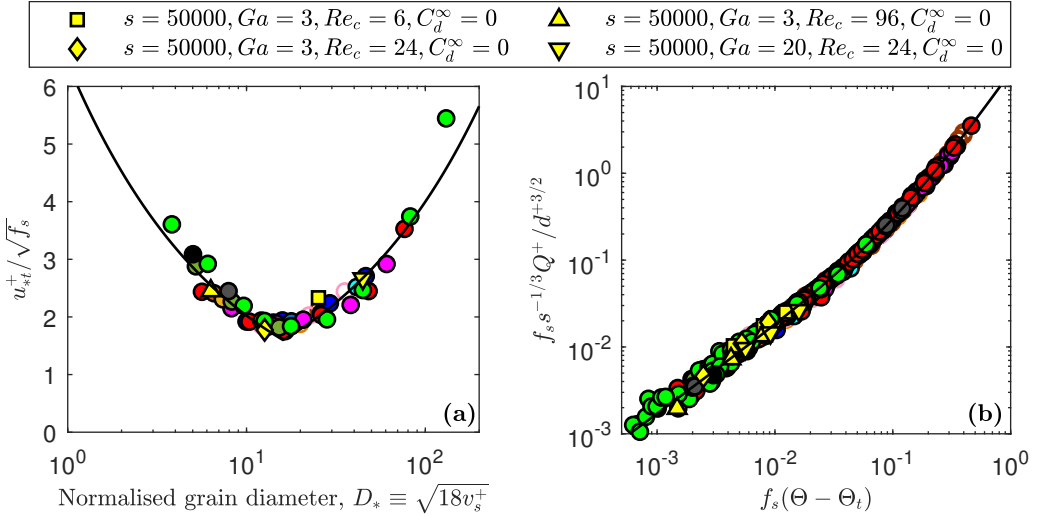


Figure 12: (a) Bedload-corrected rescaled cessation threshold shear velocity $u_{*t}^+ / \sqrt{f_s}$ versus normalised median grain diameter, here redefined as $D_* \equiv \sqrt{18v_s^+} = \sqrt{24s/Re_c} d^+$.

(b) Bedload-corrected normalised sediment transport rate $f_s s^{-1/3} Q^+ / d^{+3/2}$ versus bedload-corrected Shields number in excess of the cessation threshold $f_s (\Theta - \Theta_t)$. Non-yellow symbols correspond to numerical simulations, carried out using the standard drag law parameters $Re_c = 24$ and $C_d^\infty = 0.5$, for various combinations of the density ratio s and Galileo number Ga (see table 1 and figure 1) with $Ga\sqrt{s} > 81$, and Shields number Θ , where open and filled symbols indicate bedload and saltation conditions, respectively (see figure 1 for the definition). Yellow symbols correspond to additional simulations with modified drag law parameters as indicated in the legend.

generalised definition of D_* should be used for highly rarefied atmospheres ($s \gtrsim 10^6$):

$$D_* \equiv \sqrt{f_{Kn}} \sqrt{s} d^+ . \quad (3.20)$$

4. Discussion

4.1. Choice of dynamic-threshold measurements for evaluation of cessation threshold models

Equilibrium saltation becomes intermittent below the continuous-transport threshold, characterised by alternating periods of equilibrium saltation and periods of rest (Martin & Kok 2018). The cessation threshold is therefore the wind strength at which equilibrium saltation would cease if extrapolated from the continuous-transport regime, that is, as the zero-point of equilibrium transport equations such as (2.6) or (3.2). It is also the threshold of intermittent saltation (Martin & Kok 2018). To evaluate the cessation threshold scaling law in (3.1), we have therefore chosen exclusively measurements that either extrapolate continuous saltation in some manner to vanishing transport (Clifton *et al.* 2006; Zhu *et al.* 2019) or directly measure the cessation of intermittent saltation (Bagnold 1937; Chepil 1945; Sugiura *et al.* 1998; Martin & Kok 2018; Zhu *et al.* 2019). Both methods require that equilibrium transport conditions can at least temporarily be established during the experiments (Pächtz *et al.* 2020), usually by feeding sufficient sediment when the test section is too short for transport to reach equilibrium. This requirement was probably not satisfied in all of the above-cited measurements. The snow drift wind tunnel by Clifton *et al.* (2006), who did not feed snow at the tunnel entrance, was probably too short to establish equilibrium conditions for their beds of old and therefore cohesive snow, since cohesion can dramatically increase the fetch required to reach equilibrium (Comola *et al.* 2019a). For this reason, we have only compared with their data for freshly fallen snow.

Unfortunately, many other studies have not employed the same criteria when choosing measurements to evaluate their cessation threshold models (Claudin & Andreotti 2006; Kok 2010b; Berzi *et al.* 2017; Andreotti *et al.* 2021; Gunn & Jerolmack 2022). This has largely been driven by the belief that there is only one dynamic threshold, implying that any kind of dynamic-threshold measurement is at least a proxy for the cessation threshold. However, we have presented evidence for the hypothesis that the continuous-transport threshold is a second kind of dynamic threshold with an underlying physics different from that of the cessation threshold (Pächtz & Durán 2018a; Pächtz *et al.* 2020, 2021). An important example for a potential misinterpretation of measured dynamic thresholds as cessation thresholds is the study by Andreotti *et al.* (2021) for the following reasons.

(i) Andreotti *et al.* (2021), who carried out their measurements in a pressurised-wind tunnel, explicitly mentioned that they were only able to establish equilibrium transport for air pressures relatively close to ambient pressure ($P \gtrsim 30000$ Pa) but not for the vast majority of studied pressure conditions (down to $P \approx 200$ Pa): ‘below 300 hPa [the erosional zone] encompasses the entire bed.’

(ii) Andreotti *et al.* (2021) explicitly defined threshold conditions ‘as the transition between saltation of groups of particles (bursts) to intermittent saltation of single particles (at high pressure) or no transport (at low pressure).’ For high-pressure conditions, the so measured threshold is, by definition, larger than the cessation threshold (i.e., the threshold of intermittent saltation; Martin & Kok 2018). For low-pressure conditions, the measurements are difficult to interpret due to the lack of equilibrium transport.

(iii) Andreotti *et al.* (2021) accompanied their direct threshold measurements with indirect measurements obtained from extrapolating to vanishing transport. However, since they

have not established equilibrium (for most pressure conditions), this extrapolation does not necessarily yield the cessation threshold.

(iv) Pächtz *et al.* (2021) hypothesised that the continuous-transport threshold is the smallest wind shear stress at which an average grain ejected by an impacting grain can be accelerated into a steady trajectory. A modification of their trajectory-based model based on this hypothesis captured the measurements by Andreotti *et al.* (2021), suggesting that their employed experimental method yields a threshold akin to the continuous-transport threshold.

The potential misinterpretation of the measurements by Andreotti *et al.* (2021) as cessation threshold measurements is highly relevant, since it led Gunn & Jerolmack (2022) to introduce a Galileo number (Ga)-dependent viscous damping of grain–bed rebounds in their cessation threshold model in an attempt to capture these data. However, this rebound damping is the very reason for the very strong disagreement between their model and the here presented numerical data of the cessation threshold (section 3.3.1). Note that, from a physical perspective, rebound damping should not depend on Ga but on the Stokes number associated with the grain’s impact velocity $St = \rho_p |\mathbf{v}_\downarrow| d / \mu$ (Berzi *et al.* 2016, 2017; Andreotti *et al.* 2021), which is experimentally known to control the viscous damping of frontal grain collisions with a flat plate (Gondret *et al.* 2002). Since typical values of $|\mathbf{v}_\downarrow| / \sqrt{\bar{g}d}$ for Martian saltation are at the very least comparable to, if not much larger than, those for terrestrial saltation (because of $V_t \propto s^{1/3} \sqrt{\bar{g}d}$, see section 3.2.3), and since ρ_p , d and μ are of the same order of magnitude on Earth and Mars, typical values of St on Mars are many orders of magnitude too large for viscous damping to play a meaningful role. In addition, even if there was a strong damping of frontal grain–plate collisions, this would not necessarily translate into a strong damping of grain–bed collisions. In fact, we previously reported only slight differences between DEM–RANS simulations of saltation for undamped (normal restitution coefficient $e = 0.9$) and nearly fully damped ($e = 0.01$) frontal grain–grain collisions (Pächtz & Durán 2018a). Even for $e = 0.01$, grains can saltate in large hops on the order of $100d$ high (Movie S3 of Pächtz & Durán 2018a).

4.2. Recommendations for how to reliably measure the saltation cessation threshold for low-pressure atmospheric conditions

As described in the previous section, a reliable wind tunnel measurement of the cessation threshold for a given low-pressure atmospheric condition requires that equilibrium transport conditions can be established, at least temporarily. Since we are currently unable to predict with confidence the fetch distance saltation needs to reach equilibrium as a function of the atmospheric pressure, and since the required fetch could potentially be very large, it makes sense to design an experimental set-up that allows for adjustable sand feeding. However, this may be challenging given the closed-conduit nature of pressurised-wind tunnels. Once equilibrium transport is established in one way or another, we recommend to carry out measurements in the continuous-transport regime of the equilibrium transport rate Q (or a proxy thereof) as a function of the shear velocity u_* and then extrapolate these measurements to vanishing transport using $Q = c_1(u_*^2 - u_{*t}^2) + c_2(u_*^2 - u_{*t}^2)^2$ (consistent with (3.2)), where c_1 , c_2 and u_{*t} are treated as fit parameters. The resulting cessation threshold u_{*t} should be substantially smaller than the dynamic-transport threshold. In fact, for the terrestrial wind tunnel measurements by Creyssels *et al.* (2009), this extrapolation method yields the value $u_{*t} \simeq 0.13$ m/s (Pächtz & Durán 2020), which is nearly a factor of 2 smaller than the smallest wind shear velocity ($u_* \simeq 0.24$ m/s) for which Creyssels *et al.* (2009) reported continuous equilibrium transport.

5. Conclusions

Guided by simulations with a well-established DEM-based numerical model (Durán *et al.* 2012) and existing experimental data, we have semi-empirically derived the scaling behaviours of the cessation threshold shear velocity u_{*t} and rate Q of equilibrium sediment transport across almost seven orders of the particle–fluid density ratio s , ranging from subaqueous transport ($s \approx 2.65$) to aeolian transport in the highly rarefied atmosphere on Pluto ($s \approx 10^7$). For saltation transport, occurring in planetary aeolian environments, they are

$$u_{*t} = 2.3(\tilde{g}\nu)^{1/3} \max \left[(D_*/18)^{-1/2}, (D_*/18)^{1/2} \right], \quad (5.1)$$

$$Q = 1.7s^{1/3} \rho_p (d/\tilde{g})^{1/2} (u_*^2 - u_{*t}^2) + 12s^{-2/3} \rho_p (\tilde{g}^3 d)^{-1/2} (u_*^2 - u_{*t}^2)^2, \quad (5.2)$$

where ρ_p is the particle density, ν the kinematic fluid viscosity, $\tilde{g} \equiv (1 - 1/s)g$ the buoyancy-reduced gravity, d the median grain diameter and $D_* \equiv \sqrt{s}\tilde{g}d/(\tilde{g}\nu)^{2/3}$ its normalised value. In highly rarefied atmospheres ($s \gtrsim 10^6$), D_* is calculated by the more general (3.20), accounting for drag rarefaction effects. Put together, (5.1) and (5.2) constitute a simple means to make predictions of aeolian processes across a large range of planetary conditions.

The derivation of (5.1) consists of a first-principle-based proof of the statement that $u_{*t}/(\tilde{g}\nu)^{1/3}$ is a function of only D_* (section 3.2.1). In contrast to existing cessation threshold models, this proof does not resort to coarse-graining the particle phase of the aeolian transport layer above the bed surface, but requires comparably much milder assumptions. Its arguably most critical underlying assumption is that scale-free boundary conditions describe the outcome of grain–bed collisions. The validation of the above statement with our extensive simulation data set therefore indicates that the characteristic velocity scale $\sqrt{\tilde{g}d}$ of grains ejected by the splash of an impacting grain plays no important role for the physics behind the cessation threshold. Instead, grain–bed rebounds and/or splash ejection events associated with the upper-tail end of the ejection velocity distribution are seemingly the physical processes that need to be considered.

The left and right term of the right-hand side of (5.2) are consistent with the saltation limit and collisional limit, respectively, of the Q -scaling derived by Pätz & Durán (2020), with a threshold mean grain velocity scaling as $V_t \propto s^{1/3}\sqrt{\tilde{g}d}$. This scaling strongly deviates from the previous physical transport laws by Ungar & Haff (1987, $V_t \propto \sqrt{\tilde{g}d}$) and Durán *et al.* (2011, $V_t \propto u_{*t}$). For example, the law by Ungar & Haff (1987), which has been adjusted to Earth conditions, underestimates the sediment transport rate for the simulated Martian conditions by a factor of about 5. Only the recent model of Pätz *et al.* (2021) comes somewhat close to reproducing this scaling. It captures the $s^{1/3}$ -dependence of V_t , but fails to capture its proportionality to $\sqrt{\tilde{g}d}$. This hints at a quite fundamental lack of understanding of the transport rate physics and calls for future studies on this issue.

For Martian atmospheric conditions, the cessation threshold values predicted by the numerical simulations and (5.1) are much smaller than the recent dynamic-threshold measurements by Andreotti *et al.* (2021). This is particularly odd given that both the numerical simulations and (5.1) are in agreement with terrestrial experimental data. If the simulations were fundamentally wrong, one would expect them to fail for all conditions, not just for Martian conditions. In section 4, we have therefore presented arguments for why the experimental methods used by Andreotti *et al.* (2021) may have yielded a threshold different from u_{*t} . This issue needs to be resolved in future studies, since knowing the ‘true’ value of u_{*t} is crucial for understanding the time evolution of Martian landscapes.

Funding. T.P. acknowledges support from the National Natural Science Foundation of China (no. 12272344). O.D. acknowledges support from the Texas A&M Engineering Experiment Station.

Declaration of interests. The authors report no conflict of interest.

REFERENCES

- ANDREOTTI, B. 2004 A two-species model of aeolian sand transport. *Journal of Fluid Mechanics* **510**, 47–70.
- ANDREOTTI, B., CLAUDIN, P., IVERSEN, J. J., MERRISON, J. P. & RASMUSSEN, K. R. 2021 A lower than expected saltation threshold at Martian pressure and below. *Proceedings of the National Academy of Sciences of the United States of America* **118** (5), e2012386118.
- BAGNOLD, R. A. 1937 The transport of sand by wind. *The Geographical Journal* **89** (5), 409–438.
- BARENBLATT, G. I. 1996 *Scaling, Self-similarity, and Intermediate Asymptotics*. Cambridge University Press, Cambridge.
- BELADJINE, D., AMMI, M., OGER, L. & VALANCE, A. 2007 Collision process between an incident bead and a three-dimensional granular packing. *Physical Review E* **75** (6), 061305.
- BERZI, D., JENKINS, J. T. & VALANCE, A. 2016 Periodic saltation over hydrodynamically rough beds: aeolian to aquatic. *Journal of Fluid Mechanics* **786**, 190–209.
- BERZI, D., VALANCE, A. & JENKINS, J. T. 2017 The threshold for continuing saltation on Earth and other solar system bodies. *Journal of Geophysical Research: Earth Surface* **122** (7), 1374–1388.
- BESNARD, J. B., DUPONT, P., OULD EL MOCTAR, A. & VALANCE, A. 2022 Aeolian erosion thresholds for cohesive sand. *Journal of Geophysical Research: Earth Surface* **127**, e2022JF006803.
- BOURKE, M. C., LANCASTER, N., FENTON, L. K., PARTELI, E. J. R., ZIMBELMAN, J. R. & RADEBAUGH, J. 2010 Extraterrestrial dunes: An introduction to the special issue on planetary dune systems. *Geomorphology* **121** (1-2), 1–14.
- BUFFINGTON, J. M. & MONTGOMERY, D. R. 1997 A systematic analysis of eight decades of incipient motion studies, with special reference to gravel-bedded rivers. *Water Resources Research* **33** (8), 1993–2029.
- BURR, D. M., BRIDGES, N. T., MARSHALL, J. R., SMITH, J. K., WHITE, B. R. & EMERY, J. P. 2015 Higher-than-predicted saltation threshold wind speeds on Titan. *Nature* **517** (7532), 60–63.
- BURR, D. M., SUTTON, S. L. F., EMERY, J. P., NIELD, E. V., KOK, J. F., SMITH, J. K. & BRIDGES, N. T. 2020 A wind tunnel study of the effect of intermediate density ratio on saltation threshold. *Aeolian Research* **45**, 100601.
- CAMENEN, B. 2007 Simple and general formula for the settling velocity of particles. *Journal of Hydraulic Engineering* **133** (2), 229–233.
- CAPART, H. & FRACCAROLLO, L. 2011 Transport layer structure in intense bed-load. *Geophysical Research Letters* **38** (20), L20402.
- CARNEIRO, M. V., ARAÚJO, N. A. M., PÄHTZ, T. & HERRMANN, H. J. 2013 Midair collisions enhance saltation. *Physical Review Letters* **111** (5), 058001.
- CHEPIL, W. S. 1945 Dynamics of wind erosion: II. Initiation of soil movement. *Soil Science* **60** (5), 397–411.
- CLAUDIN, P. & ANDREOTTI, B. 2006 A scaling law for aeolian dunes on Mars, Venus, Earth, and for subaqueous ripples. *Earth and Planetary Science Letters* **252** (1-2), 30–44.
- CLIFTON, A., RÜEDI, J. D. & LEHNING, M. 2006 Snow saltation threshold measurements in a drifting-snow wind tunnel. *Journal of Glaciology* **52** (179), 585–596.
- COMOLA, F., GAUME, J., KOK, J. F. & LEHNING, M. 2019a Cohesion-induced enhancement of aeolian saltation. *Geophysical Research Letters* **46** (10), 5566–5574.
- COMOLA, F., KOK, J. F., CHAMECKI, M. & MARTIN, R. L. 2019b The intermittency of wind-driven sand transport. *Geophysical Research Letters* **46** (22), 13430–13440.
- COMOLA, F., KOK, J. F., LORA, J. M., COHANIM, K., YU, X., HE, C., MCGUIGGAN, P., HÖRST, S. M. & TURNER, F. 2022 Titan’s prevailing circulation might drive highly intermittent, yet significant sediment transport. *Geophysical Research Letters* **49** (7), e2022GL097913.
- CREYSSELS, M., DUPONT, P., OULD EL MOCTAR, A., VALANCE, A., CANTAT, I., JENKINS, J. T., PASINI, J. M. & RASMUSSEN, K. R. 2009 Saltating particles in a turbulent boundary layer: experiment and theory. *Journal of Fluid Mechanics* **625**, 47–74.
- CROWE, C. T., SCHWARZKOPF, J. D., SOMMERFELD, M. & TSUJI, Y. 2012 *Multiphase Flows with Droplets and Particles*. Taylor & Francis Group, Boca Raton.
- DINEGA, S., KRESLAVSKY, M., RADEBAUGH, J., SILVESTRO, S., TELFER, M. & TIRSCH, D. 2017 Our evolving understanding of aeolian bedforms, based on observation of dunes on different worlds. *Aeolian Research* **26**, 5–27.

- DURÁN, O., ANDREOTTI, B. & CLAUDIN, P. 2012 Numerical simulation of turbulent sediment transport, from bed load to saltation. *Physics of Fluids* **24** (10), 103306.
- DURÁN, O., ANDREOTTI, B. & CLAUDIN, P. 2014a Turbulent and viscous sediment transport - a numerical study. *Advances in Geosciences* **37**, 73–80.
- DURÁN, O., CLAUDIN, P. & ANDREOTTI, B. 2011 On aeolian transport: Grain-scale interactions, dynamical mechanisms and scaling laws. *Aeolian Research* **3** (3), 243–270.
- DURÁN, O., CLAUDIN, P. & ANDREOTTI, B. 2014b Direct numerical simulations of aeolian sand ripples. *Proceedings of the National Academy of Sciences of the United States of America* **111** (44), 15665–15668.
- DURÁN VINENT, O., ANDREOTTI, B., CLAUDIN, P. & WINTER, C. 2019 A unified model of ripples and dunes in water and planetary environments. *Nature Geoscience* **12**, 345–350.
- GONDRET, P., LANCE, M. & PETIT, L. 2002 Bouncing motion of spherical particles in fluids. *Physics of Fluids* **14** (2), 643.
- GREELEY, R., IVERSEN, J., LEACH, R., MARSHALL, J., WHITE, B. & WILLIAMS, S. 1984 Windblown sand on Venus: Preliminary results of laboratory simulations. *Icarus* **57** (1), 112–124.
- GREELEY, R., LEACH, R., WHITE, B., IVERSEN, J. & POLLACK, J. 1980 Threshold windspeeds for sand on mars: Wind tunnel simulations. *Geophysical Research Letters* **7** (2), 121–124.
- GREELEY, R., WHITE, B., LEACH, R., IVERSEN, J. & POLLACK, J. 1976 Mars: Wind friction speeds for particle movement. *Geophysical Research Letters* **3** (8), 417–420.
- GUNN, A. & JEROLMACK, D. J. 2022 Conditions for aeolian transport in the solar system. *Nature Astronomy* **57**, 923–929.
- GUO, J. 2015 Sidewall and non-uniformity corrections for flume experiments. *Journal of Hydraulic Research* **53** (2), 218–229.
- HO, T. D. 2012 Etude expérimentale du transport de particules dans une couche limite turbulente. PhD thesis, University of Rennes 1, Rennes, France.
- HO, T. D., VALANCE, A., DUPONT, P. & OULD EL MOCTAR, A. 2011 Scaling laws in aeolian sand transport. *Physical Review Letters* **106** (9), 094501.
- IVERSEN, J. D. & WHITE, B. R. 1982 Saltation threshold on Earth, Mars and Venus. *Sedimentology* **29** (1), 111–119.
- JENKINS, J. T. & VALANCE, A. 2014 Periodic trajectories in aeolian sand transport. *Physics of Fluids* **26** (7), 073301.
- JIA, P., ANDREOTTI, B. & CLAUDIN, P. 2017 Giant ripples on comet 67p/churyumov-gerasimenko sculpted by sunset thermal wind. *Proceedings of the National Academy of Sciences of the United States of America* **114** (10), 2509–2514.
- KOK, J. F. 2010a Difference in the wind speeds required for initiation versus continuation of sand transport on Mars: Implications for dunes and dust storms. *Physical Review Letters* **104** (7), 074502.
- KOK, J. F. 2010b An improved parametrization of wind blown sand flux on Mars that includes the effect of hysteresis. *Geophysical Research Letters* **37** (12), L12202.
- KOK, J. F., PARTELI, E. J. R., MICHAELS, T. I. & KARAM, D. BOU 2012 The physics of wind-blown sand and dust. *Reports on Progress in Physics* **75** (10), 106901.
- KOK, J. F. & RENNO, N. O. 2009 A comprehensive numerical model of steady state saltation (COMSALT). *Journal of Geophysical Research: Atmospheres* **114**, D17204.
- LÄMMEL, MARC, DZIKOWSKI, K., KROY, K., OGER, L. & VALANCE, A. 2017 Grain-scale modeling and splash parametrization for aeolian sand transport. *Physical Review E* **95** (2), 022902.
- LÄMMEL, M. & KROY, K. 2017 Analytical mesoscale modeling of aeolian sand transport. *Physical Review E* **96** (5), 052906.
- LEONARD, K. C., TREMBLAY, L. B., THOM, J. E. & MACAYEAL, D. R. 2011 Drifting snow threshold measurements near McMurdo station, Antarctica: A sensor comparison study. *Cold Regions Science and Technology* **70**, 71–80.
- MARTIN, R. L. & KOK, J. F. 2017 Wind-invariant saltation heights imply linear scaling of aeolian saltation flux with shear stress. *Science Advances* **3** (6), e1602569.
- MARTIN, R. L. & KOK, J. F. 2018 Distinct thresholds for the initiation and cessation of aeolian saltation from field measurements. *Journal of Geophysical Research: Earth Surface* **123** (7), 1546–1565.
- MEYER-PETER, E. & MÜLLER, R. 1948 Formulas for bedload transport. In *Proceedings of the 2nd Meeting of the International Association for Hydraulic Structures Research*, pp. 39–64. IAHR, Stockholm.
- PÄHTZ, T., CLARK, A. H., VALYRAKIS, M. & DURÁN, O. 2020 The physics of sediment transport initiation,

- cessation, and entrainment across aeolian and fluvial environments. *Reviews of Geophysics* **58** (1), e2019RG000679.
- PÄHTZ, T. & DURÁN, O. 2018a The cessation threshold of nonsuspended sediment transport across aeolian and fluvial environments. *Journal of Geophysical Research: Earth Surface* **123** (8), 1638–1666.
- PÄHTZ, T. & DURÁN, O. 2018b Universal friction law at granular solid-gas transition explains scaling of sediment transport load with excess fluid shear stress. *Physical Review Fluids* **3** (10), 104302.
- PÄHTZ, T. & DURÁN, O. 2020 Unification of aeolian and fluvial sediment transport rate from granular physics. *Physical Review Letters* **124** (16), 168001.
- PÄHTZ, T., LIU, Y., XIA, Y., HU, P., HE, Z. & THOLEN, K. 2021 Unified model of sediment transport threshold and rate across weak and intense subaqueous bedload, windblown sand, and windblown snow. *Journal of Geophysical Research: Earth Surface* **126** (4), e2020JF005859.
- POMEROY, J. W. & GRAY, D. M. 1990 Saltation of snow. *Water Resources Research* **26** (7), 1583–1594.
- RALAIARISOA, J. L., BESNARD, J. B., FURIERI, B., DUPONT, P., OULD EL MOCTAR, A., NAAIM-BOUVET, F. & VALANCE, A. 2020 Transition from saltation to collisional regime in windblown sand. *Physical Review Letters* **124** (19), 198501.
- SAGAN, C. & CHYBA, C. 1990 Triton's streaks as windblown dust. *Nature* **346**, 546–548.
- SHAO, Y. & LU, H. 2000 A simple expression for wind erosion threshold friction velocity. *Journal of Geophysical Research: Atmospheres* **105** (D17), 22437–22443.
- SMART, G. M. & JAEGGI, M. N. R. 1983 Sediment transport on steep slopes. In *Mitteilungen der Versuchsanstalt für Wasserbau, Hydrologie und Glaziologie*. ETH Zurich, Zurich, Switzerland.
- SUGIURA, K., NISHIMURA, K., MAENO, N. & KIMURA, T. 1998 Measurements of snow mass flux and transport rate at different particle diameters in drifting snow. *Cold Regions Science and Technology* **27** (2), 83–89.
- SWANN, C., SHERMAN, D. J. & EWING, R. C. 2020 Experimentally derived thresholds for windblown sand on Mars. *Geophysical Research Letters* **47**, e2019GL084484.
- TELFER, M. W., PARTELI, E. J. R., RADEBAUGH, J., BEYER, R. A., BERTRAND, T., FORGET, F., NIMMO, F., GRUNDY, W. M., MOORE, J. M., STERN, S. A., SPENCER, J., LAUER, T. R., EARLE, A. M., BINZEL, R. P., WEAVER, H. A., OLKIN, C. B., YOUNG, L. A., ENNICO, K., RUNYON, K. & THE NEW HORIZONS GEOLOGY, GEOPHYSICS AND IMAGING SCIENCE THEME TEAM 2018 Dunes on Pluto. *Science* **360** (6392), 992–997.
- THOMAS, N., SIERKS, H., BARBIERI, C., LAMY, P. L., RODRIGO, R., RICKMAN, H., KOSCHNY, D., KELLER, H. U., AGARWAL, J., A'HEARN, M. F., ANGRILLI, F., AUGER, A. T., BARUCCI, M. A., BERTAUX, J. L., BERTINI, I., BESSE, S., BODEWITS, D., CREMONESE, G., DEPPO, V. DA, DAVIDSSON, B., DE CECCO, M., DEBEL, S., EL-MAARRY, M. R., FERRI, F., FORNASIER, S., FULLE, M., GIACOMINI, L., GROUSSIN, O., GUTIERREZ, P. J., GÜTTLER, C., HVIID, S. F., IP, W. H., JORDA, L., KNOLLENBERG, J., KRAMM, J. R., KÜHRT, E., KÜPPERS, M., FORGIA, F. LA, LARA, L. M., LAZZARIN, M., MORENO, J. J. LOPEZ, MAGRIN, S., MARCHI, S., MARZARI, F., MASSIRONI, M., MICHALIK, H., MOISSL, R., MOTTOLA, S., NALETTO, G., OKLAY, N., PAJOLA, M., POMMEROL, A., PREUSKER, F., SABAU, L., SCHOLTEN, F., SNODGRASS, C., TUBIANA, C., VINCENT, J. B. & WENZEL, K. P. 2015 The morphological diversity of comet 67p/churyumov-gerasimenko. *Science* **347** (6220), aaa0440.
- UNGAR, J. E. & HAFF, P. K. 1987 Steady state saltation in air. *Sedimentology* **34** (2), 289–299.
- ZHU, W., HUO, X., ZHANG, J., WANG, P., PÄHTZ, T., HUANG, N. & HE, Z. 2019 Large effects of particle size heterogeneity on dynamic saltation threshold. *Journal of Geophysical Research: Earth Surface* **124** (8), 2311–2321.