

BrainIB: Interpretable Brain Network-based Psychiatric Diagnosis with Graph Information Bottleneck

Kaizhong Zheng, Shujian Yu, Baojuan Li, Robert Jenssen, and Badong Chen

Abstract—Developing a new diagnostic models based on the underlying biological mechanisms rather than subjective symptoms for psychiatric disorders is an emerging consensus. Recently, machine learning-based classifiers using functional connectivity (FC) for psychiatric disorders and healthy controls are developed to identify brain markers. However, existing machine learning-based diagnostic models are prone to over-fitting (due to insufficient training samples) and perform poorly in new test environment. Furthermore, it is difficult to obtain explainable and reliable brain biomarkers elucidating the underlying diagnostic decisions. These issues hinder their possible clinical applications. In this work, we propose BrainIB, a new graph neural network (GNN) framework to analyze functional magnetic resonance images (fMRI), by leveraging the famed Information Bottleneck (IB) principle. BrainIB is able to identify the most informative edges in the brain (i.e., subgraph) and generalizes well to unseen data. We evaluate the performance of BrainIB against 8 popular brain network classification methods on two multi-site, large-scale datasets and observe that our BrainIB always achieves the highest diagnosis accuracy. It also discovers the subgraph biomarkers which are consistent to clinical and neuroimaging findings.

Index Terms—Psychiatric diagnosis, graph neural network (GNN), Information bottleneck, brain network, functional magnetic resonance imaging (fMRI).

I. INTRODUCTION

PSYCHIATRIC disorders (such as depression and autism) are the leading causes of disability worldwide [1–3], whereas psychiatric diagnoses remain a challenging open issue. Existing clinical diagnosis of psychiatric disorders relies heavily on constellations of symptoms [4], such as emotional, cognitive symptoms *etc.* In general, patients with psychiatric disorders are diagnosed by psychiatrists using criteria from the Diagnostic and Statistical Manual of Mental Disorders 5th edition (DSM-V) [5]. However, traditional symptom-based diagnosis is insufficient and may lead to misdiagnosis, due

to the clinical heterogeneity [6]. Therefore, developing an effective diagnostic tool based on the underlying biological mechanisms rather than symptoms is an emerging consensus.

Functional magnetic resonance imaging (fMRI) [7] is a noninvasive neuroimaging technique that has been widely used to characterize the underlying pathophysiology of psychiatric disorders. The resting-state fMRI (rs-fMRI) can be used to study and assess alternations of whole brain functional connectivity (FC) network in diverse patient populations [8, 9]. Previous studies demonstrated that fMRI-based characterizations are reliable complements to the existing symptom-based diagnoses [8–10].

Machine learning (ML) techniques that use fMRI FC measures as input have been extensively investigated for psychiatric diagnosis. Earlier methods use shallow or simple classification models such as support vector machines (SVM) [11] and random forest (RF) [12], which are incapable of analyzing nonlinear information of brain network. Deep neural networks have gained popularity in recent years due to their strong representation power [13, 14].

In general, brain networks can be viewed as complex graphs with anatomic brain regions of interest (ROIs) represented as nodes and FC between brain ROIs as edges. This motivates the applications of graph neural networks (GNNs) [15] for psychiatric diagnosis [16, 17]. So far, GNNs have achieved promising diagnostic accuracy on autism spectrum disorder (ASD) [14], schizophrenia [18] and bipolar disorder (BD) [19].

Despite of recent performance gains, existing ML-based diagnostic models still suffer from the following issues:

- 1) **Interpretability:** Most of existing diagnostic models [14, 20] cannot discover explainable brain biomarkers (e.g., ROIs as groups of nodes or edges) elucidating the underlying diagnostic decisions and revealing neural mechanism of the disease.
- 2) **Generalization:** Most of existing diagnostic models are trained in a homogeneous or single site dataset with a small number of samples. This may increase the probability of over-fitting and lead to poor generalization capacity during deployment. For example, [21] only considers 24 patients with major depression.

In this paper, we take inspiration from the recently proposed subgraph information bottleneck (SIB) [22, 23] and develop a new GNN-based interpretable brain network classification framework that is able to identify the most informative subgraph to the decision and generalizes well to unseen data. We

This work was supported in part by the National Natural Science Foundation of China with grant numbers (62088102, U21A20485, 61976175), and the Research Council of Norway with grant number 309439. (Corresponding authors: Shujian Yu; Badong Chen.)

Kaizhong Zheng and Badong Chen are with the Institute of Artificial Intelligence and Robotics, Xi’an Jiaotong University, Xi’an (Email: kz-zheng@stu.xjtu.edu.cn; chenbd@mail.xjtu.edu.cn).

Shujian Yu is with the Department of Computer Science, Vrije Universiteit Amsterdam, Amsterdam and the Machine Learning Group, UiT - Arctic University of Norway, Norway (Email: yusj9011@gmail.com)

Robert Jenssen is with the Machine Learning Group, UiT - Arctic University of Norway, Norway (Email: robert.jenssen@uit.no).

Baojuan Li is with the School of Biomedical Engineering, Fourth Military Medical University, Xi’an (Email: libjuan@fmmu.edu.cn).

term our framework the brain information bottleneck (BrainIB) and evaluate it in two multi-site, large-scale datasets.

To summarize, our contributions are threefold:

- In terms of methodology, our BrainIB makes two improvements over SIB:
 - Instead of using the mutual information neural estimator (MINE) [24], the matrix-based Rényi’s α -order entropy functional [25, 26] is used to measure mutual information values in graph information bottleneck, which significantly stabilizes the training (see Fig. 1).
 - We optimize subgraph generator specifically for brain network analysis, which is able to discover informative edges. However, most of subgraph discovery model are always based on the node selection such as SIB [23]. Note that, edges (i.e., functional connectivities) are more critical in psychiatric diagnosis [27].
- In terms of generalization capability, we use BrainIB against other 6 popular brain network classification methods (including SIB) on two multi-site, large-scale datasets, i.e., ABIDE [28] and REST-meta-MDD [29]. Both datasets have more than 1,000 samples and consist of 17 independent sites. Our BrainIB demonstrates overwhelming performance gain in both 10-fold and leave-one-site-out cross validations.
- In terms of interpretability, we obtain disease-specific prominent brain network connections/systems in patients with MDD and ASD. Some of our discovered biomarkers are consistent with clinical and neuroimaging findings.

The remaining of this paper is organized as follows. Section II briefly introduce the related work. Section III elaborates our BrainIB which consists of three modules: subgraph generator, graph encoder and mutual information estimation module. Experiments results are presented in Section IV. Finally, Section V draws the conclusion.

II. RELATED WORK

A. Diagnostic Models For Psychiatric Disorders

The identification of predictive subnetworks and edges is an essential procedure for the development of modern psychiatric diagnostic models [27]. Traditionally, this is done by treating functional connectivities as features and performing feature selection to preserve the most salient connections. Popular feature selection methods include statistical test [30] like t-test or ranksum-test and LASSO. Our BrainIB is an end-to-end disease diagnostic model that is able to remove irrelevant or less-informative edges without an explicit feature selection procedure.

Earlier classification models for psychiatric disorders include support vector machines (SVM) and random forest (RF) [11]. For example, [31] uses linear SVM to discriminate autism patients from healthy controls and achieves an overall accuracy of 0.697. However, these shallow learning methods could not capture topological information within complex brain network structures [32] and achieve the acceptable performance on the large-scale data sets. The most recent studies

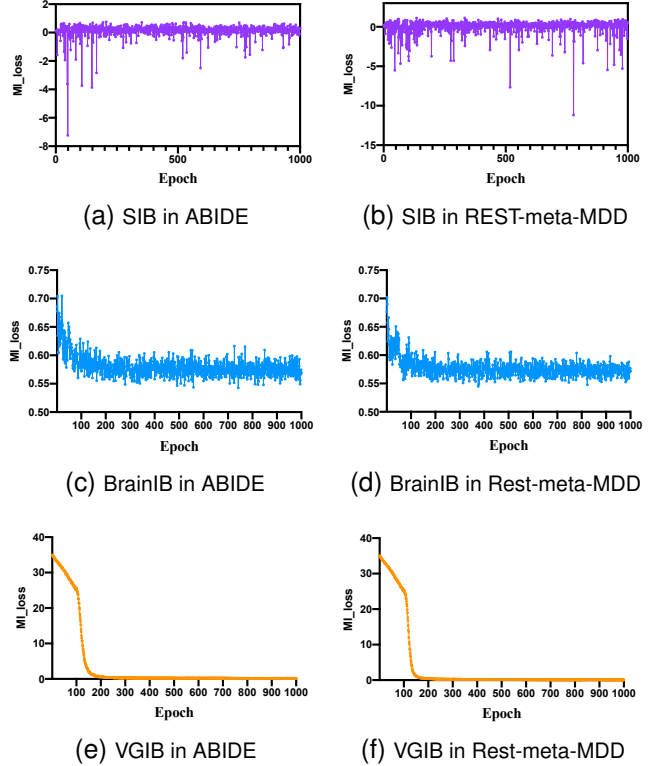


Fig. 1. Training dynamics of $I(\mathcal{G}; \mathcal{G}_{\text{sub}})$ (MI_loss) in SIB, BrainIB and VGIB over 1000 epochs on REST-meta-MDD and ABIDE. $I(\mathcal{G}; \mathcal{G}_{\text{sub}})$ is the mutual information between subgraph and input graph. The training process of BrainIB is stable, while SIB suffers from an unstable training process and inaccurate estimation of mutual information between subgraph and input graph. In addition, $I(\mathcal{G}; \mathcal{G}_{\text{sub}})$ converges faster in BrainIB, compared with VGIB.

resort to GNNs to further improve diagnostic accuracy. For example, [33] applies graph convolutional networks (GCNs) also on autism dataset and obtain a higher accuracy of 0.704. Despite the obvious performance gain, GNNs are always “black-box” algorithms, which makes it hard to understand their decision making process - a major issue for clinical applications. In this study, we propose a *built-in* explainable diagnostic model which enables automatically recognize subgraphs elucidating the underlying diagnostic decisions.

B. Graph Neural Networks For Graph Classification

Brain networks are complex graphs in which anatomic regions denote nodes and functional connectivities denote edges. Therefore, psychiatric diagnosis can be regarded as graph classification task. Given an input graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ with node feature matrix X , GNNs employ the message-passing paradigm to propagate and aggregate the representations of information along edges to generate a node representation h_v for each node $v \in \mathcal{V}$. Formally, a GNN can be defined through an aggregation function A and a combine function C such that for the k -th layer:

$$a_v^{(k)} = A^{(k)} \left(\left\{ h_u^{(k-1)} : u \in \mathcal{N}(v) \right\} \right), \quad (1)$$

$$h_v^{(k)} = C^{(k)} \left(h_v^{(k-1)}, a_v^{(k)} \right), \quad (2)$$

where $h_v^{(k)}$ is the node embedding of node v at the k -th layer and $\mathcal{N}(v)$ is the set of neighbour nodes of v . In general, the aggregation strategies of GNN include mean- [15], sum- [34], or max-pooling [35]. Here, we use Graph Isomorphism Networks (GIN) which uses sum-pooling as the aggregation strategy, as an example. Its message passing procedures:

$$h_v^k = \text{MLP}^k \left((1 + \epsilon^k) \cdot h_v^{k-1} + \sum_{u \in \mathcal{N}(v)} h_u^{k-1} \right) \quad (3)$$

where MLP is the multi-layer perceptron, ϵ refers to a learnable parameter. We initialize $H^0 = X$ in the first iteration.

For graph classification task, the entire graph's representation h_G is obtained from node embedding h_v^k through the READOUT function R:

$$h_G = \text{R} \left(\left\{ h_v^{(k)} | v \in G \right\} \right). \quad (4)$$

Averaging and summation [15, 34] are the most common strategies for the READOUT function. Another popular strategy is the hierarchical graph pooling [36, 37] that decreases the number of nodes to one.

C. Information Bottleneck and GNN Interpretability

In a typical learning scenario and more specifically classification tasks, we have input X and corresponding desired output Y , and we seek to find a mapping between X and Y via observing a finite sample generated by a fixed but unknown distribution $p(x, y)$. The Information Bottleneck (IB) principle [38] formulates the learning as:

$$\min_{p(t|x)} I(X; T) - \beta I(Y; T), \quad (5)$$

in which $I(\cdot; \cdot)$ denotes mutual information, T is the latent representation of the input X . $\beta > 0$ is a Lagrange multiplier that controls the trade-off between the **minimality** or complexity of the representation (as measured by $I(X; T)$) and the **sufficiency** of the representation T to the performance of the task (as quantified by $I(Y; T)$). In this sense, the IB principle also provides a natural approximation of *minimal sufficient statistic* [39].

The general idea of IB has recently been extended to GNNs. Let \mathcal{G} denote graph input data which encodes both graph structure information (characterized by either adjacency matrix A) and node attribute matrix X , and Y the desired response such as node labels or graph labels. The Subgraph Information Bottleneck (SIB) [23] aims to extract the most informative or interpretable subgraph \mathcal{G}_{sub} from \mathcal{G} by the following objective:

$$\mathcal{L}_{\text{SIB}} = \min I(\mathcal{G}; \mathcal{G}_{\text{sub}}) - \beta I(Y; \mathcal{G}_{\text{sub}}). \quad (6)$$

Yu *et al* [23] approximates $-I(Y; \mathcal{G}_{\text{sub}})$ by minimizing the cross-entropy loss and extracts the subgraph by removing redundant or irrelevant nodes. The mutual information term $I(\mathcal{G}; \mathcal{G}_{\text{sub}})$ is evaluated by the mutual information neural estimator (MINE) [24] which requires an additional network and is highly unstable during training. In another parallel work, the IB principle has been used to learn compressed node representations [40].

The SIB can be viewed as a *built-in* interpretable GNNs (i.e. self-explaining GNNs), as it can automatically identify the informative subgraph that is mostly influential to decision or graph label Y . The GNN interpretability has recently gained increased attention. We refer interested readers to a recent survey [41] on this topic. However, most of existing interpretation methods are *post-hoc*, which means another explanatory model is used to provide explanations for a well-trained GNN. Notable examples include [42–44]. It remains a question that the *post-hoc* explanation is unreliable in the process of underlying diagnostic decision compared with self-explaining methods [45]. In the application of brain network classification, BrainNNEExplainer [46], learns a global mask to highlight disease-specific prominent brain network connections, whereas BrainGNN [13] designed region-of-interest (ROI) aware graph convolutional layer and pooling layer to highlight salient ROIs (nodes in the graph).

III. PROPOSED FRAMEWORK

A. Problem Definition

Given a set of weighted brain networks $\{\mathcal{G}^1, \mathcal{G}^2, \dots, \mathcal{G}^N\}$, the model outputs corresponding labels $\{y^1, y^2, \dots, y^N\}$. We define the i -th brain network as $\mathcal{G}^i = (A^i, X^i)$, where A^i is the graph adjacency matrix characterizing the graph structure ($A^i \in \{0, 1\}^{n \times n}$) and X^i is node feature matrix constituted by weighted functional connectivity values ($X^i \in \mathbb{R}^{n \times n}$). Specifically, A^i is a binarized FC matrix, where only the top 20-percentile absolute values of the correlations of the matrix are transformed into ones, while the rest are transformed into zeros. For node feature X , X_k^i for node k can be defined as $X_k^i = [\rho_{k1}, \dots, \rho_{kn}]^T$, where ρ_{kl} is the Pearson's correlation coefficient for node k and node l . Fig. 2 shows the pipeline from rs-fMRI raw data to the brain functional graph. In brain network analysis, N is the number of participants and n is the number of regions of interest (ROIs). Note that, we only consider functional connectivity values as node features, which is common in brain network analysis [47]. In practice, one can incorporate other graph statistical measures such as degree profiles [48] to further improve diagnostic accuracy.

B. Overall framework of BrainIB

The flowchart of BrainIB is illustrated in Fig. 3. BrainIB consists of three modules: subgraph generator, graph encoder, and mutual information estimation module. The subgraph generator is used to sample subgraph \mathcal{G}_{sub} from the original \mathcal{G} . The graph encoder is used to learn graph embeddings from either \mathcal{G} or \mathcal{G}_{sub} . The mutual information estimation module evaluates the mutual information between \mathcal{G} or \mathcal{G}_{sub} .

C. Subgraph Generator

The procedure of subgraph generator module is shown in Fig. 4. We generate IB-Subgraph from the input graph with edge assignment rather than node assignment. Here, edge assignments and node assignments indicate each edge and node is either in or out of the IB-subgraph, respectively. Given a graph $\mathcal{G} = (A, X)$, we calculate the probability of edges to

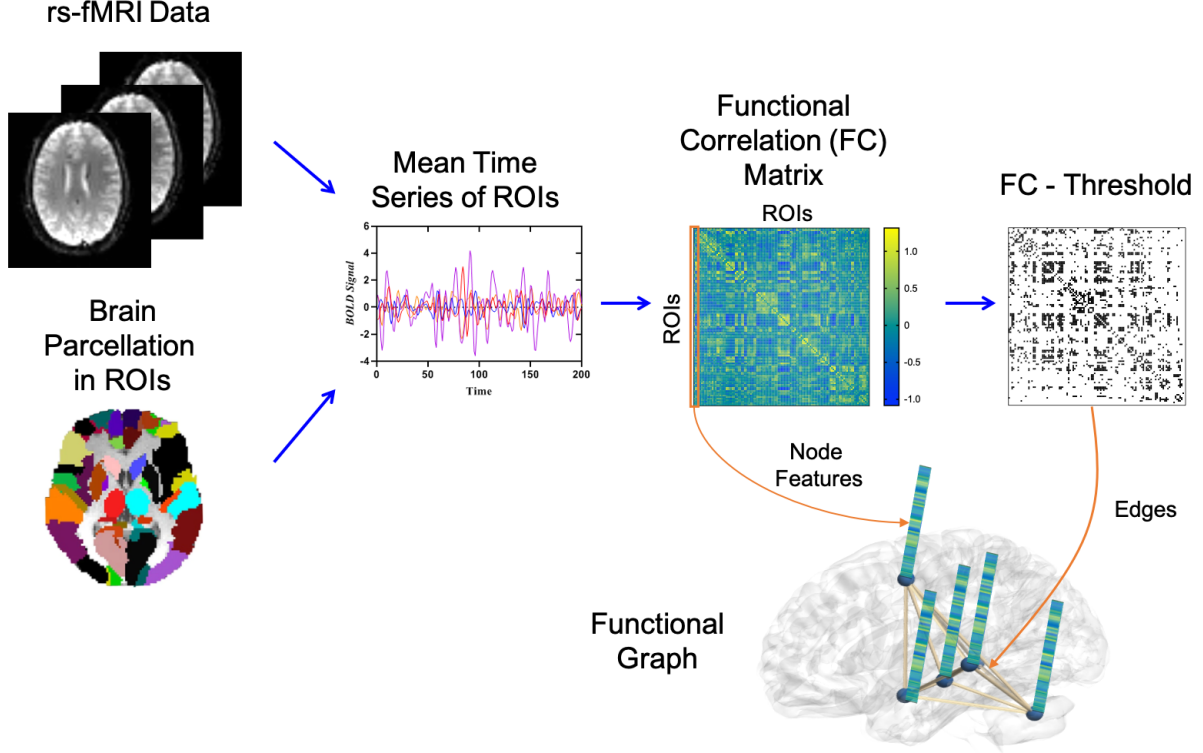


Fig. 2. Pipeline from rs-fMRI raw data to the functional graph. The resting-state fMRI raw data are preprocessed and then parcellated into regions of interest (ROIs) according to the automated anatomical labelling (AAL) atlas. The functional connectivity (FC) matrices are calculated using Pearson correlation between ROIs. From the FC we construct the brain functional graph $\mathcal{G} = (A, X)$, where A is the graph adjacency matrix characterizing the graph structure ($A \in \{0, 1\}^{n \times n}$) and X is node feature matrix. Specifically, A is a binarized FC matrix, where only the top 20-percentile absolute values of the correlations of the matrix are transformed into ones, while the rest are transformed into zeros. For node feature X , X_k for node k can be defined as $X_k = [\rho_{k1}, \dots, \rho_{kn}]^T$, where ρ_{kl} is the Pearson’s correlation coefficient for node k and node l .

determine the edge assignment \mathcal{S} from node feature X . First, we learn edge attention mask P , where each entry represents edge selection probability. For simplicity, X is directly sent to a linear layer followed by a sigmoid function to obtain edge attention mask P and ensure $p_{ij} \in [0, 1]$, where p_{ij} represents edge selection probability between node i and node j . Here, P is defines as:

$$P = (\text{Sigmoid}(\text{MLP}(X; \theta))), \quad (7)$$

where P is a $n \times n$ matrix, n is the number of nodes. Subsequently, we binarize P to obtain edge assignment $\mathcal{S} \in \{0, 1\}^{n \times n}$. In order to make sure the gradient, w.r.t., p_{ij} is computable, we leverage the gumbel-softmax reparameterization trick [49, 50] to update edge assignment \mathcal{S} . To ensure that a sufficient number of edges are retained, P is reshaped to K -dimensional matrix and then is binarized to generate edge assignment \mathcal{S} with Gumbel-Softmax approach. Specifically, Gumbel-Softmax approximates a continuous random variable represented as a one-hot vector \mathbb{R}^K according to the edge sample probability. Here, k -th edge sample probability for the K -dimensional sample vector is defined as:

$$\hat{p}_k = \frac{\exp((\log p_k + c_k) / \tau)}{\sum_{i=1}^K \exp((\log p_i + c_i) / \tau)}, \quad (8)$$

where τ is a temperature for the Concrete distribution, p is edge selection probability, \hat{p} is sample probability and c_k is generated from a Gumbel(0, 1) distribution:

$$c_k = -\log(-\log U_k), U_k \sim \text{Uniform}(0, 1). \quad (9)$$

Thus, according to this procedure, K is able to determine the size of IB-subgraph \mathcal{G}_{sub} and we could preserve $n \times n / K$ edges. Next, \mathcal{S} is transform to $n \times n$ matrix. Finally, the IB-subgraph \mathcal{G}_{sub} can be extracted through $A_{\text{sub}} = A \odot \mathcal{S}$, where \odot is entry-wise product and A , A_{sub} represent adjacency matrix of the input graph \mathcal{G} , IB-subgraph \mathcal{G}_{sub} , respectively.

Note that, the above mentioned subgraph sampling strategy only applies when we take the FC values as node feature matrix X . This is common in brain network analysis [8] (especially for traditional feature selection methods such as statistical test [30]), as one can view each FC value as an individual feature, i.e., selecting the most informative features amounts to edge selection.

In practice, if one wants to incorporate other graph properties (such as degree profiles) into node feature vectors or generalizes our framework to other graph structure data such as molecules, one possible solution is to represent the edge selection probability as [51]:

$$e_{ij} = \sigma(\text{MLP}_{\theta}([z_i; z_j])), \quad (10)$$

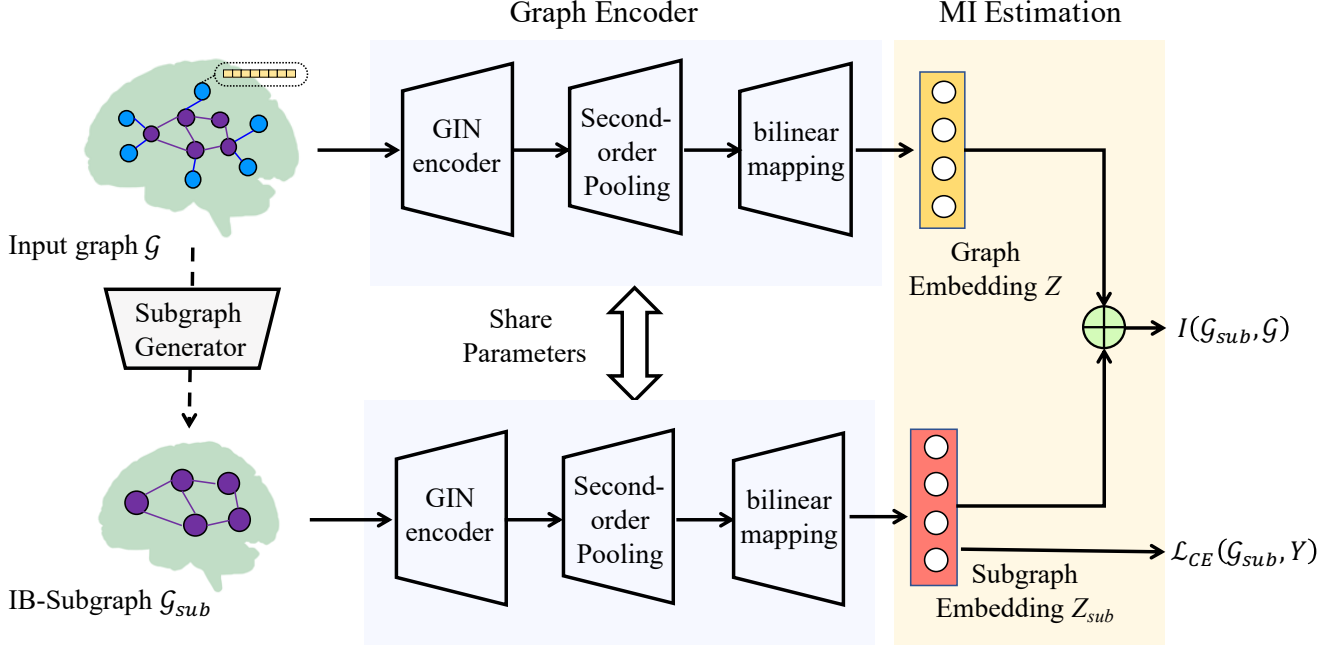


Fig. 3. Architecture of our proposed BrainIB. The framework mainly consists of three modules: subgraph generator module, graph encoder module and mutual information estimator module. Given an input graph \mathcal{G} and corresponding graph label Y , the subgraph generator is used to sample subgraph \mathcal{G}_{sub} from input graph \mathcal{G} . The graph encoder is used to learn graph embeddings Z or Z_{sub} from either \mathcal{G} or \mathcal{G}_{sub} , where Z_{sub} be used for graph classification by computing cross-entropy loss $\mathcal{L}_{CE}(\mathcal{G}_{\text{sub}}, Y)$. The mutual information estimation module evaluates the mutual information $I(\mathcal{G}_{\text{sub}}, \mathcal{G})$ between \mathcal{G} and \mathcal{G}_{sub} .

where $\sigma(\cdot)$ is the Sigmoid function, z_i and z_j are node embedding obtained from the GNN Encoder and $[\cdot; \cdot]$ is the concatenation operation.

We leave it as future work, as the focus of this work is particularly for brain networks.

D. Graph Encoder

Graph encoder module consists of GIN encoder and the bilinear mapping second-order pooling [52]. After GIN encoder, we obtain node representations $H \in \mathbb{R}^{n \times f}$ from the original node feature matrix X . We then apply the bilinear mapping second-order pooling to generate vectorized graph embeddings from H . Compared to existing graph pooling methods, bilinear mapping second-order pooling is able to use information from all nodes, collect second-order statistics and reduce the excessive number of training parameters [52]. For clarity, we first provide the definition of the bilinear mapping second-order pooling.

Definition 3.1: Given $H = [h_1, h_2, \dots, h_n]^T \in \mathbb{R}^{n \times f}$, the second-order pooling (SOPOOL) is defined as:

$$\text{SOPOOL}(H) = H^T H \in \mathbb{R}^{f \times f}. \quad (11)$$

Definition 3.2: Given $H = [h_1, h_2, \dots, h_n]^T \in \mathbb{R}^{n \times f}$ and $W \in \mathbb{R}^{f \times f'}$ a trainable matrix representing a linear mapping from \mathbb{R}^f to $\mathbb{R}^{f'}$, the bilinear mapping second-order pooling (SOPOOL_{bimap}) is formulated as:

$$\begin{aligned} \text{SOPOOL}_{\text{bimap}}(H) &= \text{SOPOOL}(HW) \\ &= W^T H^T H W \in \mathbb{R}^{f' \times f'}. \end{aligned} \quad (12)$$

We directly apply SOPOOL_{bimap} on $H = \text{GIN}(A, X)$ and flatten the output matrix into a f'^2 -dimensional graph embedding h_g :

$$h_g = \text{FLATTEN}(\text{SOPOOL}_{\text{bimap}}(\text{GIN}(A, X))) \in \mathbb{R}^{f'^2}. \quad (13)$$

E. Mutual Information Estimation

The graph IB objective includes two mutual information terms:

$$\min_{\mathcal{G}_{\text{sub}}} I(\mathcal{G}_{\text{sub}}, \mathcal{G}) - \beta I(\mathcal{G}_{\text{sub}}, Y). \quad (14)$$

Minimizing $-I(\mathcal{G}_{\text{sub}}, Y)$ (a.k.a., maximizing $I(\mathcal{G}_{\text{sub}}, Y)$) encourages \mathcal{G}_{sub} is most predictable to graph label Y . Mathematically, we have:

$$\begin{aligned} -I(\mathcal{G}_{\text{sub}}, Y) &\leq \mathbb{E}_{Y, \mathcal{G}_{\text{sub}}} -\log q_{\theta}(Y | \mathcal{G}_{\text{sub}}) \\ &:= \mathcal{L}_{CE}(\mathcal{G}_{\text{sub}}, Y), \end{aligned} \quad (15)$$

where $q_{\theta}(Y | \mathcal{G}_{\text{sub}})$ is the variational approximation to the true mapping $p(Y | \mathcal{G}_{\text{sub}})$ from \mathcal{G}_{sub} to Y . Eq. (15) indicates that $\min -I(\mathcal{G}_{\text{sub}}, Y)$ approximately equals to minimizing the cross-entropy loss \mathcal{L}_{CE} .

As for the mutual information term $I(\mathcal{G}_{\text{sub}}, \mathcal{G})$, we first obtain (vectorized) graph embeddings Z_{sub} and Z from respectively \mathcal{G}_{sub} and \mathcal{G} by the graph encoder. According to the sufficient encoder assumption [53] that the information of Z is lossless in the encoding process, we approximate $I(\mathcal{G}_{\text{sub}}, \mathcal{G})$ with $I(Z_{\text{sub}}, Z)$. Different from SIB that uses MINE which requires an additional neural network, we directly estimate $I(Z_{\text{sub}}, Z)$ with the recently proposed matrix-based Rényi's

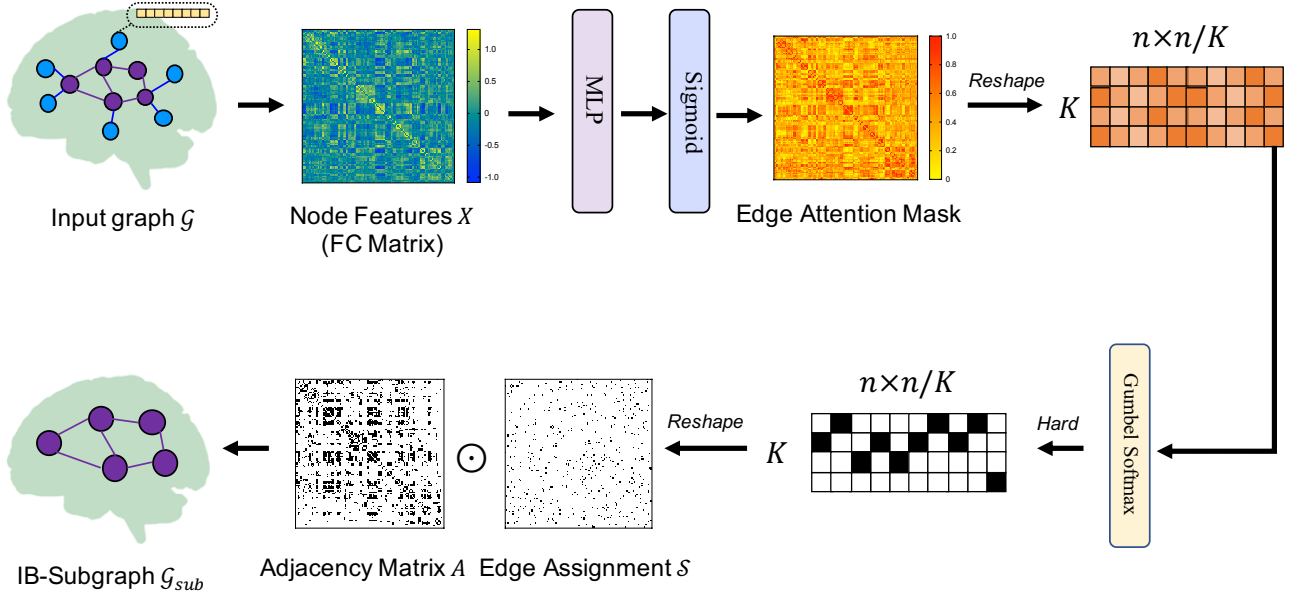


Fig. 4. Subgraph Generator. IB-Subgraph is generated from the input graph with the edge selection strategy. Given an input graph $\mathcal{G} = (A, X)$, X is sent to a linear layer followed by a sigmoid function to obtain edge attention mask P and ensure $p_{ij} \in [0, 1]$, where p_{ij} represents edge selection probability between node i and node j . Subsequently, we binarize P to obtain edge assignment \mathcal{S} . In order to make sure the gradient, w.r.t., p_{ij} is computable, we leverage the gumbel-softmax reparameterization trick to update edge assignment \mathcal{S} . To ensure that a sufficient number of edges are retained, P is reshaped to K -dimensional matrix and then is binarized to generate edge assignment \mathcal{S} with Gumbel-Softmax approach. Next, \mathcal{S} is transformed to $n \times n$ matrix. Finally, the IB-subgraph \mathcal{G}_{sub} can be extracted through $A_{\text{sub}} = A \odot \mathcal{S}$, where \odot is entry-wise product and A, A_{sub} represent adjacency matrix of the input graph \mathcal{G} , IB-subgraph \mathcal{G}_{sub} , respectively.

α -order mutual information [25, 26], which is mathematically well-defined and computationally efficient.

Specifically, given a mini-batch of samples of size N , we obtain both $\{Z^i\}_{i=1}^N$ and $\{Z_{\text{sub}}^i\}_{i=1}^N$, in which Z^i and Z_{sub}^i refer to respectively the graph embeddings of the i -th graph and the i -th subgraph (in a mini-batch). According to [25], we can evaluate the entropy of graph embeddings using the eigenspectrum of the (normalized) Gram matrix D obtained from $\{Z^i\}_{i=1}^N$ as:

$$\begin{aligned} H_\alpha(Z) &= \frac{1}{1-\alpha} \log_2(\text{tr}(D^\alpha)) \\ &= \frac{1}{1-\alpha} \log_2\left(\sum_{i=1}^N \lambda_i(D)^\alpha\right), \end{aligned} \quad (16)$$

where tr denotes trace of a matrix, $D = K/\text{tr}(K)$, and $K = \kappa(Z^i, Z^j)$ is the Gram matrix obtained from $\{Z^i\}_{i=1}^N$ with a positive definite kernel κ on all pairs of exemplars. λ_i denotes the i -th eigenvalue of D . In the limit case of $\alpha \rightarrow 1$, Eq. (16) reduced to an entropy-like measure that resembles the Shannon entropy of $H(Z)$.

Similarly, we can evaluate the entropy of subgraph embeddings from $\{Z_{\text{sub}}^i\}_{i=1}^N$ by:

$$\begin{aligned} H_\alpha(Z_{\text{sub}}) &= \frac{1}{1-\alpha} \log_2(\text{tr}(D_{\text{sub}}^\alpha)) \\ &= \frac{1}{1-\alpha} \log_2\left(\sum_{i=1}^N \lambda_i(D_{\text{sub}})^\alpha\right), \end{aligned} \quad (17)$$

where D_{sub} is the trace normalized Gram matrix evaluated on $\{Z_{\text{sub}}^i\}_{i=1}^N$ also with the kernel function κ .

The joint entropy between Z and Z_{sub} can be evaluated as:

$$H_\alpha(Z, Z_{\text{sub}}) = H_\alpha\left(\frac{D \circ D_{\text{sub}}}{\text{tr}(D \circ D_{\text{sub}})}\right), \quad (18)$$

in which $D \circ D_{\text{sub}}$ denotes the Hadamard product between the D and D_{sub} .

According to Eqs. (16)-(18), the matrix-based Rényi's α -order mutual information $I(Z_{\text{sub}}, Z)$ in analogy of Shannon's mutual information is defined as [26]:

$$I(Z_{\text{sub}}, Z) = H_\alpha(Z_{\text{sub}}) + H_\alpha(Z) - H_\alpha(Z_{\text{sub}}, Z). \quad (19)$$

In this work, we use the radial basis function (RBF) kernel κ to obtain D and D_{sub} :

$$\kappa(z^i, z^j) = \exp\left(-\frac{\|z^i - z^j\|^2}{2\sigma^2}\right), \quad (20)$$

and for the kernel width σ , we estimate the k ($k = 10$) nearest distances of each sample and obtain the mean. We set the σ with the average of mean values for all samples. We also fix $\alpha = 1.01$ to approximate Shannon mutual information.

The final objective of BrainIB can be formulated as:

$$\mathcal{L} = \mathcal{L}_{CE}(\mathcal{G}_{\text{sub}}, Y) + \beta I(\mathcal{G}_{\text{sub}}, \mathcal{G}) \quad (21)$$

in which β are the hyper-parameters.

IV. EXPERIMENTS

In order to demonstrate the effectiveness and superiority of BrainIB, we compare the performance of BrainIB against 6 popular brain network classification models on two multi-site, large-scale datasets, namely ABIDE and REST-meta-MDD. The selected competitors include: a benchmark SVM

TABLE I
DEMOGRAPHIC AND CLINICAL CHARACTERISTICS OF ABIDE AND REST-META-MDD.

Characteristic	ABIDE		REST-meta-MDD	
	ASD	TD	MDD	HC
Sample size	528	571	828	776
Age	17.0 ± 8.4	17.1 ± 7.7	34.3 ± 11.5	34.4 ± 13.0
Age range	7-64	8.1-56.2	18-65	18-64
Gender (M/F)	464/64	471/100	301/527	318/458
Education	-	-	12.0 ± 3.4	13.6 ± 3.4

“-” denotes the missing values.

model [31]; four state-of-the-art (SOTA) deep learning models including DBN [32], GCN [15], GAT [54] and GIN [34]; three self-explained GNN including SIB [23], DIR-GNN [55] and ProtGNN [56] that use GCN as the backbone network. We perform both 10-fold and leave-one-site-out cross validations to assess the generalization capacity of BrainIB to unseen data. We also evaluate the interpretability of BrainIB with respect to clinical and neuroimaging findings.

A. Data sets and Data Preprocessing

We use ABIDE and REST-meta-MDD datasets, both of which contain more than 1,000 participants collected from multi centers. Their demographic information is summarized in Table I.

The Autism Brain Imaging Data Exchange I (ABIDE-I) [28] dataset is a grassroots consortium aggregating and openly sharing more than 1,000 existing resting-state fMRI data¹. In this study, a total of 528 patients with ASD and 571 typically developed (TD) individuals were provided by ABIDE. Our further analysis was based on resting-state raw fMRI data and these data were preprocessed using the statistical parametric mapping (SPM) software². First, the resting-state fMRI images are corrected for slice timing, compensating the differences in acquisition time between slices. Then, realignment is performed to correct for head motion between fMRI images at different time point by translation and rotation. The deformation parameters from the fMRI images to the MNI (Montreal Neurological Institute) template are then used to normalize the resting-state fMRI images into a standard space. Additionally, a Gaussian filter with a half maximum width of 6 mm is used to smooth the functional images. The resulting fMRI images are temporally filtered with a band-pass filter (0.01–0.08 Hz). Finally, we regress out the effects of head motion, white matter and cerebrospinal fluid signals (CSF).

The REST-meta-MDD is the largest MDD R-fMRI database to date [29]. It contains fMRI images of 2,428 participants (1,300 patients with MDD and 1,128 HCs) collected from

twenty-five research groups from 17 hospitals in China. In the current study, we select 1,604 participants (848 MDDs and 794 HCs) according to exclusion criteria from a previous study including incomplete information, bad spatial normalization, bad coverage, excessive head motion, and sites with fewer than 10 subjects in either group and incomplete time series data. Our further analysis was based on preprocessed data previously made available by the REST-meta-MDD. The preprocessing pipeline includes discarding the initial 10 volumes, slice-timing correction, head motion correction, space normalization, temporal bandpass filtering (0.01-0.1 HZ) and removing the effects of head motion, global signal, white matter and cerebrospinal fluid signals, as well as linear trends.

After preprocessing, mean time series of each participant is extracted from each region of interests (ROIs) by the automated anatomical labelling (AAL) template, which consists of 90 cerebrum regions and 26 cerebellum regions. In addition, we compute functional connectivity (Fisher’s r-to-z transformed Pearson’s correlation) between all ROI pairs to generate a 116×116 symmetric matrix (brain network).

B. BrainIB Configurations and Hyperparameter Setup

BrainIB is implemented with PyTorch³. We use Adam optimizer [57] with an initial learning rate 0.001 and decay the learning rate by 0.5 every 50 epochs. A weight decay is set to 0.0001. For the backbone GIN model, 5 GNN layers are employed and all MLPs include 2 layers. Each hidden layer is followed by batch normalization and all MLPs also include the activation layer such as ReLU. For the hyperparameters of GIN, we choose hidden units of size 128, batch size of 32, the number of epochs 350, dropout ratio 0.5 and the number of iterations number 50. For the subgraph generator, we use a 2 layers of MLP, and the number of hidden units is set to 16. We additionally set $\beta = 0.001$ in BrainIB objective Eq. (21). Table II demonstrates the range of hyperparameters that are examined and the final specification of all hyperparameters are applied to generate the reported results. For GIN, Graph Attention Network (GAT) and SIB, we use authors’ recommended hyperparameters to train the models. Additionally, we tune the weight β of the mutual information term $I(\mathcal{G}_{\text{sub}}; \mathcal{G})$ in the SIB objective in the range $\{0.0001, 0.1\}$ and select $\beta = 0.001$ finally.

C. Hyperparameter Sensitivity Analysis and Ablation Study

To analyze how the hyperparameter β affect the model performance, we further tune $\beta \in \{0, 0.0001, 0.001, 0.01, 0.1\}$ in the loss function using the tenfold cross validation on the ABIDE and Rest-meta-MDD datasets. Fig. 5 demonstrates the mean and standard deviation of accuracy for different β across 10 folds. As shown in Fig. 5, we observe that BrainIB achieves the highest classification accuracy on both brain disease datasets, when β is set as 0.001.

Furthermore, we perform ablation studies to show whether bilinear mapping second-order pooling is able to improve the model performance. Specifically, we compare bilinear

¹http://fcon_1000.projects.nitrc.org/indi/abide/

²<https://www.fil.ion.ucl.ac.uk/spm/software/spm12/>

³We will release our code upon acceptance of this work.

TABLE II
RANGE OF HYPER-PARAMETERS AND FINAL SPECIFICATION FOR BRAINIB.

Hyper-parameter	Range Examined	Final Specification
Graph Encoder		
#GNN Layers	[2,3,4,5,6]	5
#MLP Layers	[2,3,4]	2
#Hidden Dimensions	[64,128,256,512]	128
Subgraph Generator		
#MLP Layers	[2,3,4]	2
#Hidden Dimensions	[16,32,64]	16
Learning Rate	[1e-2,1e-3,1e-4]	1e-3
Batch Size	[32,64,128]	32
Weight Decay	[1e-3,1e-4]	1e-4
K	[2,4,8]	2

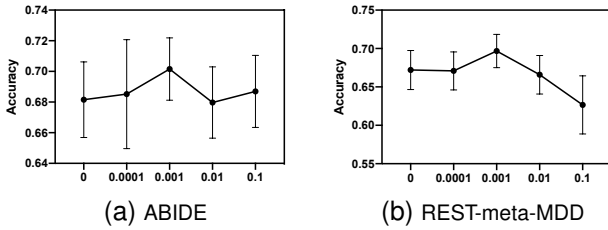


Fig. 5. The influence of hyperparameter β on performance using the ABIDE and Rest-meta-MDD datasets.

mapping second-order pooling with other graph pooling methods including sum-pooling, average-pooling and max-pooling by fixing other BrainIB configurations. Fig. 6 provides the comparison results. We observe that bilinear mapping second-order pooling achieves better classification performance than sum-pooling, average-pooling and max-pooling.

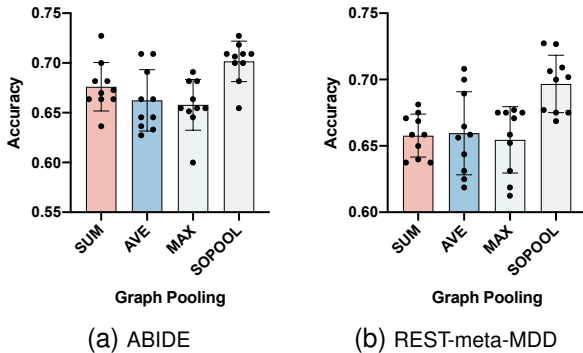


Fig. 6. The influence of different graph pooling methods on performance using the ABIDE and Rest-meta-MDD datasets. SUM, AVE, MAX and SOPOOL represent sum-pooling, average-pooling, max-pooling and bilinear mapping second-order pooling, respectively.

D. Stable Training Discussion

Although SIB completes theoretical process of subgraph information bottleneck (see eq. 6), its optimization process is unstable, especially mutual information estimation $I(\mathcal{G}_{\text{sub}}, \mathcal{G})$, which is demonstrated in Fig. 1 (a)-(b). This phenomenon is

caused by the use of the mutual information neural estimator (MINE) [24], which needs to train auxiliary neural network f and is defined as:

$$I(\mathcal{G}, \mathcal{G}_{\text{sub}}) = \sup_{f(\mathcal{G}, \mathcal{G}_{\text{sub}})} \mathbb{E}_{\mathcal{G}, \mathcal{G}_{\text{sub}} \in \mathcal{P}(\mathcal{G}, \mathcal{G}_{\text{sub}})} f(\mathcal{G}, \mathcal{G}_{\text{sub}}) - \log \mathbb{E}_{\mathcal{G} \in \mathcal{P}(\mathcal{G}), \mathcal{G}_{\text{sub}} \in \mathcal{P}(\mathcal{G}_{\text{sub}})} e^{f(\mathcal{G}, \mathcal{G}_{\text{sub}})}. \quad (22)$$

Due to the application of f , estimation of $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$ is unstable during the training or even lead to negative values (see Fig. 1 (a)-(b)). To address this issue, we use matrix-based Rényi's α -order mutual information to estimate $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$. To calculate $I(\mathcal{G}_{\text{sub}}, \mathcal{G})$, we first obtain (vectorized) graph embeddings Z_{sub} and Z from respectively \mathcal{G}_{sub} and \mathcal{G} by the graph encoder. According to the sufficient encoder assumption [53] that the information of Z is lossless in the encoding process, we approximate $I(\mathcal{G}_{\text{sub}}, \mathcal{G})$ with $I(Z_{\text{sub}}, Z)$. Because the Rényi's α -order entropy is defined in terms of the normalized eigenspectrum of the Gram matrix of the data projected to a reproducing kernel Hilbert space (RKHS) [25, 26], we could directly estimate $H_{\alpha}(Z)$, $H_{\alpha}(Z_{\text{sub}})$ and $H_{\alpha}(Z, Z_{\text{sub}})$ from data without discrete probability density function (PDF) estimation and any auxiliary neural network. According to Shannon's chain rule, $I(Z, Z_{\text{sub}})$ can be decomposed as:

$$I(Z_{\text{sub}}, Z) = H_{\alpha}(Z_{\text{sub}}) + H_{\alpha}(Z) - H_{\alpha}(Z_{\text{sub}}, Z). \quad (23)$$

Thus, $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$ can be easily computed and is also differentiable which suits well for deep learning applications. In Fig. 1 (a)-(d), matrix-based Rényi's α -order mutual information significantly stabilizes the training compared with MINE.

Recently, Yu et al. also propose Variational Graph Information Bottleneck (VGIB) [58] to address unstable training issues of SIB. VGIB employs a noise injection method to achieve a tractable variational upper bound of VGIB objective and effective optimization of the gradient-based method. However, VGIB uses the variational upper bound of $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$ to approximate $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$, while BrainIB strictly calculates mutual information between \mathcal{G} and \mathcal{G}_{sub} , where \mathcal{G}_N is perturbed graph computed by the noise injection method. In addition, we compare the stable training of BrainIB and VGIB as shown in Fig. 1. As can be seen, $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$ in BrainIB (100 epoches) converges faster than VGIB (200 epoches). In addition, the decrease in $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$ in brainIB (approximately 0.15) is smaller than VGIB (approximately 35). More importantly, although the approximation of $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$ by VGIB significantly stabilize the training, the final results may lack physical significance. As shown in fig. 1 (e)-(f), the MI loss converges to almost zero after VGIB optimization. Such a result is highly unrealistic since $I(\mathcal{G}, \mathcal{G}_{\text{sub}})$ value of zero in the information bottleneck framework implies that \mathcal{G}_{sub} does not receive any meaningful information from \mathcal{G} .

V. RESULTS

A. Generalization Performance

1) *Tenfold Cross Validation*: Here, we implement tenfold cross validation to assess performance in both datasets including ABIDE and Rest-meta-MDD and accuracy is used as

evaluating indicator. Table III shows the mean and standard deviation of accuracy for different models across 10 folds.

As can be seen, BrainIB yields significant and consistent improvements over all SOTA baselines in both datasets. For MDD dataset, BrainIB outperforms traditional shallow model (SVM) with nearly 15.5% absolute improvements. In addition, compared with other SOTA deep models such as GIN, BrainIB achieves more than 5% absolute improvements. For ASD dataset, BrainIB achieves the highest accuracy of 70.2% compared with all SOTA shallow and deep baselines. More importantly, the superiority of BrainIB against SIB suggests the effectiveness of our improvement over SIB for brain networks analysis.

TABLE III

TENFOLD CROSS VALIDATION PERFORMANCE OF DIFFERENT MODELS ON REST-META-MDD AND ABIDE. THE HIGHEST PERFORMANCE IS HIGHLIGHTED WITH BOLDFACE. ALL THE PERFORMANCE OF METHODS ARE REPORTED UNDER THEIR BEST SETTINGS.

Method	REST-meta-MDD	ABIDE
SVM	0.545 ± 0.001	0.550 ± 0.003
DBN	0.594 ± 0.001	0.541 ± 0.003
GCN	0.608 ± 0.013	0.644 ± 0.038
GAT	0.647 ± 0.017	0.679 ± 0.039
GIN	0.654 ± 0.032	0.679 ± 0.035
SIB	0.577 ± 0.032	0.627 ± 0.044
DIR-GNN	0.644 ± 0.018	0.670 ± 0.027
ProtGNN	0.610 ± 0.021	0.653 ± 0.031
BrainIB	0.700 ± 0.022	0.702 ± 0.020

2) *Leave-One-Site-Out Cross Validation*: To further assess the generalization capacity of BrainIB to unseen data, we further implement leave-one-site-out cross validation. Both datasets contain 17 independent sites. In detail, we divide each dataset into the training set (16 sites out of 17 sites) to train the model, and the testing set (remaining site out of 17 sites) for testing a model. Additionally, we compare the BrainIB with two SOTA models including GAT and GIN for performance evaluation, since GAT and GIN perform better in tenfold cross validation than other SOTA models.

For REST-meta-MDD, age, education, Hamilton Depression Scale (HAMD), illness duration, gender and sample size are selected as six representative factors. HAMD are clinical profiles for depression symptoms. The lower value of the HAMD indicates the less severity of depression. The experimental results are summarized in Table IV. Compared with the baselines, BrainIB achieves the highest mean generalization accuracy of 71.8% and yields significant and consistent improvements in most sites, suggesting an strength of our study that the BrainIB could generalize well on the completely different multi-sites even if site-specific difference. To be specific, the most classifiers achieved generalization accuracy

of more than 70%, even 85.4% for site 3. Compared with other SOTA deep models such as ProtGNN, BrainIB achieves with up to more than 17.1% absolute improvements in site 3. Interestingly, we observe the values of age and education in site 3 are similar with site 1 and site 5, suggesting that the better generalization performance in site 3 result from the prediction of homogeneous data (site 1 and site 5). However, classifiers developed in site 1 and site 14 achieved generalization accuracy of less than 70%. Similarly, we speculate that the poor generalization performance of site 1 and site 14 result from the prediction of heterogenous data. The values of representative factors in site 1 are different from the most sites, while sites with similar factors such as site 5 often obtain the poor generalization performance.

For ABIDE, MRI vendors, age, FIQ (Full-Scale Intelligence Quotient), gender and sample size are selected as five representative factors. FIQ is able to reflect the degree of brain development. Table V shows the generalized performance of BrainIB and phenotypic information for the 17 sites. As can be seen, BrainIB outperforms four SOTA deep models in mean generalization accuracy by large margins, with up to more than 2% absolute improvements. Specifically, the most classifiers achieved generalization accuracy of more than 70%, even 83.3% for CMU. However, five sites demonstrates significantly reduced accuracies than the accuracy of 70% : MAX_MUN, OHSU, PITT and TRINITY, which are consistent with the previous studies [32, 59]. These results suggest that these centers might be provided with site-specific variability and heterogeneity, which leads to the poor generalization performance. Therefore, BrainIB is more robust to generalization to a new different site and outperforms the baselines on classification accuracy by a large margin. BrainIB is able to provide clear diagnosis boundary which allows accurate diagnosis of MDD and ASD and ignores the effects of site.

B. Interpretation Analysis

1) *Disease-Specific Brain Network Connections*: In order to evaluate the interpretation of BrainIB, we further investigate the capability of IB-subgraph on interpreting the property of neural mechanism in patients with MDD and ASD. BrainIB could capture the important subgraph structure in each subject. To compare inter-group differences in subgraphs, we calculate the average subgraph and select the top 50 edges to generate the dominant subgraph. Figure 4 demonstrates the comparison of dominant subgraph G_{dsub} for healthy controls and patient groups on two datasets, in which the color of nodes represents distinct brain networks and the size of an edge is determined by its weight in the dominant subgraph.

As can be seen, patients with MDD exhibits tight interactions between default mode network and limbic network, while these connections in healthy controls are much more sparse. These patterns are consistent with the findings in Korgaonkar et al. [60], where connections between default mode network and limbic network are a predictive biomarker of remission in major depressive disorder. Abnormal affective processing and maladaptive rumination are core feature of MDD [61]. Our results found that DMN related to rumination [62] and limbic

TABLE IV

LEAVE-ONE-SET-OUT CROSS VALIDATION ON REST-META-MDD. ALL THE PERFORMANCE OF METHODS ARE REPORTED UNDER THEIR BEST SETTINGS.

Site	Age (y)	Education (y)	HAMD	Illness Duration (m)	Gender (M/F)	Sample(MDD/HC)	GAT	GIN	DIR-GNN	ProtGNN	BrainIB
site1	31.8 ± 8.5	14.5 ± 2.7	24.9 ± 4.8	5.3 ± 5.1	62/84	73/73	51.4%	58.2%	56.8%	56.8%	63.3%
site2	43.5 ± 11.7	10.8 ± 4.6	22.9 ± 3.0	29.8 ± 28.5	5/25	16/14	73.3%	66.7%	70.0%	70.0%	70.0%
site3	30.0 ± 6.2	14.6 ± 3.1	-	-	19/22	18/23	75.6%	80.5%	78.0%	68.3%	85.4%
site4	40.0 ± 11.8	13.1 ± 4.5	22.1 ± 4.4	41.5 ± 43.2	27/45	35/37	66.7%	72.2%	75.0%	63.9%	77.8%
site5	31.9 ± 10.3	12.1 ± 3.2	24.3 ± 7.9	16.6 ± 22.9	30/57	39/48	67.8%	71.3%	64.4%	63.2%	67.8%
site6	28.6 ± 8.3	14.7 ± 3.1	-	31.3 ± 43.1	52/44	48/48	67.7%	66.7%	68.8%	64.6%	68.8%
site7	32.7 ± 9.8	11.9 ± 2.8	20.7 ± 3.7	11.6 ± 23.0	38/33	45/26	67.60%	73.2%	70.4%	67.6%	73.2%
site8	30.8 ± 9.3	13.2 ± 3.6	21.6 ± 3.2	29.2 ± 23.9	17/20	20/17	62.20%	67.60%	67.6%	75.7%	75.7%
site9	33.4 ± 9.5	13.5 ± 2.2	24.8 ± 3.9	-	13/23	20/16	69.40%	72.20%	80.6%	72.2%	75.0%
site10	29.9 ± 6.3	14.0 ± 3.2	21.1 ± 3.2	6.1 ± 4.1	34/59	61/32	66.7%	71.0%	71.0%	66.7%	72.0%
site11	42.8 ± 14.1	12.2 ± 3.9	26.5 ± 5.3	41.0 ± 57.2	26/41	30/37	79.1%	79.1%	70.0%	64.2%	82.1%
site12	21.2 ± 14.1	12.2 ± 3.9	20.7 ± 5.6	-	27/55	41/41	57.3%	59.8%	64.6%	63.4%	67.1%
site13	35.1 ± 10.6	9.8 ± 3.6	19.4 ± 8.9	87.0 ± 99.6	19/30	18/31	67.3%	67.3%	67.3%	65.3%	69.4%
site14	38.9 ± 13.8	12.0 ± 3.7	21.0 ± 5.7	50.8 ± 64.6	149/321	245/225	59.1%	60.6%	56.6%	56.8%	63.2%
site15	35.2 ± 12.3	12.3 ± 2.5	14.3 ± 8.1	86.7 ± 92.7	62/82	79/65	69.4%	64.6%	61.1%	62.5%	70.1%
site16	28.8 ± 9.6	12.7 ± 2.6	23.1 ± 4.3	28.7 ± 26.6	21/17	18/20	68.40%	65.80%	68.4%	73.7%	71.1%
site17	29.7 ± 10.5	14.1 ± 3.6	18.5 ± 8.7	19.5 ± 26.1	18/27	22/23	60.00%	64.40%	68.9%	71.1%	68.90%
Mean	34.4 ± 12.3	12.8 ± 3.5	21.2 ± 6.5	39.1 ± 61.1	36/58	49/46	66.40%	68.30%	68.2%	66.2%	71.8%

“-” denotes the missing values.

network associated with emotion processing [63], providing an explanation for maladaptive rumination and negative emotion in MDD. In addition, connections within the frontoparietal system of patients are significantly less than that of healthy controls, which is consistent with the previous studies [64]. For the ASD, patterns within dorsal attention network of patients are significantly more than that of typical development controls (TD), which is in line with a recent review [65]. They review the hypothesis that the neurodevelopment of joint attention contributes to the development of neural systems for human social cognition. In addition, we also observe that the reduced number of connections within subcortical system in patients, which in line with a recent study [66].

2) *Important Brain Systems* : To investigate the contributions of brain systems to the prediction of a specific disease, we further use graph theory analysis on the subgraphs to discover important brain systems. Here, subgraph for each participant represent a weighted adjacency matrix, which doesn't remove low-probability edges. To exclude weak or irrelevant edges from graph analysis, we use network sparsity strategy to generate a series of connected networks with connection density ranging from 10% to 50% in increments of 10%. For each connection density, six topological property measurements are estimated: (1) betweenness centrality (Bc) characterizes the effect of a node on information flow between other nodes. (2) degree centrality (Dc) reflects the information communication ability in the subgraph. (3) clustering coefficient (Cp) measures the likelihood the neighborhoods of a node are connected to each other. (4) nodal efficiency (Eff) characterizes the efficiency of parallel information transfer of a node in the subgraph. (5) local efficiency (LocEff) calculates how efficient the communication is among the first neighbors of a node when it is deleted. (6) shortest path length (Lp) quantifies the mean distance or routing efficiency between

individual node and all the other nodes in the subgraph. More details are described as the previous studies [67, 68]. Then we compute the AUC (area under curve) of all topological property measurements of each node in the subgraph for each subject. Finally, all topological property measurements of 9 brain systems by averaging the measurements of nodes assigned to the same brain systems. The experimental results are summarized in Table V.

As shown in Table V, we observed that the importance of somatomotor network (SMN) for healthy controls (HC) is stronger than that of patients with MDD, while default mode network (DMN) is more important for patients than HC. These observations is in line with the findings in Yang et al. [69], where patients with MDD are characterized by decreased degree centrality in the somatomotor network. This is in line with our findings on Rest-meta-MDD in Fig. 7, in which the excessive connected structure within DMN in patients with MDD. Moreover, we also observe the importance of attention network in ASD, which is similar with the observations of explanation graph connections.

3) *Quantitative Study*: To further check the robust and interpretability of BrainIB, we compare the difference in predictions and subgraph structure obtained by BrainIB when feeding the original data and perturbed data. Specifically, we divide the ABIDE dataset into the training set (9 folds out of 10 folds), which is used for training a model, and the testing set (1 fold out of 10 folds) for testing a model. Then we construct perturbed data from testing set by adding irrelevant edges. Considering that ASD is a common psychiatric disorder characterised by early-onset difficulties in social communication [70] but cerebellum is a brain structure directly related to motor function [71], we add connections between and within cerebellum for the original data in testing set as perturbed data (see Fig. 8 (a)-(b)). Subsequently, we use training set to train

TABLE V
LEAVE-ONE-SET-OUT CROSS VALIDATION ON ABIDE. ALL THE PERFORMANCE OF METHODS ARE REPORTED UNDER THEIR BEST SETTINGS.

Site	Vendor	Age (y)	FIQ	Gender (M/F)	Sample (ASD/TD)	GAT	GIN	DIR-GNN	ProtGNN	BrainIB
CMU	Siemens	26.6 ± 5.8	115.3 ± 9.8	18/6	11/13	79.2%	83.3%	83.3%	75.0%	83.3%
CALTECH	Siemens	28.2 ± 10.7	111.3 ± 11.4	30/8	19/19	71.1%	71.1%	68.4%	68.4%	71.1%
KKI	Philips	10.1 ± 1.3	106.7 ± 15.3	42/13	22/33	72.7%	70.9%	65.5%	65.5%	72.7%
LEUVEN	Philips	18.0 ± 5.0	112.2 ± 13.0	56/8	29/35	64.1%	73.4%	68.8%	73.4%	73.4%
MAX_MUN	Siemens	26.2 ± 12.1	110.8 ± 11.3	50/7	24/33	63.2%	64.9%	64.9%	68.4%	66.7%
NYU	Siemens	15.3 ± 6.6	110.9 ± 14.9	147/37	79/105	67.4%	69.0%	63.6%	57.1%	70.1%
OHSU	Siemens	10.8 ± 1.9	111.6 ± 16.9	28/0	13/15	67.9%	71.4%	71.4%	71.4%	67.9%
OLIN	Siemens	16.8 ± 3.5	113.9 ± 17.0	31/5	20/16	66.7%	72.2%	77.8%	75.0%	75.0%
PITT	Siemens	18.9 ± 6.9	110.1 ± 12.2	49/18	30/27	64.9%	66.7%	70.2%	64.9%	66.7%
SBL	Philips	34.4 ± 8.6	109.2 ± 13.6	30/0	15/15	73.3%	76.7%	76.7%	73.3%	83.3%
SDSU	GE	14.4 ± 1.8	109.4 ± 13.8	29/7	14/22	72.2%	75.0%	75.0%	72.2%	75.0%
STANFORD	GE	10.0 ± 1.6	112.3 ± 16.4	32/8	20/20	70.0%	67.5%	80.0%	72.5%	75.0%
TRINITY	Philips	17.2 ± 3.6	110.1 ± 13.5	49/0	24/25	71.4%	63.3%	63.3%	73.5%	65.3%
UCLA	Siemens	13.0 ± 2.2	103.2 ± 12.8	87/12	54/45	71.7%	66.7%	68.7%	64.6%	74.7%
UM	GE	14.0 ± 3.2	106.9 ± 14.0	117/28	68/77	63.4%	64.1%	66.2%	62.8%	64.8%
USM	Siemens	22.1 ± 7.7	106.6 ± 16.7	101/0	58/43	73.2%	71.3%	67.3%	61.4%	73.3%
YALE	Siemens	12.7 ± 2.9	99.8 ± 20.1	40/16	28/28	80.4%	78.6%	73.2%	67.9%	82.1%
Mean	N.A.	17.1 ± 8.1	108.5 ± 15.0	55/10	31/34	70.2%	70.9%	71.1%	68.7%	73.0%

TABLE VI
TOP RANKED NEURAL SYSTEMS OF THE EXPLANATION SUBGRAPH ON MDD AND ASD FOR BOTH HEALTHY CONTROL (HC), TYPICALLY DEVELOPED (TD) INDIVIDUALS AND PATIENT UNDER SIX COMPARATIVE MEASURES.

Measures	MDD Datasets		ASD Dataset	
	MDD	HC	ASD	TD
Bc	SMN DMN	SMN DMN	VAN CBL	VAN SMN
Dc	DMN SMN	SMN DMN	CBL VN	LN DAN
Cp	SMN DMN	SMN DMN	FPN LN	VAN DMN
Eff	DMN SMN	SMN DMN	CBL VN	LN DAN
LocEff	DMN SMN	SMN DMN	DMN LN	DMN SMN
Lp	DMN SMN	SMN DMN	LN BLN	DMN VN

the model and use respectively the original input data and the perturbed data to test the performance and interpretability of model. Results demonstrate that BrainIB with original data

achieves the classification accuracy of 71.8%, while BrainIB with perturbed data achieves the classification accuracy of 65.4%, suggesting perturbed data could impair model performance. In addition, Fig. 8 (c)-(d) demonstrates subgraph from perturbed data for patients with ASD and typically developed (TD) individuals on ABIDE dataset. As can be seen, BrainIB successfully identify tight connections within dorsal attention network and reduced number of connections within subcortical network in patients with ASD, which is consistent with the results obtained with the original data. These results indicate that BrainIB is able to recognize disease-specific brain network connections with or without perturbing.

VI. CONCLUSION

In this paper, we develop BrainIB, a novel GNN framework based on information bottleneck (IB) for interpretable psychiatric diagnosis. To the best of our knowledge, this is the first work that uses IB principle for brain network analysis. BrainIB is able to effectively recognize disease-specific prominent brain network connections and demonstrates superior out-of-distribution generalization performance when compared against other state-of-the-art (SOTA) methods on two challenging psychiatric prediction datasets. We also validate the

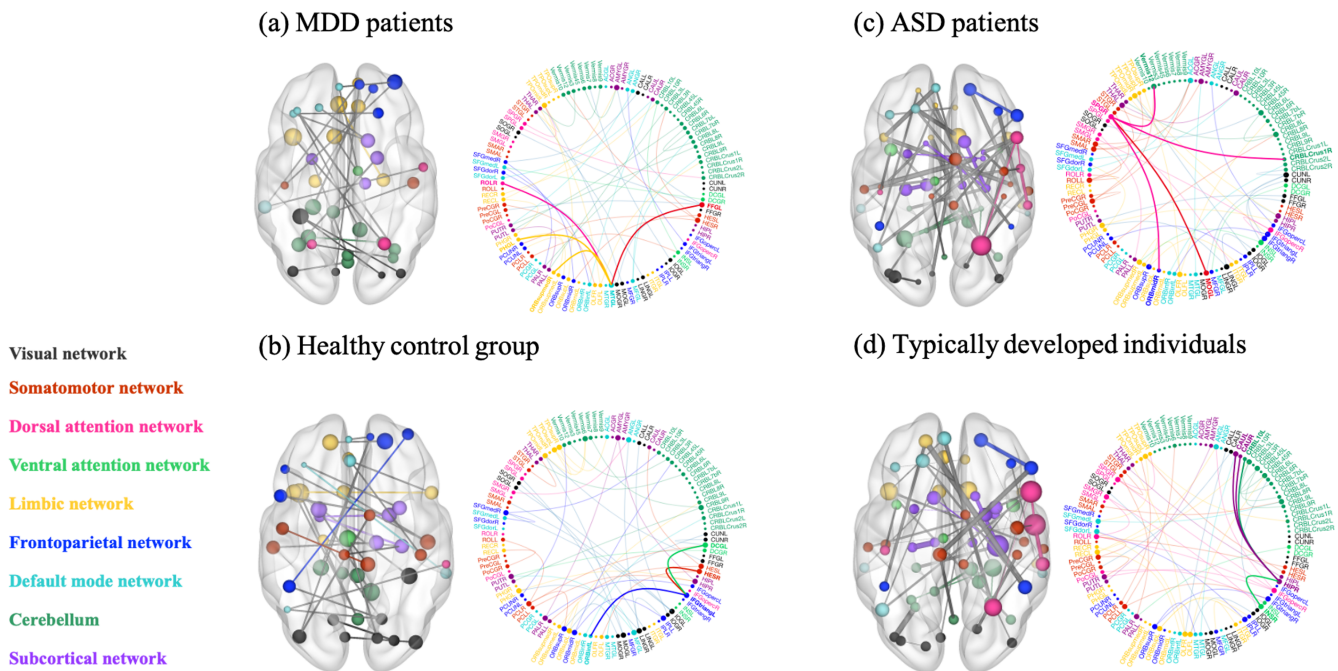


Fig. 7. Comparison of explanation graph connections in brain networks of healthy controls and patients on ASD and MDD datasets. The colors of brain neural systems are described as: visual network, somatomotor network, dorsal attention network, ventral attention network, limbic network, frontoparietal network, default mode network, cerebellum and subcortical network respectively.

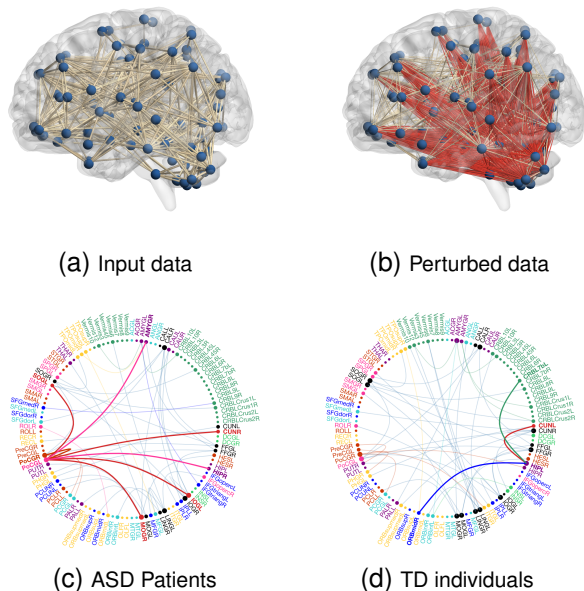


Fig. 8. The influence of perturbed data on IB-subgraph using the ABIDE datasets. (a) Original input data. (b) Perturbed data where red edges are perturbed edges. Here, perturbed edges are cerebellum connections. (c) Subgraph connections in the patients with ASD using the Perturbed data. (d) Subgraph connections in the TD individuals using the Perturbed data.

rationality of our discovered biomarkers with clinical and neuroimaging finds. Our improvements on generalization and interpretability make BrainIB moving one step ahead towards practical clinical applications. In the future, we will consider combining BrainIB with multimodal data to further improve

the accuracy of psychiatric diagnosis.

REFERENCES

- [1] M. Marshall, "The hidden links between mental disorders," *Nature*, vol. 581, no. 7806, pp. 19–22, 2020.
- [2] G. Schreiber and S. Avissar, "Application of g-proteins in the molecular diagnosis of psychiatric disorders," *Expert review of molecular diagnostics*, vol. 3, no. 1, pp. 69–80, 2003.
- [3] B. J. Sadock, V. A. Sadock, and P. Ruiz, *Comprehensive textbook of psychiatry*. lippincott Williams & wilkins Philadelphia, 2000, vol. 1.
- [4] Y. Zhang, W. Wu, R. T. Toll, S. Naparstek, A. Maron-Katz, M. Watts, J. Gordon, J. Jeong, L. Astolfi, E. Shpigel *et al.*, "Identification of psychiatric disorder subtypes from functional connectivity patterns in resting-state electroencephalography," *Nature biomedical engineering*, vol. 5, no. 4, pp. 309–323, 2021.
- [5] A. P. Association *et al.*, "American psychiatric association: Diagnostic and statistical manual of mental disorders," 1994.
- [6] M. Goodkind, S. B. Eickhoff, D. J. Oathes, Y. Jiang, A. Chang, L. B. Jones-Hagata, B. N. Ortega, Y. V. Zaiko, E. L. Roach, M. S. Korgaonkar *et al.*, "Identification of a common neurobiological substrate for mental illness," *JAMA psychiatry*, vol. 72, no. 4, pp. 305–315, 2015.
- [7] P. M. Matthews and P. Jezzard, "Functional magnetic resonance imaging," *Journal of Neurology, Neurosurgery & Psychiatry*, vol. 75, no. 1, pp. 6–12, 2004.
- [8] B. B. Biswal, M. Mennes, X.-N. Zuo, S. Gohel, C. Kelly, S. M. Smith, C. F. Beckmann, J. S. Adelstein, R. L.

- Buckner, S. Colcombe *et al.*, “Toward discovery science of human brain function,” *Proceedings of the National Academy of Sciences*, vol. 107, no. 10, pp. 4734–4739, 2010.
- [9] M. Xia and Y. He, “Functional connectomics from a “big data” perspective,” *Neuroimage*, vol. 160, pp. 152–167, 2017.
- [10] N. Yahata, J. Morimoto, R. Hashimoto, G. Lisi, K. Shibata, Y. Kawakubo, H. Kuwabara, M. Kuroda, T. Yamada, F. Megumi *et al.*, “A small number of abnormal brain connections predicts adult autism spectrum disorder,” *Nature communications*, vol. 7, no. 1, pp. 1–12, 2016.
- [11] X. Pan and Y. Xu, “A novel and safe two-stage screening method for support vector machine,” *IEEE transactions on neural networks and learning systems*, vol. 30, no. 8, pp. 2263–2274, 2018.
- [12] J. F. A. Ronicko, J. Thomas, P. Thangavel, V. Koneru, G. Langs, and J. Dauwels, “Diagnostic classification of autism using resting-state fmri data improves with full correlation functional brain connectivity compared to partial correlation,” *Journal of Neuroscience Methods*, vol. 345, p. 108884, 2020.
- [13] X. Li, Y. Zhou, N. Dvornek, M. Zhang, S. Gao, J. Zhuang, D. Scheinost, L. H. Staib, P. Ventola, and J. S. Duncan, “Braingnn: Interpretable brain graph neural network for fmri analysis,” *Medical Image Analysis*, vol. 74, p. 102233, 2021.
- [14] Z. Rakhimberdina, X. Liu, and T. Murata, “Population graph-based multi-model ensemble method for diagnosing autism spectrum disorder,” *Sensors*, vol. 20, no. 21, p. 6001, 2020.
- [15] T. N. Kipf and M. Welling, “Semi-supervised classification with graph convolutional networks,” *International Conference on Learning Representations*, 2017.
- [16] G. Mårtensson, J. B. Pereira, P. Mecocci, B. Vellas, M. Tsolaki, I. Kłoszewska, H. Soininen, S. Lovestone, A. Simmons, G. Volpe *et al.*, “Stability of graph theoretical measures in structural brain networks in alzheimer’s disease,” *Scientific reports*, vol. 8, no. 1, pp. 1–15, 2018.
- [17] C. Yang, P. Zhuang, W. Shi, A. Luu, and P. Li, “Conditional structure generation through graph variational generative adversarial nets,” *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- [18] Z. Rakhimberdina and T. Murata, “Linear graph convolutional model for diagnosing brain disorders,” in *International Conference on Complex Networks and Their Applications*. Springer, 2019, pp. 815–826.
- [19] H. Yang, X. Li, Y. Wu, S. Li, S. Lu, J. S. Duncan, J. C. Gee, and S. Gu, “Interpretable multimodality embedding of cerebral cortex using attention graph network for identifying bipolar disorder,” in *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 2019, pp. 799–807.
- [20] D. Yao, M. Liu, M. Wang, C. Lian, J. Wei, L. Sun, J. Sui, and D. Shen, “Triplet graph convolutional network for multi-scale analysis of functional connectivity using functional mri,” in *International Workshop on Graph Learning in Medical Imaging*. Springer, 2019, pp. 70–78.
- [21] L.-L. Zeng, H. Shen, L. Liu, L. Wang, B. Li, P. Fang, Z. Zhou, Y. Li, and D. Hu, “Identifying major depression using whole-brain functional connectivity: a multivariate pattern analysis,” *Brain*, vol. 135, no. 5, pp. 1498–1507, 2012.
- [22] J. Yu, T. Xu, Y. Rong, Y. Bian, J. Huang, and R. He, “Graph information bottleneck for subgraph recognition,” in *International Conference on Learning Representations*, 2020.
- [23] —, “Recognizing predictive substructures with subgraph information bottleneck,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2021.
- [24] M. I. Belghazi, A. Baratin, S. Rajeshwar, S. Ozair, Y. Bengio, A. Courville, and D. Hjelm, “Mutual information neural estimation,” in *International conference on machine learning*. PMLR, 2018, pp. 531–540.
- [25] L. G. S. Giraldo, M. Rao, and J. C. Principe, “Measures of entropy from data using infinitely divisible kernels,” *IEEE Transactions on Information Theory*, vol. 61, no. 1, pp. 535–548, 2014.
- [26] S. Yu, L. G. S. Giraldo, R. Jenssen, and J. C. Principe, “Multivariate extension of matrix-based rényi’s α -order entropy functional,” *IEEE transactions on pattern analysis and machine intelligence*, vol. 42, no. 11, pp. 2960–2966, 2019.
- [27] L. Wang, F. V. Lin, M. Cole, and Z. Zhang, “Learning clique subgraphs in structural brain network classification with application to crystallized cognition,” *Neuroimage*, vol. 225, p. 117493, 2021.
- [28] A. Di Martino, C.-G. Yan, Q. Li, E. Denio, F. X. Castellanos, K. Alaerts, J. S. Anderson, M. Assaf, S. Y. Bookheimer, M. Dapretto *et al.*, “The autism brain imaging data exchange: towards a large-scale evaluation of the intrinsic brain architecture in autism,” *Molecular psychiatry*, vol. 19, no. 6, pp. 659–667, 2014.
- [29] C.-G. Yan, X. Chen, L. Li, F. X. Castellanos, T.-J. Bai, Q.-J. Bo, J. Cao, G.-M. Chen, N.-X. Chen, W. Chen *et al.*, “Reduced default mode network functional connectivity in patients with recurrent major depressive disorder,” *Proceedings of the National Academy of Sciences*, vol. 116, no. 18, pp. 9078–9083, 2019.
- [30] Y. Du, Z. Fu, and V. D. Calhoun, “Classification and prediction of brain disorders using functional connectivity: promising but challenging,” *Frontiers in neuroscience*, vol. 12, p. 525, 2018.
- [31] M. Plitt, K. A. Barnes, and A. Martin, “Functional connectivity classification of autism identifies highly predictive brain features but falls short of biomarker standards,” *Neuroimage Clinical*, vol. 7, no. C, 2015.
- [32] Z.-A. Huang, Z. Zhu, C. H. Yau, and K. C. Tan, “Identifying autism spectrum disorder from resting-state fmri using deep belief network,” *IEEE Transactions on Neural Networks and Learning Systems*, vol. 32, no. 7, pp. 2847–2861, 2020.
- [33] S. Parisot, S. I. Ktena, E. Ferrante, M. Lee, R. Guerrero, B. Glocker, and D. Rueckert, “Disease prediction using

- graph convolutional networks: application to autism spectrum disorder and alzheimer’s disease,” *Medical image analysis*, vol. 48, pp. 117–130, 2018.
- [34] K. Xu, W. Hu, J. Leskovec, and S. Jegelka, “How powerful are graph neural networks?” in *International Conference on Learning Representations*, 2018.
- [35] W. Hamilton, Z. Ying, and J. Leskovec, “Inductive representation learning on large graphs,” *Advances in neural information processing systems*, vol. 30, 2017.
- [36] Z. Ying, J. You, C. Morris, X. Ren, W. Hamilton, and J. Leskovec, “Hierarchical graph representation learning with differentiable pooling,” *Advances in neural information processing systems*, vol. 31, 2018.
- [37] J. Lee, I. Lee, and J. Kang, “Self-attention graph pooling,” in *International conference on machine learning*. PMLR, 2019, pp. 3734–3743.
- [38] N. Tishby, F. C. Pereira, and W. Bialek, “The information bottleneck method,” in *Proc. 37th Annual Allerton Conference on Communications, Control and Computing*, 1999, pp. 368–377.
- [39] R. Gilad-Bachrach, A. Navot, and N. Tishby, “An information theoretic tradeoff between complexity and accuracy,” in *Learning Theory and Kernel Machines*. Springer, 2003, pp. 595–609.
- [40] T. Wu, H. Ren, P. Li, and J. Leskovec, “Graph information bottleneck,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 20 437–20 448, 2020.
- [41] H. Yuan, H. Yu, S. Gui, and S. Ji, “Explainability in graph neural networks: A taxonomic survey,” *arXiv preprint arXiv:2012.15445*, 2020.
- [42] Z. Ying, D. Bourgeois, J. You, M. Zitnik, and J. Leskovec, “Gnnexplainer: Generating explanations for graph neural networks,” *Advances in neural information processing systems*, vol. 32, 2019.
- [43] D. Luo, W. Cheng, D. Xu, W. Yu, B. Zong, H. Chen, and X. Zhang, “Parameterized explainer for graph neural network,” *Advances in neural information processing systems*, vol. 33, pp. 19 620–19 631, 2020.
- [44] H. Yuan, H. Yu, J. Wang, K. Li, and S. Ji, “On explainability of graph neural networks via subgraph explorations,” in *International Conference on Machine Learning*. PMLR, 2021, pp. 12 241–12 252.
- [45] C. Rudin, “Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead,” *Nature Machine Intelligence*, vol. 1, no. 5, pp. 206–215, 2019.
- [46] H. Cui, W. Dai, Y. Zhu, X. Li, L. He, and C. Yang, “Brainnnexplainer: An interpretable graph neural network framework for brain network based disease analysis,” *International Conference on Machine Learning*, 2021.
- [47] S. Gallo, A. El-Gazzar, P. Zhutovsky, R. M. Thomas, N. Javaheripour, M. Li, L. Bartova, D. Bathula, U. Dannlowski, C. Davey *et al.*, “Functional connectivity signatures of major depressive disorder: machine learning analysis of two multicenter neuroimaging studies,” *Molecular Psychiatry*, pp. 1–10, 2023.
- [48] C. Cai and Y. Wang, “A simple yet effective baseline for non-attributed graph classification,” *International Conference on Machine Learning*, 2019.
- [49] C. Maddison, A. Mnih, and Y. Teh, “The concrete distribution: A continuous relaxation of discrete random variables,” in *Proceedings of the international conference on learning Representations*, 2017.
- [50] E. Jang, S. Gu, and B. Poole, “Categorical reparameterization with gumbel-softmax,” *stat*, vol. 1050, p. 5, 2017.
- [51] Z. Zhang, Q. Liu, H. Wang, C. Lu, and C. Lee, “Protgnn: Towards self-explaining graph neural networks,” *Association for the Advance of Artificial Intelligence*, 2021.
- [52] Z. Wang and S. Ji, “Second-order pooling for graph neural networks,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2020.
- [53] Y. Tian, C. Sun, B. Poole, D. Krishnan, C. Schmid, and P. Isola, “What makes for good views for contrastive learning?” *Advances in Neural Information Processing Systems*, vol. 33, pp. 6827–6839, 2020.
- [54] P. Veličković, G. Cucurull, A. Casanova, A. Romero, P. Liò, and Y. Bengio, “Graph attention networks,” in *International Conference on Learning Representations*, 2018.
- [55] Y. Wu, X. Wang, A. Zhang, X. He, and T.-S. Chua, “Discovering invariant rationales for graph neural networks,” in *International Conference on Learning Representations*, 2022.
- [56] Z. Zhang, Q. Liu, H. Wang, C. Lu, and C. Lee, “Protgnn: Towards self-explaining graph neural networks,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 36, no. 8, 2022, pp. 9127–9135.
- [57] D. P. Kingma and J. Ba, “Adam: A method for stochastic optimization,” *arXiv preprint arXiv:1412.6980*, 2014.
- [58] J. Yu, J. Cao, and R. He, “Improving subgraph recognition with variational graph information bottleneck,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 19 396–19 405.
- [59] A. S. Heinsfeld, A. R. Franco, R. C. Craddock, A. Buchweitz, and F. Meneguzzi, “Identification of autism spectrum disorder using deep learning and the abide dataset,” *NeuroImage: Clinical*, vol. 17, pp. 16–23, 2018.
- [60] M. S. Korgaonkar, A. N. Goldstein-Piekarski, A. Fornito, and L. M. Williams, “Intrinsic connectomes are a predictive biomarker of remission in major depressive disorder,” *Molecular psychiatry*, vol. 25, no. 7, pp. 1537–1549, 2020.
- [61] R. H. Belmaker and G. Agam, “Major depressive disorder,” *New England Journal of Medicine*, vol. 358, no. 1, pp. 55–68, 2008.
- [62] R. H. Kaiser, S. Whitfield-Gabrieli, D. G. Dillon, F. Goer, M. Beltzer, J. Minkel, M. Smoski, G. Dichter, and D. A. Pizzagalli, “Dynamic resting-state functional connectivity in major depression,” *Neuropsychopharmacology*, vol. 41, no. 7, pp. 1822–1830, 2016.
- [63] E. T. Rolls, “Limbic systems for emotion and for memory, but no single limbic system,” *Cortex*, vol. 62, pp. 119–157, 2015.
- [64] S. Rai, K. R. Griffiths, I. A. Breukelaar, A. R. Barreiros, W. Chen, P. Boyce, P. Hazell, S. L. Foster, G. S.

- Malhi, A. W. Harris *et al.*, “Default-mode and fronto-parietal network connectivity during rest distinguishes asymptomatic patients with bipolar disorder and major depressive disorder,” *Translational psychiatry*, vol. 11, no. 1, pp. 1–8, 2021.
- [65] P. Mundy, “A review of joint attention and social-cognitive brain systems in typical development and autism spectrum disorder,” *European Journal of Neuroscience*, vol. 47, no. 6, pp. 497–514, 2018.
- [66] M. Hoogman, D. Van Rooij, M. Klein, P. Boedhoe, I. Ilioska, T. Li, Y. Patel, M. C. Postema, Y. Zhang-James, E. Anagnostou *et al.*, “Consortium neuroscience of attention deficit/hyperactivity disorder and autism spectrum disorder: The enigma adventure,” *Human brain mapping*, vol. 43, no. 1, pp. 37–55, 2022.
- [67] M. Rubinov and O. Sporns, “Complex network measures of brain connectivity: uses and interpretations,” *Neuroimage*, vol. 52, no. 3, pp. 1059–1069, 2010.
- [68] M. Mazrooyisebdani, V. A. Nair, C. Garcia-Ramos, R. Mohanty, E. Meyerand, B. Hermann, V. Prabhakaran, and R. Ahmed, “Graph theory analysis of functional connectivity combined with machine learning approaches demonstrates widespread network differences and predicts clinical variables in temporal lobe epilepsy,” *Brain connectivity*, vol. 10, no. 1, pp. 39–50, 2020.
- [69] H. Yang, X. Chen, Z.-B. Chen, L. Li, X.-Y. Li, F. X. Castellanos, T.-J. Bai, Q.-J. Bo, J. Cao, Z.-K. Chang *et al.*, “Disrupted intrinsic functional brain topology in patients with major depressive disorder,” *Molecular psychiatry*, pp. 1–9, 2021.
- [70] R. Keller, F. Ardizzone, C. Finardi, R. Colella, C. Genuario, M. Lopez, L. Salerno, E. Nobile, and G. Cicinelli, “Real-life social-skills training and motor-skills training in adults with autism spectrum disorder: The con-tatto project walking down the francigena route,” *Frontiers in Psychiatry*, vol. 13, p. 743, 2022.
- [71] L. N. Miterko, K. B. Baker, J. Beckinghausen, L. V. Bradnam, M. Y. Cheng, J. Cooperrider, M. R. DeLong, S. V. Gornati, M. Hallett, D. H. Heck *et al.*, “Consensus paper: experimental neurostimulation of the cerebellum,” *The Cerebellum*, vol. 18, pp. 1064–1097, 2019.