

The performance of the MAGIC telescopes using deep convolutional neural networks with CTLearn

T. Miener,^{a,*} D. Nieto,^a R. López-Coto,^b J. L. Contreras,^a J. G. Green,^c D. Green^c and E. Mariotti^d on behalf of the MAGIC Collaboration

^a*Instituto de Física de Partículas y del Cosmos and Departamento de EMFTEL, Universidad Complutense de Madrid, Spain*

^b*Instituto de Astrofísica de Andalucía - CSIC, Granada, Spain*

^c*Max-Planck-Institut für Physik, München, Germany*

^d*Dipartimento di Fisica e Astronomia dell'Università and Sezione INFN, Padova, Italy*

E-mail: tmiener@ucm.es

The Major Atmospheric Gamma Imaging Cherenkov (MAGIC) telescope system is located on the Canary Island of La Palma and inspects the very high-energy (VHE, few tens of GeV and above) gamma-ray sky. MAGIC consists of two imaging atmospheric Cherenkov telescopes (IACTs), which capture images of the air showers originating from the absorption of gamma rays and cosmic rays by the atmosphere, through the detection of Cherenkov photons emitted in the shower. The sensitivity of IACTs to gamma-ray sources is mainly determined by the ability to reconstruct the properties (type, energy, and arrival direction) of the primary particle generating the air shower. The state-of-the-art IACT pipeline for shower reconstruction is based on the parameterization of the shower images by extracting geometric and stereoscopic features and machine learning algorithms like random forest or boosted decision trees. In this contribution, we explore deep convolutional neural networks applied directly to the pixelized images of the camera as a promising method for IACT full-event reconstruction and present the performance of the method on observational data using CTLearn, a package for IACT event reconstruction that exploits deep learning.

*7th Heidelberg International Symposium on High-Energy Gamma-Ray Astronomy (Gamma2022)
4-8 July 2022
Barcelona, Spain*

*Speaker

1. Introduction

In this contribution, we show how deep convolutional neural networks (CNNs) can be utilized to detect astrophysical gamma-ray sources like the Crab Nebula using CTLearn¹ [1–4], a deep learning (DL) framework for IACT event reconstruction, and DL1-Data-Handler² (DL1DH) [5], a package designed for the data management of machine learning image analysis techniques for IACT data. The results are compared to the standard analysis (random forest (RF) for the background rejection, Look-Up tables (LUTs) for the energy estimation and RF for bidimensional direction reconstruction) obtained with MAGIC Analysis and Reconstruction Software MARS [6, 7]. Previous DL analyses of MAGIC data [8] were carried out with CTLearn v0.5 based on TensorFlow³ v1, while this work used CTLearn v0.6, which adopted the Keras⁴ API [9] from TensorFlow v2 [10].

The workflow of the MAGIC DL analysis with CTLearn is illustrated in Fig. 1. First, the images are calibrated and cleaned by MARS to suppress the major fraction of the Night Sky Background (NSB). Crucial information are translated into uproot⁵-readable branches [11] using a complementary macro. Then, the DL1DH assembles several data levels from MARS and unifies them in a common data format in HDF5 designed for DL purposes. The image preprocessing and data reading is managed by the DL1DH. Bilinear interpolation is used to map the hexagonal pixel layout of the MAGIC cameras to a Cartesian lattice to directly apply CNNs [12]. Finally, CTLearn performs training and prediction with CNN-based models, allowing for full-event reconstruction.

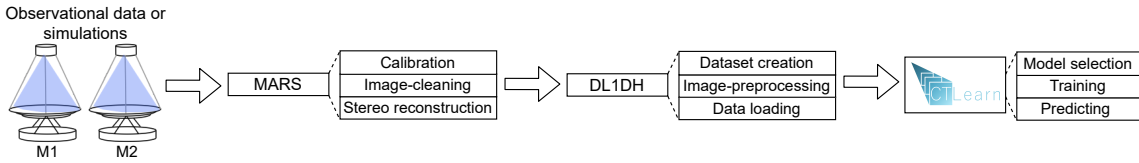


Figure 1: Workflow of the MAGIC DL analysis with CTLearn [8].

2. DL analysis with the MAGIC telescopes

2.1 Model selection

For this work, we selected CTLearn’s Thin-ResNet (TRN) [15] model [13, 14], which is a shallow residual neural network [16] with 33 layers⁶. In each of the residual blocks, we deploy a dual squeeze-and-excitation (SE) attention mechanism [17] to focus on the channel relationship. We perform either particle classification or regression (energy or arrival direction reconstruction) with a fully-connected head (FCH), a traditional multi-layer perceptron (MLP) neural network. The properties (type, energy, and arrival direction) of the primary particle generating the air

¹<https://github.com/ctlearn-project/ctlearn>

²<https://github.com/cta-observatory/dl1-data-handler>

³<https://www.tensorflow.org/>

⁴<https://keras.io/>

⁵<https://github.com/scikit-hep/uproot4>

⁶The first initialization layer of the original Thin-ResNet [15] is skipped in order to adjust for the specific input shape of the MAGIC images.

shower are reconstructed in the single-task learning mode (see [18] for an IACT-based multi-task learning architecture), where each task is trained with a separate network. We explore stereoscopic information by concatenating the images (integrated pixel charges and signal arrival times) of the two MAGIC telescopes channel-wise before feeding the network as depicted in Fig. 2.

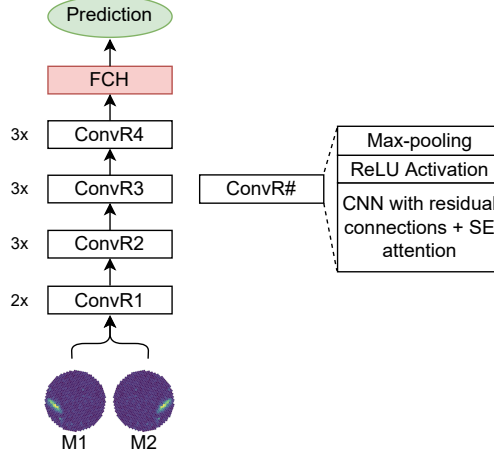


Figure 2: CTLearn’s TRN model with channel-wise concatenation of the two stereoscopic images recorded by the MAGIC telescopes (M1 and M2).

2.2 Validation on simulations

The evaluation of the performance using common metrics like ROC curves, energy and angular resolution curves with the same quality cuts (see Fig. 3) are taken from [8]. A similar performance is also observed with CTLearn v0.6. Monte Carlo (MC) gamma simulations coming uniformly from a 0.4° offset of the telescope pointing (ringwobble) are used to obtain the reconstruction performance. For the background rejection (see *left panel* of Fig. 3), we tested against MC proton simulations and observational off-source data, where we do not expect any gamma-ray signal.

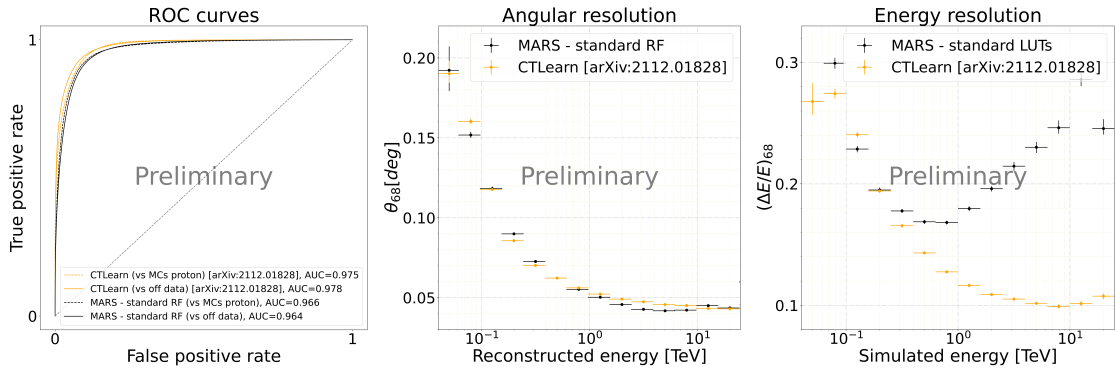


Figure 3: The validation of the performance is taken from [8]. *Left)* ROC curves with MC proton simulations and observational off data. *Center)* Angular resolution vs. reconstructed energy. *Right)* Energy resolution vs. simulated energy.

2.3 Results on observational data

We analyzed 5.38 h of observations of the standard gamma-ray candle the Crab Nebula, taken with the MAGIC telescopes on four different nights in 2016 under good weather conditions at low zenith distance ($z_d < 35^\circ$). We used MARS and CTLearn with two settings of analysis cuts (in background suppression and reconstructed energy) focusing on the medium energy (ME; $E > 250$ GeV) and low energy (LE; $E > 100$ GeV) range. For a fair comparison between the different analysis methods, the background (bkg) rates of the CTLearn analyses are adjusted, through a fine-tuning of the background suppression cut, to match for the corresponding standard MARS analyses (ME or LE). The Crab Nebula is detected using θ^2 plots (see Fig. 4 for the CTLearn ME analysis), where θ is the angular separation of the source position and the reconstructed arrival direction of the very high-energy photon. The main results of all analyses are summarized in Tab. 1. The same arrival direction cuts, which defines the fiducial gamma-ray signal region in the θ^2 plots, are applied to all different analysis methods. Three off-source positions are considered to evaluate the background distributions. The sensitivity is computed as the strength of the source that gives $\text{excess}/\sqrt{\text{background}} = 5$ after 50h with the condition of $\text{excess}/\text{background} > 5\%$ and is given in percentage of the Crab Nebula flux. The significance is calculated following Li&Ma [19].

Analysis	N_{on}	N_{off}	N_{ex}	γ rate [/min]	bkg rate [/min]	Sen. [% Crab]	Sig. (Li&Ma)
MARS – ME	1934	45.3 ± 3.9	1888.7 ± 44.1	5.85 ± 0.14	0.140 ± 0.012	0.58 ± 0.03	66.6σ
CTLearn – ME	1907	46.0 ± 3.9	1861.0 ± 43.8	5.77 ± 0.14	0.143 ± 0.012	0.60 ± 0.03	66.0σ
MARS – LE	7933	1827.3 ± 24.7	6105.7 ± 92.4	18.91 ± 0.29	5.661 ± 0.076	1.50 ± 0.01	83.7σ
CTLearn – LE	7889	1826.3 ± 24.7	6062.7 ± 92.2	18.78 ± 0.29	5.658 ± 0.076	1.51 ± 0.01	83.2σ

Table 1: Summary of all performed analyses (LE/ME and MARS/CTLearn) of the same Crab Nebula sample.

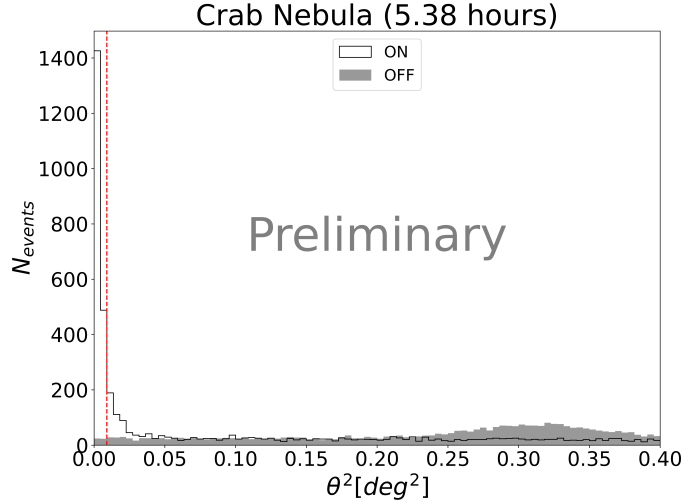


Figure 4: θ^2 plot for the CTLearn ME analysis.

3. Conclusions and outlook

This contribution shows that CNN-based full-event reconstruction works for MC simulations and observational data of the MAGIC telescopes. The performance obtained with CTLearn v0.6 matches the sensitivity of detection of the conventional analysis on real data. The selected TRN model is relatively shallow and further performance enhancements are foreseen by increasing the model depth/complexity. We plan to evaluate the full performance of the MAGIC telescopes with CNN-based analyses under various observation conditions in the future.

References

- [1] **Brill et al.** CTLearn v0.6.0: Deep learning for imaging atmospheric Cherenkov telescopes event reconstruction, *Zenodo* [[10.5281/zenodo.6842323](https://zenodo.org/record/6842323)], (2022).
- [2] **Nieto et al.** Exploring deep learning as an event classification method for the Cherenkov Telescope Array, *Proceedings of 35th International Cosmic Ray Conference (ICRC)* **301**, 809 (2017).
- [3] **Nieto et al.** CTLearn: Deep Learning for Gamma-ray Astronomy, *Proceedings of 36th International Cosmic Ray Conference (ICRC)* **358**, 752 (2019).
- [4] **Nieto et al.** Reconstruction of IACT events using deep learning techniques with CTLearn, *Proceedings of XXX Astronomical Data Analysis Software and Systems (ADASS) conference* **532**, 191 (2022).
- [5] **Kim et al.** DL1-Data-Handler v0.10.8: DL1 HDF5 writer, reader, and processor for IACT data, *Zenodo* [[10.5281/zenodo.7053921](https://zenodo.org/record/7053921)], (2022).
- [6] **Zanin et al.** MARS, The MAGIC Analysis and Reconstruction Software, *Proceedings of 33th International Cosmic Ray Conference (ICRC)*, 773 (2013).
- [7] **Aleksić et al.** The major upgrade of the MAGIC telescopes, Part II: A performance study using observations of the Crab Nebula, *Astroparticle Physics* **72**, 76 (2016).
- [8] **Miener et al.** IACT event analysis with the MAGIC telescopes using deep convolutional neural networks with CTLearn, *Proceedings of XXXI Astronomical Data Analysis Software and Systems (ADASS) conference* [[arXiv:2112.01828](https://arxiv.org/abs/2112.01828)], (2021).
- [9] **Chollet et al.** Keras, <https://keras.io> (2015).
- [10] **TensorFlow Developers** TensorFlow v2.8.0, *Zenodo* [[10.5281/zenodo.5949125](https://zenodo.org/record/5949125)], (2022).
- [11] **Pivarski et al.** scikit-hep/uproot4: 4.1.4, *Zenodo* [[10.5281/zenodo.5567737](https://zenodo.org/record/5567737)], (2021).
- [12] **Nieto et al.** Studying Deep Convolutional Neural Networks With Hexagonal Lattices for Imaging Atmospheric Cherenkov Telescope Event Reconstruction, *Proceedings of 36th International Cosmic Ray Conference (ICRC)* **358**, 753 (2019).
- [13] **Grespan et al.** Deep-learning-driven event reconstruction applied to simulated data from a single Large-Sized Telescope of CTA, *Proceedings of 37th International Cosmic Ray Conference (ICRC)* **395**, 771 (2021).
- [14] **Miener et al.** Reconstruction of stereoscopic CTA events using deep learning with CTLearn, *Proceedings of 37th International Cosmic Ray Conference (ICRC)* **395**, 730 (2021).
- [15] **Xie et al.** Utterance-level Aggregation For Speaker Recognition In The Wild, *Proceedings of IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 5791 (2019).

- [16] **He et al.** Deep Residual Learning for Image Recognition, *Proceedings of the IEEE conference on computer vision and pattern recognition* , 770 (2016).
- [17] **Hu et al.** Squeeze-and-excitation networks, *Proceedings of the IEEE conference on computer vision and pattern recognition* , 7132 (2018).
- [18] **Vuillaume et al.** Analysis of the Cherenkov Telescope Array first Large-Sized Telescope real data using convolutional neural networks, *Proceedings of 37th International Cosmic Ray Conference (ICRC)* **395**, 703 (2021).
- [19] **Li and Ma** Analysis methods for results in gamma-ray astronomy, *Astrophys. J.* **272**, 317 (1983).

Acknowledgments

We would like to thank the Instituto de Astrofísica de Canarias for the excellent working conditions at the Observatorio del Roque de los Muchachos in La Palma. The financial support of the German BMBF, MPG and HGF; the Italian INFN and INAF; the Swiss National Fund SNF; the ERDF under the Spanish Ministerio de Ciencia e Innovación (MICINN) (FPA2017-87859-P, FPA2017- 85668-P, FPA2017-82729-C6-5-R, FPA2017-90566-REDC, PID2019-104114RB-C31, PID2019-104114RB-C32, PID2019- 105510GB-C31C42, PID2019- 107847RB-C44, PID2019-107988GB-C22); the Indian Department of Atomic Energy; the Japanese ICRR, the University of Tokyo, JSPS, and MEXT; the Bulgarian Ministry of Education and Science, National RI Roadmap Project DO1-268/16.12.2019 and the Academy of Finland grant nr. 317637 and 320045 are gratefully acknowledged. This work was also supported by the Spanish Centro de Excelencia “Severo Ochoa” SEV-2016- 0588, SEV-2017-0709 and CEX2019-000920-S, and “María de Maeztu” CEX2019-000918-M, the Unidad de Excelencia “María de Maeztu” MDM-2015-0509-18-2 and the “la Caixa” Foundation (fellowship LCF/BQ/PI18/11630012), by the Croatian Science Foundation (HrZZ) Project IP-2016-06-9782 and the University of Rijeka Project 13.12.1.3.02, by the DFG Collaborative Research Centers SFB823/C4 and SFB876/C3, the Polish National Research Centre grant UMO-2016/22/M/ST9/00382 and by the Brazilian MCTIC, CNPq and FAPERJ. TM acknowledges support from PID2019-104114RB-C32. JLC and DN acknowledges partial support from The European Science Cluster of Astronomy & Particle Physics ESFRI Research Infrastructures funded by the European Union’s Horizon 2020 research and innovation program under Grant Agreement no. 824064. We acknowledge the support of NVIDIA Corporation with the donation of a Titan X Pascal GPU used for part of this research.

This paper has gone through internal review by the MAGIC Collaboration.