

COSST: Multi-organ Segmentation with Partially Labeled Datasets Using Comprehensive Supervisions and Self-training

Han Liu, Zhoubing Xu, Riqiang Gao, Hao Li, Jianing Wang, Guillaume Chabin, Ipek Oguz, and Sasa Grbic

Abstract—Deep learning models have demonstrated remarkable success in multi-organ segmentation but typically require large-scale datasets with all organs of interest annotated. However, medical image datasets are often low in sample size and only partially labeled, i.e., only a subset of organs are annotated. Therefore, it is crucial to investigate how to learn a unified model on the available partially labeled datasets to leverage their synergistic potential. In this paper, we empirically and systematically study the partial-label segmentation with in-depth analyses on the existing approaches and identify three distinct types of supervision signals, including two signals derived from ground truth and one from pseudo label. We propose a novel training framework termed COSST, which effectively and efficiently integrates comprehensive supervision signals with self-training. Concretely, we first train an initial unified model using two ground truth-based signals and then iteratively incorporate the pseudo label signal to the initial model using self-training. To mitigate performance degradation caused by unreliable pseudo labels, we assess the reliability of pseudo labels via outlier detection in latent space and exclude the most unreliable pseudo labels from each self-training iteration. Extensive experiments are conducted on six CT datasets for three partial-label segmentation tasks. Experimental results show that our proposed COSST achieves significant improvement over the baseline method, i.e., individual networks trained on each partially labeled dataset. Compared to the state-of-the-art partial-label segmentation methods, COSST demonstrates consistent superior performance on various segmentation tasks and with different training data size.

Index Terms—Multi-organ segmentation, computed tomography, partially labeled dataset, unified model, self-training, pseudo label

I. INTRODUCTION

Manuscript submitted on XX April 2023. This work was done during research internship at Siemens Healthineers, Princeton, NJ USA.

Han Liu and Ipek Oguz are with the Department of Computer Science, Vanderbilt University, TN 37235 USA (e-mail: han.liu@vanderbilt.edu; ipek.oguz@vanderbilt.edu).

Hao Li is with the Department of Electrical and Computer Engineering, Vanderbilt University, Nashville, TN 37235 USA. (e-mail: hao.li.1@vanderbilt.edu).

Zhoubing Xu, Riqiang Gao, Jianing Wang, Guillaume Chabin and Sasa Grbic are with Siemens Healthineers, Princeton, NJ 08540 USA (e-mail: zhoubing.xu@siemens-healthineers.com; riqiang.gao@siemens-healthineers.com; jianing.wang@siemens-healthineers.com; guillaume.chabin@siemens-healthineers.com; sasa.grbic@siemens-healthineers.com).

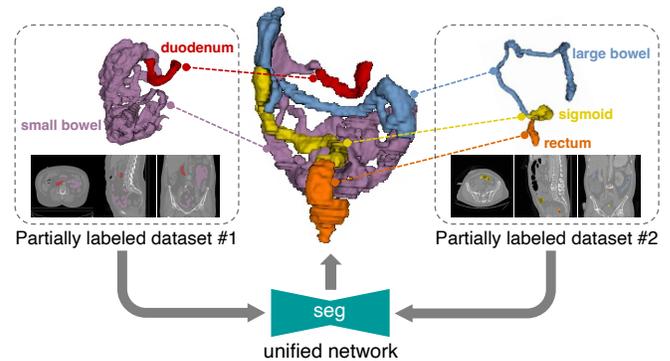


Fig. 1. An illustration of multi-organ partially labeled datasets and the partial-label segmentation task. Each partially labeled dataset only contains the annotations for a subset of organs. The goal of partial-label segmentation is to train a single unified model with multiple partially labeled datasets to segment all organs of interest.

MULTI-ORGAN segmentation for computed tomography (CT) scans is a fundamental yet challenging task in medical imaging [1]–[4]. It plays a crucial role in a variety of biomedical tasks. For example, in radiotherapy treatment planning, accurate delineation of organs at risk is clinically imperative and critical to guarantee a safe and effective treatment [5]. It also enables extraction of quantitative information such as organ shape and size for biomedical research [6]. Typically, delineation of critical organs needs to be performed manually by radiation oncologists but this process is highly tedious, time consuming, and prone to intra- and inter-observer variations. It is thus favorable to have automatic and accurate algorithms to perform the multi-organ segmentation task.

To date, deep learning models have achieved state-of-the-art performance on multi-organ segmentation tasks [7]–[11], but they typically require all organs of interest to be annotated. However, due to the costly and laborious labeling process, it is extremely difficult to obtain a large-scale fully-annotated dataset, especially in medical domain. In practice, medical image datasets are usually annotated by only a single or few organs depending on the particular clinical purpose at different institutes. Given a multi-organ segmentation task, these datasets are considered as *partially labeled datasets*, which can be integrated to segment a full coverage of organs of interest (Fig. 1). Hence, it is highly desirable to develop an effective integration strategy to leverage the synergistic

potential of the partially labeled datasets.

An intuitive strategy is to train individual models on each partially labeled dataset. Afterwards, the segmentation result of all requested organs can be obtained by ensembling the outputs from individual networks. An alternative strategy is to train a single unified model with multiple partially labeled datasets, where the organs of interest can be segmented simultaneously. In comparison, the latter strategy yields three clear advantages. First, based on the demonstrated benefits of larger training datasets for deep learning models [12], a unified model trained on the union of all partially labeled datasets, is anticipated to outperform the individual models trained on each partially labeled dataset. Second, during deployment, using a single unified model can lead to faster inference speeds and reduced storage requirements. Lastly, it does not require extra post-processing steps to address conflicting voxel predictions (a voxel being predicted as different classes), a challenge that may arise when using multiple models.

Consequently, increasing efforts have been made to the unified models over the past few years [13]–[20]. For instance, some studies proposed to address the partial-label segmentation problem from a perspective of network designs [19], [20], e.g., conditioned networks, where the segmentation task from each partially labeled dataset is encoded as a task-aware prior to guide the model to segment on-demand organs. Other studies have attempted to tackle this problem from a perspective of using class adaptive losses [14], [15] or pseudo label learning [16]–[18]. Nevertheless, there lacks a systematic understanding of the partial-label segmentation problem and an in-depth analysis of the existing techniques. Besides, we observe that most existing methods are developed and validated using singly-annotated datasets [13]–[15], [17]–[20], i.e., one annotated organ per dataset, whereas in practice a partially labeled dataset may have multiple annotated organs. Hence, additional validation of the well-established methods on multi-organ partially labeled datasets is needed.

In this study, we revisit the partial-label segmentation problem from a new perspective, i.e., supervision signals, and ask ourselves two questions: (1) how many useful supervision signals are there? and (2) how to integrate all available signals effectively? To answer the first question, we perform in-depth analyses on all mainstream partial-label segmentation approaches and identify three distinct types of supervision signals, including two supervision signals derived from ground truth annotations and one from pseudo labels (see more in Sec. II). To answer the second question, we propose a novel training framework named COSST, which effectively and efficiently integrates comprehensive supervision signals with self-training. Specifically, we propose to firstly train an initial unified model using two ground-truth based signals and then iteratively incorporate the pseudo label signal to the initial model using self-training. To mitigate the potential performance degradation caused by poor pseudo labels, we assess the reliability of pseudo labels and exclude the training data with detected unreliable pseudo labels at each self-training iteration. The pseudo label assessment approach is inspired by a unique property of partial-label segmentation: for each organ, ground truth annotations are available in at

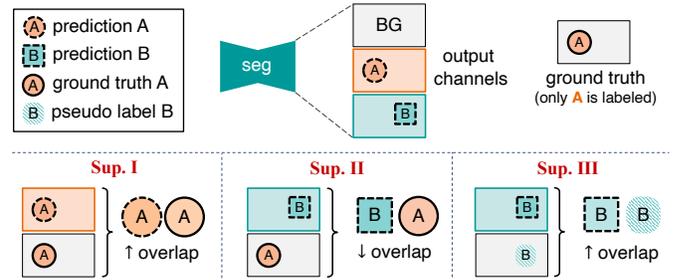


Fig. 2. Illustration of three types of supervision signals in partial-label segmentation. Given an input image where only organ A is labeled, Sup. I aims to maximize the overlap between output A and ground truth A. Sup. II aims to minimize the overlap between output B and ground truth A (due to mutual exclusiveness among organs). Sup. III aims to maximize the overlap between output B and pseudo label B.

least one of the partially labeled datasets. Given a distribution of ground truth labels, the quality of a pseudo label can be assessed via outlier detection in latent space. In summary, the key contributions of our work are as follows:

- We empirically and systematically study the partial-label segmentation problem with in-depth analyses on the existing methods and identify three distinct types of supervision signals.
- We propose a novel training framework to learn a unified model from partially labeled datasets, where comprehensive supervision signals are integrated effectively and efficiently via self-training.
- We design a pseudo label assessment and filtering strategy based on outlier detection in latent space, further optimizing the usage of pseudo labels.
- We perform extensive experiments on three segmentation tasks including six partially labeled CT datasets, demonstrating the effectiveness of COSST and our pseudo label assessment strategy. Take-away messages are provided.

II. SUPERVISION SIGNALS IN PARTIAL-LABEL SEGMENTATION

With a systematic analysis of the existing partial-label segmentation approaches, we summarize that there are primarily three types of supervision signals, denoted as Sup. I, II and III. In Fig. 2, we illustrate these supervision signals with a toy example. Imagine there are two partially labeled datasets: Dataset \mathbb{A} (labeled with organ A) and Dataset \mathbb{B} (labeled with organ B). For a multi-class segmentation network (typically with a softmax function), there are three output channels corresponding to background (BG), A and B. Now, consider an image from Dataset \mathbb{A} being passed to the network.

Sup. I aims to *maximize* the overlap between the prediction of the labeled organ (organ A) and the corresponding ground truth. This signal utilizes the available annotations to supervise labeled organs as in a standard segmentation task.

Sup. II aims to *minimize* the overlap between the prediction of the unlabeled organ (organ B) and the ground truth of the labeled organ (organ A). This is inspired by the fact that different organs must be mutually exclusive [15]. In other words, each foreground voxel must be classified as either A or B in our example. The mutual exclusiveness can thus be

TABLE I

COMPARISON OF TYPES OF SUPERVISION SIGNALS USED IN COSST AND THE EXISTING PARTIAL LABEL SEGMENTATION METHODS.

Method	Sup. I	Sup. II	Sup. III
TAL [14]	✓		
ME [15]	✓	✓	
PLT [16]	✓		✓
Co-training [17]	✓		✓
DoDNet [19]	✓		
MS-KD [18]			✓
COSST (ours)	✓	✓	✓

used as a constraint to regularize the predictions of unlabeled organs based on the available labeled organs.

Sup. III aims to *maximize* the overlap between the prediction and the pseudo label for the unlabeled organ (organ B). Compared to Sup. II, where the prediction of the unlabeled organ is constrained to where it *cannot* overlap, Sup. III imposes a stronger supervision by guiding the prediction to where it *should* overlap, i.e., pseudo labels. Note that pseudo labels can be easily generated by the models trained on individual partially labeled dataset.

Discussion Sup. I is applied to labeled organs whereas Sup. II and III are applied to unlabeled organs. Besides, we note that Sup. I and II are derived from ground truth annotations, whereas Sup. III is derived from pseudo labels. Compared to Sup. III, which can be noisy due to unreliable pseudo labels, Sup. I and II are noise-free throughout the training process. This observation motivates us to separate supervision signals into different training stages in our COSST.

III. RELATED WORKS

A. Partially Labeled Medical Image Segmentation

In the past few years, substantial efforts have been devoted to explore partially labeled image segmentation. A straightforward strategy is to train individual networks on each partially labeled dataset, but suffers from several drawbacks including: (1) less training data for each individual network, (2) longer inference time, and (3) more complexity for post-processing.

Recent studies have been focused on training a single unified model with multiple partially labeled datasets. Zhou *et al.* [13] proposed Prior-aware Neural Network (PaNN) by firstly estimating anatomical priors of organ sizes based on a fully labeled dataset, and then regularizing the organ size distributions on the partially labeled datasets. However, this approach requires access to at least one fully annotated dataset and thus cannot generalize well. Some studies have attempted to design adaptive loss functions that can be directly applied to partially labeled data [14], [15]. Fang *et al.* [14] presented a target adaptive loss (TAL) by treating the unlabeled organs as background. Besides, Shi *et al.* [15] proposed a marginal and exclusive loss by imposing an additional exclusive constraint for the unlabeled organs. Additionally, several works have explored to train unlabeled organs with pseudo labels [16]–[18], [21]. Liu *et al.* [16] proposed to first train individual models on each partially labeled dataset and generate pseudo labels for unlabeled organs. Then a pseudo multi-organ dataset, consisting of both ground truth and pseudo labels, was used for

supervised training. Huang *et al.* [17] developed a co-training framework based on cross-pseudo supervision [22], where the prediction of unlabeled organs from one network is supervised by the weight-averaged output of the other network. Feng *et al.* [18] presented a multi-teacher single-student knowledge distillation (MS-KD) framework by learning the soft pseudo labels generated by the teacher models pre-trained on each partially labeled dataset.

The aforementioned methods rely on a standard multi-output channel network (typically with a softmax activation). Recently, conditioned networks have emerged as an effective alternative network architecture for partial-label segmentation [19], [20], [23], [24], where a task-aware prior is used to guide the segmentation of the task-related organ. Dmitriev *et al.* [20] incorporated organ class information into the intermediate activation signal for training. Zhang *et al.* [19] presented a dynamic on-demand network (DoDNet) by using one-hot code as task-aware prior to generate weights for dynamic convolution filters. However, the conditioned networks are typically designed to segment one organ per forward pass and hence can be computationally inefficient.

Our proposed method is different from the existing techniques in three major aspects: (1) as shown in Tab. I, compared to the existing approaches, COSST leverages more comprehensive supervision signals for training. (2) COSST employs self-training to better exploit the pseudo labels. (3) COSST explicitly considers the quality of pseudo labels during training, a crucial aspect that is often overlooked in other pseudo label-based approaches.

B. Self-training

Self-training is an iterative process that aims to improve the model performance by leveraging the predictions of the model on unlabeled data, i.e., pseudo labels, and has been widely investigated in semi-supervised learning [25]–[27] and domain adaption [28]–[32]. In self-training, a model is first trained on a labeled dataset and then used to generate the pseudo labels on an unlabeled dataset. Lastly, the model is retrained on the human labels and pseudo labels jointly. As more unlabeled data is incorporated into the training process, the model performance is expected to improve. The improved model can in turn generate better pseudo labels and this process is repeated till convergence. Previous studies have shown that the performance of self-training can be further improved by using more confident pseudo labels [26], [30], [31], where the unconfident images or pixels can be either de-prioritized [26] or removed from training [30], [31]. This motivates us to develop a pseudo label filtering strategy for the self-training process in our COSST.

IV. METHODS

A. Overview

Let us consider N partially labeled datasets $\mathcal{D}_{PL} = \{\mathcal{D}_1, \mathcal{D}_2, \dots, \mathcal{D}_N\}$, which are annotated with C_1, C_2, \dots, C_N types of organs, respectively. We aim to learn a single unified segmentation model \mathcal{F}_θ from \mathcal{D}_{PL} to segment $C_{PL} = \bigcup_i^N C_i$ organs. An illustration of our proposed COSST is shown in

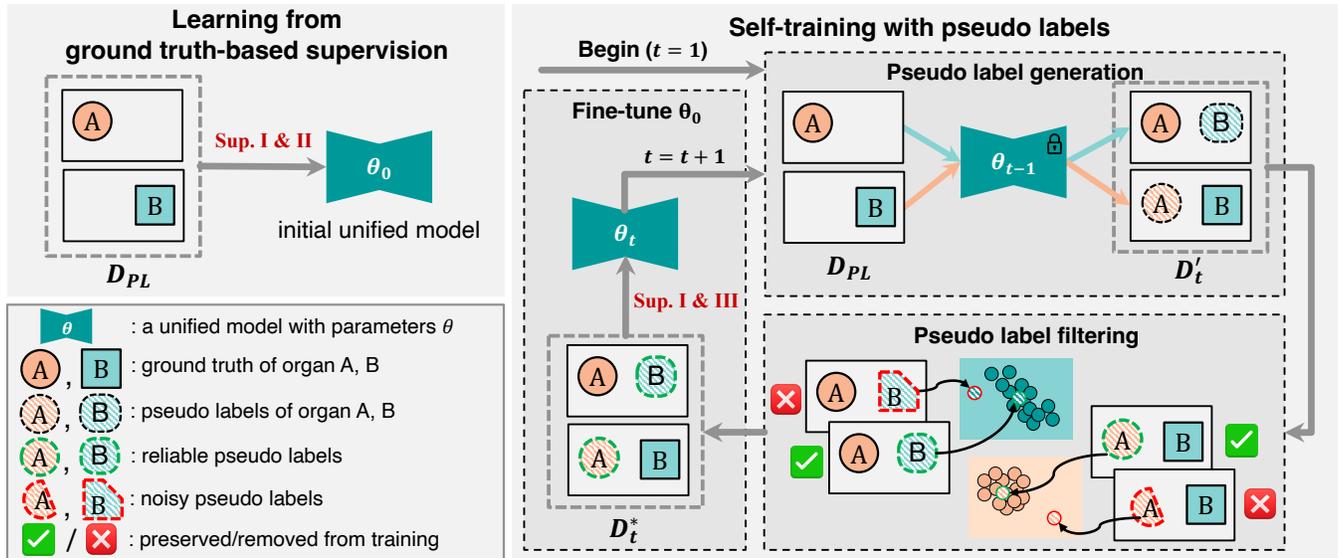


Fig. 3. An illustration of our proposed training framework COSST. First, we train an initial unified model using only the ground truth-based supervision. Afterwards, we use self-training to iteratively incorporate the most updated pseudo label supervision to the initial model. In each iteration, we first create a pseudo multi-organ dataset by generating the pseudo labels for the unlabeled organs. Then we assess the quality of pseudo labels and perform image-level pseudo label filtering by removing the training data with unreliable pseudo labels from the pseudo multi-organ dataset. Lastly, we fine-tune the initial unified model on the filtered dataset. Self-training is employed iteratively until convergence.

Fig. 3. Overall, COSST consists of two training stages: (i) learning from ground truth-based supervision (ii) self-training with pseudo labels. To optimize pseudo label learning, we introduce a pseudo label assessment and filtering strategy to mitigate the potential performance degradation caused by noisy pseudo labels. Detailed descriptions are as follows.

B. Learning from Ground Truth-based Supervision

In the first training stage, we aim to learn an initial unified model \mathcal{F}_{θ_0} using the supervision signals derived *only* from the ground truth annotations: (i) Sup. I: for labeled organs, they can be supervised using the available annotations. (2) Sup. II: for unlabeled organs, they can be supervised to not overlap the annotated regions. The major challenge is that there are always certain labels absent in partially labeled data, making the traditional segmentation losses inapplicable. To tackle this problem, we use adaptive loss functions as in [14], [15]. Specifically, for labeled organs, we treat the unlabeled organs as background by merging the output channels of the original background channel and all unlabeled organs into a new background channel. The channels are merged by taking the sum of the probabilities. Given an input image x , the original model prediction $\tilde{y} = \mathcal{F}(x; \theta)$ is thus transformed to a new prediction \tilde{y}_t , which only has the output channels of the new background and the labeled organs, allowing regular segmentation losses to be directly applied. For unlabeled organs, we first create a binary mask M by taking the union of all labeled organs. We then regularize all output channels of unlabeled organs by minimizing the overlap between the prediction on each channel and the binary mask. Let y be the ground truth annotation, C_u be the number of unlabeled organs, and L be a standard segmentation loss, e.g., Dice loss. The overall learning objective of training the initial unified

model can be expressed as:

$$\theta_0 = \underset{\theta}{\operatorname{argmin}} L(\tilde{y}_t, y) - \sum_{u \in C_u} L(\tilde{y}_u, M) \quad (1)$$

C. Self-training with Pseudo Labels

In partially labeled data, the pseudo labels of unlabeled organs naturally exist and can be exploited without additional annotation efforts. However, we observe that pseudo labels are either overlooked or not optimized in the existing partial-label segmentation approaches (Tab. I). For example, in [16], [17], pseudo labels are generated by the individual networks trained on each partially labeled dataset. As demonstrated later in our experiments, our initial unified model \mathcal{F}_{θ_0} obtained in the first training stage can already outperform the individual networks, suggesting that better pseudo labels can be used. Indeed, the quality of pseudo labels is highly dependent on the performance of the network used for pseudo label generation. This motivates us to use self-training to optimize the usage of pseudo labels. Specifically, at self-training iteration $t \in \{1, 2, 3, \dots\}$, we use $\mathcal{F}_{\theta_{t-1}}$ to generate pseudo labels for unlabeled organs. We obtain the network prediction $\tilde{y} = \mathcal{F}(x; \theta_{t-1})$ as pseudo labels and then merge the pseudo labels of unlabeled organs to y , with the original ground truth of labeled organs retained. Note that during the label merging, ground truth has higher priority than pseudo labels when there are conflicting labels. As a result, we obtain a pseudo multi-organ dataset \mathcal{D}'_t where each training data is fully-annotated by the merged labels. Lastly, we obtain an improved model \mathcal{F}_{θ_t} by fine-tuning our initial model \mathcal{F}_{θ_0} on the pseudo multi-organ dataset \mathcal{D}'_t . The learning objective of self-training at iteration t can thus be expressed as:

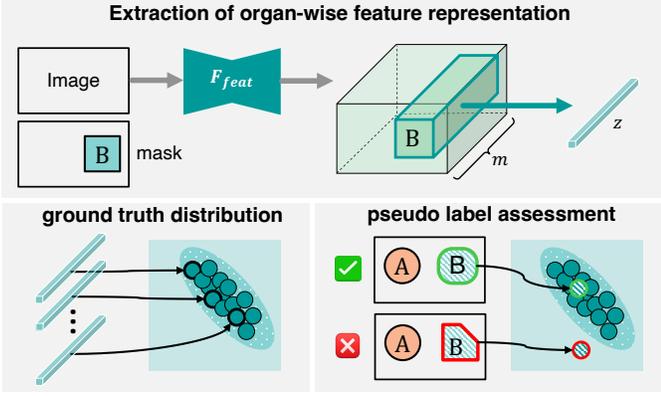


Fig. 4. Top panel: an illustration of how organ-wise feature representation z is computed. Note that mask can be either ground truth or pseudo label. Bottom left panel: ground truth distribution for organ B (generated by ground truth masks of B). Bottom right panel: the reliability of a pseudo label is assessed via outlier detection in latent space.

$$\theta_t = \operatorname{argmin}_{\theta} L(\tilde{y}, y'_t; \theta) \quad (2)$$

where $y'_t \in \mathcal{D}'_t$. Note that, fine-tuning, which has shown its success in incorporating new pseudo labels to pre-trained network [33]–[35], offers an efficient way to train \mathcal{F}_{θ_0} (trained by Sup. I and II) on the most updated pseudo labels (Sup. III). We employ self-training until the model performance converges on the validation set.

D. Pseudo Label Assessment and Filtering

The quality of pseudo labels plays a key role in self-training. As shown in previous studies, unreliable pseudo labels may lead to severe confirmation bias [36] and potential performance degradation [26], [37]. To address this problem, we develop a pseudo label assessment and filtering strategy to better exploit the pseudo labels during self-training, as illustrated in Fig. 4. Particularly, our assessment strategy is inspired by a unique property of partial-label segmentation: for each organ, ground truth annotations are available in at least one of the partially labeled datasets. Therefore, given the distribution of the available ground truth labels, the quality of a pseudo label can be assessed via outlier detection in latent space: if the pseudo label is a clear outlier deviating from the ground truth distribution, it is very likely to be a noisy label.

To this end, inspired by [38], we represent each organ (both labeled and unlabeled) in each training data as a feature vector by using the merged label y' . Suppose the network input be $x \in \mathbb{R}^{ch \times h \times w \times d}$ with ch channels, h height, w width and d depth. A multi-class segmentation network \mathcal{F} can be decomposed as (1) a dense feature extractor $\mathcal{F}_{feat} : \mathbb{R}^{ch \times h \times w \times d} \rightarrow \mathbb{R}^{m \times h \times w \times d}$ and (2) a subsequent voxel-wise classifier $\mathcal{F}_{cls} : \mathbb{R}^{m \times h \times w \times d} \rightarrow [0, 1]^{(1+C_{PL}) \times h \times w \times d}$ that projects the m dimensional features into class predictions. For the i_{th} training data x_i , we first calculate the voxel-wise feature representation using the dense feature extractor \mathcal{F}_{feat} , where the feature representation of the j_{th} voxel is expressed as $\mathcal{F}_{feat}(x_i)^j$. For the k_{th} organ, we obtain the organ-wise

Algorithm 1: Pseudocode of COSST

input : Partially labeled datasets \mathcal{D}_{PL} ,
hyperparameters: τ
output: Parameters of the unified model θ
// learning from ground truth-based supervision
Train an initial unified model on \mathcal{D}_{PL} with Eq.1 $\rightarrow \theta_0$
// self-training with pseudo labels
repeat
 for $t = 1 : T$ **do**
 Generate pseudo multi-organ dataset with
 $\theta_{t-1} : \mathcal{D}_{PL} \rightarrow \mathcal{D}'_t$
 Detect unreliable pseudo labels with Eq. 5.
 Image-level pseudo label filtering: $\mathcal{D}'_t \rightarrow \mathcal{D}^*_t$
 Fine-tune on \mathcal{D}^*_t with Eq. 6: $\rightarrow \theta_t$
until converge

feature representation $z^{(i,k)} \in \mathbb{R}^m$ by computing the feature centroid for all voxels belonging to the mask $y'^{(k)}$:

$$z^{(i,k)} = \frac{\sum_j \mathcal{F}_{feat}(x_i)^j * \mathbb{1}(y'^{(j,k)} == 1)}{\sum_j \mathbb{1}(y'^{(j,k)} == 1)} \quad (3)$$

where $\mathbb{1}$ is the indicator function. Besides, we use principal component analysis (PCA) to reduce the dimension of z from m to 2, which is empirically more effective and computationally more efficient. Let n be the number of training data with the k_{th} organ annotated. The ground truth distribution for the k_{th} organ can thus be expressed as:

$$z^k = \{z^{i,k}, \dots, z^{i+n,k}\} \quad (4)$$

Given the ground truth distribution z^k , we aim to assess whether each pseudo label is an outlier. Prior studies show that the feature centroid of a distribution, or prototype, can be used to assess the similarity between the distribution and a query sample by measuring its distance to the prototype (typically by Euclidean distance) [38], [39]. However, our preliminary experiments show that this strategy is not effective for our tasks, possibly because representing the entire distribution as a single feature vector results in a loss of intricate intra-class relationship among samples. To address this problem, we propose to assess the reliability of pseudo labels using Mahalanobis distance, which considers the intra-class relationship by taking into account the covariance matrix. The Mahalanobis distance d between the assessed pseudo label \bar{z}^k and the ground truth distribution z^k can be expressed as:

$$d^2(\bar{z}^k, \mu, C) = (\bar{z}^k - \mu)^T \cdot C^{-1} \cdot (\bar{z}^k - \mu) \quad (5)$$

where μ and C represent the mean feature vector and covariance matrix of z^k , respectively. To detect the outlier, we define a threshold τ for Mahalanobis distance and a pseudo label is considered unreliable if $d(\bar{z}^k, \mu, C) > \tau$.

The detected unreliable pseudo labels may cause performance degradation and thus need to be denoised or removed before training. Inspired by [26], we propose to filter the unreliable pseudo labels on image-level. Specifically, we remove

TABLE II

THREE PARTIALLY LABELED SEGMENTATION TASKS IN OUR EXPERIMENTS. EACH TASK AIMS TO SEGMENT ALL ANNOTATED ORGANS FROM TWO PARTIALLY LABELED DATASETS. RES: RESAMPLED RESOLUTION. L: LEFT. R: RIGHT.

Task	Dataset	res (mm)	# train / valid / test	# organs	annotated organs
Task 1	Bowel 1	$2 \times 2 \times 2$	104 / 41 / 63	2	duodenum, small bowel
	Bowel 2	$2 \times 2 \times 2$	104 / 41 / 63	3	large bowel, sigmoid, rectum
Task 2	Pelvic 1	$2 \times 2 \times 2$	568 / 72 / 72	6	bladder, prostate, rectum, femur (L), femur (R), seminal vesicle
	Pelvic 2	$2 \times 2 \times 2$	128 / 16 / 16	1	uterus
Task 3	Eye 1	$1 \times 1 \times 1$	124 / 62 / 63	3	chiasm, optic nerve (L), optic nerve (R)
	Eye 2	$1 \times 1 \times 1$	125 / 62 / 63	4	len (L), len (R), eyeball (L), eyeball (R)

the training data with unreliable pseudo labels from the pseudo multi-organ dataset \mathcal{D}'_t , resulting in a filtered dataset \mathcal{D}_t^* . By incorporating the pseudo label filtering to self-training, we replace the overall learning objective of self-training at iteration t from Eq. 2 to Eq. 6:

$$\theta_t = \underset{\theta}{\operatorname{argmin}} L(\tilde{y}, y_t^*; \theta_0) \quad (6)$$

where $y_t^* \in \mathcal{D}_t^*$. As in classical self-training where the labeled and unlabeled data are optimized jointly, both the labeled (Sup. I) and unlabeled organs (Sup. III) in the preserved training data are optimized in Eq. 6. Note that COSST also mitigates the information loss caused by image-level filtering, i.e., the labeled organs in the filtered images are excluded from training, by fine-tuning on the initial unified model, where all labeled organs have been used as ground truth-based supervision signals in the first training stage. Lastly, we provide the pseudo code of COSST in Alg. 1.

V. EXPERIMENTS

A. Datasets

We evaluate the performance of the compared methods on three partial-label segmentation tasks, covering a variety of organs from bowel, pelvic and eye regions, respectively. Each task consists of two partially labeled CT datasets. The datasets were acquired from regular radiotherapy planning routine and the organs were annotated by a team of experienced specialists with an internal annotation tool. For each organ, a detailed annotation protocol was set up based on Radiation Therapy Oncology Group (RTOG) guidelines. A quality assessment was performed for each annotated dataset before further use. In contrast to the existing studies which mostly used single-organ datasets, we explored a rarely studied yet more complex experiment setting where each partially labeled dataset can be annotated with multiple organs. Details of our datasets are shown in Tab. II.

Note that we obtained the fully-annotated training sets of bowel datasets by having specialists additionally annotate the unlabeled organs on the partially labeled datasets. Thus, the bowel datasets were also used to (1) compare the model trained with partially labeled datasets against fully-annotated datasets (upper bound) and (2) comprehensively evaluate the quality of pseudo labels as later shown in our ablation study.

B. Experiment Setup

1) *Implementation Details*: Without loss of generality, we adopted the classical 3D U-Net [40] as the backbone architecture, with the output layer activated by softmax and the number

of output channels set to $C_{PL} + 1$. We empirically set the threshold for Mahalanobis distance τ as $\chi^2(2, 0.999)$, i.e., the 99.9% quantile of the chi-squared distribution with a degree of freedom of 2. For pre-processing, we clipped the intensity of CT scans to $[-1024, 1024]$ Hounsfield Units (HU) values to filter irrelevant regions. The large range of intensities was used to guarantee fair contrast for different types of organs such as soft tissues and bones. The clipped CT scan was then rescaled to $[0, 1]$. In the training phase, we adopted the stochastic gradient descent (SGD) algorithm with a Nesterov momentum ($\mu = 0.99$) as the optimizer. In the first training stage, an initial learning rate was set as 0.01 and was decayed throughout the training process with a polynomial policy as in [7]. In the fine-tuning stage, we adopted a smaller learning rate of 0.001 for fine-tuning to avoid directly erasing the pre-trained weights. During training, we randomly extracted 3D patches with a fixed size of $128 \times 128 \times 128$ with the center being a foreground or background voxel using a ratio of 2 : 1. To achieve optimal performance for all compared methods, we followed [7] and applied a variety of augmentation techniques on-the-fly including rotation, scaling, Gaussian blur, Gaussian noise, brightness, contrast, low resolution simulation and gamma correction. The sum of Dice loss and cross-entropy loss was used as the segmentation loss. In the inference phase, we utilized the sliding window inference with a window step size equal to half of the patch size. The overlapping windows were merged using Gaussian weighting. The best model checkpoint was selected based on the performance on the validation set. All experiments were implemented in PyTorch [41] v1.10 and MONAI [42] v0.8 with a single NVIDIA V100 16 GB GPU.

2) *Evaluation Metrics*: Dice Similarity Coefficient (DSC) and average symmetric surface distance (ASSD) were used to evaluate the segmentation performance. DSC computes the overlapping between the predicted mask and ground truth. ASSD evaluates the quality of segmentation boundaries by computing the average of all distances between the predicted mask and the ground truth boundary. We note that in our experiments, the validation and testing sets were also partially labeled datasets. Thus, the average metrics for each organ was only computed based on the dataset where the organ was annotated. Due to the same reason, Wilcoxon signed-rank test used for statistical analysis was conducted on individual organs instead of the average metrics of all organs.

C. Comparison With State-of-the-Art Methods

We compare our proposed COSST against seven state-of-the-art approaches that also address the partial-label segmen-

TABLE III

PERFORMANCE COMPARISON (DSC, %, HIGHER IS BETTER; ASSD, MM, LOWER IS BETTER) OF PARTIALLY LABELED SEGMENTATION METHODS ON BOWEL DATASETS. RED AND BLUE DENOTE THE BEST AND SECOND BEST SCORES. † AND * REPRESENT P-VALUE <0.05 AND <0.01 USING WILCOXON SIGNED-RANK TEST. UPPER BOUND: MODEL TRAINED WITH FULLY-ANNOTATED DATASETS.

Methods	Duodenum		Small Bowel		Large Bowel		Sigmoid		Rectum		Average	
	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD
Multi-Nets	70.57	2.82	83.70*	2.70*	81.83†	3.80†	66.12*	7.66	73.31	4.58	75.11	4.32
TAL [14]	63.82*	3.20*	85.12*	2.38†	84.05*	3.32*	68.13*	6.52	74.46	3.42	75.12	3.76
ME [15]	70.59*	2.88*	85.80*	2.66*	84.93*	3.08*	70.24*	7.46	75.60	3.88†	77.43	4.00
PLT [16]	71.51	2.56	84.79*	2.32	83.93†	3.12	68.27	6.44†	75.60	3.28*	76.82	3.54
Co-training [17]	71.95	2.52†	85.54*	2.16	84.72†	3.04	69.94	5.94	76.06	3.88	77.64	3.52
MS-KD [18]	65.16*	5.02*	83.06*	3.54*	80.76*	7.08*	66.06*	12.70†	70.19*	5.42*	73.04	6.76
DoDNet [19]	42.97*	98.44*	84.39*	3.00*	83.28*	5.50*	67.16*	9.46*	56.06*	102.84	66.77	43.84
COSST (ours)	71.94	2.74	86.45	2.30	86.07	3.02	70.84	5.72	76.06	3.60	78.27	3.48
Upper bound	74.41	2.84	86.92	2.28	86.09	3.04	73.67	5.28	77.04	3.28	79.63	3.34

TABLE IV

PERFORMANCE COMPARISON ON PELVIC DATASETS. FORMATTING IS THE SAME AS TABLE III. SEM.VES: SEMINAL VESICLES

Methods	Bladder		Prostate		Rectum		Femur (L)		Femur (R)		Sem.Ves		Uterus		Average	
	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD
Multi-Nets	87.80*	6.88*	77.51	2.16	83.42†	2.16	93.15*	0.78*	93.15*	0.96	71.40†	1.58†	78.59	3.98	83.57	2.64
TAL [14]	87.82*	3.60*	73.88*	2.30*	82.06*	2.28*	94.78	1.26	94.53	0.98	65.25	1.90	75.37*	3.74	81.96	2.30
ME [15]	88.97*	1.82*	79.56	2.28*	84.62*	2.76*	94.11*	1.08*	93.28*	1.24*	73.64	1.50*	79.65	3.96	84.83	2.10
PLT [16]	88.10	3.80	77.31	6.06	83.34	2.46	93.80	2.92	93.45	2.62*	73.34	1.40	75.79	4.52	83.59	3.40
Co-training [17]	89.71	3.10	79.20	2.10	85.84	2.12	95.01	0.86	94.62	0.90*	72.58	1.42	73.91	4.44	84.41	2.14
MS-KD [18]	78.55*	7.86	69.84	3.14	77.98	9.36	91.90*	4.82*	92.65*	2.70*	46.02	2.64	74.16	7.34	75.87	5.40
DoDNet [19]	88.09*	5.90*	77.55*	4.26*	85.24*	2.34*	62.44*	90.32*	63.24*	88.64*	73.74*	3.90*	79.35	4.16*	75.67	28.50
COSST (ours)	89.43	1.54	79.64	2.20	85.84	2.06	95.14	0.82	94.59	0.96	73.50	1.40	78.99	3.72	85.30	1.82

TABLE V

PERFORMANCE COMPARISON ON DATASETS. FORMATTING IS THE SAME AS TABLE III. ON: OPTIC NERVE

Methods	Chiasm		ON (L)		ON (R)		Len (L)		Len (R)		Eyeball (L)		Eyeball (R)		Average	
	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD	DSC	ASSD
Multi-Nets	48.76†	1.24	65.54*	0.82	66.55†	0.82†	76.66	0.56	76.53	0.49	92.57	0.54	92.59	0.54	74.17	0.72
TAL [14]	44.98*	1.18	61.27*	0.84	62.99*	0.80	62.73*	0.55*	70.23*	0.55*	91.47*	0.55*	91.87*	0.55*	69.36	0.76
ME [15]	49.56*	1.29*	66.38*	0.86*	67.21*	0.83*	77.09	0.53	77.70	0.50*	91.86*	0.74*	91.82*	0.55*	74.52	0.77
PLT [16]	49.58†	1.21†	66.35	0.81	67.06	0.79†	77.07	0.55	77.79	0.50	92.57*	0.55†	92.59	0.55	74.72	0.71
Co-training [17]	49.60	1.25	66.57	0.80	67.45	0.78	76.84	0.55	77.41	0.47	92.52†	0.55*	92.78	0.52*	74.74	0.70
MS-KD [18]	47.07*	1.87*	57.63*	1.50*	58.17*	1.45*	76.37	0.81†	77.25	0.55†	92.17	0.55	91.80*	0.73*	71.50	1.07
DoDNet [19]	47.86	1.32	41.40*	17.47*	43.54*	17.32*	43.91*	33.23*	51.47*	28.43*	60.54*	26.52*	61.80*	26.16*	50.07	21.49
COSST (ours)	50.55	1.26	67.17	0.81	67.89	0.79	76.89	0.53	77.99	0.48	92.31	0.58	92.52	0.56	75.05	0.71

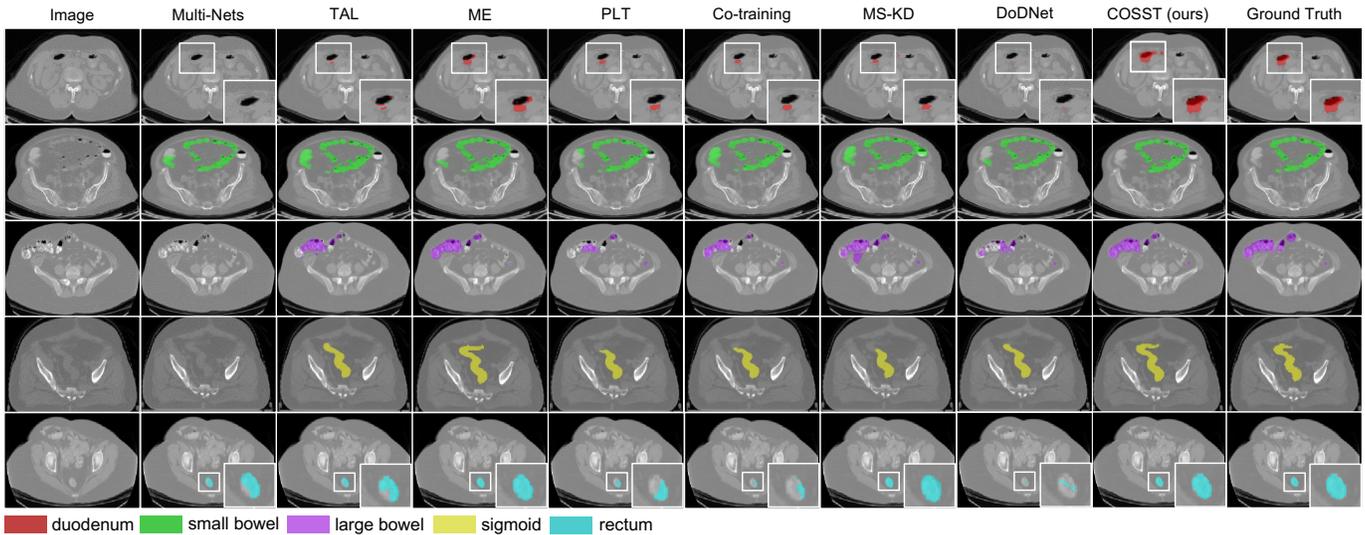


Fig. 5. Qualitative comparisons between our proposed COSST and other partial-label segmentation methods on bowel datasets.

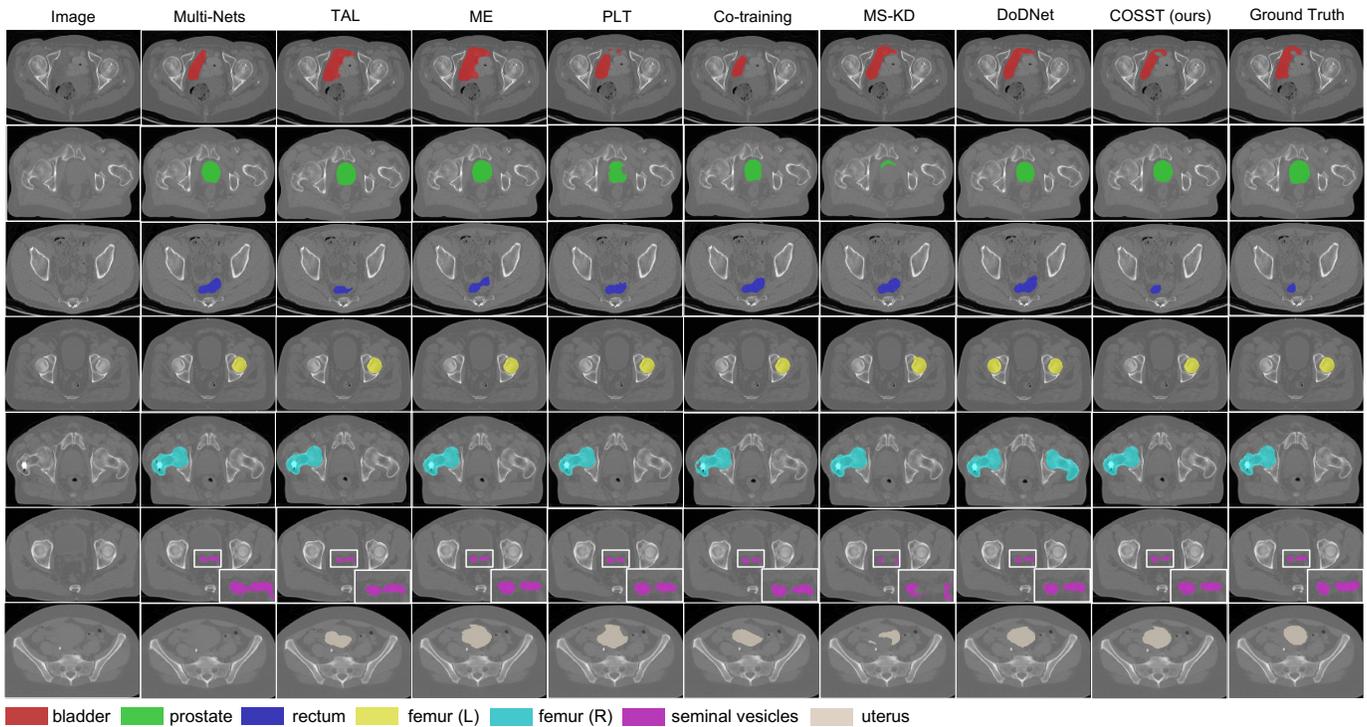


Fig. 6. Qualitative comparisons between our proposed COSST and other partial-label segmentation methods on pelvic datasets.

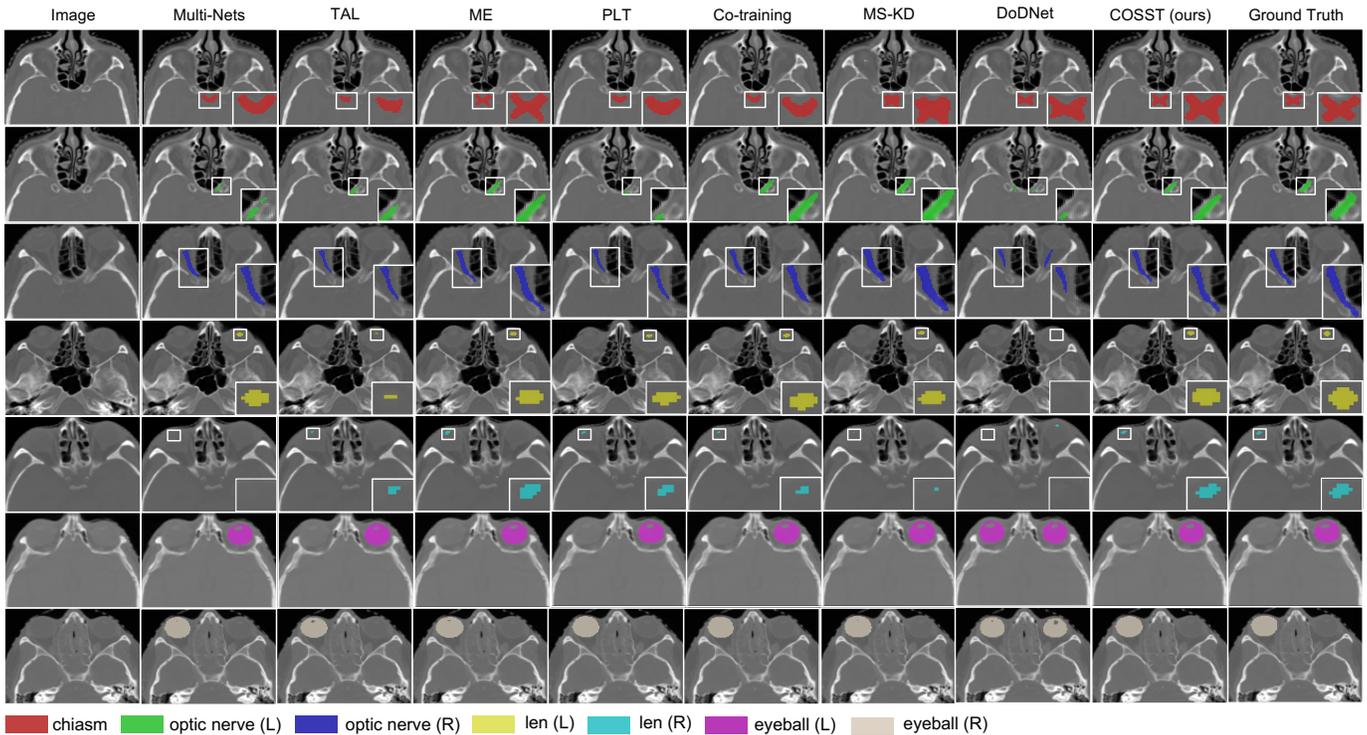


Fig. 7. Qualitative comparisons between our proposed COSST and other partial-label segmentation methods on eye datasets.

tation problem. The compared methods are (1) individual networks trained on each partially labeled dataset (Multi-Nets), (2) two methods that utilize only the ground truth-based supervision: target adaptive loss [14] and marginal and exclusive loss [15] (denoted as TAL and ME), (3) three

methods that employ pseudo label supervision: pseudo label training [16], Co-training of weight-averaged models [17], a multi-teacher single-student knowledge distillation framework that exploits soft pseudo labels (denoted as PLT, Co-training, and MS-KD), (4) DoDNet [19]: a state-of-the-art conditioned

network. To ensure fair comparison, we use the same backbone architecture and training strategies for all compared methods.

Tab. III, IV, and V tabulate the segmentation performance on the bowel, pelvic, and eye datasets, respectively. The qualitative results are shown in Fig. 5, 6 and 7. Our results reveal that most partial-label segmentation approaches outperform the baseline Multi-Nets, demonstrating the benefits of training a single network on the union of partially labeled datasets. For the ground truth-based supervision methods, we observe that ME consistently outperforms TAL on all three segmentation tasks. For the pseudo label based methods, Co-training achieves consistent better performance than PLT. The performance of MS-KD does not appear competitive as it is even worse than the baseline Multi-Nets. The conditioned network DoDNet achieves sub-optimal results in our experiments, especially for the small organs in bowel datasets, i.e., duodenum and rectum. However, it achieves superior performance on the gender-specific organs such as seminal vesicles and uterus in pelvic datasets (Tab. IV). In addition, we notice it fails to distinguish the left and right labels for symmetric organs, such as femurs and optic nerves (Fig. 6 and Fig. 7). Lastly, the proposed COSST achieves the highest overall segmentation performance among the competing partial-label segmentation methods on all three segmentation tasks (except the second best ASSD on eye dataset). Furthermore, in Tab. III, our results show that the performance achieved by COSST is comparable to the upper bound, i.e., the network trained with fully-annotated datasets. Especially, COSST achieves significant improvements on complex structures such as small bowel and large bowel. Qualitatively, we also observe that COSST provides more reasonable segmentation than other partial-label segmentation approaches.

D. Ablation Studies

We conduct ablation studies on the bowel datasets to investigate several important questions regarding our method.

1) *Effectiveness of Pseudo Label Assessment*: In this section, we evaluate the effectiveness of our pseudo label assessment strategy. As shown in Fig. 8, we first visualize the organ-wise feature representations obtained by Eq. 3 using 2D PCA on the left panel. In Fig. 8 (a), we observe that most feature vectors belonging to the same organ are well clustered. In Fig. 8 (b), for each organ, the ground truth distribution is highly entangled with the pseudo label distribution. In Fig. 8 (c), we visualize the detected outliers (unreliable pseudo labels) identified by our pseudo label assessment strategy. Given the additional annotations of the initially unlabeled organs, we comprehensively evaluate the quality of the pseudo labels that are identified as outliers. On the right panel of Fig. 8, our qualitative comparison shows that the detected pseudo labels have significant differences in shape compared to the ground truth. For quantitative comparison, we compute the Dice scores of all pseudo labels against ground truth and calculate the Pearson Correlation Coefficient (PCC) between the our assessment metric, i.e., Mahalanobis distance, and the Dice scores. As shown in Fig. 9 (a)-(e), we observe strong correlations for most organs, i.e., duodenum, small

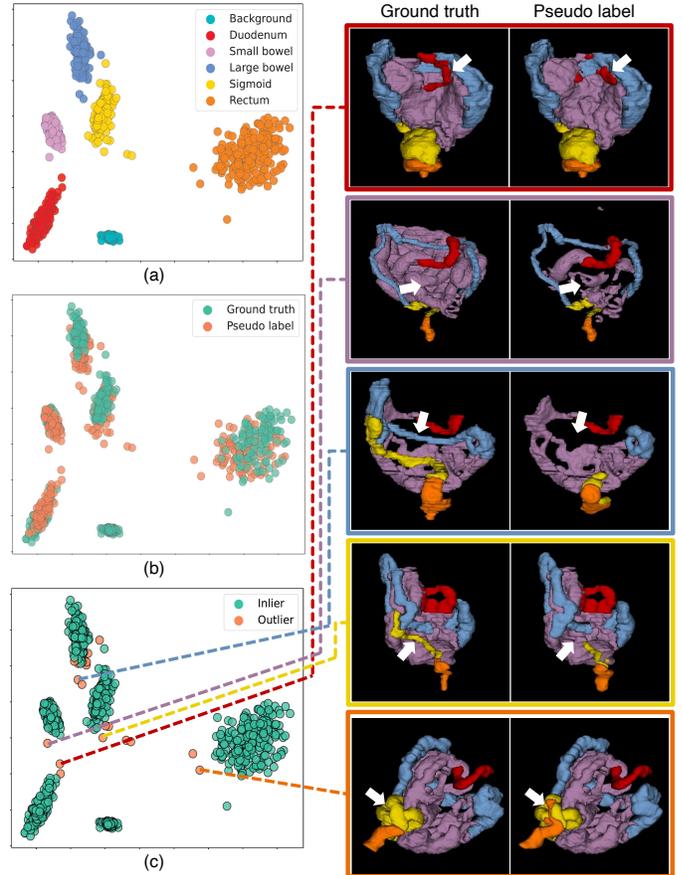


Fig. 8. Left panel: visualization of the organ-wise feature representations with 2D PCA on bowel datasets, color coded by (a) organ names, (b) ground truth or pseudo label, and (3) detected inlier or outlier. Right panel: qualitative comparison between the detected unreliable pseudo labels (outliers) and the ground truth for each organ. Major differences are marked by white arrows.

bowel and large bowel, moderate correlation for sigmoid, but weak correlation for rectum. In Fig. 9 (f), we can clearly see that most detected outliers are among the pseudo labels with the lowest Dice scores across the entire distribution, further verifying the effectiveness of our strategy.

2) *Effectiveness of Pseudo Label Filtering*: In this section, we investigate the effectiveness of the different pseudo label filtering schemes for self-training. Specifically, we compare four schemes including (1) no filtering: pseudo labels are used without quality control, (2) image-level filtering (ours), (3) voxel-level filtering which has been shown to effectively denoise the pseudo label masks on voxel-level [38], and (4) the combination of image-level and voxel-level filtering. We report the average Dice scores and ASSD of all organs for comparison, as shown in Tab. VI. Our observations are as follows. First, even with no filtering, self-training with the plain pseudo labels has already improved the performance of the initial unified model (row 1 vs. row 2), demonstrating that both the pseudo label supervision can be used for free performance boost and is complementary to the ground truth-based supervision. Second, self-training performance can be further improved by image-level pseudo label filtering, especially the ASSD (row 2 vs. row 3), suggesting that the unreliable pseudo

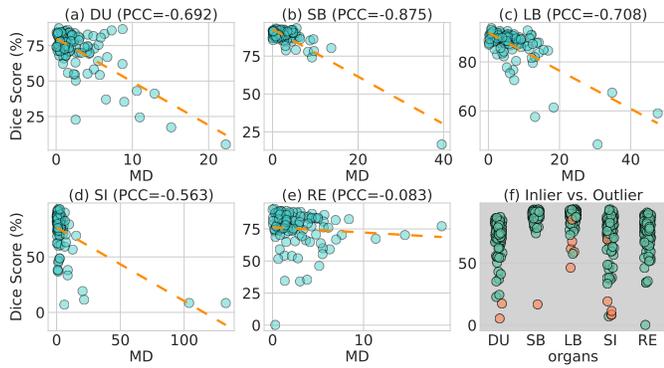


Fig. 9. (a)-(e): the Dice scores of pseudo labels vs. their corresponding assessment metric, i.e., Mahalanobis distance (MD). Strong correlations are observed for DU, SB and LB, moderate correlation for SI, and weak correlation for RE. The dashed line represents linear regression model fit. (f): the detected inliers (green) and outliers (orange) for each organ. Most detected outliers are among the pseudo labels with the lowest Dice scores across the entire distribution. DU: duodenum, SB: small bowel, LB: large bowel, SI: sigmoid, RE: rectum.

labels may have limited the model performance. Lastly, our experiments show that the voxel-level filtering scheme does not enhance the self-training performance for our specific task (row 4 and 5). This indicates that the noisy pseudo labels may not be reliably fixed via voxel-level denoising and they should rather be entirely excluded from training.

TABLE VI

PERFORMANCE ON BOWEL DATASETS WITH DIFFERENT PSEUDO LABEL FILTERING SCHEMES. COSST (ROW 3) EXPLOITS PSEUDO LABELS FOR TRAINING AND ONLY THE IMAGE-LEVEL PSEUDO LABEL FILTERING IS APPLIED. THE AVERAGE DSC AND ASSD ARE REPORTED.

pseudo label	image-level	voxel-level	DSC (%)	ASSD (mm)
			77.43	4.00
✓			77.85	3.96
✓	✓		78.27	3.48
✓		✓	77.74	3.98
✓	✓	✓	77.91	3.80

3) Impact of Training Data Size: In this section, we explore the impact of training data size on different partial-label segmentation methods. Specifically, we additionally train all competing methods using only 50% and 25% of training data, simulating the scenarios where the size of partially labeled datasets is more limited. As shown in Fig. 10, we observe that the top three benchmark methods, i.e., ME, PLT, and Co-training, achieve comparable performance with 100% and 50% of training data, while ME outperforms the other two by a large margin at 25%. This suggests that the pseudo label based approaches (PLT and Co-training) may yield sub-optimal performance in low-data scenarios if the noisy pseudo labels are not removed. By contrast, our COSST consistently outperforms the top-performing benchmark methods with different training data size.

4) Impact of Self-training Iterations: We investigate the impact of self-training iterations on model performance on all three segmentation tasks. As shown in Fig. 11, we observe that self-training mostly converges within one or two iterations and the most significant improvement is observed at the

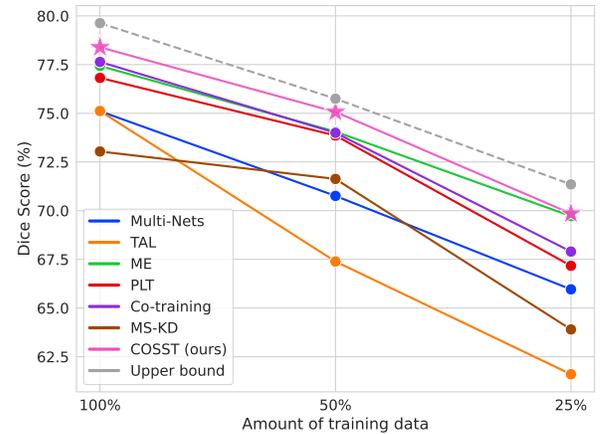


Fig. 10. Performance of partial-label segmentation methods with different training data size. Our proposed COSST consistently achieves superior performance when the training data size varies.

first iteration (No Pseudo vs. Self-train #1). Moreover, in our experiments, we find it effective to use the validation performance to determine when to terminate self-training. However, this finding needs to be interpreted carefully because the data distribution of our validation set may be similar to testing set. Other termination criteria may be used to obtain better self-training results.

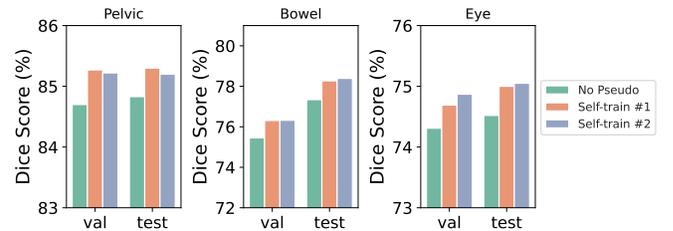


Fig. 11. Performance achieved by different self-training iterations on three segmentation tasks. Self-training mostly converges within one or two iterations and the most significant improvement is observed at the first iteration.

VI. DISCUSSION AND CONCLUSION

In this study, we systematically and empirically study the partial-label segmentation with comprehensive evaluations on the existing techniques. Moreover, we identify three types of supervision signals for partial-label segmentation and show that integration of three supervision signals using self-training and pseudo label filtering can lead to improved performance. In the following sections, we offer a detailed discussion of our observations, along with some key take-away messages.

1) Unified model vs. Individual models: We observe that most unified models that leverage all partial-label datasets outperform the Multi-Nets that train on each individual partial-label dataset. The outperformance is consistent on all three segmentation tasks in our experiments and also aligns with the results provided by other studies [14]–[19]. In addition, our results also show that the superiority of unified models is invariant to the amount of training data used (Fig. 10).

Besides the performance gap, unified models are more efficient than Multi-Nets as they can segment all organs of interest simultaneously. By contrast, Multi-Nets needs to combine the results from individual models and thus takes longer inference time. Moreover, Multi-Nets may require extra post-processing steps to address conflicting predictions.

Take-away: when partially labeled datasets are available, it can be more effective and efficient to train a unified model from all datasets than individual models on each dataset.

2) Analyses of Existing Partial-label Segmentation Methods:

In this section, we empirically analyze the benchmark partial-label segmentation methods based on our experimental results.

First, we compare the two methods that utilize only the ground truth-based supervision signals, namely TAL [14] and ME [15]. Compared to TAL which only considers Sup. I, ME imposes an additional supervision (Sup. II) to regularize the predictions of unlabeled organs based on the mutual exclusiveness among organs, achieving consistent better segmentation results all segmentation tasks. Moreover, even though no pseudo label signal is used in ME, it can surpass pseudo label based approaches, e.g., on the pelvic datasets, and is among the top-performers in our experiments, demonstrating that the mutual exclusiveness is a very useful regularization technique.

Take-away: the mutual exclusiveness regularization is very effective for partial-label segmentation task.

Second, we compare the approaches that exploit pseudo labels, including PLT [16], Co-training [17] and MS-KD [18]. Compared to PLT where pseudo labels are not updated throughout the training process, Co-training uses a pair of co-trained networks to generate pseudo labels for each other and thus pseudo labels can be updated during training. Our results show that Co-training is among the top-performing methods and outperforms PLT consistently, suggesting that the quality of pseudo labels plays a key role for pseudo label learning. Besides, we observe unsatisfactory performance for the MS-KD, where the student model is trained solely on the soft pseudo labels generated by the teacher models. The underlying reason may be that the teacher models in MS-KD, i.e., the individual networks trained on each partially labeled dataset (Multi-Nets), are not strong. Hence, it may be necessary to incorporate both soft and hard labels (ground truth) as in [43] for more effective knowledge distillation.

Take-away: the performance of pseudo label-based approaches can be further boosted by improving pseudo labels.

Third, we analyze the results achieved by the conditioned network, DoDNet [19]. Overall, DoDNet achieves sub-optimal segmentation performance in our experiments. For example, on the bowel datasets, it achieves inferior results on small structures such as duodenum and rectum compared to the methods that use multi-output channel networks. A possible reason could be that in our experiments we use the same backbone for DoDNet and other competing methods, but DoDNet may require a more complex backbone to achieve comparable results as in [19] where the channels of decoder layers of DoDNet were doubled. Besides, as shown in Fig. 6 and 7, we notice that DoDNet fails to distinguish the symmetric organs such as left and right femur/optic nerve, i.e., both sides of organs would be segmented when only

asked for one side. The underlying reason may be that the conditioned networks by design learn each organ independently and thus may ignore the correlation among organs [44]. By contrast, multi-output channel networks, which segment all organs simultaneously, naturally capture the relationships among different organs. However, this suggests that DoDNet can be better at the segmentation tasks where organs are less correlated. As shown in Tab. IV, we observe that DoDNet shows superior segmentation results on seminal vesicles and uterus, which are less correlated to other organs because they do not always appear due to gender difference. This finding aligns with the results presented in [19] where DoDNet outperforms other methods in segmenting different types of tumors, which can be considered uncorrelated to each other. Lastly, since each organ is trained separately, DoDNet may be less efficient to train on the partially labeled dataset labeled with multiple organs.

Take-away: the conditioned network DoDNet may need a more complex backbone to achieve optimal performance and is better at independent segmentation tasks.

3) Analyses of COSST: The development of the proposed COSST is motivated by taking advantage of the effective components based on the empirical analyses above. Specifically, COSST is built upon a multi-output channel network by incorporating (1) mutual exclusiveness for regularization, (2) pseudo label for training, and (3) better pseudo labels for improved performance, where (1) and (2) correspond to the integration of comprehensive supervision signals and (3) corresponds to self-training and pseudo label filtering. In Tab. III-V, we show that the proposed COSST outperforms the top-performing benchmark methods, i.e., ME [15] and Co-training [17], on all three segmentation tasks with different degrees of improvement. Besides, in Fig. 9, we observe that ME outperforms Co-training by a large margin when the amount of training data is small, but slightly underperforms Co-training when more training data is available. By contrast, COSST achieves consistent better performance than ME and Co-training regardless of the amount of training data.

Take-away: comprehensive supervision signals and self-training can be incorporated to achieve state-of-the-art partial-label segmentation performance.

In Sec. V.D.1, we demonstrate the effectiveness of our pseudo label assessment approach with in-depth analyses. Specifically, we show that given the distribution of the ground truth labels, the quality of the unlabeled pseudo labels can be successfully assessed by using outlier detection in latent space. Our approach can thus be potentially extend to other fields where pseudo labeling is essential, such as semi-supervised learning and domain adaption. However, this approach is far from perfect. In Fig. 9, we observe that rectum shows almost no correlation ($PCC=-0.083$) between the assessment metric and the actual Dice scores. This may be related to its widely dispersed distribution in latent space (Fig. 8) but further investigation is needed. Besides, our approach may be sensitive to the field of view (FOV) of images as the organ-wise feature representation is computed based on the organ mask. A reliable pseudo labels would be considered as outlier in latent space if its organ mask is not complete due to the

limited FOV. In such scenario, we can selectively apply our approach to a subset of organs within the same FOV.

Take-away: our pseudo label assessment approach can be potentially extended to other fields where pseudo labeling is essential.

Learning from partially labeled datasets is critical to the emerging medical foundation models, which aim to train a universal segmentation model from large-scale datasets collected from different institutions. The types of supervision signals and the training strategy presented in our study can thus be used as a reference for future studies in foundation model development. For example, we observe that the current medical foundation models [44]–[46] have not exploited pseudo labels for training, i.e., Sup. III. Besides our study, modern foundation models in the computer vision community [47], [48] have also shown that self-training with pseudo labels is an effective technique for performance boost. Hence, it is a promising direction to incorporate pseudo label training to medical foundation models. Besides, we observe that nearly all existing studies for medical partial-label segmentation are focused on CT scans, possibly because CT scans collected from different institutes do not exhibit large domain gaps as in MRI. It is interesting for future studies to investigate partial-label segmentation in a cross-modality setting.

Take-away: incorporation of pseudo label learning to medical foundation models and cross-modality partial-label segmentation are two promising directions for future studies.

Disclaimer. The information in this paper is based on research results that are not commercially available. Future commercial availability cannot be guaranteed.

REFERENCES

- [1] B. Landman, Z. Xu, J. Igelsias, M. Styner, T. Langerak, and A. Klein, "Miccail multi-atlas labeling beyond the cranial vault—workshop and challenge," in *Proc. MICCAI Multi-Atlas Labeling Beyond Cranial Vault—Workshop Challenge*, vol. 5, 2015, p. 12.
- [2] A. E. Kavur, N. S. Gezer, M. Barış, S. Aslan, P.-H. Conze, V. Groza, D. D. Pham, S. Chatterjee, P. Ernst, S. Özkan *et al.*, "Chaos challenge-combined (ct-mr) healthy abdominal organ segmentation," *Medical Image Analysis*, vol. 69, p. 101950, 2021.
- [3] J. Ma, Y. Zhang, S. Gu, X. An, Z. Wang, C. Ge, C. Wang, F. Zhang, Y. Wang, Y. Xu *et al.*, "Fast and low-gpu-memory abdomen ct organ segmentation: the flare challenge," *Medical Image Analysis*, vol. 82, p. 102616, 2022.
- [4] J. Ma, Y. Zhang, S. Gu, C. Zhu, C. Ge, Y. Zhang, X. An, C. Wang, Q. Wang, X. Liu *et al.*, "Abdomenct-1k: Is abdominal organ segmentation a solved problem?" *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 44, no. 10, pp. 6695–6714, 2021.
- [5] B. Sahiner, A. Pezeshk, L. M. Hadjiiski, X. Wang, K. Drukker, K. H. Cha, R. M. Summers, and M. L. Giger, "Deep learning in medical imaging and radiation therapy," *Medical physics*, vol. 46, no. 1, pp. e1–e36, 2019.
- [6] O. Schoppe, C. Pan, J. Coronel, H. Mai, Z. Rong, M. I. Todorov, A. Müskes, F. Navarro, H. Li, A. Ertürk *et al.*, "Deep learning-enabled multi-organ segmentation in whole-body mouse scans," *Nature communications*, vol. 11, no. 1, p. 5626, 2020.
- [7] F. Isensee, P. F. Jaeger, S. A. Kohl, J. Petersen, and K. H. Maier-Hein, "nnu-net: a self-configuring method for deep learning-based biomedical image segmentation," *Nature methods*, vol. 18, no. 2, pp. 203–211, 2021.
- [8] E. Gibson, F. Giganti, Y. Hu, E. Bonmati, S. Bandula, K. Gurusamy, B. Davidson, S. P. Pereira, M. J. Clarkson, and D. C. Barratt, "Automatic multi-organ segmentation on abdominal ct with dense v-networks," *IEEE transactions on medical imaging*, vol. 37, no. 8, pp. 1822–1834, 2018.
- [9] Y. Wang, Y. Zhou, W. Shen, S. Park, E. K. Fishman, and A. L. Yuille, "Abdominal multi-organ segmentation with organ-attention networks and statistical fusion," *Medical image analysis*, vol. 55, pp. 88–102, 2019.
- [10] Y. Tang, R. Gao, H. H. Lee, S. Han, Y. Chen, D. Gao, V. Nath, C. Bermudez, M. R. Savona, R. G. Abramson *et al.*, "High-resolution 3d abdominal segmentation with random patch network fusion," *Medical image analysis*, vol. 69, p. 101894, 2021.
- [11] H. H. Lee, S. Bao, Y. Huo, and B. A. Landman, "3d UX-net: A large kernel volumetric convnet modernizing hierarchical transformer for medical image segmentation," in *The Eleventh International Conference on Learning Representations*, 2023. [Online]. Available: <https://openreview.net/forum?id=wsZsjOSytRA>
- [12] J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei, "Imagenet: A large-scale hierarchical image database," in *2009 IEEE conference on computer vision and pattern recognition*. Ieee, 2009, pp. 248–255.
- [13] Y. Zhou, Z. Li, S. Bai, C. Wang, X. Chen, M. Han, E. Fishman, and A. L. Yuille, "Prior-aware neural network for partially-supervised multi-organ segmentation," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2019, pp. 10 672–10 681.
- [14] X. Fang and P. Yan, "Multi-organ segmentation over partially labeled datasets with multi-scale feature abstraction," *IEEE Transactions on Medical Imaging*, vol. 39, no. 11, pp. 3619–3629, 2020.
- [15] G. Shi, L. Xiao, Y. Chen, and S. K. Zhou, "Marginal loss and exclusion loss for partially supervised multi-organ segmentation," *Medical Image Analysis*, vol. 70, p. 101979, 2021.
- [16] P. Liu, Y. Deng, C. Wang, Y. Hui, Q. Li, J. Li, S. Luo, M. Sun, Q. Quan, S. Yang *et al.*, "Universal segmentation of 33 anatomies," *arXiv preprint arXiv:2203.02098*, 2022.
- [17] R. Huang, Y. Zheng, Z. Hu, S. Zhang, and H. Li, "Multi-organ segmentation via co-training weight-averaged models from few-organ datasets," in *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 2020, pp. 146–155.
- [18] S. Feng, Y. Zhou, X. Zhang, Y. Zhang, and Y. Wang, "Ms-kd: Multi-organ segmentation with multiple binary-labeled datasets," *arXiv preprint arXiv:2108.02559*, 2021.
- [19] J. Zhang, Y. Xie, Y. Xia, and C. Shen, "Dodnet: Learning to segment multi-organ and tumors from multiple partially labeled datasets," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 1195–1204.
- [20] K. Dmitriev and A. E. Kaufman, "Learning multi-class segmentations from single-class datasets," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2019, pp. 9501–9511.
- [21] O. Petit, N. Thome, and L. Soler, "Iterative confidence relabeling with deep convnets for organ segmentation with partial labels," *Computerized Medical Imaging and Graphics*, vol. 91, p. 101938, 2021.
- [22] X. Chen, Y. Yuan, G. Zeng, and J. Wang, "Semi-supervised semantic segmentation with cross pseudo supervision," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 2613–2622.
- [23] R. Deng, Q. Liu, C. Cui, T. Yao, J. Long, Z. Asad, R. M. Womick, Z. Zhu, A. B. Fogo, S. Zhao *et al.*, "Omni-seg: A scale-aware dynamic network for renal pathological image segmentation," *IEEE Transactions on Biomedical Engineering*, 2023.
- [24] H. Wu, S. Pang, and A. Sowmya, "Tgnet: A task-guided network architecture for multi-organ and tumour segmentation from partially labelled datasets," in *2022 IEEE 19th International Symposium on Biomedical Imaging (ISBI)*. IEEE, 2022, pp. 1–5.
- [25] D.-H. Lee *et al.*, "Pseudo-label: The simple and efficient semi-supervised learning method for deep neural networks," in *Workshop on challenges in representation learning, ICML*, vol. 3, no. 2, 2013, p. 896.
- [26] L. Yang, W. Zhuo, L. Qi, Y. Shi, and Y. Gao, "St++: Make self-training work better for semi-supervised semantic segmentation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 4268–4277.
- [27] K. Chaitanya, E. Erdil, N. Karani, and E. Konukoglu, "Local contrastive loss with pseudo-label based self-training for semi-supervised medical image segmentation," *Medical Image Analysis*, vol. 87, p. 102792, 2023.
- [28] Y. Zou, Z. Yu, X. Liu, B. Kumar, and J. Wang, "Confidence regularized self-training," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2019, pp. 5982–5991.
- [29] Q. Xie, Y. Li, N. He, M. Ning, K. Ma, G. Wang, Y. Lian, and Y. Zheng, "Unsupervised domain adaptation for medical image segmentation by disentangle learning and self-training," *IEEE Transactions on Medical Imaging*, 2022.
- [30] H. Shin, H. Kim, S. Kim, Y. Jun, T. Eo, and D. Hwang, "Cosmos: Cross-modality unsupervised domain adaptation for 3d medical image

- segmentation based on target-aware domain translation and iterative self-training,” *arXiv preprint arXiv:2203.16557*, 2022.
- [31] H. Dong, F. Yu, J. Zhao, B. Dong, and L. Zhang, “Unsupervised domain adaptation in semantic segmentation based on pixel alignment and self-training,” *arXiv preprint arXiv:2109.14219*, 2021.
- [32] H. Liu, Y. Fan, and B. M. Dawant, “Enhancing data diversity for self-training based unsupervised cross-modality vestibular schwannoma and cochlea segmentation,” *arXiv preprint arXiv:2209.11879*, 2022.
- [33] K. Wang, D. Zhang, Y. Li, R. Zhang, and L. Lin, “Cost-effective active learning for deep image classification,” *IEEE Transactions on Circuits and Systems for Video Technology*, vol. 27, no. 12, pp. 2591–2600, 2016.
- [34] B. Kostić, M. Lucka, and J. Risch, “Pseudo-labels are all you need,” *arXiv preprint arXiv:2208.09243*, 2022.
- [35] L. Song, Y. Xu, L. Zhang, B. Du, Q. Zhang, and X. Wang, “Learning from synthetic images via active pseudo-labeling,” *IEEE Transactions on Image Processing*, vol. 29, pp. 6452–6465, 2020.
- [36] E. Arazo, D. Ortego, P. Albert, N. E. O’Connor, and K. McGuinness, “Pseudo-labeling and confirmation bias in deep semi-supervised learning,” in *2020 International Joint Conference on Neural Networks (IJCNN)*. IEEE, 2020, pp. 1–8.
- [37] X. Wang, J. Gao, M. Long, and J. Wang, “Self-tuning for data-efficient deep learning,” in *International Conference on Machine Learning*. PMLR, 2021, pp. 10 738–10 748.
- [38] P. Zhang, B. Zhang, T. Zhang, D. Chen, Y. Wang, and F. Wen, “Prototypical pseudo label denoising and target structure learning for domain adaptive semantic segmentation,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2021, pp. 12 414–12 424.
- [39] L. Ruff, R. Vandermeulen, N. Goernitz, L. Deecke, S. A. Siddiqui, A. Binder, E. Müller, and M. Kloft, “Deep one-class classification,” in *International conference on machine learning*. PMLR, 2018, pp. 4393–4402.
- [40] O. Ronneberger, P. Fischer, and T. Brox, “U-net: Convolutional networks for biomedical image segmentation,” in *International Conference on Medical image computing and computer-assisted intervention*. Springer, 2015, pp. 234–241.
- [41] A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga *et al.*, “Pytorch: An imperative style, high-performance deep learning library,” *Advances in neural information processing systems*, vol. 32, 2019.
- [42] M. J. Cardoso, W. Li, R. Brown, N. Ma, E. Kerfoot, Y. Wang, B. Murrey, A. Myronenko, C. Zhao, D. Yang *et al.*, “Monai: An open-source framework for deep learning in healthcare,” *arXiv preprint arXiv:2211.02701*, 2022.
- [43] M. Hu, M. Maillard, Y. Zhang, T. Ciceri, G. La Barbera, I. Bloch, and P. Gori, “Knowledge distillation from multi-modal to mono-modal segmentation networks,” in *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 2020, pp. 772–781.
- [44] Y. Ye, Y. Xie, J. Zhang, Z. Chen, and Y. Xia, “Uniseg: A prompt-driven universal segmentation model as well as a strong representation learner,” *arXiv preprint arXiv:2304.03493*, 2023.
- [45] J. Liu, Y. Zhang, J.-N. Chen, J. Xiao, Y. Lu, B. A. Landman, Y. Yuan, A. Yuille, Y. Tang, and Z. Zhou, “Clip-driven universal model for organ segmentation and tumor detection,” *arXiv preprint arXiv:2301.00785*, 2023.
- [46] C. Ulrich, F. Isensee, T. Wald, M. Zenk, M. Baumgartner, and K. H. Maier-Hein, “Multitalent: A multi-dataset approach to medical image segmentation,” *arXiv preprint arXiv:2303.14444*, 2023.
- [47] L. H. Li, P. Zhang, H. Zhang, J. Yang, C. Li, Y. Zhong, L. Wang, L. Yuan, L. Zhang, J.-N. Hwang *et al.*, “Grounded language-image pre-training,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 10 965–10 975.
- [48] A. Kirillov, E. Mintun, N. Ravi, H. Mao, C. Rolland, L. Gustafson, T. Xiao, S. Whitehead, A. C. Berg, W.-Y. Lo *et al.*, “Segment anything,” *arXiv preprint arXiv:2304.02643*, 2023.