

Fairly Allocating Goods and (Terrible) Chores

Hadi Hosseini, Aghaheybat Mammadov, and Tomasz Wąs

Pennsylvania State University

{hadi, mammadovagha, twas}@psu.edu

Abstract

We study the fair allocation of mixtures of indivisible goods and chores under lexicographic preferences—a subdomain of additive preferences. A prominent fairness notion for allocating indivisible items is *envy-freeness up to any item* (EFX). Yet, its existence and computation has remained a notable open problem. By identifying a class of instances with “terrible chores”, we show that determining the existence of an EFX allocation is NP-complete. This result immediately implies the intractability of EFX under additive preferences. Nonetheless, we propose a natural subclass of lexicographic preferences for which an EFX and Pareto optimal (PO) allocation is guaranteed to exist and can be computed efficiently for any mixed instance. Focusing on two weaker fairness notions, we investigate finding EF1 and PO allocations for special instances with terrible chores, and show that MMS and PO allocations can be computed efficiently for any mixed instance with lexicographic preferences.

1 Introduction

Fair division of indivisible items has provided a rich mathematical framework for studying computational and axiomatic aspects of fairness in a variety of settings ranging from assigning students to courses [Budish, 2011] and distributing food donations [Aleksandrov et al., 2015] to assigning papers to reviewers [Shah, 2022, Payan and Zick, 2022] and distributing medical equipment and vaccines [Schmidt et al., 2021, Aziz and Brandl, 2021, Pathak et al., 2021]. In these applications, the preferences of agents over items may be *subjective*, that is, some agents may consider an item as a *good* (with non-negative utility) while others may see the same item as a *chore* (with negative utility). For instance, in peer reviewing, reviewers may consider a paper to be a chore if it is outside of their immediate expertise while another subset of reviewers consider it as a good due its proximity to their own field. Thus, an emerging line of work has focused on fair allocation of mixture of goods and chores [Aziz et al., 2022, Bérczi et al., 2020, Kulkarni et al., 2021].

When distributing indivisible items, a prominent fairness notion, *envy-freeness* (EF) [Foley, 1967, Gamow and Stern, 1958], may not always exist. Its most compelling relaxation, *envy-freeness up to any item* (EFX) [Caragiannis et al., 2019], states that any pairwise envy is eliminated if we remove *any* single item that is considered a good in the envied agent’s bundle or is seen as a chore in the envious agent’s bundle. A slightly weaker notion is *envy-freeness up to one item* (EF1) [Lipton et al., 2004a, Budish, 2011], which requires that any pairwise envy can be eliminated by the removal of *some* single item from the bundle of one of the two agents. These relaxations gave rise to several challenging open problems, particularly when dealing with chores: the existence of EFX and the existence and computation of EF1 in conjunction with efficiency notions such as *Pareto optimality* (PO).

To gain insights into structural and computational boundaries of achieving these fairness notions, several recent efforts have considered a variety of *restricted domains* such as limiting the number of agents [Chaudhury et al., 2020, Mahara, 2021], the item types [Aziz et al., 2023, Nguyen and Rothe, 2023], or the valuations (binary, bi-valued valuations, or identical) [Halpern et al., 2020, Garg et al., 2022, Bérczi et al., 2020]. One such natural restriction are *lexicographic preferences*—a subdomain of additive preferences—which provides a compact representation of preferences, and has been studied in voting [Lang et al., 2018], object allocation [Saban and Sethuraman, 2014, Hosseini and Larson, 2019], and fair division [Nguyen, 2020, Ebadian et al., 2022].

In this domain, it was recently shown that an EFX allocation may not always exist for mixed instances [Hosseini et al., 2023]. Moreover, while weaker fairness notions such as EF1 and maximin share (MMS) are guaranteed to exist for mixed items, their computation along with PO remains unknown even for *objective* instances where all agents agree on whether an item is a good or a chore.

The non-existence of EFX for mixed items crucially relies on a set of highly undesirable chores (aka ‘terrible chores’). Without these chores (i.e., if a single agent considers a good as its most important item), under lexicographic preferences an EFX and PO allocation can be computed in polynomial time [Hosseini et al., 2023]. This observation raises several important questions: Can we efficiently decide whether an EFX allocation exists even in the presence of terrible chores? Can we efficiently compute an EF1 (or MMS) allocation in conjunction with Pareto optimality?

1.1 Contributions

We focus on the allocation of mixtures of goods and chores in the lexicographic domain and resolve several open computational problems pertaining to the well-studied fairness notions of EFX, EF1, and MMS.

EFX. We show that determining the existence of an EFX allocation is NP-complete under lexicographic mixed instances even for *objective* preferences, i.e., when all agents agree on whether an item is a good or a chore (Theorem 1). To the best of our knowledge, this finding is the first computational intractability result for EFX over any preference extension containing lexicographic (and as a result additive) preferences. Subsequently, we discuss that deciding whether an EFX and PO allocation exist is NP-hard (Corollary 1).

EFX+PO. Given the non-existence of EFX even for objective mixed instances, and the computational hardness of determining such allocations, we identify a natural variation of lexicographic preferences, called *separable* lexicographic preferences for which positive results can be obtained. In particular, we show that EFX and PO allocations are guaranteed to exist even on instances that contain terrible chores (Theorem 2), and thus, prove that under separable lexicographic preferences, an EFX and PO allocation can be computed efficiently (Corollary 2).

EF1+PO. Given the non-existence of EFX under general (not necessarily separable) lexicographic mixed instances, we focus our attention on EF1 along with Pareto optimality. While an EF1 allocation always exists and can be computed efficiently [Bhaskar et al., 2021, Aziz et al., 2022], its existence and computation along with PO remains open even for additive chores-only instances. We identify a class of lexicographic mixed instances with sufficiently many common terrible chores for which an EF1 and PO allocation can be computed in polynomial time (Theorem 3), and discuss several technical challenges in extending these results.

MMS+PO. Despite the non-existence of EFX and challenges in achieving EF1+PO, we show that an MMS and PO allocation always exist for any mixed instance containing terrible chores (Theorem 4), and can be computed efficiently for any mixed instance (Corollary 3). Moreover, we show that when the efficiency is strengthened to rank-maximality (RM), deciding whether an instance admits an MMS and rank-maximal allocation is NP-complete (Theorem 5).

1.2 Related Work

The existence of EFX is a major open problem in goods-only and chores-only settings. Moreover, EFX is known to be incompatible with PO under non-negative valuations [Plaut and Roughgarden, 2020]. An EFX allocation may fail to exist under non-monotone, non-additive, and identical valuation functions [Bérczi et al., 2020] and for mixed items with additive valuations [Hosseini et al., 2023]. Yet, determining whether an instance admits an EFX allocation has been an open question, which we answer in this paper.

An EF1 allocation can be computed efficiently in goods-only [Caragiannis et al., 2019, Lipton et al., 2004a] and chores-only [Aziz et al., 2022, Bhaskar et al., 2021] settings. When considering economic efficiency, for goods-only problems EF1 is compatible with PO [Caragiannis et al., 2019] and can be computed in pseudo-polynomial time [Barman et al., 2018]. In contrast, for chores-only settings, it is not known whether EF1 and PO allocations exist under additive valuations. For mixed items, an EF1 allocation can still be computed efficiently when valuations are doubly monotonic (which includes additive valuations) [Bhaskar et al., 2021, Aziz et al., 2022] through a careful use of the envy-graph algorithm. However, achieving EF1 alongside PO (except for two agents [Aziz et al., 2022]) remains an open problem.

With additive valuations, an MMS allocation could fail to exist in both the goods-only [Kurokawa et al., 2018] and the chores-only [Aziz et al., 2017] settings. Due to this non-existence, several multiplicative [Aziz et al., 2017, Ghodsi et al., 2021, Garg and Taki, 2021] and ordinal approximations [Babaioff et al., 2019, Hosseini et al., 2022a] to MMS have been proposed for both goods-only and chores-only settings. For mixed items, no constant multiplicative [Kulkarni et al., 2021] or ordinal [Hosseini et al., 2022b] approximation of MMS may exist.

Domain Restriction. To circumvent the negative results and explore the computational boundary and their compatibility with other properties, much attention has been given to studying fairness in restricted domains. For goods-only settings, an EFX allocation is guaranteed to exist when agents have identical monotone valuations [Plaut and Roughgarden, 2020], or submodular valuations with binary marginals [Babaioff et al., 2021, Viswanathan and Zick, 2022], or additive valuations with at most two distinct values [Amanatidis et al., 2021, Garg and Murhekar, 2021]. For chores-only instances, an EFX allocation can be efficiently computed when there are four agents with only two types of additive valuations over seven items [Bérczi and Gedefa Tolessa, 2022]. Under lexicographic preferences, EFX and PO allocation always exist and can be computed in polynomial time for goods-only and chores-only settings [Hosseini et al., 2021], and can often be satisfied along with strategyproofness and other desirable properties.

In chores-only settings, EF1 and PO allocations can be computed in polynomial time when preferences are restricted to bivalued additive valuations [Ebadian et al., 2022, Garg et al., 2022] or when there are only two types of chores [Aziz et al., 2023]. Similarly, MMS allocations are known to always exist for restricted domains such as personalized bivalued valuations, and can be computed efficiently along PO under factored bivalued valuations and weakly lexicographic valuations (allowing ties between items) [Ebadian et al., 2022].

2 Preliminaries

For every $k \in \mathbb{N}$, let $[k] = \{1, \dots, k\}$. Let $N := [n]$ be a set of n agents and $M := \{o_1, \dots, o_m\}$ be a set of m items. For each $i \in N$, $G_i \subseteq M$ denotes the subset of items considered as goods and $C_i := M \setminus G_i$ is the set of items considered as chores by agent i . Items that are goods (chores) for all agents are referred to as *common goods* (similarly, *common chores*) i.e., $\bar{G} := \bigcap_{i \in N} G_i$ ($\bar{C} := \bigcap_{i \in N} C_i$).

Preferences. We consider *lexicographic preferences* over all possible subsets of mixed items, through a linear order that specifies the *importance ordering* of items for each agent. Thus, for each agent $i \in N$ there is an associated importance ordering \triangleright_i that is a linear order over M . Thus, an *importance profile* is simply denoted by $\triangleright := (\triangleright_1, \dots, \triangleright_n)$. We use “+” (or “−”) in superscript to denote that an item is a good (or a chore) in an importance ordering. For example,

$$\triangleright_i : o_1^+ \triangleright o_2^- \triangleright o_3^+, \quad (1)$$

means that agent i considers o_1 and o_3 as goods and o_2 as a chore. Given an importance ordering \triangleright_i and a subset of items $X \subseteq M$, let $\triangleright_i(k, X)$ denote the k -th most important item in X according to \triangleright_i . In case $X = M$, we will write simply $\triangleright_i(k)$ for brevity.

Agent i 's lexicographic preference \succ_i is a strict linear order over all possible subsets of items, which is defined based on its importance ordering \triangleright_i as follows: For every non-identical $X, Y \subseteq M$, we say that $X \succ_i Y$ if and only if $\triangleright_i(1, X \Delta Y) \in (X \cap G_i) \cup (Y \cap C_i)$, where Δ denotes a symmetric difference (formally, $A \Delta B = (A \cup B) \setminus (A \cap B)$ for every sets A and B). In other words, X is preferred to Y if and only if the most important item on which they differ is either a good in X or a chore in Y . For every $X, Y \subseteq M$, we will write $X \succeq_i Y$ if $X \succ_i Y$ or $X = Y$. For instance, based on agent i 's preference stated above in (1), we have $\{o_1^+, o_3^+\} \succ_i \{o_1^+\} \succ_i \{o_1^+, o_2^-, o_3^+\} \succ_i \{o_1^+, o_2^-\} \succ_i \{o_3^+\} \succ_i \emptyset \succ_i \{o_2^-, o_3^+\} \succ_i \{o_2^-\}$.

Terrible Chores and Separable Preferences. For disjoint subsets $X, Y \subseteq M$, we use a shorthand notation $X \triangleright_i Y$ to say that for every $x \in X$ and $y \in Y$ it holds that $x \triangleright_i y$. A set of *terrible chores* is a set of chores more important than any good, i.e., a maximal set $C_i^* \subseteq C_i$ such that $C_i^* \triangleright_i G_i$ (note that, if $G_i = \emptyset$, then $C_i^* = C_i$). An importance ordering \triangleright_i is *separable* if either $C_i \triangleright_i G_i$ or $G_i \triangleright_i C_i$. In other words, in separable ordering either all chores are terrible or every good is more important than every chore.

Instance. An *instance of the allocation problem with mixed items* (a mixed instance) is a four-tuple $(N, M, G, \triangleright)$, where $G := (G_i)_{i \in N}$ and $\triangleright := (\triangleright_i)_{i \in N}$. An instance is *goods-only* if $G = M$, *chores-only* if $G = \emptyset$, and is *objective* if $G_i = G_j$ for every $i, j \in N$. An instance $(N, M, G, \triangleright)$ is separable if the importance orderings are separable. Note that separable instances can be seen as a special extension of lexicographic preferences over mixed items with the assumption that for every agent either chores are more important than goods or goods than chores. On the other hand, lexicographic preferences can be seen as a special case of additive preferences in which the magnitude of valuations grow exponentially in the importance ordering. Figure 1 illustrate the inclusion relation between different lexicographic extensions.

A *mixed instance with terrible chores* is a (possibly objective) instance in which $C_i^* \neq \emptyset$ for every $i \in N$. The following example illustrates such an instance.

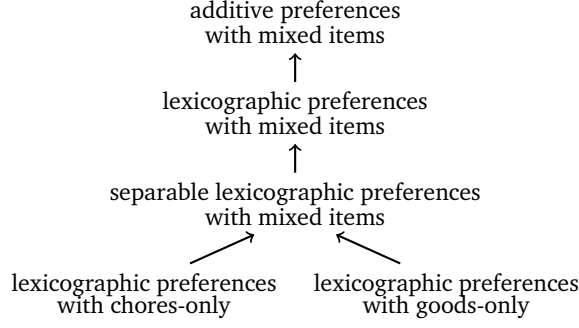


Figure 1: Inclusion relation in different lexicographic extensions.

Example 1. Consider a mixed instance with three agents, six items and a profile as follows. The set of common goods is $\bar{G} = \{o_5^+, o_6^+\}$, and the set of common chores is $\bar{C} = \{o_1^-, o_2^-\}$. This mixed instance contains terrible chores because every agent has a top item as a chore, i.e., $\triangleright_i(1) \in C_i$. In fact, it is a separable instance as well.

$$\begin{aligned}
 1 : & \quad o_1^- \triangleright \underline{o_2^-} \triangleright o_3^- \triangleright \underline{o_4^+} \triangleright o_5^+ \triangleright o_6^+ \\
 2 : & \quad \underline{o_1^-} \triangleright o_2^- \triangleright o_3^- \triangleright o_4^- \triangleright \underline{o_5^+} \triangleright \underline{o_6^+} \\
 3 : & \quad o_1^- \triangleright o_2^- \triangleright \underline{o_3^+} \triangleright o_4^+ \triangleright o_5^+ \triangleright o_6^+
 \end{aligned}$$

(underline denotes an allocation described in Section 3.1).

Allocations. An allocation $A := (A_i)_{i \in N}$ is a partition of M such that $A_i \subseteq M$ is agent i 's bundle. An allocation is *complete* if all items in M are assigned, i.e., $\bigcup_{i \in N} A_i = M$ and is *partial* otherwise. Unless explicitly stated, we assume that an allocation is complete.

Envy-freeness. Given a pair of agents $i, j \in N$, agent i *envies* j if $A_j \succ_i A_i$. Allocation A is *envy-free* (EF), if for every pair of agents $i, j \in N$, we have $A_i \succeq_i A_j$. Allocation A is *envy-free up to one item* (EF1), if for every $i, j \in N$ such that i envies j , there is $g \in G_i \cap A_j$ such that $A_i \succeq_i A_j \setminus \{g\}$ or there is $c \in C_i \cap A_i$ such that $A_i \setminus \{c\} \succeq_i A_j$. Allocation A is *envy-free up to any item* (EFX), if for every $i, j \in N$ such that i envies j , it holds that for every $g \in G_i \cap A_j$ we have $A_i \succeq_i A_j \setminus \{g\}$ and for every $c \in C_i \cap A_i$ we have $A_i \setminus \{c\} \succeq_i A_j$.

Maximin Share. The *maximin share* (MMS) of an agent is the most preferred bundle it can guarantee by creating an n -partition and receiving the worst one. Formally, for agent $i \in N$, $\text{MMS}_i := \max_{A \in \Pi_n} \min\{A_1, \dots, A_n\}$, where Π_n is the set of all n -partitions of M , and \max and \min denote the most preferred and the least preferred bundles according to \succ_i , respectively. An allocation A satisfies *maximin share*, if for every $i \in N$ it holds that $A_i \succeq_i \text{MMS}_i$. In our setting EFX implies both EF1 and MMS, but the converse is not true. Moreover, EF1 and MMS do not imply each other.

Economic Efficiency. A (possibly partial) allocation A *Pareto dominates* allocation B if A assigns the same set of items as B , i.e., $\bigcup_{i \in N} A_i = \bigcup_{i \in N} B_i$, and $A_i \succeq_i B_i$ for every $i \in N$ and there exists $i \in N$ such that $A_i \succ_i B_i$. Allocation A is *Pareto optimal* (PO), if it is not Pareto dominated by any other allocation. In Section 5, we also consider *rank maximality* (RM), which is a stronger

efficiency notion. Intuitively, it means that each item is given to an agent that values it the most. We give a formal definition in Appendix C.2.

We note that EFX and PO allocations always exist and can be efficiently computed in every instance without terrible chores, i.e., when at least one agent sees its most important item as a good [Hosseini et al., 2023]. Thus, we primarily focus on instances with terrible chores.

Serial Dictatorship. An *ordering* of agents is a sequence $\sigma = (\sigma_1, \dots, \sigma_n)$ such that $\sigma_i \in N$ denotes the i -th agent in the sequence. A *quota* vector $q = (q_1, \dots, q_n)$ is a vector of integers that we assign to each agent. A *serial dictatorship* mechanism, prescribed by an ordering σ and a quota q , proceeds as follows: starting from some partial (possibly empty) allocation A , in each step, $i \in [k]$, if there are still unallocated items, we take the q_{σ_i} most preferred ones by agent σ_i (i.e., the most important goods and then the least important chores if there are not enough goods left) and add it to the bundle of this agent.

3 Envy-Freeness up to Any Item (EFX)

Recall that an EFX allocation may fail to exist for mixed instances [Hosseini et al., 2023]. This non-existence crucially relies on a set of common chores with the highest importance ordering, i.e., the terrible chores. Otherwise, if there is at least one agent with the top item as a good, an EFX and PO allocation can be computed efficiently under lexicographic preferences. Thus, we focus on mixed instances with terrible chores and show that deciding whether an EFX allocation exists is computationally hard under lexicographic preferences, which subsequently implies hardness for additive preferences with mixed items. The formal proof is relegated to Appendix A.1.

Theorem 1. *Deciding whether there exists an EFX allocation for a given lexicographic mixed instance is NP-complete.*

Proof (sketch). We prove the hardness by a reduction from EXACT COVER BY 3-SETS (X3C). In an X3C instance, we have a universe $\mathcal{U} = \{u_1, \dots, u_m\}$ and a family of its three-element-subsets, $\mathcal{S} = \{S_1, \dots, S_n\}$. The problem, which is known to be NP-complete [Johnson and Garey, 1979], is to decide whether there exists an exact cover $\mathcal{K} \subset \mathcal{S}$ of size k , such that $\bigcup_{S_j \in \mathcal{K}} S_j = \mathcal{U}$.

For every such X3C instance, we construct a corresponding objective mixed items instance $(N, M, G, \triangleright)$ as follows. For every element $u_i \in \mathcal{U}$, we take $2n$ common chores $c_{i,1}, \dots, c_{i,2n}$. We add to it k common goods g_1, \dots, g_k (the assignment of which will correspond to the choice of subsets in \mathcal{K}), which gives us $|M| = 2mn + k$ items in total. Next, for every subset $S_j \in \mathcal{S}$ we take two agents $2j - 1$ and $2j$ and we give them identical importance orderings, i.e., $\triangleright_{2j-1} = \triangleright_{2j}$. Specifically, their importance ordering consists of three “blocks”: first there are all chores corresponding to elements u_i such that $u_i \notin S_j$, then there are k goods g_1, \dots, g_k , and at the end there are all chores corresponding to elements $u_i \in S_j$. For example, if we had $S_j = \{u_1, u_2, u_3\}$, then the importance ordering of agents $2j - 1$ and $2j$ would be $c_{4,1} \triangleright \dots \triangleright c_{m,2n} \triangleright g_1 \triangleright \dots \triangleright g_k \triangleright c_{1,1} \triangleright \dots \triangleright c_{3,2n}$.

We prove that there is a cover in an X3C instance, if and only if, there is an EFX allocation in the corresponding mixed item instance. If there is a cover, without loss of generality we assume that $\mathcal{K} = \{S_1, \dots, S_k\}$ and show that allocation $A = (A_1, \dots, A_{2n})$, where

$$A_j = \begin{cases} \{g_{j/2}\} \cup \{c_{i,l} \in \bar{C} : u_i \in S_{j/2}\}, & \text{if } j \in \{2, \dots, 2k\}, \\ \emptyset, & \text{otherwise,} \end{cases} \quad (2)$$

is EFX (and also PO). If there is no cover, we analyze the number of “uncovered” chores in an allocation, i.e., chores received by an agent that are more important than every good it received.

We show that EFX would imply that there can be at most $2n - 1$ such chores, but no set cover implies that there are at least $2n$ of them—a contradiction. \square

In the proof of Theorem 1, we show that the allocation defined in equation (2) (i.e., an EFX allocation that exists when there is a set cover in an X3C instance) is not only EFX but also PO. This implies that deciding whether there exists an allocation that is both EFX and PO is also NP-hard (we note that the problem of verifying if an allocation is PO in polynomial time remains open, thus we cannot claim NP-completeness).

Corollary 1. *Deciding whether there exists an EFX and PO allocation for a given lexicographic mixed instance is NP-hard.*

The constructions in the proof of Theorem 1 only used objective instances, where all agents agree on whether an item is a chore or a good. Thus, these computational hardness results hold for all mixed instances and do not rely on subjective views of agents.

3.1 EFX and PO: Separable Preferences

An important feature of our construction in the proof of Theorem 1 is that each agent has some terrible chores and some other (non-terrible) chores that are separated by several goods in its importance ordering. In this section, we analyze the case where either all chores are terrible or all are less important than every good, i.e., the separable lexicographic preferences. We show that such a constraint enables us to devise an algorithm that computes an EFX and PO allocation for every separable instance.

Algorithm 1 finds one such allocation for every mixed instance with separable preferences that contains terrible chores. It extends the algorithm by Hosseini et al. [2023] for EFX and PO allocations in instances in which the most important item of one of the agents is a good (in fact Phase 2 of our algorithm can be seen as running this algorithm on a smaller instance).

Algorithm. Fix any ordering of agents $1, \dots, n$. The algorithm runs in two phases. In Phase 1, we allocate all common chores (items in \bar{C}) and goods to agents that receive these chores. First, all common chores are allocated through a serial dictatorship with ordering $(1, \dots, n)$ and quotas q , where $q_i = 1$ for $i \in N$, except $q_1 = |\bar{C}| - n + 1$, if $|\bar{C}| > n$. Then starting from the last agent which received a common chore (i.e., the worst chore), say agent z , in the reverse order, i.e., $z, z-1, \dots, 1$, we add to each agent’s bundle all the unassigned items that it considers as goods. At the end of Phase 1, all remaining items are considered as a good for at least one agent in N , but considered as a chore by all agents who received an item in Phase 1, i.e., agents in $[z]$. This is crucial for ensuring that the final allocation will be EFX. In Phase 2, we distribute the remaining items in such a way that each is assigned to an agent for which it is a good. Specifically, we move through the positions in importance orderings, one by one, starting from the first position with an unassigned item. For each position k , we find an agent $i \in N'$, that has yet unassigned good at position k , and assign this good plus all remaining items that only i considers as goods (but no other remaining agent considers as goods). This process repeats until no item remains unassigned. Example 2 illustrates the execution of Algorithm 1).

Example 2. *Consider the mixed instance with separable preferences given in Example 1.*

Algorithm 1 starts by running a serial dictatorship with a fixed ordering of $(1, 2, 3)$ to allocate all terrible common chores, i.e., $\{o_1^-, o_2^-\}$. Thus, agents 1 and 2 receive o_2^- and o_1^- respectively, while agent 3 receives nothing. Then, starting from agent 2, the last agent who received a chore (the worst chore),

Algorithm 1 Computing an EFX and PO allocation for separable lexicographic preferences

Input: A mixed instance $(N, M, G, \triangleright)$ with separable preferences that contains terrible chores

Output: An allocation A that is EFX and PO

```

1:  $A := (\emptyset, \dots, \emptyset)$ 
    $\triangleright$  PHASE 1:
2: assign common chores,  $\bar{C}$ , by a serial dictatorship with ordering  $(1, \dots, n)$  and quotas  $q$ , where  $q_1 = \max(1, |\bar{C}| - n + 1)$  and  $q_i = 1$ , for  $i \in N \setminus \{1\}$ 
3:  $N' := \{i \in N : A_i = \emptyset\}$ ,  $H := M \setminus \bar{C}$ 
4:  $z := \max\{N \setminus N'\}$ 
5: for  $i \in (z, z - 1, \dots, 1)$  do
6:    $A_i \leftarrow A_i \cup (G_i \cap H)$ ,  $H \leftarrow H \setminus A_i$ 
7: end for
    $\triangleright$  PHASE 2:
8: for  $k \in (1, \dots, |M|)$  do
9:   while there is  $i \in N'$  such that  $\triangleright_i(k) \in H \cap G_i$  do
10:     $g_i := \triangleright_i(k)$ ,  $A_i \leftarrow \{g_i\}$ 
11:     $A_i \leftarrow A_i \cup (H \cap G_i \setminus \bigcup_{j \in N' \setminus \{i\}} G_j)$ 
12:     $N' \leftarrow N' \setminus \{i\}$ ,  $H \leftarrow H \setminus A_i$ 
13:   end while
14: end for
15: return  $A$ 

```

in the reverse ordering i.e., $(2, 1)$, agents receive all their remaining goods (if any). Therefore, at the end of Phase 1, $A_1 = \{o_2^-, o_4^+\}$, $A_2 = \{o_1^-, o_5^+, o_6^+\}$ and $A_3 = \emptyset$.

In Phase 2, the only remaining item o_3 is allocated to agent 3 who sees it as a good (while agents 1 and 2 consider o_3 as a chore). The final allocation is underlined in Example 1.

Before proving the correctness of the algorithm, let us show a general result (Lemma 1) concerning the serial dictatorship mechanism. Assume that there is a PO partial allocation and the set of common chores H such that for each agent H is more important than its bundle and all its goods (i.e., H contains terrible chores for all agents). We show that extending such partial allocation by allocating items in H through the serial dictatorship with arbitrary ordering and quotas will preserve PO. Since the order of allocating items does not affect the final allocation, Lemma 1 can be used to show the correctness of Algorithm 1.

Lemma 1. For every instance $(N, M, G, \triangleright)$, subset of common chores $H \subseteq \bar{C}$, and partial allocation B of items in $M \setminus H$ that is PO, if for each $i \in N$ it holds that $H \triangleright_i (G_i \cup B_i)$, then every allocation A obtained by extending B by the serial dictatorship with an arbitrary ordering and quotas is PO.

Proof. Assume by contradiction that there exists A obtained by the serial dictatorship that is not PO. This means that there exists an allocation A' that Pareto dominates A . Now, let us consider two cases based on whether A and A' differ on assignment of chores in H . If this is true, then there exists a common chore, $c \in H$, that is assigned to different agents in A and A' , i.e., there exists $i \in N$ such that $c \in A'_i \setminus A_i$. Let us take c and i such that, among all such chores, c was picked as the last one in the serial dictatorship leading to A . Observe that every chore $c' \in H \cap A_i$ such that $c' \triangleright_i c$ was picked by agent i after c was assigned (otherwise i would pick c instead). Hence, for every such c' we have also $c' \in A'_i$ (otherwise c would not be the last picked chore that is assigned to different agents in A and A'). Since $H \triangleright_i (G_i \cup B_i)$, this implies that $A_i \succ_i A'_i$, which means that A' does not Pareto dominate A —a contradiction.

Finally, consider the case in which A and A' assign chores in H identically. By B' let us denote

the partial allocation obtained from A' by removing chores in H . Since A' Pareto dominates A , it means that B' Pareto dominates B . But that contradicts the fact that B is PO. \square

Theorem 2. *Given a mixed instance with separable preferences that contains terrible chores, an EFX and PO allocation always exists and can be computed in polynomial time.*

The proof is relegated to Appendix A.2. When at least one agent’s top item is a good, an EFX and PO allocations are guaranteed to exist and can be computed efficiently [Hosseini et al., 2023]. Combining this with Theorem 2 we obtain the following computational and existence results for separable preferences.

Corollary 2. *Given any mixed instance with separable preferences, an EFX and PO allocation always exists and can be computed in polynomial time.*

4 EF1 and PO

Despite the non-existence of EFX and the computational hardness of deciding whether an instance admits such an allocation (Theorem 1), we identified a natural class of separable lexicographic preferences for which an EFX and PO allocation is always guaranteed to exist and can be computed efficiently (Theorem 2). This raises the question of whether focusing on weaker fairness notions, e.g., EF1 or MMS, enables us to escape these negative results for the more general mixed lexicographic (but not necessarily separable) preferences.

In this section, we focus on EF1 and discuss the technical challenges in satisfying it with PO. We then devise an efficient algorithm for finding EF1 and PO when there are sufficiently many *common* terrible chores, in particular, when there are at least $n - 1$ terrible chores shared by all agents.

Before presenting our main result in this section, let us discuss the technical challenges in achieving EF1 and PO for mixed lexicographic preferences.¹ For mixed instances, under additive or doubly monotone valuations,² an EF1 allocation (without PO) can be computed efficiently through either the double round robin algorithm [Aziz et al., 2022] or a variant of the envy-graph algorithm [Bhaskar et al., 2021]. However, both these approaches fail in satisfying PO even when preferences are restricted to the lexicographic domain, as we illustrate in Appendix B.1.

Remark 1. *Other naive approaches also fail to achieve the desired outcome. For instance, a good may have to be assigned to an agent for which it is not in the highest position. This observation immediately shows that approaches used for achieving EFX and PO under separable preferences (as described in Algorithm 1) or those proposed by [Hosseini et al., 2023] that assign goods to agents having them high in the orderings. We illustrate this challenge in the next example.*

Example 3. *Consider a mixed instance with five agents, six items, and a profile as follows. The set of common goods is $\bar{G} = \{o_1^+\}$, the set of common chores is $\bar{C} = \{o_2^-, o_3^-, o_4^-, o_5^-, o_6^-\}$, but the set of*

¹The existence and computation of EF1 and PO allocations remain open even for additive chores-only instances.

²Doubly (or item-wise [Chen and Liu, 2020]) monotone is a broad valuation class wherein each agent can partition items into those with non-negative (goods) or negative (chores) marginal utility.

common terrible chores is empty.

$$\begin{aligned}
1 : & \quad o_4^- \triangleright o_5^- \triangleright o_6^- \triangleright o_1^+ \triangleright o_2^- \triangleright o_3^- \\
2 : & \quad o_2^- \triangleright o_3^- \triangleright o_1^+ \triangleright o_4^- \triangleright o_5^- \triangleright o_6^- \\
3 : & \quad o_2^- \triangleright o_3^- \triangleright o_1^+ \triangleright o_4^- \triangleright o_5^- \triangleright o_6^- \\
4 : & \quad o_2^- \triangleright o_3^- \triangleright o_1^+ \triangleright o_4^- \triangleright o_5^- \triangleright o_6^- \\
5 : & \quad o_2^- \triangleright o_3^- \triangleright o_1^+ \triangleright o_4^- \triangleright o_5^- \triangleright o_6^-
\end{aligned}$$

In this instance, every EF1 and PO allocation must assign the only good, o_1^+ to agent 1; otherwise, either the allocation violates PO or it violates EF1. Note that all other agents rank o_1^+ higher in their importance ranking; yet, this common good must be allocated to agent 1.

Another unintuitive observation is that if the preferences of agents 3, 4, and 5 were identical to those of agent 1 (instead of 2), then o_1^+ would need to be allocated to agent 2 to guarantee EF1 and PO. In Appendix B.1, we give additional examples to illustrate the complexity of this problem.

Given the aforementioned challenges, we show that for lexicographic mixed instances that contain at least $n - 1$ common terrible chores, an EF1 and PO allocation always exists and can be computed efficiently. Formally, the set of *common terrible chores* contains all chores that are terrible for all agents, i.e., $\bar{C}^* = \bigcap_{i \in N} C_i^*$. We describe an algorithm that finds an EF1 and PO allocation for every mixed instance with at least $n - 1$ common terrible chores, i.e., $|\bar{C}^*| \geq n - 1$. We present its pseudocode in Appendix B.2.

Algorithm. Fix any ordering of agents $1, \dots, n$. We start by giving agent 1 all items it considers as goods. To each next agent, in the order $2, \dots, n$, we give everything it considers as goods from the set of unassigned items (or nothing if there are no such items left). The remaining items are necessarily common chores. Next, we start from agent n , and assign to it all of its non-terrible chores. To each next agent, in the reversed order, i.e., $n - 1, \dots, 1$, we give all its non-terrible chores that remain (if any). The only remaining items are common terrible chores. Such partial allocation is PO, but it can be very unfair (agent 1 got all its goods and agent n all its non-terrible chores). To ensure fairness, we assign the remaining common terrible chores using serial dictatorship with ordering σ such that the last agent, σ_n , is not envied by any other agent (since the partial allocation is PO there surely is such σ). In this way, every agent (except possibly σ_n) receives at least one common terrible chore, which results in an EF1 allocation (and by Lemma 1 it is still PO).

Example 4. Consider a mixed instance with three agents, eight items, and a profile as follows. The set of common chores is $\bar{C} = \{o_1^-, o_2^-, o_3^-, o_5^-\}$.

$$\begin{aligned}
1 : & \quad o_1^- \triangleright o_2^- \triangleright \underline{o_3^-} \triangleright \underline{o_4^+} \triangleright o_5^- \triangleright \underline{o_6^+} \triangleright o_7^- \triangleright \underline{o_8^+} \\
2 : & \quad o_1^- \triangleright \underline{o_2^-} \triangleright o_3^- \triangleright o_4^+ \triangleright o_5^- \triangleright o_6^+ \triangleright \underline{o_7^+} \triangleright o_8^+ \\
3 : & \quad \underline{o_1^-} \triangleright o_2^- \triangleright o_3^- \triangleright o_4^+ \triangleright \underline{o_5^-} \triangleright o_6^+ \triangleright o_7^- \triangleright o_8^+
\end{aligned}$$

Suppose the ordering is $(1, 2, 3)$. Algorithm 2 starts by assigning $\{o_4^+, o_6^+, o_8^+\}$ and $\{o_7^+\}$ to agents 1 and 2, respectively. Then in the reverse ordering $(3, 2, 1)$, agents get their common non-terrible chores (out of the remaining items), resulting in agent 3 receiving o_5^- (and nothing for others). Since agent 3 is not envied (such an agent always exists), Algorithm 2 allocates all common terrible chores ($\{o_1^-, o_2^-, o_3^-\}$) by running a serial dictatorship with the ordering of $(1, 2, 3)$ and single quota. The final allocation is underlined.

Algorithm 2 Finding an EF1 and PO allocation when there is at least $n - 1$ common terrible chores

Input: A mixed instance $(N, M, G, \triangleright)$ s.t. $|\bar{C}^*| \geq n - 1$

Output: An allocation A that is EF1 and PO

```
1:  $A := (\emptyset, \dots, \emptyset)$ ,  $H := \bar{C} \setminus \bar{C}^*$ 
    $\triangleright$  PHASE 1:
2: for  $i \in (1, \dots, n)$  do
3:    $A_i \leftarrow G_i \setminus \bigcup_{j \in [i-1]} A_j$ 
4: end for
5: for  $i \in (n, \dots, 1)$  do
6:    $A_i \leftarrow A_i \cup H \setminus C_i^*$ 
7:    $H \leftarrow H \setminus A_i$ 
8: end for
    $\triangleright$  PHASE 2:
9: take an arbitrary ordering  $\sigma$  s.t. no one envies agent  $\sigma_n$ 
10: assign the items in  $\bar{C}^*$  by the serial dictatorship with ordering  $\sigma$  and quotas  $q$ , where  $q_{\sigma_1} = \max(1, |\bar{C}^*| - n + 1)$  and  $q_{\sigma_i} = 1$ , for every  $i \in \{2, \dots, n\}$ 
11: return  $A$ 
```

Theorem 3. *Given a lexicographic mixed instance with at least $n - 1$ common terrible chores, an EF1 and PO allocation always exists and can be computed in polynomial time.*

The formal proof is relegated to Appendix B.2. Given the theorem above, one may wonder whether a similar approach can be utilized for instances with potentially fewer than $n - 1$ common terrible chores. In Appendix B.1, we show that even extending to $n - 2$ (if possible) requires new techniques with a rather complicated analysis to guarantee Pareto optimality.

5 MMS and Efficiency

Despite the challenges in satisfying EF1 and PO for lexicographic mixed instances that contain terrible chores, we show that an MMS and PO allocation always exists and can be computed in polynomial time. Note that while an MMS allocation can be computed efficiently [Hosseini et al., 2023], its computation along with economic efficiency notions such as PO and rank maximality was open even for objective instances.

We build on the characterization of maximin share which is specified by the most important items. Simply put, an agent's MMS is characterized by its top item: if it is a chore, its MMS is the top item and all its goods; otherwise its MMS is the set of all items that it considers as good without the first $n - 1$ goods according to its importance ordering (or the empty set if its importance ordering contains fewer than n goods).

Proposition 1. [Hosseini et al., 2023] *Given a mixed instance $(N, M, G, \triangleright)$, for every agent $i \in N$, if $\triangleright_i(1) \in C_i$, it holds that $\text{MMS}_i = \{\triangleright_i(1)\} \cup G_i$. Otherwise, if $\triangleright_i(1) \in G_i$, it holds that $\text{MMS}_i = \emptyset$, if $|G_i| < n$, or $\text{MMS}_i = G_i \setminus \bigcup_{k \in [n-1]} \{\triangleright_i(k, G_i)\}$, if $|G_i| \geq n$.*

Algorithm. Fix any ordering of agents $1, \dots, n$. Similar to Algorithm 2, we start by allocating to each agent, in the ordering $1, \dots, n$, all remaining unassigned items that it considers as goods (or nothing if there are no such items left). The remaining items will be common chores. We give all of them to agent n , with the exception of the most important item for n , which we denote by c^* . Now,

Algorithm 3 Finding an MMS and PO allocation

Input: A mixed instance $(N, M, G, \triangleright)$ with terrible chores

Output: An allocation A that is MMS and PO

```
1:  $A := (\emptyset, \dots, \emptyset), \quad c^* := \triangleright_n(1)$ 
2: for  $i \in (1, \dots, n)$  do
3:    $A_i \leftarrow G_i \setminus \bigcup_{j \in [i-1]} A_j$ 
4: end for
5:  $A_n \leftarrow A_n \cup \bar{C} \setminus \{c^*\}$ 
6: if for every  $i \in N$  it holds that  $\triangleright_i(1) = c^*$  then
7:    $A_1 \leftarrow A_1 \cup \{c^*\}$ 
8: else if  $c^* \in \bar{C}$  then
9:    $i^* := \max\{i \in [n] : \triangleright_i(1) \neq c^*\}$ 
10:   $A_{i^*} \leftarrow A_{i^*} \cup \{c^*\}$ 
11: end if
12: return  $A$ 
```

the choice of which agent should receive c^* depends on whether c^* is the most important item for all agents. If it is the case, we give it to agent 1. Otherwise, i.e., if there is at least one agent for which there is more important item than c^* , we give it to the last such agent in the ordering.

Example 5. We revisit the instance given in Example 4.

$$\begin{aligned} 1: & \underline{o_1^-} \triangleright o_2^- \triangleright o_3^- \triangleright \underline{o_4^+} \triangleright o_5^- \triangleright \underline{o_6^+} \triangleright o_7^- \triangleright \underline{o_8^+} \\ 2: & o_1^- \triangleright o_2^- \triangleright o_3^- \triangleright \underline{o_4^+} \triangleright o_5^- \triangleright \underline{o_6^+} \triangleright \underline{o_7^+} \triangleright o_8^+ \\ 3: & o_1^- \triangleright \underline{o_2^-} \triangleright \underline{o_3^-} \triangleright o_4^+ \triangleright \underline{o_5^-} \triangleright \underline{o_6^+} \triangleright o_7^- \triangleright o_8^+ \end{aligned}$$

For this instance, the allocation returned by Algorithm 2 is not MMS. The outcome for agent 3 was $\{o_1^-, o_5^-\}$, to which agent 3 strictly prefers its MMS ($\text{MMS}_3 = \{o_1^-, o_4^+, o_6^+, o_8^+\}$). Suppose the ordering is $(1, 2, 3)$. Algorithm 3 starts by assigning $\{o_4^+, o_6^+, o_8^+\}$ and $\{o_7^+\}$ to agents 1 and 2, respectively. Then, agent 3 receives all common chores, except its most important item $c^* = o_1^-$. Lastly, since c^* is the most important item for every agent, it is allocated to the first agent. The final allocation is underlined.

Let us prove the correctness of our algorithm (the full proof is relegated to Appendix C.1).

Theorem 4. Given a lexicographic mixed instance with terrible chores, an MMS and PO allocation always exists and can be computed in polynomial time.

Proof (sketch). Since $(N, M, G, \triangleright)$ is an instance with terrible chores, by Proposition 1, maximin share of every agent consists of its most important chore and all goods. The first agent, agent 1, is the only one that can receive its most important chore in our algorithm. However, since apart from that it receives all of its goods, the output allocation is MMS.

For PO, consider two agents $i < j \in [n]$. Observe that j does not have any item that i considers as good. Hence, the only Pareto improvement between those two agents is possible if i received c^* (Pareto improvement can involve more than two agents, but we do not consider such in this sketch). Then, i can potentially offer c^* to j , bundled with less important for i goods. However, if i was assigned c^* , this means that c^* is the most important item for j . Hence, j would not accept any exchange in result of which it gets c^* . \square

Combining Theorem 4 with the existence and computation results when there are no terrible chores [Hosseini et al., 2023], we obtain the following general conclusion.

Corollary 3. *Given a lexicographic mixed instance, an MMS and PO allocation always exists and can be computed in polynomial time.*

Corollary 3 ensures that an MMS and PO allocation always exists. From Corollary 1 we know however that if we strengthen MMS to EFX, then an EFX and PO allocation may not exist and deciding if such an allocation exists is computationally hard. A natural question is whether one can strengthen the efficiency to rank maximality. We show that deciding whether there exists an MMS and RM allocation is computationally hard, which stands in sharp contrast to the goods-only and chores-only settings.

Theorem 5. *Deciding whether there exists an MMS and RM allocation for a given lexicographic mixed instance is NP-complete.*

The proof of the theorem (relegated to Appendix C.2) is a reduction from SET COVER problem and shares some similarities with the proof of Theorem 1 (instance is objective and chores correspond to elements of the universe, agents to subsets, and assignment of goods to subsets chosen to the cover). However, there are some important differences. First, much more emphasis is put on the positions of items in the importance orderings. To this end, we introduce additional dummy goods and chores and two agents that allow us to restrict the set of possible rank maximal allocations.

6 Concluding Remarks

By focusing on the restricted domain of lexicographic preferences, we identified instances with terrible chores for which EFX is hard to compute, thus, providing the first ever computational hardness result for EFX. Nonetheless, we identified a natural class of separable lexicographic preferences for which EFX and PO allocations are efficiently computable (and always exist). Moreover, we showed that MMS and PO allocations always exist and can be computed efficiently for any lexicographic mixed instance.

For EF1 and PO, the main remaining challenge is how to deal with (possibly subjective) mixed instances that contain fewer than $n - 1$ common terrible chores. Steps towards addressing this problem could potentially lead to novel techniques for more general preferences, including and beyond, the additive domain.

Acknowledgments

Hadi Hosseini acknowledges support from NSF grants #2144413 (CAREER), #2052488, and #2107173. We thank the anonymous reviewers for their helpful comments.

References

Martin Aleksandrov, Haris Aziz, Serge Gaspers, and Toby Walsh. Online fair division: analysing a food bank problem. In *Proceedings of the Twenty-Fourth International Joint Conference on Artificial Intelligence (IJCAI 2015)*, pages 2540–2546, 2015.

Georgios Amanatidis, Georgios Birmpas, Aris Filos-Ratsikas, Alexandros Hollender, and Alexandros A Voudouris. Maximum Nash Welfare and Other Stories about EFX. *Theoretical Computer Science*, 863:69–85, 2021.

- Haris Aziz and Florian Brandl. Efficient, Fair, and Incentive-Compatible Healthcare Rationing. In *Proceedings of the 22nd ACM Conference on Economics and Computation*, pages 103–104, 2021.
- Haris Aziz, Gerhard Rauchecker, Guido Schryen, and Toby Walsh. Algorithms for Max-Min Share Fair Allocation of Indivisible Chores. In *Proceedings of the Thirty-First AAAI Conference on Artificial Intelligence*, page 335–341, 2017.
- Haris Aziz, Ioannis Caragiannis, Ayumi Igarashi, and Toby Walsh. Fair Allocation of Indivisible Goods and Chores. *Autonomous Agents and Multi-Agent Systems*, 36(1):1–21, 2022.
- Haris Aziz, Jeremy Lindsay, Angus Ritossa, and Mashbat Suzuki. Fair allocation of two types of chores. In *Proceedings of the 22nd International Conference on Autonomous Agents and MultiAgent Systems*, 2023. forthcoming.
- Moshe Babaioff, Noam Nisan, and Inbal Talgam-Cohen. Fair Allocation through Competitive Equilibrium from Generic Incomes. In *Proceedings of the 2019 ACM Conference on Fairness, Accountability and Transparency*, pages 180–180, 2019.
- Moshe Babaioff, Tomer Ezra, and Uriel Feige. Fair and Truthful Mechanisms for Dichotomous Valuations. In *Proceedings of the 35th AAAI Conference on Artificial Intelligence*, volume 35, pages 5119–5126, 2021.
- Siddharth Barman, Sanath Kumar Krishnamurthy, and Rohit Vaish. Finding Fair and Efficient Allocations. In *Proceedings of the 2018 ACM Conference on Economics and Computation*, pages 557–574, 2018.
- Kristóf Bérczi and Fekadu Gedefa Tolessa. A note on the existence of EFX allocations for negative additive valuations. Technical Report QP-2022-01, Egerváry Research Group, Budapest, 2022. egres.elte.hu.
- Kristóf Bérczi, Erika R Bérczi-Kovács, Endre Boros, Fekadu Tolessa Gedefa, Naoyuki Kamiyama, Telikepalli Kavitha, Yusuke Kobayashi, and Kazuhisa Makino. Envy-Free Relaxations for Goods, Chores, and Mixed Items. *arXiv preprint arXiv:2006.04428*, 2020.
- Umang Bhaskar, AR Sricharan, and Rohit Vaish. On Approximate Envy-Freeness for Indivisible Chores and Mixed Resources. In *Proceedings of the 24th International Conference on Approximation Algorithms for Combinatorial Optimization Problems*, 2021.
- Eric Budish. The combinatorial assignment problem: Approximate competitive equilibrium from equal incomes. *Journal of Political Economy*, 119(6):1061–1103, 2011.
- Ioannis Caragiannis, David Kurokawa, Hervé Moulin, Ariel D Procaccia, Nisarg Shah, and Junxing Wang. The Unreasonable Fairness of Maximum Nash Welfare. *ACM Transactions on Economics and Computation*, 7(3):12, 2019.
- Bhaskar Ray Chaudhury, Jugal Garg, and Kurt Mehlhorn. EFX Exists for Three Agents. In *Proceedings of the 21st ACM Conference on Economics and Computation*, pages 1–19, 2020.
- Xingyu Chen and Zijie Liu. The fairness of leximin in allocation of indivisible chores. *arXiv preprint arXiv:2005.04864*, 2020.
- Soroush Ebadian, Dominik Peters, and Nisarg Shah. How to Fairly Allocate Easy and Difficult Chores. In *Proceedings of the 21st International Conference on Autonomous Agents and MultiAgent Systems*, pages 372–380, 2022.

- Duncan K. Foley. Resource Allocation and the Public Sector. *Yale Economic Essays*, 7:45–98, 1967.
- George Gamow and Marvin Stern. Puzzle math. *Viking, New York*, 1958.
- Jugal Garg and Aniket Murhekar. Computing Fair and Efficient Allocations with Few Utility Values. In *Proceedings of the 14th International Symposium on Algorithmic Game Theory*, pages 345–359. Springer, 2021.
- Jugal Garg and Setareh Taki. An Improved Approximation Algorithm for Maximin Shares. *Artificial Intelligence*, 300:103547, 2021.
- Jugal Garg, Aniket Murhekar, and John Qin. Fair and efficient allocations of chores under bivalued preferences. *Proceedings of the AAI Conference on Artificial Intelligence*, 36(5):5043–5050, 2022. doi: 10.1609/aaai.v36i5.20436.
- Mohammad Ghodsi, Mohammad Taghi Hajiaghayi, Masoud Seddighin, Saeed Seddighin, and Hadi Yami. Fair Allocation of Indivisible Goods: Improvement. *Mathematics of Operations Research*, 46(3):1038–1053, 2021.
- Daniel Halpern, Ariel D Procaccia, Alexandros Psomas, and Nisarg Shah. Fair Division with Binary Valuations: One Rule to Rule Them All. In *Proceedings of the 16th International Conference on Web and Internet Economics*, pages 370–383. Springer, 2020.
- Hadi Hosseini and Kate Larson. Multiple Assignment Problems under Lexicographic Preferences. In *Proceedings of the 18th International Conference on Autonomous Agents and MultiAgent Systems*, pages 837–845, 2019.
- Hadi Hosseini, Sujoy Sikdar, Rohit Vaish, and Lirong Xia. Fair and efficient allocations under lexicographic preferences. In *Proceedings of the AAI Conference on Artificial Intelligence*, volume 35, pages 5472–5480, 2021.
- Hadi Hosseini, Andrew Searns, and Erel Segal-Halevi. Ordinal maximin share approximation for goods. *Journal of Artificial Intelligence Research*, 74:353–391, 2022a.
- Hadi Hosseini, Andrew Searns, and Erel Segal-Halevi. Ordinal maximin share approximation for chores. In *Proceedings of the 21st International Conference on Autonomous Agents and Multiagent Systems*, pages 597–605, 2022b.
- Hadi Hosseini, Sujoy Sikdar, Rohit Vaish, and Lirong Xia. Fairly dividing mixtures of goods and chores under lexicographic preferences. In *Proceedings of the 22nd International Conference on Autonomous Agents and MultiAgent Systems*, 2023. forthcoming.
- David S Johnson and Michael R Garey. *Computers and intractability: A guide to the theory of NP-completeness*. WH Freeman, 1979.
- Rucha Kulkarni, Ruta Mehta, and Setareh Taki. Indivisible Mixed Manna: On the Computability of MMS+PO Allocations. In *Proceedings of the 22nd ACM Conference on Economics and Computation*, pages 683–684, 2021.
- David Kurokawa, Ariel D Procaccia, and Junxing Wang. Fair Enough: Guaranteeing Approximate Maximin Shares. *Journal of the ACM*, 65(2):1–27, 2018.
- Jérôme Lang, Jérôme Mengin, and Lirong Xia. Voting on Multi-Issue Domains with Conditionally Lexicographic Preferences. *Artificial Intelligence*, 265:18–44, 2018.

- Richard J Lipton, Evangelos Markakis, Elchanan Mossel, and Amin Saberi. On Approximately Fair Allocations of Indivisible Goods. In *Proceedings of the 5th ACM Conference on Electronic Commerce*, pages 125–131, 2004a.
- Richard J Lipton, Evangelos Markakis, Elchanan Mossel, and Amin Saberi. On approximately fair allocations of indivisible goods. In *Proceedings of the 5th ACM Conference on Electronic Commerce*, pages 125–131, 2004b.
- Ryoga Mahara. Extension of additive valuations to general valuations on the existence of efx. *arXiv preprint arXiv:2107.09901*, 2021.
- Trung Thanh Nguyen. How to fairly allocate indivisible resources among agents having lexicographic subadditive utilities. In *Frontiers in Intelligent Computing: Theory and Applications*, pages 156–166. Springer, 2020.
- Trung Thanh Nguyen and Jörg Rothe. Fair and efficient allocation with few agent types, few item types, or small value levels. *Artificial Intelligence*, 314:103820, 2023.
- Parag A Pathak, Tayfun Sönmez, M Utku Ünver, and M Bumin Yenmez. Fair Allocation of Vaccines, Ventilators and Antiviral Treatments: Leaving No Ethical Value Behind in Health Care Rationing. In *Proceedings of the 22nd ACM Conference on Economics and Computation*, pages 785–786, 2021.
- Justin Payan and Yair Zick. I will have order! optimizing orders for fair reviewer assignment. In *Proceedings of the 21st International Conference on Autonomous Agents and Multiagent Systems*, pages 1711–1713, 2022.
- Benjamin Plaut and Tim Roughgarden. Almost Envy-Freeness with General Valuations. *SIAM Journal on Discrete Mathematics*, 34(2):1039–1068, 2020.
- Daniela Saban and Jay Sethuraman. A Note on Object Allocation under Lexicographic Preferences. *Journal of Mathematical Economics*, 50:283–289, 2014.
- Harald Schmidt, Rebecca Weintraub, Michelle A. Williams, Kate Miller, Alison Buttenheim, Emily Sadecki, Helen Wu, Aditi Doiphode, Neha Nagpal, Lawrence O. Gostin, and Angela A. Shen. Equitable allocation of COVID-19 vaccines in the United States. *Nature Medicine*, 27:1298–1307, 2021.
- Nihar B Shah. Challenges, experiments, and computational solutions in peer review. *Communications of the ACM*, 65(6):76–87, 2022.
- Vignesh Viswanathan and Yair Zick. Yankee Swap: A Fast and Simple Fair Allocation Mechanism for Matroid Rank Valuations. *arXiv preprint arXiv:2206.08495*, 2022.

Appendix

A Omitted Material from Section 3

A.1 Proof of Theorem 1

Theorem 1. *Deciding whether there exists an EFX allocation for a given lexicographic mixed instance is NP-complete.*

Proof. Since we can check whether given allocation is EFX in polynomial time, we know that the problem is in NP. Therefore, let us focus on proving the hardness.

To this end, we will make a reduction from EXACT COVER BY 3-SETS (X3C). In an X3C instance, we are given a universe of $m = 3k$ elements, $\mathcal{U} = \{u_1, \dots, u_m\}$ and a family of its three-element-subsets, $\mathcal{S} = \{S_1, \dots, S_n\}$. We will assume that each element of the universe is contained in at least one of the subsets and that each subset is distinct, i.e., $S_j \neq S_{j'}$ if $j \neq j'$. The problem is to decide whether there exists a subfamily $\mathcal{K} \subset \mathcal{S}$ of k subsets that is a set cover for \mathcal{U} , i.e., $\bigcup_{S_j \in \mathcal{K}} S_j = \mathcal{U}$. Observe that since $m = 3k$, each element appears in exactly one subset in \mathcal{K} , hence \mathcal{K} is necessarily also an exact cover. This problem is known to be NP-complete.

Now, for every X3C instance, let us define a corresponding lexicographic mixed instance. Specifically, let us take $2n$ agents $N = \{1, 2, \dots, 2n\}$. Also, for every element $u_i \in \mathcal{U}$, let us take $2n$ common chores $c_{i,1}, c_{i,2}, \dots, c_{i,2n}$. This will give us a total of $2mn$ chores $C = \{c_{1,1}, c_{1,2}, \dots, c_{m,2n}\}$. Let us add to it k common goods $G = \{g_1, g_2, \dots, g_k\}$, assignment of which will correspond to the choice of k subsets in the original instance. This gives as a total of $k(6n + 1)$ items $M = C \cup G$. Next, let us specify the importance ordering of each agent. To this end, first, for every $j \in [n]$ by $C^j = \{c_{i,l} \in C : u_i \in S_j\}$ let us denote the set of all chores corresponding to the elements of subset S_j . Now, for every $j \in [n]$, we set the importance ordering of agent $2j$ such that the most important items for it are chores not in C^j , followed by all goods, G , and ending with chores in C^j , i.e.,

$$(C \setminus C^j) \triangleright_{2j} G \triangleright_{2j} C^j.$$

Moreover, we specify that the importance ordering of goods as $g_1 \triangleright_{2j} g_2 \triangleright_{2j} \dots \triangleright_{2j} g_k$. The importance ordering of chores in $C \setminus C^j$ and C^j can be arbitrary. Finally, we set the importance ordering of agent $2j - 1$ as identical to this of agent $2j$, i.e., $\triangleright_{2j-1} = \triangleright_{2j}$. In the remainder of the proof we will show that a set cover in the original instance exists, if and only if, there exists an EFX allocation in the corresponding lexicographic mixed instance.

First, let us assume that there is a set cover $\mathcal{K} \subseteq \mathcal{S}$ in the original instance. Let us show that this implies that there exists an EFX allocation in the corresponding lexicographic mixed instance (on a side, we will also show that it is PO). Without loss of generality, let us assume that $\mathcal{K} = \{S_1, \dots, S_k\}$. Then, consider allocation $A = (A_1, \dots, A_{2n})$ such that for every $j \in [n]$ we have $A_{2j-1} = \emptyset$ and

$$A_{2j} = \begin{cases} \{g_j\} \cup C^j, & \text{if } j \leq k, \\ \emptyset, & \text{otherwise.} \end{cases}$$

Since \mathcal{K} covers all elements of \mathcal{U} exactly once, all items belong to some bundle in A , which means it is a well-defined allocation.

Let us show that A is also an EFX allocation. Consider an agent that received a non-empty bundle, i.e., $2j$ for arbitrary $j \in [k]$. Since its most important received item is a good, it does not envy any agent whose bundle is an empty set. Next, for every $j' \in [k] \setminus \{j\}$, we know that $S_{j'} \neq S_j$, so also $C^{j'} \neq C^j$. Thus, there is a chore $c \in C^{j'}$ such that $c \notin C^j$, which means that $c \in A_{2j'}$ and c is more important for agent $2j$ than good $g_{j'}$. Hence, for agent $2j$ the most important item in bundle $A_{2j'}$ is a chore. Thus, $2j$ does not envy $2j'$. As a result, we get that for every $j \in [k]$ agent $2j$ does not envy any other agent. It remains to consider agents whose bundles are empty sets. Observe that each such agent can envy only the agents that received some items, i.e., agents $2, 4, \dots, 2k$. However, each of these agents received only one good, after removal of which there is no more envy. Therefore, A is indeed EFX.

On a side, let us observe that A is also PO. To prove that let us consider allocation $A' = (A'_1, \dots, A'_{2n})$ such that for each agent $j \in [2n]$ bundle A'_j is at least as good as its original bundle

A_j , i.e.,

$$A'_j \succeq_i A_j, \quad \text{for every } j \in N. \quad (*)$$

We will prove that this implies that $A' = A$. First, let us show that for every $j \in [k]$, it holds that $A'_{2j} \cap G = A_{2j} \cap G$, i.e., that in A' every g_j still belongs to agent $2j$. Assume otherwise and take the smallest j such that $g_j \notin A'_{2j}$. Then, for every $i < j$ we have $g_i \in A'_{2i}$, hence $\{g_1, \dots, g_j\} \cap A'_{2j} = \emptyset$. Since, g_j was the most important item in A_{2j} , agent $2j$ prefers it to all bundles that does not have any good from $\{g_1, \dots, g_j\}$. Hence, $A_{2j} \succ_{2j} A'_{2j}$, which contradicts $(*)$. Thus, indeed $A'_{2j} \cap G = A_{2j} \cap G$. Since in A' all goods stay with agents that had them in A , we know that $A'_i = \emptyset$ for every $i \in [2n]$ such that $A_i = \emptyset$ (otherwise, this would mean that A'_i contains only chores, which would contradict $(*)$). Finally, observe that every chore $c \in C$ cannot be allocated to agent $2j$ if $c \notin C^j$. Otherwise, we would have $A_{2j} \succ_{2j} A'_{2j}$, which would contradict $(*)$. Hence, A' is an allocation in which $g_j \in A'_{2j}$, for every $j \in [k]$, and $c \in A'_{2j}$ for every $j \in [k]$ and $c \in C^j$. This means that $A' = A$. Thus, A is PO.

Finally, let us show that if there is no exact set cover \mathcal{K} in the original instance, then there does not exist an EFX allocation. By contradiction, let us assume otherwise, i.e., there is no exact set cover \mathcal{K} in the original instance, but there is an EFX allocation $A = (A_1, A_2, \dots, A_{2n})$. We begin by showing that there exists an agent that does not receive any chore in A .

Claim 1. *If $A = (A_1, A_2, \dots, A_{2n})$ is an EFX allocation, then there exists $j \in [2n]$ such that $A_j \cap C = \emptyset$.*

Proof. Assume otherwise, i.e., every agent receives at least one chore. Let us consider an agent that receives good g_1 in A . Without loss of generality, let us assume that $g_1 \in A_1$ (otherwise, we can renumerate the subsets and the agents). Since agents 1 and 2 have identical preferences, i.e., $\triangleright_1 = \triangleright_2$, we have two cases: either agent 2 envies agent 1 (case I), or agent 1 envies agent 2 (case II).

Case I: Let us denote an arbitrary chore that agent 2 receives in A by $c \in A_2$. If $c \notin C^1$, then for both agents 1 and 2 chore c is more important than good g_1 . Hence, since 2 envies 1, we have $A_1 \setminus \{g_1\} \succ_2 A_2$. Thus, A is not EFX—a contradiction. On the other hand, if $c \in C^1$, then for both 1 and 2 chore c is less important than good g_1 . Hence, since 2 envies 1, even if we remove c , agent 2 would still envy 1, i.e., $A_1 \succ_2 A_2 \setminus \{c\}$. Again, this would mean that A is not EFX, which concludes the analysis of this case.

Case II: Now, let us assume that agent 1 envies agent 2. Since agent 2 cannot receive a more important good than g_1 , the only case in which 1 can envy 2 is if 1 receives a chore, c , that is the most important item for 1 and 2 among all items in $A_1 \cup A_2$. This implies that $c \notin C^1$. Observe that this means that 1 cannot receive any other chore $c' \in C$. Otherwise, 1 would still prefer A_2 over $A_1 \setminus \{c'\}$, which would mean that A is not EFX. Hence, A_1 consists of c, g_1 and possibly other goods. Take arbitrary $j \in [n]$ such that $c \in C^j$ (since every u_i belongs to some S_j , there has to exist one). Now, observe that agent $2j$, prefers A_1 even to the bundle consisting of all of the remaining goods and no chores, i.e., $A_1 \succ_{2j} (G \setminus A_1)$, because A_1 contains g_1 and just one chore, c , for which $g_1 \triangleright_{2j} c$. However, by our assumption agent $2j$ has some chore, $c' \in C$. Therefore, $2j$ envies 1 even without c' , i.e., $A_1 \succ_{2j} (G \setminus A_1) \succeq_{2j} (A_j \setminus \{c'\})$. Thus, A is not EFX, which concludes the proof of the claim. \square

Next, for every $j \in N$, by $UC(A_j)$ let us denote the set of *uncovered chores* received by agent j , i.e., chores that are more important to j than the most important good they received (or all j 's chores, if j does not have goods). Formally, $UC(A_j) = \{c \in A_j \cap C : \{c\} \triangleright_j (G \cap A_j)\}$. Let us show, that no agent can receive more than one uncovered chore.

Claim 2. *If $A = (A_1, \dots, A_{2n})$ is an EFX allocation, then for every $j \in [2n]$, we have $|UC(A_j)| \leq 1$.*

Proof. Assume by contradiction that $A = (A_1, \dots, A_{2n})$ is an EFX allocation and there exists $j \in [2n]$ such that $UC(A_j) > 1$. Let $c \in A_j$ be an arbitrary uncovered chore of agent j . From Claim 1 we know that there exists agent $i \in [2n]$ such that $A_i \cap C = \emptyset$. Hence, since $A_j \setminus \{c\}$ still contains at least one uncovered chore for j , we have that $A_i \succ_j A_j \setminus \{c\}$. Thus, A is not EFX—a contradiction. \square

Now, we will show a contradiction in the total number of uncovered chores that we can have in allocation A . From Claim 2 we get that $|UC(A_j)| \leq 1$, for every $j \in [2n]$. Also, from Claim 1 we know that there exists $j \in [2n]$ such that $|UC(A_j)| = 0$. Combining both facts together, we obtain an upper bound

$$\sum_{j \in [2n]} |UC(A_j)| \leq 2n - 1.$$

Next, let us focus on the lower bound. To this end, observe that every chore $c \in C$ is not uncovered only if it is assigned to an agent $j \in [2n]$ that receives a good, i.e., $A_j \cap G \neq \emptyset$, and $c \in C^{\lfloor j/2 \rfloor}$. By $K = \{j \in [2n] : A_j \cap G \neq \emptyset\}$ let us denote the set of agents that received at least one good. Also, by $\mathcal{K} = \{S_{\lfloor j/2 \rfloor} : j \in K\}$ let us denote the subfamily of subsets associated with agents in K . Since $|\mathcal{K}| \leq |K| \leq k$ and there is no set cover of size k in the original instance, we know that there exists $u_i \in \mathcal{U}$ such that $u_i \notin S_j$ for every $S_j \in \mathcal{K}$. Thus, chores $c_{i,1}, \dots, c_{i,2n} \notin C^{\lfloor j/2 \rfloor}$ for every $j \in K$, which means they are uncovered. Hence,

$$\sum_{j \in [2n]} |UC(A_j)| \geq 2n.$$

However, this is in contradiction with our upper bound, which concludes the proof. \square

A.2 Proof of Theorem 2

Theorem 2. *Given a mixed instance with separable preferences that contains terrible chores, an EFX and PO allocation always exists and can be computed in polynomial time.*

Proof. Let $(N, M, G, \triangleright)$ be an arbitrary separable instance such that $\triangleright_i(1) \in C_i$ for every $i \in N$. We will show that allocation A returned by Algorithm 1 for this instance is EFX and PO and it computes in polynomial time. For the latter, observe that the total number of iterations in all phases is bounded by $|N| + |M|$. Hence, let us focus on proving EFX and PO. We denote the partial allocation obtained at the end of Phase 1 by B . In what follows, we will first show that B and A are EFX, and then that A is PO as well. Throughout the proof we will use the notation introduced in Algorithm 1, but let us fix N' as the set of agents that did not receive an item in Phase 1 of the algorithm, i.e., $N' = \{i \in N : B_i = \emptyset\}$.

B is EFX. Fix arbitrary $i, j \in N$ such that $i < j$. If $i \in N'$, then $j \in N'$ as well. Thus, $B_i = B_j = \emptyset$ and there is no envy between i and j . Hence, assume that $i \notin N'$.

If $j \in N'$, then we know that $|\bar{C}| < n$. Thus, B_i consists of exactly one common chore $c \in \bar{C}$ and goods assigned to it in line 6, i.e., $B_i \setminus \{c\} \subseteq G_i$. The instance is separable, hence c is more important for j than every item it considers as a good i.e., $\{c\} \triangleright_j G_j$. Thus, j does not envy i . Now, i envies j . However, since j does not have any items and i has only one chore, the only item we have to check for EFX is c . But since $B_i \setminus \{c\} \subseteq G_i$, we know that $B_i \setminus \{c\} \succeq_i B_j$. Thus, i and j do not violate EFX.

Finally, if $j \notin N'$, then j has exactly one common chore $c \in \bar{C}$ in its bundle, i.e., $B_j \setminus \{c\} \subseteq G_j$. We know that i will not envy j , because i picked its chores before j in line 2, so c is more important to i than every item in B_i (otherwise i would pick c instead). On the other hand, j might envy i . However, notice that j received its goods in line 6 before i , so every item in B_i is a chore for j , i.e., $B_i \cap G_j = \emptyset$. Thus, the only item we have to check for EFX is chore c . But since $B_j \setminus \{c\} \subseteq G_j$ and

i has some common chore c' that is more important to j than all goods, i.e., $\{c'\} \triangleright_j G_j$, we have $B_j \setminus \{c\} \succ_j B_i$. Thus, i and j do not violate EFX.

A is EFX. Fix arbitrary $i, j \in N$ such that $i < j$. If $i \in N'$, then $j \in N'$ as well. If $A_i = A_j = \emptyset$, then i and j do not violate EFX. Otherwise, observe that one of them had to receive some good in line 10 of the algorithm. Let us assume that i received goods in Phase 2 and it was when j was still “unhandled” agent, i.e., j 's bundle was empty at that time (the case where j received goods before i is analogous). Then, g_i is more important for i than any item in A_j . Thus, i does not envy j . Now, j may envy i . However, observe that in Phase 2 we do not assign chores to agents, i.e., $A_j \cap C_j = \emptyset$. Moreover, the only item that j may consider as good in A_i is g_i (all other items in A_i are assigned in line 11, but we excluded G_j there). Hence, the only item we have to check for EFX is g_i . But since $A_j \subseteq G_j$ and $A_i \cap G_j = \{g_i\}$, we have $A_j \succeq_j A_i \setminus \{g_i\}$. Hence, i and j do not violate EFX. Thus, in the remainder of this part of the proof we assume that $i \notin N'$.

If $j \in N'$, it means that $|\bar{C}| < n$. Thus, A_i contains exactly one common chore $c \in \bar{C}$ and no other chores, i.e., $A_i \setminus \{c\} \subseteq G_i$. Instance is separable, so c is more important than all goods for j . Since A_j does not contain any chore, j does not envy i . Now, i may envy j . However, recall that j does not receive any item considered as good by i , i.e., $A_j \cap G_i = \emptyset$. Hence, the only item we have to check for EFX is c . However, since $A_i \setminus \{c\} \subseteq G_i$, we have $A_i \setminus \{c\} \succeq_i A_j$. Hence, i and j do not violate EFX.

Finally, if $j \notin N$, then $A_i = B_i$ and $A_j = B_j$. Thus, i and j do not violate EFX from the fact that B is EFX.

A is PO. By D let us denote the partial allocation obtained from A by removing all common chores i.e., $D_i = A_i \setminus \bar{C}$ for every $i \in N$. Observe that in D all agents have only items they consider as goods, i.e., $D_i \subseteq G_i$ for every $i \in N$. Let us first prove that D is PO and then, using Lemma 1 we will show that A is PO as well.

Assume that D is not PO. Then, there exists a partial allocation D' that Pareto dominates D . First, let us show that $D'_i = D_i$ for every $i \in N \setminus N'$. Assume otherwise and take the largest $i \in N \setminus N'$ such that $D'_i \neq D_i$. By Pareto domination, this means that $D'_i \succ_i D_i$. Hence, there exists $g \in G_i$ such that $g \in D'_i \setminus D_i$. However, observe that in line 6, we assign to i all its goods that were not assigned earlier, i.e., $D_i = G_i \setminus (D_z \cup D_{z-1} \cup \dots \cup D_{i+1})$. Since i is the largest, $D'_j = D_j$ for every $j \in \{z, z-1, \dots, i+1\}$. Hence, there is no other good we can add to D'_i —a contradiction.

Now, let us prove that $D'_i = D_i$ for all $i \in N'$ as well. To this end, first by $N^0 = \{i \in N' : D_i = \emptyset\}$ let us denote the set of agents in N' that did not receive a good. Now, let us show that $g_i \in D'_i$ for every $i \in N' \setminus N^0$. Assume otherwise and among $i \in N' \setminus N^0$ such that $g_i \notin D'_i$ let us take the one that received g_i the earliest in the execution of the algorithm. Since $D'_i \succ_i D_i$, there must exist $g \in G_i$ such that $g \triangleright_i g_i$ and $g \in D'_i \setminus D_i$. Let j be an agent such that $g \in D_j$. Since $g \notin D'_j$ we know that $j \in N'$ (as $D_k = D'_k$ for all $k \in N \setminus N'$). We also know that $j \notin N^0$. Now, if j received g_j after i received g_i , then g_i is more important to i than all items in D_j (otherwise i would get one of them). But this is a contradiction since $g \in D_j$ and we assumed $g \triangleright_i g_i$. On the other hand, if j received g_j before i received g_i , then from the assumption that i is the earliest, we know that $g_j \in D'_j$. However, all other goods that j received in line 11, are not viewed as goods by i , in particular $g \notin G_i$. But this is again a contradiction. Thus, we have proven that $g_i \in D'_i$ for every $i \in N' \setminus N^0$.

Now, let us show that in fact $D'_i = D_i$ for every $i \in N' \setminus N^0$. Assume otherwise and among $i \in N' \setminus N^0$ such that $D'_i \neq D_i$ let us take such that i was given g_i as the latest. Since $D'_i \succ_i D_i$, there exists $g \in G_i$ such that $g \in D'_i \setminus D_i$. Let j be such that $g \in D_j$. Since i was given g_i as the latest and $D'_j \neq D_j$, we know that j was given g_j before i received g_i . We also know that $g \neq g_j$ since $g_j \in D'_j$. However, all other items given to j in line 11, are not viewed as goods by i . In

particular $g \notin G_i$, which is a contradiction.

Since for every agent $i \in N \setminus N^0$, we know that $D'_i = D_i$, this means that the agents that did not receive items in D do not receive them in D' , i.e., $D'_i = \emptyset = D_i$ for each $i \in N^0$. Thus, $D' = D$, which contradicts the assumption that D' Pareto dominates D . Therefore, D is PO.

Finally, observe that since $D_i \subseteq G_i$ for every $i \in N$ and we have a separable instance in which the most important item of every agent is a chore, this means that $\bar{C} \triangleright_i D_i$. Hence, A is PO from Lemma 1. □

B Omitted Material from Section 4

B.1 Examples for the EF1 and PO Algorithm

In this section, we analyze several examples that show the complexity of the problem of finding an EF1 and PO allocation. Specifically,

- in Example 6, we show that a double round robin algorithm as proposed by Aziz et al. [2022] does not necessarily find a PO allocation,
- in Example 7, we argue that a modified version of the envy-graph algorithm as proposed by Bhaskar et al. [2021] does not always find a PO allocation as well,
- in Example 8, we demonstrate that Algorithm 2 that finds EF1 and PO allocation when there are at least $(n - 1)$ common terrible chores may not return an EF1 allocation, when this condition does not hold,
- finally, in Example 9, we show that bundling a good with all less important chores (which is a building block of an algorithm proposed by Hosseini et al. [2023]) may preclude achieving an EF1 allocation.

Example 6. Consider a mixed instance with two agents, five items and a profile as follows. The set of common goods is $G = \{o_2^+, o_3^+\}$, and the set of common chores is $\bar{C} = \{o_1^-, o_4^-, o_5^-\}$. Notice that in this instance, there is one $(n - 1)$ common terrible chore, which is o_1^- .

$$\begin{aligned} 1: & \quad o_1^- \triangleright o_2^+ \triangleright \underline{o_3^+} \triangleright \underline{o_4^-} \triangleright o_5^- \\ 2: & \quad \underline{o_1^-} \triangleright o_4^- \triangleright \underline{o_5^-} \triangleright \underline{o_2^+} \triangleright o_3^+ \end{aligned}$$

This example shows that even though the double round robin algorithm [Aziz et al., 2022] efficiently computes an EF1 allocation under additive valuations, it does not necessarily return a PO allocation (the allocation returned by this algorithm is underlined).

The algorithm starts by allocating common chores (\bar{C}) according to a round-robin sequence (1, 2). Since there are three common chores to be allocated among two agents, the algorithm adds one dummy null item (i.e., an item with zero valuation for both agents) to \bar{C} , and then agents come in a round-robin sequence (1, 2) and pick their most preferred item left in \bar{C} . Thus, agent 1 receives $\{o_4^-\}$ while agent 2 receives $\{o_1^-, o_5^-\}$. Then, in the reverse round-robin sequence (2, 1), agents pick their most preferred item left in \bar{C} . Therefore, agents 2 and 1 get o_2^+ and o_3^+ , respectively.

This allocation is not PO, as taking $\{o_2^+, o_5^-\}$ from agent 2 and giving it to agent 1 will lead to a Pareto improvement.

Example 7. We revisit the mixed instance given in Example 6

$$\begin{aligned} 1 : & \quad \underline{o_1^-} \triangleright \underline{o_2^+} \triangleright o_3^+ \triangleright o_4^- \triangleright \underline{o_5^-} \\ 2 : & \quad o_1^- \triangleright \underline{o_4^-} \triangleright o_5^- \triangleright o_2^+ \triangleright \underline{o_3^+} \end{aligned}$$

This example also shows that even though the modified version of the envy-graph algorithm [Bhaskar et al., 2021] efficiently computes an EF1 allocation under doubly monotone valuations, it does not necessarily return a PO allocation (the allocation returned by this algorithm is underlined).

The algorithm starts by allocating common goods (\bar{G}) using the envy-cycle elimination algorithm of Lipton et al. [2004b] in Phase 1. Thus, agents 1 and 2 receive o_2^+ and o_3^+ , respectively. Then, in Phase 2, as long as there is an agent who has no outgoing edge (i.e., a sink) in the envy-graph, that agent receives a common chore from \bar{C} . Therefore, agent 1 receives $\{o_5^-, o_1^-\}$ and agent 2 receives o_4^- .

This allocation is not PO, as taking $\{o_3^+, o_4^-\}$ from agent 2 and giving it to agent 1 will lead to a Pareto improvement.

Example 8. Consider a mixed instance with three agents, four items and a profile as follows. The set of common goods is $\bar{G} = \{o_1^+\}$, and the set of common chores is $\bar{C} = \{o_2^-, o_3^-, o_4^-\}$. Notice that in this instance, there is one $(n - 2)$ common terrible chore, which is o_2^- .

$$\begin{aligned} 1 : & \quad \underline{o_2^-} \triangleright \underline{o_1^+} \triangleright o_3^- \triangleright o_4^- \\ 2 : & \quad o_2^- \triangleright o_1^+ \triangleright o_3^- \triangleright o_4^- \\ 3 : & \quad o_2^- \triangleright o_1^+ \triangleright \underline{o_3^-} \triangleright \underline{o_4^-} \end{aligned}$$

This example shows that Algorithm 2 does not necessarily return an EF1 allocation when the number of common terrible chores is less than $n - 1$ (the allocation returned by this algorithm is underlined).

Suppose the ordering is $(1, 2, 3)$. Algorithm 2 starts by assigning o_1^+ to agent 1. Then, in the reverse ordering $(3, 2, 1)$, agents get their common non-terrible chores (out of the remaining items), resulting in agent 3 receiving $\{o_3^-, o_4^-\}$ (and nothing for others). Since agent 3 is not envied (such an agent always exists), Algorithm 2 allocates a common terrible chore (o_2^-) by running a serial dictatorship with the ordering of $(1, 2, 3)$ and single quota.

This allocation is not EF1, as agent 3 whose bundle consists of two chores envies agent 2 who has an empty bundle and this envy cannot be eliminated by removal of one item.

Example 9. Consider a mixed instance with four agents, seven items and a profile as follows. The set of common goods is $\bar{G} = \{o_1^+\}$, and the set of common chores is $\bar{C} = \{o_2^-, o_3^-, o_4^-, o_5^-, o_6^-, o_7^-\}$ (note that agents 1 and 2 have identical preferences and the same holds for agents 3 and 4).

$$\begin{aligned} 1 : & \quad o_2^- \triangleright o_3^- \triangleright o_4^- \triangleright \underline{o_1^+} \triangleright \underline{o_5^-} \triangleright \underline{o_6^-} \triangleright \underline{o_7^-} \\ 2 : & \quad o_2^- \triangleright o_3^- \triangleright o_4^- \triangleright o_1^+ \triangleright o_5^- \triangleright o_6^- \triangleright o_7^- \\ 3 : & \quad o_5^- \triangleright o_6^- \triangleright o_7^- \triangleright o_1^+ \triangleright \underline{o_2^-} \triangleright o_3^- \triangleright o_4^- \\ 4 : & \quad o_5^- \triangleright o_6^- \triangleright o_7^- \triangleright o_1^+ \triangleright o_2^- \triangleright \underline{o_3^-} \triangleright \underline{o_4^-} \end{aligned}$$

We will show that giving an agent a good, o_1^+ , together with all of the chores that are less important than o_1^+ for this agent, necessarily results in an allocation that is not EF1 (an example of such allocation is underlined).

Observe that the instance is symmetric, hence without loss of generality we can assume that we give good o_1^+ to agent 1. Now, an intuitive idea for guarantying fairness is to give to agent 1 also all of the chores that are less important than o_1^+ in order to balance its bundle. In fact, such technique is used by [Hosseini et al. \[2023\]](#) in the algorithm for finding an EFX and PO allocation in instances where there is an agent without terrible chores.

However, we can show that assignment of o_1^+, o_5^-, o_6^- , and o_7^- to agent 1 cannot be extended to an EF1 allocation. To see this, first observe that in such a case assigning any chore $o_2^-, o_3^-,$ or o_4^- to agent 2 would violate EF1. But if we assign all three chores to agents 3 and 4, then one of them will receive two chores. Then, this agent will envy agent 2 even after removal of one of the chores. Hence, indeed, an EF1 allocation is unobtainable in this way.

Observe that to get an EF1 and PO allocation it suffices to move o_7^- from agent 1 to agent 2 in the underlined allocation.

B.2 Proof of Theorem 3

In this section, we provide the pseudocode for Algorithm 2 and prove the correctness of the algorithm.

Theorem 3. *Given a lexicographic mixed instance with at least $n - 1$ common terrible chores, an EF1 and PO allocation always exists and can be computed in polynomial time.*

Proof. Let $(N, M, G, \triangleright)$ be an arbitrary lexicographic mixed instance with at least $n - 1$ common terrible chores, i.e., $\bar{C}^* \geq n - 1$. We assume that $N = [n]$, but this is without loss of generality as we can relabel the agents. We will show that allocation A returned by Algorithm 2 for this instance is EF1 and PO and it computes in polynomial time. For the latter, observe that the total number of iterations in Phase 1 is bounded by $2|N|$ and in Phase 2 by $|M|$. Hence, let us focus on showing that A is PO and EF1. By B let us denote the partial allocation we obtain after the end of Phase 1. Since B is PO (as we will show), there always exists an agent that is not envied by any other agent (otherwise there has to be a cycle of envy, which resolved would be a Pareto improvement). Thus, there exists ordering σ such that no one envies agent σ_n (let us take the one that the algorithm takes in line 9). Finally, by H let us denote all of the common chores that are not terrible for some agent, i.e., $H = \bar{C} \setminus \bar{C}^*$. In what follows we first show that allocation B is PO and then that allocation A is PO and EF1.

B is PO. Assume that B is not PO, i.e., there exists an allocation B' that Pareto dominates B . Let i be the agent with minimal number that receives different bundles in B and B' . By Pareto domination, this means that $B'_i \succ_i B_i$. Hence, there exists a good in B'_i that is not in B_i or chore in B_i that is not in B'_i .

If there exists a good $g \in G_i$ such that $g \in B'_i \setminus B_i$, then let j be the agent that has g in B . This means that $B'_j \neq B_j$, which by i 's minimality implies that $j > i$. This means that g was not given to any agent with the number smaller than i , i.e., $g \notin A_k$ for every $k \in [i - 1]$. But since $g \in G_i$, good g should be then assigned to agent i in line 3 before j 's turn—a contradiction.

If there exists a chore $c \in C_i$ such that $c \in B_i \setminus B'_i$, then observe it is a common chore (only common chores are assigned as chores in the algorithm). Let j be an agent that receives c in B' . This means that $B'_j \neq B_j$, which by i 's minimality implies that $j > i$. Note that since c was not assigned to j in line 6 of the algorithm (and j was handled there before i), it means that c is a terrible chore for j , i.e., $c \in C_j^*$. But then, c is more important to all goods for j and thus also all items it received in Phase 1, i.e., $\{c\} \triangleright_j G_j \cup B_j$. This implies that $B_j \succ_j B'_j$, which contradicts the Pareto domination.

A is PO. Observe that \bar{C}^* is more important to every agent than all items it considers as goods. Moreover, in Phase 1, we assign only goods and chores less important than goods. Hence, $\bar{C}^* \triangleright_i G_i \cup B_i$ for every $i \in N$. Since B is PO, from Lemma 1 we know that A is PO as well.

A is EF1. Let us take $i, j \in N$ such that i is before j in ordering σ .

If $j \neq \sigma_n$ or $|\bar{C}^*| > n - 1$, then agent j receives exactly one chore, $c \in \bar{C}^*$, in Phase 2 of the algorithm. Agent i does not envy j , because c is more important chore than all items in i 's bundle (otherwise, since i picks in serial dictatorship before j , i would choose c instead of its chore). Now, agent j can envy agent i . However, agent i has some common terrible chore $c' \in \bar{C}^*$. This chore is more important to j , than all goods and anything it received in Phase 1, i.e., $\{c'\} \triangleright_j B_j \cup G_j$. Hence, $A_j \setminus \{c\} = B_j \succ_j A_i$, which means that i and j do not violate EF1.

If $j = \sigma_n$ and $|\bar{C}^*| = n - 1$, agent j does not receive any chore in Phase 2, i.e., $A_j = B_j$, while agent i receives exactly one chore, $c \in \bar{C}^*$. Observe that c is more important to j than all goods and anything it received in Phase 1, i.e., $\{c\} \triangleright_j B_j \cup G_j$. Hence, agent j does not envy agent i . Now, agent i envies agent j . However, recall that we have chosen σ in such a way that no agent envies σ_n in partial allocation B . Therefore, $A_i \setminus \{c\} = B_i \succeq_i B_j = A_j$, which means that i and j do not violate EF1. \square

C Omitted Material from Section 5

C.1 Proof of Theorem 4

Theorem 4. *Given a lexicographic mixed instance with terrible chores, an MMS and PO allocation always exists and can be computed in polynomial time.*

Proof. Let $(N, M, G, \triangleright)$ be an arbitrary lexicographic mixed instance with terrible chores, i.e., $\triangleright_i(1) \in C_i$ for each $i \in N$. We assume that $N = [n]$, but this is without loss of generality as we can relabel the agents. We will show that allocation A returned by Algorithm 3 for this instance is MMS and PO and it computes in polynomial time. For the latter, observe that the total number of iterations is bounded by $|N|$. Hence, let us focus on first showing MMS and then PO. Throughout the proof we will use the notation introduced in the algorithm.

MMS. Since the most important item for every agent is a chore, by Proposition 1, we have that $MMS_i = \triangleright_i(1) \cup G_i$ for every agent $i \in N$. Thus, for every agent $i \in N$ that does not receive its most important item, i.e., $\triangleright_i(1) \notin A_i$, we have $A_i \succ_i MMS_i$. Moreover, the only agent that can receive its most important item is agent 1. However, we give agent 1 all of the items it considers as goods in line 3 and we do not give it any chores, except for possibly c^* in line 7. Hence, $A_1 \succeq_1 MMS_1$, which means that A satisfies MMS.

PO. Assume that A is not PO, i.e., there exists allocation A' that Pareto dominates A . By i^* let us denote the agent that receives item c^* in allocation A . Also, let us take the smallest $i \in [n]$ such that agent i receives different bundles in allocations A and A' . From PO domination, this means that $A'_i \succ_i A_i$.

If $i < i^*$, then we know that the only items received by i in the algorithm are the goods assigned to it in line 3, i.e., $A_i = G_i \setminus \bigcup_{j \in [i-1]} A_j$. Since i is the smallest, we have $A'_j = A_j$ for every $j \in [i-1]$. Thus, A_i is the best possible bundle agent i can receive. Hence, $A'_i \not\succeq_i A_i$ —a contradiction.

If $i = i^*$ and c^* is a good for agent i , then we can get the contradiction in exactly the same way as for $i < i^*$. Hence, assume that $i = i^*$ and c^* is a chore for i . We will first show that $c^* \in A'_i$. Assume otherwise, i.e., there exists agent $j \in N \setminus \{i\}$ such that $c^* \in A'_j$. Since $c^* \notin A_j$ and i is the agent with the smallest number that receives different bundles in A and A' , we know that $j > i$. On the other hand, since c^* is a chore for agent i , c^* has to be the most important item for all $j > i$,

i.e., $\triangleright_j(1) = c^*$. But that would mean that $A_j \succ_j A'_j$, which is a contradiction. Now, let us show that the remaining items in A_i and A'_i must also be the same. Observe that apart from c^* , the only items received by i are goods that it gets in line 3. Hence, $A_i = \{c^*\} \cup G_i \setminus \bigcup_{j \in [i-1]} A_j$. But since $c^* \in A'_i$ and $A'_j = A_j$ for every $j \in [i-1]$ this is the best possible bundle agent i can receive. Thus, $A'_i \not\succeq_i A_i$ —a contradiction.

If $i^* < i < n$, we can get the contradiction in exactly the same way as for $i < i^*$.

Finally, observe that i cannot be equal to n , as there always have to be at least two agents with different bundles in two different allocations. \square

C.2 Proof of Theorem 5

Let us begin by introducing formal definition of rank maximality (RM) and required notation.

By a *position* of item $o \in M$ in agent's i importance ordering, we mean a number $\text{pos}_i(o)$ such that $\triangleright_i(\text{pos}_i(o)) = o$. Allocation A is *rank maximal* (RM), if for every common chore $c \in \bar{C}$ it holds that $c \in A_i$ for some agent $i \in N$ such that $\text{pos}_i(c) = \max_{j \in N} \text{pos}_j(c)$, and for every other item $o \in M \setminus \bar{C}$, it holds that $o \in A_i$ for some agent $i \in N^o$, where $N^o = \{j \in N : o \in G_j\}$, and $\text{pos}_i(o) = \min_{j \in N^o} \text{pos}_j(o)$.

Example 10. We revisit the mixed instance given in Example 6 to show a rank maximal allocation.

$$\begin{aligned} 1 : & \quad \underline{o_1^-} \triangleright \underline{o_2^+} \triangleright \underline{o_3^+} \triangleright \underline{o_4^-} \triangleright \underline{o_5^-} \\ 2 : & \quad \underline{o_1^-} \triangleright \underline{o_4^-} \triangleright \underline{o_5^-} \triangleright \underline{o_2^+} \triangleright \underline{o_3^+} \end{aligned}$$

The underlined allocation is RM since every common chore, $\underline{o_1^-}, \underline{o_4^-}$ and $\underline{o_5^-}$, is allocated to an agent that has it in the position with the highest number and every common good, $\underline{o_2^+}$ and $\underline{o_3^+}$, is allocated to an agent that has it in the position with the lowest number. Observe that the only other RM allocation is the one in which agent 1 receives all of the items.

Theorem 5. Deciding whether there exists an MMS and RM allocation for a given lexicographic mixed instance is NP-complete.

Proof. Checking whether a given allocation is MMS and RM can be done in polynomial time, hence our problem is in NP. Thus, let us focus on showing the hardness of the problem.

To this end, we will follow a reduction from SET COVER. In this problem, we are given a constant $k \in \mathbb{N}$, a universe of elements, $\mathcal{U} = \{u_1, \dots, u_m\}$, and a family of subsets of the universe, $\mathcal{S} = \{S_1, \dots, S_n\}$. We assume that every element u_1, \dots, u_m belongs to at least one subset from \mathcal{S} . The goal is to decide whether there exists a subfamily of the size at most k that covers every element of the universe, i.e., $\mathcal{K} \subseteq \mathcal{S}$ such that $|\mathcal{K}| \leq k$ and $\bigcup_{S_j \in \mathcal{K}} S_j = \mathcal{U}$. Such task is known to be NP-complete.

For every instance of this problem, we define the corresponding lexicographic mixed instance as follows. Let us take one agent, j , for every set $S_j \in \mathcal{S}$, m dummy agents, $n+1, \dots, n+m$, and two additional agents, called *filler* agent f and *setting* agent x . Hence, we have $N = \{x, f, 1, 2, \dots, n+m\}$. Next, let us define the items in our instance—there will be four types of such. First, let us have m common chores c_1, \dots, c_m corresponding to the elements of the universe \mathcal{U} . Next, let us have m *filler* common goods f_1, \dots, f_m that correspond to the elements of the universe \mathcal{U} as well (but their assignment will be straightforward). Moreover, let us have k common goods g_1, \dots, g_k the assignment of which will correspond to the choice of k sets from the family \mathcal{S} . Finally, let us add one common chore c_x and one common good g_x with which we will be able to restrict the number of possible MMS and RM allocations. This gives us $2m + k + 2$ items in total and every one of them

is either a common good or a common chore, i.e., for every $j \in N$, $G_j = \{f_1, \dots, f_m, g_x, g_1, \dots, g_k\}$ and $C_j = \{c_x, c_1, \dots, c_m\}$.

Now, let us define the importance orderings of the agents. First, for brevity, we define the following shorthand notation: for every linear order $Z = z_1 \triangleright z_2 \triangleright \dots \triangleright z_r$, and two different elements of this order z_i, z_j such that $z_i \triangleright z_j$, by $s(z_i, z_j, Z)$, we will understand a linear order obtained from Z by swapping the positions of the elements z_i and z_j in that order, i.e., $s(z_i, z_j, Z) = z_1 \triangleright z_2 \triangleright \dots \triangleright z_{i-1} \triangleright z_j \triangleright z_{i+1} \triangleright \dots \triangleright z_{j-1} \triangleright z_i \triangleright z_{j+1} \triangleright \dots \triangleright z_r$.

Let us begin by defining the importance ordering of the setter agent as follows:

$$x : g_x \triangleright c_1 \triangleright \dots \triangleright c_m \triangleright c_x \triangleright f_1 \triangleright \dots \triangleright f_m \triangleright g_1 \triangleright \dots \triangleright g_k.$$

Next, let us define the importance ordering of the filler agent as:

$$f : f_1 \triangleright \dots \triangleright f_m \triangleright c_x \triangleright g_x \triangleright c_1 \triangleright \dots \triangleright c_m \triangleright g_1 \triangleright \dots \triangleright g_k.$$

For the remaining agents, let us first define the standard importance ordering, which we will then modify for each of the agents independently. The standard importance ordering is given by:

$$T = g_x \triangleright c_x \triangleright c_1 \triangleright \dots \triangleright c_m \triangleright g_1 \triangleright \dots \triangleright g_k \triangleright f_1 \triangleright \dots \triangleright f_m.$$

Now, for every $j \in [n]$, let us denote the elements of subset S_j by $S_j = \{u_{j,1}, u_{j,2}, \dots, u_{j,m_j}\}$. Then, we define the importance ordering of agent j as:

$$j : s(c_{j,1}, f_{j,1}, s(c_{j,2}, f_{j,2}, s(\dots, s(c_{j,m_j}, f_{j,m_j}, T) \dots))),$$

i.e., the standard importance ordering T with the positions of c_i and f_i swapped for every $u_i \in S_j$. Finally, we set the importance ordering of every dummy agent $j \in \{n+1, \dots, n+m\}$ to standard ordering T , i.e.,

$$j : g_x \triangleright c_x \triangleright c_1 \triangleright \dots \triangleright c_m \triangleright g_1 \triangleright \dots \triangleright g_k \triangleright f_1 \triangleright \dots \triangleright f_m.$$

In what follows, we will prove that there exists an allocation that satisfies MMS and RM, if and only if, there exists a set cover in the original instance. To this end, we first characterize MMS allocations (Claim 3) and RM allocations (Claim 4).

Claim 3. *An allocation $A = (A_x, A_d, A_1, \dots, A_{n+m})$ is MMS, if and only if, for every agent, either the most important item in its bundle is a good, or its bundle is empty.*

Proof. Every item is either a common good or a common chore, hence for every agent $j \in N$, we have $|G_j| = k+m$. $k \leq n$ and we have $n+m+2$ agents, thus for every agent there is less goods than agents. Since the importance order of every agent starts with a good, by Proposition 1 we have that the maximin share allocation for every agent is an empty allocation. Thus, in an allocation that satisfies maximin share, every agent has to receive either its maximin share bundle, which is an empty set, or a better bundle, which is any bundle in which the most important item is a good. \square

Claim 4. *An allocation $A = (A_x, A_d, A_1, \dots, A_{n+m})$ is RM, if and only if,*

- a) *the setting agent receives chore c_x , i.e., $c_x \in A_x$,*
- b) *good g_x is given to any agent apart from the filler agent, i.e., $g_x \notin A_f$,*
- c) *the filler agent receives all filler goods, i.e., $f_1, \dots, f_m \in A_f$,*

- d) goods g_1, \dots, g_k are received by agents $[n + m]$, i.e., $g_i \in \bigcup_{j=1}^{n+m} A_j$, for every $i \in [k]$, and
e) for each $i \in [m]$, chore c_i is received by an agent $j \in [n]$ such that $u_i \in S_j$.

Proof. Every item is either a common good or a common chore, hence allocation A is rank maximal if and only if every common good is given to an agent for which it is in the highest position, and every common chore is given to an agent for which it is in the lowest position. We first prove that rank maximality implies points a – e .

For a , observe that c_x is ranked in position $m + 2$ by the setting agent x , in position $m + 1$ by the filler agent f , and in position 2, by every other agent. Thus, in a rank maximal allocation, c_x has to be given to agent x .

For b , note that g_x is ranked in position $m + 2$ by the filler agent f and in position 1 by all other agents. Hence, in a rank maximal allocation, g_x can be given to every agent except f .

For c , fix $i \in [m]$ and observe that

$$\text{pos}_j(f_i) = \begin{cases} m + 2 + i, & \text{if } j = x, \\ i, & \text{if } j = f, \\ 2 + i, & \text{if } j \in [n] \text{ and } u_i \in S_j, \\ m + k + 2 + i, & \text{otherwise.} \end{cases}$$

Thus, the smallest position is in the importance ordering of the filler agent f . Hence, in a rank maximal allocation, f_i has to be given to agent f , for every $i \in [m]$.

For d , fix $i \in [k]$ and observe that

$$\text{pos}_j(g_i) = \begin{cases} 2m + 2 + i, & \text{if } j = x, \\ 2m + 2 + i, & \text{if } j = f, \\ m + 2 + i, & \text{otherwise.} \end{cases}$$

Hence, the smallest position is in the importance ordering of the agents $1, \dots, n + m$. Therefore, in an RM allocation, every good g_1, \dots, g_k has to be given to one of these agents.

Finally, for e , fix $i \in [m]$ and observe that

$$\text{pos}_j(c_i) = \begin{cases} 1 + i, & \text{if } j = x, \\ m + 2 + i, & \text{if } j = f, \\ m + k + 2 + i, & \text{if } j \in [n] \text{ and } u_i \in S_j, \\ 2 + i, & \text{otherwise.} \end{cases}$$

Hence, the highest position number is in the importance ordering of an agent $j \in [n]$ such that $u_i \in S_j$. Since we assume that for every $u_i \in \mathcal{U}$ there exists $S_j \in \mathcal{S}$ such that $u_i \in S_j$, we know that such agent exists. Therefore, in a rank maximal allocation, every chore c_1, \dots, c_m has to be given to such an agent.

Points a – e cover all items in the instance. Hence, if every item is assigned in accordance with them, then the allocation is rank maximal. \square

Now, let us show that if there exists a set cover \mathcal{K} in the original instance, then there exists an MMS and RM allocation in the corresponding lexicographic mixed instance. Without loss of generality, we can assume that $\mathcal{K} = \{S_1, \dots, S_k\}$ (otherwise we can reorder the subsets and corresponding agents). Then, for every subset $S_j \in \mathcal{S}$, by $F(S_j)$ let us denote the subset of elements of S_j for which S_j has the smallest index among all subsets they belong to, i.e.,

$F(S_j) = \{u_i \in S_j : \forall_{j' < j} u_i \notin S_{j'}\}$. Next, let us consider allocation $A = (A_x, A_f, A_1, \dots, A_{n+m})$, given by

$$A_j = \begin{cases} \{g_x, c_x\}, & \text{if } j = x, \\ \{f_1, \dots, f_m\}, & \text{if } j = f, \\ \{g_j\} \cup \{c_i : u_i \in F(S_j)\}, & \text{if } j \in \{1, \dots, k\}, \\ \emptyset, & \text{otherwise.} \end{cases}$$

Observe that since \mathcal{K} is the cover of \mathcal{U} , every element u_i belongs to exactly one set from $F(S_1), \dots, F(S_k)$. Thus, A is indeed a well-defined allocation. Finally, observe that from Claims 3 and 4 allocation A is both MMS and RM.

It remains to show that if there exists an MMS and RM allocation A in the lexicographic mixed instance, then there exists a set cover in the original instance. Let us fix such an allocation $A = (A_x, A_f, A_1, \dots, A_{n+m})$. From Claim 4a we know that $c_x \in A_x$. By Claim 3 this implies that A_x contains a good which is more important than chore c_x for the setter agent x . However, the only such good is g_x . Hence, $g_x \in A_x$. Next, let us denote the agents which received any of the goods $\{g_1, \dots, g_k\}$ by \mathcal{H} , i.e., let $\mathcal{H} = \{j \in N : \{g_1, \dots, g_k\} \cap A_j \neq \emptyset\}$. From Claim 4d we know that $\mathcal{H} \subseteq [n+m]$.

Now, let us prove that only agents from \mathcal{H} can receive chores c_1, \dots, c_m in allocation A . Assume otherwise, i.e., there exists agent j and chore c_i such that $j \notin \mathcal{H}$ and $c_i \in A_j$. From Claim 3 this means that A_j contains also some good that is more important for j than chore c_i . However, this good cannot be g_x , because as we established $g_x \in A_x$. Moreover, by Claim 4c, this cannot be one of the goods f_1, \dots, f_m . The only remaining goods are g_1, \dots, g_k —a contradiction. Thus, indeed, all chores c_1, \dots, c_m are distributed among agents from \mathcal{H} . By Claim 4e, this means that chores c_1, \dots, c_m are given to agents from $\mathcal{H}' = \mathcal{H} \cap \{1, \dots, n\}$. Since there are k goods g_1, \dots, g_k , we know that $|\mathcal{H}'| \leq k$. Therefore, let us take $\mathcal{K} = \{S_j \in \mathcal{S} : j \in \mathcal{H}'\}$. Clearly, $|\mathcal{K}| \leq k$. Thus, it remains to check that the union of subsets in \mathcal{K} contains all elements of \mathcal{U} . Fix arbitrary $u_i \in \mathcal{U}$. By Claim 4e, $c_i \in A_j$ for some agent j such that $u_i \in S_j$. By Claim 3, agent j has to receive some good and since it cannot be g_x nor any of f_1, \dots, f_m it has to be one from g_1, \dots, g_k . Hence $j \in \mathcal{H}'$ and $u_i \in \bigcup_{S_j \in \mathcal{K}} S_j$, which concludes the proof. \square