
GPT4Image : Can Large Pre-trained Models Help Vision Models on Perception Tasks?

Ning Ding^{1,2}, Yehui Tang², Zhongqian Fu², Chao Xu¹, Kai Han^{2*}, Yunhe Wang^{2*}

¹ National Key Lab of General AI, School of Intelligence Science and Technology, Peking University

² Huawei Noah's Ark Lab

dingning@stu.pku.edu.cn, yehui.tang@huawei.com, fuzhongqian@huawei.com,
xuchao@cis.pku.edu.cn, kai.han@huawei.com, yunhe.wang@huawei.com

Abstract

The recent upsurge in pre-trained large models (e.g. GPT-4) has swept across the entire deep learning community. Such powerful large language models (LLMs) demonstrate advanced generative ability and multimodal understanding capability, which quickly achieve new state-of-the-art performances on a variety of benchmarks. The pre-trained LLM usually plays the role as a universal AI model that can conduct various tasks, including context reasoning, article analysis and image content comprehension. However, considering the prohibitively high memory and computational cost for implementing such a large model, the conventional models (such as CNN and ViT), are still essential for many visual perception tasks. In this paper, we propose to enhance the representation ability of ordinary vision models for perception tasks (e.g. image classification) by taking advantage of large pre-trained models. We present a new learning paradigm, dubbed GPT4Image, in which the knowledge extracted from large pre-trained models are utilized to help models like CNN and ViT learn enhanced representations and achieve better performance. Firstly, we curate a high quality description set by prompting a multimodal LLM to generate descriptive text for all training images. Furthermore, we feed these detailed descriptions into a pre-trained encoder to extract text embeddings with rich semantic information that encodes the content of images. During training, text embeddings will serve as extra supervising signals and be *aligned* with image representations learned by vision models. The alignment process helps vision models learn better and achieve higher accuracy with the assistance of pre-trained LLMs. We conduct extensive experiments to verify that the proposed algorithm consistently improves the performance for various vision models with heterogeneous architectures. Description set and training code are available at this link ¹. MindSpore checkpoint is also available.

1 Introduction

In the past few years, the natural language processing (NLP) community has made significant progress rapidly. Among all algorithms, the transformer model [44] and self-attention mechanism laid the foundation for the success of NLP technology nowadays. At the same time, the improvement of computing power also presents opportunities for the enlargement of model size [29, 41, 35]. The advancement of large language models (LLMs) is the key factor to achieving state of the arts on various benchmarks. With the concomitant pre-training-and-fine-tuning paradigm [11], LLMs

* Corresponding authors.

¹ <https://github.com/huawei-noah/Efficient-Computing/tree/master/GPT4Image/>

can effectively handle a wide range of tasks such as sentiment analysis [38], text completion and cross-language translation [51].

Released at the end of 2022, ChatGPT has been one of the hottest topics all around the world for the past few months, with people from all walks of life discussing and using it [24, 4, 33]. ChatGPT is a versatile chat robot that can provide elaborate answers after processing the user’s instructions, e.g. reading an entire document to generate a comprehensive analysis report. The recently released GPT-4 [26] model is even more impressive given its extraordinary multimodal capabilities. It’s able to not only deal with diversified textual input, but also understand the content of the input image and generate detailed descriptions about it.

However, the remarkable capabilities of GPT-4 stem from its trillions of parameters trained on thousands of GPUs. The prohibitively high computational cost makes it almost impossible for small enterprises to directly train GPT-4 level models to support their own business. In addition, the generation ability of chat robot models cannot meet the end of most application scenarios in actual production; for instance, conventional vision models such as CNNs and ViTs are still the best choices for visual perception tasks like image classification. Therefore, it’s more practical and cost-effective to explore how to take advantage of pre-trained LLMs to boost the performance of existing task-specific models.

In the traditional supervised training paradigm, vision models can only learn visual representations through labels and pure pixels, while the information from other modalities is ignored. In this paper, we present a novel learning framework dubbed GPT4Image, where the knowledge of pre-trained large models are utilized to help the conventional vision models learn enhanced representations from multimodalities and achieve higher performance on perception tasks (e.g. image classification). Specifically, we first resort to the multimodal understanding ability of pre-trained LLMs through conversations to generate detailed high-quality descriptions for all images in the dataset. Subsequently, a pre-trained text encoder is used to extract the corresponding text embeddings for all descriptions in the curated description set. After this process, the rich semantic information contained in the descriptive text generated by LLMs is compressed into a high-dimensional vector which can be easily digested by normal neural networks. During the training process, in addition to receiving the supervising signal from ground-truth labels, the visual representations learned by the model will also be aligned with the text embeddings by minimizing a distance loss function. The alignment between image and text modalities through embeddings implicitly transfers the knowledge of image comprehension possessed by the LLM to conventional visual perception models.

We verify the effectiveness of our proposed GPT4Image algorithm on benchmark datasets. We conduct sufficient experiments to demonstrate that our proposed method is consistently effective for multiple vision architectures. Description set and training code are available via GitHub and MindSpore [18].

2 Related Work

2.1 Large Language Models (LLMs)

In the past few years, the natural language processing (NLP) community has made extraordinary breakthroughs since the advent of transformer [44]. Language models which are based on attention mechanism such as BERT [11], GPT [28], XLNet [46], T5 [31] achieved state of the arts on a variety of language benchmarks. Meanwhile, a great number of pre-training and fine-tuning algorithms were developed to further enhance the performance of transformer models. As the model size keeps increasing, researchers then discovered the data-hungry nature [17, 27] and model scaling property [32, 1] of transformer architecture. These important works paved the way for the subsequent emergence of large language models, which includes LLaMa [41] with 65 billion parameters, GPT-3 [5] with 175B parameters, BLOOM [34] with 176B parameters and Megatron Turing-NLG [35] with 530B parameters. These LLMs demonstrate some astonishing *emergent abilities* [45], such as solving math problems and analysing articles, which have never been observed on previous small language models.

2.2 Vision-Language Pre-training (VLP)

As both the model capacity and computational resources increase rapidly, the input of deep neural networks is no longer limited to a single modality such as image or text. Vision-language pre-training (VLP) [6, 14] was proposed to mitigate the gap between different modalities and jointly harness the

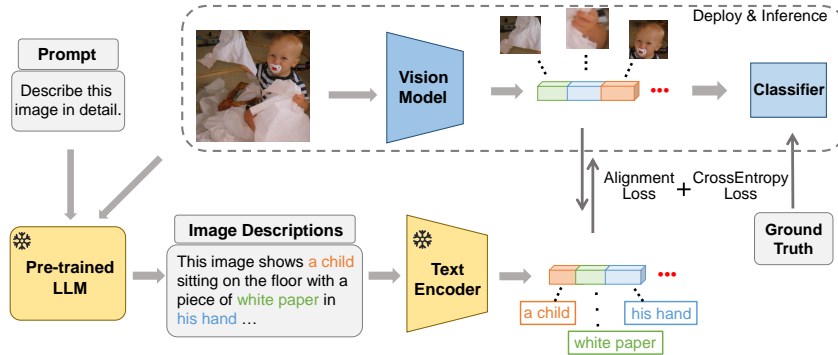


Figure 1: Overall diagram of the proposed training framework. Conventional vision models (e.g. CNN and ViT) can learn better representations with the assistance of pre-trained LLMs. Only the model within the dashed box will be deployed and used for inference after training.

image and text cross-modality information. Benefiting from the pre-training-and-finetuning training paradigm that has prevailed in NLP, VLP models [47, 49, 19, 23, 36, 39] quickly achieved excellent performance in various sophisticated vision-language tasks like image captioning [9], visual question answering [3] and visual reasoning [37]. Among existing studies, one simple yet significant work is CLIP [30], which uses the idea of contrastive learning to seek alignment between image and text. CLIP jointly trains an image encoder and a text encoder on millions of image-text pairs collected from internet, the resulted encoder performs unexpectedly well on downstream tasks by its zero-shot classification ability.

2.3 Combining VLP Models with LLMs

Compared to training the text encoder from scratch, researchers began to notice that integrating a large pre-trained generative language model directly into the visual-language system can bring significant benefits to the performance on many generative tasks, such as image captioning and visual question answering. Many works [42, 2, 7, 25, 20] utilize an off-the-shelf pre-trained LLM and freeze its parameters to exploit the knowledge and more importantly, to save computational resources. Among all the LLMs, Flan-T5 [10], OPT [48] and GPT-2 [29] are the popular encoders to be chosen due to their astonishing generative capabilities and scalabilities. One critical issue in this VLP method is how to align the image representations extracted by the visual encoder with the text embeddings output by LLM. To tackle this problem, FROZEN [42] use the image features output by visual encoder as the prompts to instruct the LLM. VisualGPT [7] inserted a self-resurrecting activation unit into the LLM to strike a balance the language knowledge and image information. BLIP-2 [20] trains a Q-Former as the adaptation layer to connect the output of visual encoder and the input of pre-trained LLM. Very recently, PaLM-E [13] and GPT-4 [26] with hundreds of billion of parameters demonstrate overwhelming understanding and reasoning abilities for both images and languages, which proves the success of such combined training paradigm.

3 Method

In this section, we first elaborate the overall design for the propose training framework GPT4Image. Then, we introduce the process of generating image descriptions by using multimodal LLMs. Finally, we present how to utilize these textual descriptions as supervising signals during the training phase to help vision models learn better representations and achieve high accuracy on perception task like image classification.

3.1 Overall Framework

In the traditional paradigm of supervised learning [15, 40], vision models (e.g. CNNs and ViTs) directly learn feature representations from ground truth labels and raw pixels. As recent researches have demonstrated that large pre-trained models have remarkable ability to understand and generate multimodal information, we reckon that traditional supervised learning method for visual perception tasks might as well introduce a new modality to provide diversified supervising information, instead of solely using raw pixels.

Based on the idea of guiding vision models to learn knowledge of different modality, such as text, we first curate a high-quality description set to textualize the content of all images in the training dataset. Given the powerful multimodal understanding and generative abilities of large language models like GPT-4, we interact with a LLM through conversation by inputting both an training image and some prompts to make it generate a detailed description of the image. Afterwards, a pre-trained text encoder is adopted to encode the image description, which compressed the text knowledge generated by LLM into a high-dimensional text embedding. Finally, we minimize a contrastive distance loss function between image and text embeddings to achieve cross-modality alignment. The description generated by LLM serves as supervising signal of text modality to guide visual models in learning more comprehensive knowledge. Fig. 1 illustrates the overall diagram of our proposed GPT4Image learning algorithm.

3.2 Generating Images Descriptions via LLMs

In this section, we explore how to generate image descriptions by resorting to pre-trained generative language models, such as GPT-4 [26], MiniGPT-4 [50] and LLaVa [21]. These multimodal LLMs are able to take both an image and a user instruction (*i.e.* prompts) as input at the same time, and generate the corresponding answer.

First of all, by giving the prompts *"Describe this image in detail."* along with an input image, we can get a narrative paragraph consisting of multiple sentences which summarize the detailed content of the image. Besides the detailed description, we can also generate a single-sentence description in COCO Caption [9] form for each image. With properly crafted prompts, *i.e.* *"Write a one-sentence short description about this image."*, the LLM is able to generate a single-sentence description. Although this type of short caption cannot describes the majority of detail within the image, yet it captures the most salient object of the image.

By using the aforementioned two types of prompts, we are able to create two description sets for training images. One is a short version description set composed of brief image captions, and the other is a long version description set consisting of detailed narrative paragraphs. Fig. 2 demonstrates an example. The comparison of the effects between using the two versions of description sets will be studied in Sec. 4.6.



Prompt : Write a one-sentence short description about this image.
Output : The image shows a man and woman standing on a boat in front of a lake with trees in the background.

Prompt : Describe this image in detail.
Output : The image shows a man and woman standing on a boat in front of a lake. The man is wearing a black suit and the woman is wearing a white dress. They are both looking at the camera with a serious expression. The lake is surrounded by trees and there is a clear blue sky in the background. The sun is shining brightly and casting a glow on the couple's faces. The water in the lake is calm and reflects the sky and trees.

Figure 2: Descriptions generated by MiniGPT-4 using different prompts.

3.3 Learning Enhanced Image Representations

Since large generative LLMs have achieved image-to-text modality transformation, in this section we present how to exploit the information from generated image descriptions during the supervised training of vision models to enhance performance.

Let $\mathbf{F}(\cdot)$ be a vision model with arbitrary architecture that takes an image x_i as input, and $f_i^{img} = \mathbf{F}(x_i) \in \mathbb{R}^d$ be the extracted feature representation. Classification task aims to optimize model \mathbf{F} and a classifier network $\hat{y}_i = \mathbf{G}(f_i^{img})$ (e.g. \mathbf{G} is a fully-connected layer) such that the value of cross entropy loss function $L_{ce} = -\sum_i^N y_i \cdot \log \hat{y}_i$ is minimized, where y_i is the corresponding label for the i -th image in the training dataset $\mathcal{D} = \{(x_i, y_i)\}_{i=1}^N$.

In order to enable the image descriptions to improve the learning of vision models, we need to extract the information contained in the text to facilitate interaction between the vision model and LLM. Therefore, we propose to embed the image descriptions into a k -dimensional feature space. We have

$$f_i^{text} = \mathbf{T}(t_i) \in \mathbb{R}^k \quad (1)$$

to denote the text embedding, where t_i is the description of the i -th image in \mathcal{D} , \mathbf{T} is a pre-trained text encoder such as BERT [11] or CLIP [30], and k is the output feature dimension of the encoder model \mathbf{T} . The text encoders has been pre-trained on a large number of natural language corpus collected from Internet, and generally has a strong capability to extract semantic information from text paragraphs. We will prove this in Sec. 4.5.

With the descriptions encoded into the embedding space, we assume that the image representation f_i^{img} should be aligned with f_i^{text} for the same image x_i so that we can maximize the utilization of the guidance from the knowledge of the LLM, which is used to curate the description set. To achieve the alignment between image and text modalities, we propose to minimize the distance metric to pull the image representation $f_i^{img} = \mathbf{F}(x_i)$ close to its corresponding text embedding $f_i^{text} = \mathbf{T}(t_i)$. Concretely, the distance loss function in this work is defined by the InfoNCE loss adopted in some contrastive learning methods [16, 8]

$$L_{dist}(x_i, t_i) = -\log \frac{\exp(f_i^{text \top} \cdot \mathbf{W} f_i^{img} / \tau)}{\sum_{j=1}^N \exp(f_j^{text \top} \cdot \mathbf{W} f_i^{img} / \tau)}, \quad (2)$$

where $\mathbf{W} \in \mathbb{R}^{k \times d}$ is a learnable matrix that maps image representations into the dimension of text embedding space, and τ is the temperature hyper-parameter to control the smoothness and separability of alignment between different samples within the same mini-batch. This loss function can not only realize cross-modality matching for the same training sample, but also improve the discriminability of visual representations through contrasting among negative samples.

Therefore, the final objective function to be optimized is

$$L = \sum_{i=1}^N L_{ce}(x_i, y_i) + \lambda \cdot L_{dist}(x_i, t_i) \quad (3)$$

where λ is a trade-off coefficient to determine the strength of distance loss term. Based on the curated description set generated by LLMs, the supervising signals received by vision model not only come from the labels y_i , but also are derived from the rich semantic information extracted from the image description by the pre-trained encoder. Fig. 1 demonstrates the overall pipeline of the proposed learning framework.

4 Experiments

4.1 Implementation Details

Datasets: In order to validate the effectiveness of the presented GPT4Image algorithm, we choose 3 widely used classification benchmarks. The CIFAR10 and CIFAR100 datasets each contain 50,000 training images with 32x32 low resolution that are divided into 10 categories and 100 categories, respectively. We report the top-1 accuracy on their validation set consisting of 10,000 images. The ImageNet-1K dataset, which is a large baseline benchmark for classification task, consists of 1,281,167 high-resolution training images that are divided into 1,000 categories. We report the top-1 accuracy on the validation set with 50,000 images.

Table 1: Top1 Accuracy of different models on ImageNet-1K dataset.

Model	Top1 accuracy (%)	Improvement (%)
convolutional models		
ResNet-50 [15]	76.3	-
ResNet-50 + GPT4Image	76.7	↑ 0.4
ConvNeXt-Tiny [22]	82.1	-
ConvNeXt-Tiny + GPT4Image	82.4	↑ 0.3
ConvNeXt-Small [22]	83.1	-
ConvNeXt-Small + GPT4Image	83.4	↑ 0.3
ConvNeXt-Base [22]	83.8	-
ConvNeXt-Base + GPT4Image	84.0	↑ 0.2
transformer models		
DeiT-Small [40]	79.8	-
DeiT-Small + GPT4Image	80.1	↑ 0.3
DeiT-Base [40]	81.8	-
DeiT-Base + GPT4Image	82.3	↑ 0.5

Baseline models: We choose visual perceptual models with different types of architecture to verify the generality of our proposed learning algorithm, which includes classic convolutional network ResNet [15], transformer network ViT [12] and a recent modified convolutional network ConvNeXt [22].

Choice of LLMs: For the collection of image description set on ImageNet-1K, we employ an open-source pre-trained generative model dubbed MiniGPT-4 [50], which possesses multimodal comprehension ability similar to GPT-4. On CIFAR dataset, we utilize BLIP-2 [20] to generate descriptions. Besides, we use the pre-trained text encoder of CLIP [30] to extract text embeddings in all experiments.

Other technical details: We set hyper-parameters $\lambda = 0.3$ and $\tau = 0.5$ for all networks and datasets. It’s worth noting that the description set and all text embeddings are generated and saved before the training phase in order to reduce the high memory computational cost caused by repeated inference of the LLMs. During training, the text embeddings will be directly loaded from hard disk drive into memory for reuse. All the experiment results are the average of three independent runs and we manually seed the training to guarantee the reproducibility.

4.2 Experiment Results on ImageNet-1K

The experiment results on ImageNet-1K dataset are shown in Tab. 1. Our proposed GPT4Image method is consistently effective for vision models with different architectures. We train ResNet-50 model for 120 epoch using SGD optimizer and cosine learning rate decay based on the official PyTorch example scripts². We achieve 76.7% top-1 accuracy, which is 0.4% absolute performance compared to the 76.3% accuracy of baseline model. For vision transformer, we follow the training procedure and data augmentation strategy presented by DeiT [40], which uses the same model architecture as ViT [12] but avoids the ImageNet-22k pre-training procedure mentioned in the original work. We use the same optimization and hyper-parameters as in the official code³. With the assistance of LLMs, DeiT-Small achieves 80.1% top-1 accuracy, which is 0.3% improvement. And DeiT-Base achieves 82.3% top-1 accuracy, gaining 0.5% absolute performance boost compared to baseline model. Similarly, we follow the official training pipeline⁴ and optimization settings to train ConvNeXt model. ConvNeXt is a modified version of convolutional network which utilizes many up-to-date components, such as large convolution kernel size, GELU activation and AdamW optimizer. Our proposed method further enhance the performance for the ConvNeXt series models. Under the training framework of GPT4Image, ConvNeXt-Tiny achieves 82.5% top1 accuracy with

²<https://github.com/pytorch/examples/tree/main/imagenet/main.py>

³https://github.com/facebookresearch/deit/blob/main/README_deit.md

⁴<https://github.com/facebookresearch/ConvNeXt>

Table 2: Top1 accuracy of ResNet-18 on CIFAR10 and CIFAR100 datasets.

Model	Top1 acc.(%)	Improve (%)
CIFAR10 dataset		
ResNet-18	95.5	-
ResNet-18 + GPT4Image	95.7	↑ 0.2
CIFAR100 dataset		
ResNet-18	75.4	-
ResNet-18 + GPT4Image	75.8	↑ 0.4

Table 3: Ablation study on different λ values. We fix hyper-parameter $\tau = 0.5$. $\lambda = 0$ denotes baseline model.

λ	Model	ImageNet-1K top1 acc. (%)	Absolute improve (%)	Model	ImageNet-1K top1 acc. (%)	Absolute improve (%)
0		76.3	-		81.8	-
0.1		76.6	↑ 0.3		82.2	↑ 0.4
0.3	ResNet-50 + GPT4Image	76.7	↑ 0.4	DeiT-Base + GPT4Image	82.3	↑ 0.5
0.5		76.5	↑ 0.2		82.1	↑ 0.3
0.75		76.5	↑ 0.2		82.2	↑ 0.4
1.0		75.4	↑ 0.1		82.0	↑ 0.2

0.4% performance improvement. ConvNeXt-Small achieves 83.4% top1 accuracy with 0.3% performance improvement. ConvNeXt-Base reaches 84.0% top1 accuracy, which is 0.2% higher than the baseline model.

4.3 Experiment Results on CIFAR

CIFAR10 and CIFAR100 are two small-scale datasets, therefore we adopt a light weight model ResNet-18 to conduct the experiments. It’s worth noting that, first of all, we up-sample all the training images from 32×32 to 224×224 resolution before feeding them into the large pre-trained model for description generation. In practical operation, MiniGPT-4 [50] cannot generate satisfying descriptions and correctly identify the object in low resolution images, which is possibly due to the lack of low-res training data. However, we found that BLIP-2 [20] is able to process such low-resolution images after up-sampling and generate an informative description. Fig. 5 demonstrates some examples of short descriptions generated for images in CIFAR. As shown in Tab. 2, the performance of the ResNet-18 model improves by 0.4% on CIFAR100, achieving 75.8% top1 accuracy compared to the 75.4% of baseline model. However, on CIFAR10 dataset, the performance improvement brought by our GPT4Image method is only 0.2%. This is probably because the images in CIFAR10 are only divided into 10 categories and the content difference between images is relatively small. Thus large pre-trained models is unable to distinguish them well, and the generated descriptions of images from the same class are semantically similar.

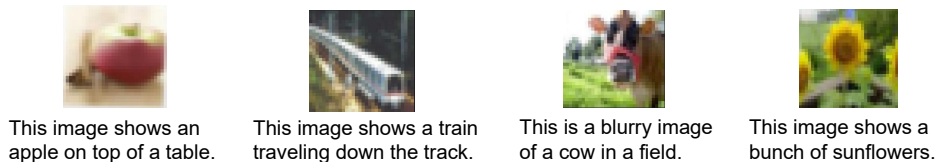


Figure 3: Examples of image descriptions generated on CIFAR100.

4.4 Ablation Study on Hyper-Parameters

The effect of trade-off coefficient λ in Eq. 3 is to control the strength of distance loss function. When the value of λ is too large, the supervising signal from the large pre-trained model may overtake the direct supervision of ground truth labels, thus leading to a sub-optimal result. However, a small value of λ is also unfavorable because of insufficient utilization of the semantic information in the

Table 4: Ablation study on different values of temperature τ . We fix hyper-parameter $\lambda = 0.3$.

τ	Model	ImageNet-1K top1 acc. (%)	Absolute improve (%)	Model	ImageNet-1K top1 acc. (%)	Absolute improve (%)
0.1		76.3	0		81.9	$\uparrow 0.1$
0.3		76.4	$\uparrow 0.1$		82.0	$\uparrow 0.2$
0.5	ResNet-50	76.7	$\uparrow 0.4$	DeiT-Base	82.3	$\uparrow 0.5$
0.75	+ GPT4Image	76.6	$\uparrow 0.3$	+ GPT4Image	82.2	$\uparrow 0.4$
1.0		75.6	$\uparrow 0.3$		82.0	$\uparrow 0.2$
1.5		75.4	$\uparrow 0.1$		82.0	$\uparrow 0.2$

text embeddings. As shown in Tab. 3, $\lambda = 0.3$ persistently obtain the optimal performance for both convolutional neural network and vision transformer model.

The temperature hyper-parameter τ in Eq. 3 controls the dispersion degree of the distribution of image representations in the feature space. If τ is too large, the logits distribution of $f_i^{text} \top \cdot \mathbf{W} f_i^{img}$ will become smooth, and consequently the alignment between description embeddings and image representations degenerates. On the contrary, a small value of τ leads to better cross-modality alignment, but image representations learned by the vision model might instead be pushed towards classification boundaries. This is harmful to the classification performance. As is shown in Tab. 4, $\tau = 0.5$ is the best choice for both CNN and ViT architecture.

4.5 Visualization of The Text Embedding

We visualize the text embeddings to prove that the vision models indeed receive extra supervising signals from the image descriptions in our presented GPT4Image training framework. We uniformly sample 50 classes out of the 1,000 categories of ImageNet dataset and then randomly select 250 training images from each sampled class. Then we use CLIP to extract text embeddings f_i^{text} for the description t_i of each image x_i following Eq. 1. We adopt t-SNE [43] to perform dimension reduction on f_i^{text} and demonstrate the visualization result in Fig. 4. Points with the same color denote the text embedding of samples that belong to the same category. The number on the color bar denotes the corresponding class index. We can see from this figure that, the natural language knowledge of pre-trained CLIP model is able to map the descriptive text into a benign feature space with strong discriminability. The images are implicitly classified in an unsupervised way as their descriptions generated by LLM are vectorized. The clustering phenomenon of the text embeddings and inter-class boundaries emerged in the feature space both act as guiding signals that facilitate the training of vision models on classification task.

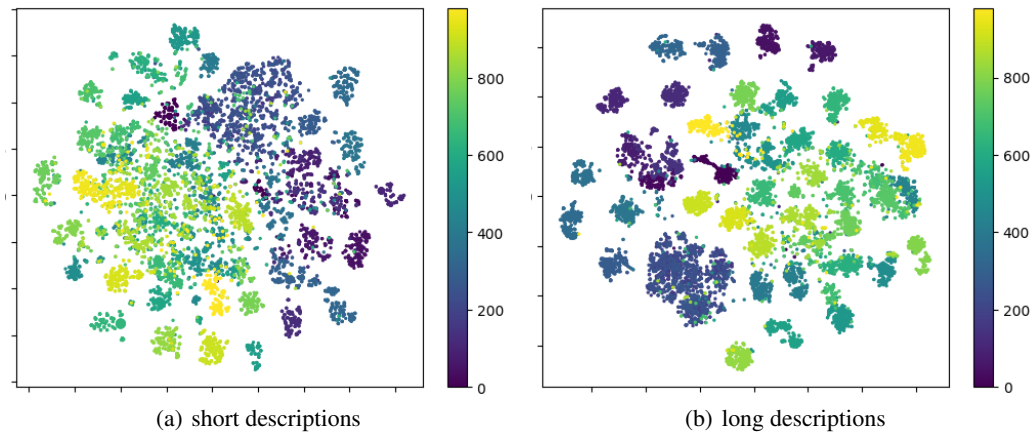


Figure 4: t-SNE visualization of text embeddings. Dots of the same color belong to the same category.

Table 5: The effect of utilizing short descriptions v.s. long descriptions.

Models	Top1 acc. (%) on ImageNet-1K		
	baseline	GPT4Image with short description	GPT4Image with long description
ResNet-50	76.3	76.7	76.6
DeiT-Base	81.8	82.3	82.3
ConvNeXt-Small	83.1	83.4	83.4
ConvNeXt-Base	83.8	84.0	83.9

4.6 Analysis on The Length of Image Description

In Sec. 3.2 we mentioned about creating two types of image description set. One set is composed of short descriptions that use one sentence to briefly depict the prominent object in an image, and the other set consists of multi-sentence long descriptions that provides as many details as possible of an image. As demonstrated in Tab. 5, DeiT-Base and ConvNeXt-Small achieve the same accuracy increase when guided by two types of descriptions of different lengths. The performance improvement brought by the long descriptions is slightly worse than that of the short descriptions for ResNet-50 and ConNeXt-Base model.

We conjecture that, the short description that focus on the prominent part of an image contributes more to classification task, because the salient object is usually the class object corresponding to the ground truth label. As a result, the text embedding encodes the detailed information (e.g. color and texture) of the class object, which can enhance the visual representation via alignment. On the other hand, although the long description comprehensively describes most of the details that appear in an image, yet much irrelevant semantic information, e.g. background, is encoded into the text embedding. These irrelevant but encoded information may misguide the feature representations of visual models in the learning process.



Figure 5: Examples of image descriptions generated on ImageNet-1K.

5 Conclusion

This paper presents a novel supervised learning framework dubbed GPT4Image, in which conventional vision models can learning enhanced representations and achieve better performance on perception tasks (e.g. image classification) by leveraging the multimodal ability and knowledge of large pre-trained models. Specifically, we curate a text description set for all training images by interacting with a pre-trained multimodal LLM. After extracting the embeddings of the collected descriptions with a pre-trained text encoder, we minimize a distance loss to align the text embeddings with the image representations learned by vision models. This utilizes the cross-modality knowledge of LLM as the supervising signal to boost the training process. We conduct extensive experiments on CIFAR and ImageNet-1K image classification benchmarks and employ various visual perception model with heterogeneous architectures to validate the generality and effectiveness of the presented algorithm. Our method can enhance traditional vision models by taking advantage of large pre-trained models, yet without requiring extremely high computational resources to train and deploy LLMs. This approach can help small companies with limited resources benefit from LLMs and achieve higher performance in visual perception tasks. With the rapid development of large pre-trained models such as GPT-4 nowadays, the performance of conventional vision models is expected to continue improving using our training paradigm.

References

- [1] Ibrahim M Alabdulmohsin, Behnam Neyshabur, and Xiaohua Zhai. Revisiting neural scaling laws in language and vision. *Advances in Neural Information Processing Systems*, 35:22300–22312, 2022.
- [2] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *Advances in Neural Information Processing Systems*, 35:23716–23736, 2022.
- [3] Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C Lawrence Zitnick, and Devi Parikh. Vqa: Visual question answering. In *Proceedings of the IEEE international conference on computer vision*, pages 2425–2433, 2015.
- [4] Som S Biswas. Role of chat gpt in public health. *Annals of Biomedical Engineering*, pages 1–2, 2023.
- [5] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [6] Fei-Long Chen, Du-Zhen Zhang, Ming-Lun Han, Xiu-Yi Chen, Jing Shi, Shuang Xu, and Bo Xu. Vlp: A survey on vision-language pre-training. *Machine Intelligence Research*, 20(1):38–56, 2023.
- [7] Jun Chen, Han Guo, Kai Yi, Boyang Li, and Mohamed Elhoseiny. Visualgpt: Data-efficient adaptation of pretrained language models for image captioning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18030–18040, 2022.
- [8] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pages 1597–1607. PMLR, 2020.
- [9] Xinlei Chen, Hao Fang, Tsung-Yi Lin, Ramakrishna Vedantam, Saurabh Gupta, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco captions: Data collection and evaluation server. *arXiv preprint arXiv:1504.00325*, 2015.
- [10] Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. Scaling instruction-finetuned language models. *arXiv preprint arXiv:2210.11416*, 2022.
- [11] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [12] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- [13] Danny Driess, Fei Xia, Mehdi SM Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, Tianhe Yu, et al. Palm-e: An embodied multimodal language model. *arXiv preprint arXiv:2303.03378*, 2023.
- [14] Yifan Du, Zikang Liu, Junyi Li, and Wayne Xin Zhao. A survey of vision-language pre-trained models. *arXiv preprint arXiv:2202.10936*, 2022.
- [15] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [16] Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9729–9738, 2020.
- [17] Joel Hestness, Sharan Narang, Newsha Ardalani, Gregory Diamos, Heewoo Jun, Hassan Kianinejad, Md Patwary, Mostofa Ali, Yang Yang, and Yanqi Zhou. Deep learning scaling is predictable, empirically. *arXiv preprint arXiv:1712.00409*, 2017.
- [18] Huawei. Mindspore. <https://www.mindspore.cn/>, 2020.
- [19] Wonjae Kim, Bokyung Son, and Ildoo Kim. Vilt: Vision-and-language transformer without convolution or region supervision. In *International Conference on Machine Learning*, pages 5583–5594. PMLR, 2021.
- [20] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. *arXiv preprint arXiv:2301.12597*, 2023.

- [21] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *arXiv preprint arXiv:2304.08485*, 2023.
- [22] Zhuang Liu, Hanzi Mao, Chao-Yuan Wu, Christoph Feichtenhofer, Trevor Darrell, and Saining Xie. A convnet for the 2020s. *arXiv preprint arXiv:2201.03545*, 2022.
- [23] Jiasen Lu, Dhruv Batra, Devi Parikh, and Stefan Lee. Vilbert: Pretraining task-agnostic visiolinguistic representations for vision-and-language tasks. *Advances in neural information processing systems*, 32, 2019.
- [24] Brady D Lund and Ting Wang. Chatting about chatgpt: how may ai and gpt impact academia and libraries? *Library Hi Tech News*, 2023.
- [25] Oscar Mañas, Pau Rodriguez, Saba Ahmadi, Aida Nematzadeh, Yash Goyal, and Aishwarya Agrawal. Mapl: Parameter-efficient adaptation of unimodal pre-trained models for vision-language few-shot prompting. *arXiv preprint arXiv:2210.07179*, 2022.
- [26] OpenAI. Gpt-4 technical report. *arXiv*, 2023.
- [27] Taiwo Oyedare and Jung-Min Jerry Park. Estimating the required training dataset size for transmitter classification using deep learning. In *2019 IEEE International Symposium on Dynamic Spectrum Access Networks (DySPAN)*, pages 1–10. IEEE, 2019.
- [28] Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. Improving language understanding by generative pre-training. 2018.
- [29] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. 2019.
- [30] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [31] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *The Journal of Machine Learning Research*, 21(1):5485–5551, 2020.
- [32] Jonathan S Rosenfeld, Jonathan Frankle, Michael Carbin, and Nir Shavit. On the predictability of pruning across scales. In *International Conference on Machine Learning*, pages 9075–9083. PMLR, 2021.
- [33] Malik Sallam. Chatgpt utility in healthcare education, research, and practice: Systematic review on the promising perspectives and valid concerns. In *Healthcare*, volume 11, page 887. MDPI, 2023.
- [34] Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagné, Alexandra Sasha Luccioni, François Yvon, Matthias Gallé, et al. Bloom: A 176b-parameter open-access multilingual language model. *arXiv preprint arXiv:2211.05100*, 2022.
- [35] Shaden Smith, Mostofa Patwary, Brandon Norick, Patrick LeGresley, Samyam Rajbhandari, Jared Casper, Zhun Liu, Shrimai Prabhumoye, George Zerveas, Vijay Korthikanti, et al. Using deepspeed and megatron to train megatron-turing nlg 530b, a large-scale generative language model. *arXiv preprint arXiv:2201.11990*, 2022.
- [36] Weijie Su, Xizhou Zhu, Yue Cao, Bin Li, Lewei Lu, Furu Wei, and Jifeng Dai. Vi-bert: Pre-training of generic visual-linguistic representations. *arXiv preprint arXiv:1908.08530*, 2019.
- [37] Alane Suhr, Stephanie Zhou, Ally Zhang, Iris Zhang, Huajun Bai, and Yoav Artzi. A corpus for reasoning about natural language grounded in photographs. *arXiv preprint arXiv:1811.00491*, 2018.
- [38] Chi Sun, Luyao Huang, and Xipeng Qiu. Utilizing bert for aspect-based sentiment analysis via constructing auxiliary sentence. *arXiv preprint arXiv:1903.09588*, 2019.
- [39] Hao Tan and Mohit Bansal. Lxmert: Learning cross-modality encoder representations from transformers. *arXiv preprint arXiv:1908.07490*, 2019.
- [40] Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. In *International Conference on Machine Learning*, pages 10347–10357. PMLR, 2021.

- [41] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [42] Maria Tsimpoukelli, Jacob L Menick, Serkan Cabi, SM Eslami, Oriol Vinyals, and Felix Hill. Multimodal few-shot learning with frozen language models. *Advances in Neural Information Processing Systems*, 34: 200–212, 2021.
- [43] Laurens Van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of machine learning research*, 9(11), 2008.
- [44] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [45] Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, et al. Emergent abilities of large language models. *arXiv preprint arXiv:2206.07682*, 2022.
- [46] Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. Xlnet: Generalized autoregressive pretraining for language understanding. *Advances in neural information processing systems*, 32, 2019.
- [47] Pengchuan Zhang, Xiujun Li, Xiaowei Hu, Jianwei Yang, Lei Zhang, Lijuan Wang, Yejin Choi, and Jianfeng Gao. Vinvl: Revisiting visual representations in vision-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5579–5588, 2021.
- [48] Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, et al. Opt: Open pre-trained transformer language models. *arXiv preprint arXiv:2205.01068*, 2022.
- [49] Luowei Zhou, Hamid Palangi, Lei Zhang, Houdong Hu, Jason Corso, and Jianfeng Gao. Unified vision-language pre-training for image captioning and vqa. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pages 13041–13049, 2020.
- [50] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*, 2023.
- [51] Jinhua Zhu, Yingce Xia, Lijun Wu, Di He, Tao Qin, Wengang Zhou, Houqiang Li, and Tie-Yan Liu. Incorporating bert into neural machine translation. *arXiv preprint arXiv:2002.06823*, 2020.