# Efficient algorithms for enumerating maximal common subsequences of two strings

Miyuji Hirota<sup>\*</sup> Yoshifumi Sakai<sup>†</sup>

Graduate School of Agricultural Science, Tohoku University

#### Abstract

When searching extensively for significant common subsequences of two strings, one can consider maximal common subsequences (MCSs) as constituting the smallest set that encompasses all common subsequences, where a common subsequence is called maximal, if there exists no common subsequence that is longer than it and has it as a subsequence. For any positive integer n, this article considers the problem of enumerating MCSs of two strings both of length O(n). Let a (p, s, d)-algorithm output all distinct MCSs each in O(d) time after performing an O(p)-time preprocessing to construct a data structure of size O(s). We propose  $(n^3, n^3, n)$ -,  $(n^2, n^2, n)$ -, and  $(n^2, n, n \log n)$ -algorithms. Although the  $O(n^3, n^3, n)$ algorithm is inferior to the  $(n^2, n^2, n)$ -algorithm in terms of efficiency, the data structure created by it permits access to all distinct MCSs without explicit enumeration and is hence suitable for efficient exploration of certain special MCSs. The  $(n^2, n^2, n)$ - and  $(n^2, n, n \log n)$ -algorithms are modifications of the  $(\sigma n^2 \log n, n^2, \sigma n \log n)$ -algorithm of [Conte et al., Algorithmica 84 (2022) 757–783], where  $\sigma$  is the size of the alphabet over which the two strings are drawn.

## 1 Introduction

To analyze sequential data consisting of characters, comparing two strings to search for significant patterns they share is a fundamental task. One of the most classic and well-studied such patterns is the longest common subsequence (LCS). The LCS of strings X and Y is defined as the longest string that commonly appears in X and Y as their subsequence. Here, a subsequence of a string is obtained from the string by deleting any number of characters at any position not necessarily contiguous. The LCS of X and Y is not necessarily unique; in general, there may exist many. The LCS problem consists of finding an arbitrary one of the LCSs for given strings X and Y. As is well known, for any strings X and Y both of length O(n), the dynamic programming (DP) algorithm solves the LCS problem in  $O(n^2)$  time [24]. The time complexity of this algorithm is almost optimal in the sense that for any positive real number  $\varepsilon$ , there exists no algorithm that solves the LCS problem in  $O(n^{2-\varepsilon})$  time,

<sup>\*</sup>miyuji.hirota.p8@dc.tohoku.ac.jp

<sup>&</sup>lt;sup>†</sup>yoshifumi.sakai.c7@tohoku.ac.jp (Corresponding author)

unless the strong exponential time hypothesis (SETH) is false [1]. The fastest algorithm known so far solves the LCS problem based on the four-Russians technique in  $O(n/\log^2 n)$  time [18], where we adopt the unit-cost RAM model in this article. For strings X and Y parameterized not only by n but also by values such as the alphabet size, the LCS length, the number of matches, the number of the dominant matches, etc., algorithms specific to those parameters have also been proposed [2, 3, 8, 13, 15, 16, 19, 20, 21]. The space complexity of the DP algorithm of [24], which is  $O(n^2)$ , can be reduced to O(n) by the divideand-conquer method without increasing the time complexity [14]. Generalizing the number of strings to be compared from two to any, the LCS problem for multiple strings was shown to be NP-hard [17].

When searching for meaningful common subsequences of strings X and Y, if the conditions to be satisfied by the common subsequence to be found are known in advance, then simply finding an LCS does not necessarily yield the desired common subsequence. As common subsequences to be found in particular such situations, conditional LCSs are considered. For example, given a string P as the required pattern to be taken into account in searching for the common subsequences, the constrained LCS (or SEQ-IC-LCS) problem [23] consists of finding an arbitrary longest subsequence common to X and Y that has P as its subsequence. By modifying the DP algorithm of [24] for the (non-conditional) LCS problem so as to work on a three-dimensional DP table, this conditional LCS problem was shown to be solvable in  $O(n^3)$  time [7]. Other conditional LCS problems with respect to P that were shown to be solvable in  $O(n^3)$  time or faster include the restricted LCS (or SEQ-EC-LCS) problem [6, 12], the STR-IC-LCS problem [6, 10], and the STR-EC-LCS problem [25].

Suppose that we want to consider all common subsequences of strings X and Y to search for some important common structures shared by the strings. For any common subsequence Z of X and Y, any subsequence  $\tilde{Z}$  of Z is also a common subsequence of X and Y, so we will treat Z as simultaneously representing Z. For example, if X = acbcded and Y = edeabcb, then we want to consider a, b, c, d, e, ab, ac, bc, cb, de, ed, abc, and acb, but it is sufficient to explicitly consider only de, ed, abc, and acb. Under this perspective, what common subsequences should we explicitly consider as the minimum set to represent all common subsequences? If only all LCSs are considered explicitly, not all common subsequences are necessarily represented. In other words, the requirement for maximum length is too restrictive. For example, the previous concrete Xand Y have abc and acb as LCSs, but neither represents d, e, de, or ed. As a common subsequence that satisfies a loose alternative to the requirement of maximum length, let a maximal common subsequence (an MCS) be a common subsequence that is no longer a common subsequence no matter what character is inserted in any position. From this definition, any common subsequence is represented by at least one MCS. Conversely, any MCS is not represented by any common subsequence other than it. Thus, our intended minimum set consists only of all MCSs.

As seen above, MCSs can be regarded as constituting the smallest set that represents all common subsequences. Despite this useful feature, MCSs have not been studied very well at this time. A few known results are as follows. The shortest MCS problem consists of finding an arbitrary MCS of X and Y that has the least length. This problem was shown to be solvable in  $O(n^3)$ time and in  $O(n^3)$  space [11]. Given a common subsequence P of X and Y arbitrarily, the constrained MCS problem consists of finding an arbitrary MCS of X and Y that has P as its subsequence. This problem can be solved in  $O(n \log n)$  time and in O(n) space<sup>1</sup> and whether a given common subsequence Z of X and Y is maximal or not can be determined in O(n) time [22]. Recently, Conte et al. [9] showed that MCSs can be enumerated with a polynomial-time delay. After performing an  $O(\sigma n^2 \log n)$ -time preprocessing to prepare a certain data structure of size  $O(n^2)$ , their algorithm outputs all distinct MCSs of X and Y each in  $O(\sigma n \log n)$  time, where  $\sigma$  is the number of characters in the alphabet. With this result of Conte et al. [9] we have for the first time a way to access the list of all MCSs. The purpose of this article is to explore more efficient ways to enumerate MCSs with the goal of providing easier access to all MCSs.

#### 1.1 Our contribution

To design algorithms for enumerating MCSs, we adopt two approaches, "the all-in-one data structure approach" and "the prefix extension approach."

In the all-in-one data structure approach, we design a directed acyclic graph (DAG), which we call the all-MCS graph, that represents all MCSs directly in the following sense. This DAG has a single source vertex, having no incoming edge, and a single sink vertex, having no outgoing edge. Furthermore, each path from the source vertex to the sink vertex represents a distinct MCS and vice versa, where the kth vertex in the path corresponds to the kth element of the MCS. Thus, we can enumerate MCSs by enumerating paths from the source vertex to the sink vertex of the all-MCS graph. We show that the all-MCS graph, satisfying the above conditions, exists as a DAG of size  $O(n^3)$ and also show that this DAG can be constructed in  $O(n^3)$  time from X and Y. In enumeration using the all-MCS graph, the delay time is superior to the algorithm of Conte et al. [9] but inferior in the preprocessing time and required space. Perhaps the greatest strength of the all-MCS graph is that it allows access to all MCSs without explicitly enumerating them. It is possible to utilize this characteristic to efficiently find certain special MCSs, a few examples of which are mentioned in the remarks.

The prefix extension approach is exactly the one adopted by the algorithm of Conte et al. [9]. In other words, we try to modify their algorithm to be more efficient. Their approach is to build each MCS by repeatedly appending a valid character to the current prefix. Since the valid characters to be appended to the prefix are determined by the support of the data structure, the design of it directly affects the efficiency of the algorithm. We propose two algorithms by replacing the original data structure of Conte et al. [9] with another. One algorithm aims to minimize the delay time. It outputs each MCS in O(n) time after performing an  $O(n^2)$ -time preprocessing to prepare a data structure of size  $O(n^2)$ . The other algorithm aims to minimize the required space to store the data structure. It outputs each MCS in  $O(n \log n)$  time after performing an  $O(n^2)$ -time preprocessing to prepare a data structure of size O(n). The

<sup>&</sup>lt;sup>1</sup>In [22] it is claimed that the MCS problem can be solved in  $O(n\sqrt{\log n/\log \log n})$  time and O(n) space by using the data structure of Beame and Fich [4] structure. However, this is incorrect because it does not take into account the time to construct the data structure nor the space to store it. The execution time and required space presented in the text are established by replacing their data structure with a naive data structure  $Index_{next/prev}$ , which is introduced in Section 2.

efficiency of either algorithm is hence independent of the size  $\sigma$  of the alphabet. Furthermore, these algorithms successfully improve either the delay time of the Conte et al. [9]'s algorithm by a factor of  $\log n$  or the required space by a factor of n. The efficiency of these proposed algorithms may appear to outperform the algorithm of Conte et al. [9]. However, since the efficiency of their algorithm can be evaluated using other parameters in addition to n and  $\sigma$ , strictly speaking, the performance of our algorithms is not comparable to theirs.

This article is organized as follows. Section 2 defines our problem formally and introduces notations and terminology used in this article. Section 3 proposes the all-in-one data structure approach algorithm by defining the all-MCS graph. Section 4 proposes the prefix extension approach algorithms by introducing the algorithm of Conte et al. [9] as the basis for the modification in Section 4.1 and designing the data structures adopted by our algorithms in Sections 4.2 and 4.3. Section 5 concludes this article.

## 2 Preliminaries

For any sequences S and S', let  $S \circ S'$  denote the sequence obtained by concatenating S' after S. For any sequence S, let |S| denote the number of elements composing S. For any index k with  $1 \leq k \leq |S|$ , let S[k] denote the kth element of S, so that  $S = S[1] \circ S[2] \circ \cdots \circ S[|S|]$ . A subsequence of S is the sequence obtained from S by deleting any number of elements at any position not necessarily contiguous, i.e.,  $S[k_1] \circ S[k_2] \circ \cdots \circ S[k_\ell]$  for some length  $\ell$  with  $0 \leq \ell \leq |S|$ and any  $\ell$  indices  $k_1, k_2, \ldots, k_\ell$  with  $1 \leq k_1 < k_2 < \cdots < k_\ell \leq |S|$ . We say that sequence S contains sequence S', if S' is a subsequence of S. For any indices k and l with  $1 \leq k \leq l \leq |S|$ , let S[k : l] denote the contiguous subsequence  $S[k] \circ S[k+1] \circ \cdots \circ S[l]$  of S. For convenience, S[k : k-1] with  $1 \leq k \leq |S|+1$ denotes the empty contiguous subsequence of S. Any contiguous subsequence S[1 : k] with  $0 \leq k \leq |S|$  is called a *prefix* of S and is denoted by  $S\langle k]$ . Any contiguous subsequence S[k : |S|] with  $1 \leq k \leq |S|+1$  is called a *suffix* of Sand is denoted by  $S[k\rangle$ . A *string* is a sequence whose elements are characters in an alphabet.

Let X and Y be arbitrary strings over an alphabet  $\Sigma$  of  $\sigma$  characters. Any string that both X and Y contain is called a *common subsequence* of X and Y. We say that X and Y share Z, if Z is a common subsequence of X and Y. A maximal common subsequence (an MCS) of X and Y is a common subsequence of X and Y in which inserting any character no longer yields a common subsequence of X and Y. We consider the problem of enumerating MCSs of any strings X and Y both of length O(n), where n is an arbitrary positive integer. Any algorithm that solves this problem would have to find each of all MCSs of X and Y exactly once within a certain delay time, perhaps after a certain preprocessing. We call this problem the MCS enumeration problem. Let an  $(f_p(n, \sigma), f_s(n, \sigma), f_d(n, \sigma))$ -algorithm solve this problem, if it performs an  $O(f_p(n, \sigma))$ -time preprocessing, uses  $O(f_s(n, \sigma))$  space, and outputs all distinct MCSs of X and Y one by one each in  $O(f_d(n, \sigma))$  time. We call  $f_p(n, \sigma)$ ,  $f_s(n, \sigma)$ , and  $f_d(n, \sigma)$  the preprocessing-time, space, and delay-time complexities of the algorithm, respectively.

In what follows, for convenience, we assume without loss of generality that  $\Sigma = \{1, 2, \dots, \sigma\}, X[1] = Y[1] = 1, X[|X|] = Y[|Y|] = \sigma$ , both X[2 : |X| - 1]

and Y[2:|Y|-1] are strings over  $\{2, 3, \ldots, \sigma-1\}$ , and  $\sigma \leq |X|+|Y|-2 = O(n)$ . Note that Z is an MCS of X and Y if and only if Z[1] = 1,  $Z[|Z|] = \sigma$ , and Z[2:|Z|-1] is an MCS of X[2:|X|-1] and Y[2:|Y|-1]. Another assumption is that any sequence S maintained by an algorithm is implemented as a onedimensional array of O(|S|) elements. Therefore, any element S[k] of S with  $1 \leq k \leq |S|$  can be accessed in O(1) time, the first or last element of S can be deleted in O(1) time, and any additional element can be appended or prepended to S in O(1) amortized time.

Below, we introduce notations and terminology that are used to design our algorithms.

For any string W in  $\{X, Y\}$ , any character c with  $1 \leq c \leq \sigma$ , and any index h with  $1 \le h \le |W|$ , let  $next_W(c,h)$   $(prev_W(c,h))$  denote the least (resp. greatest) index h' with  $h < h' \le |W|$  (resp.  $1 \le h' < h$ ) such that W[h'] = c, if any, or |W| + 1 (resp. 0), otherwise. Let queries of any of these indices be called next/prev-queries. To support next/prev-queries, we consider the following two data structures. One is  $Table_{next/prev}$ , which consists of pairs of sequences  $next_W(c,1) \circ next_W(c,2) \circ \cdots \circ next_W(c,|W|)$  and  $prev_W(c,1) \circ prev_W(c,2) \circ \cdots \circ$  $prev_W(c, |W|)$  for all strings W in  $\{X, Y\}$  and all characters c with  $1 \le c \le \sigma$ . This data structure is  $O(n^2)$ -time constructible, is of size  $O(n^2)$ , and supports O(1)-time next/prev-queries by working as the lookup table. The other data structure is  $Index_{next/prev}$ , which consists of sequences  $h_1 \circ h_2 \circ \cdots \circ h_\ell$  for all strings W in  $\{X, Y\}$  and all characters c with  $1 \le c \le \sigma$ , where  $h_1 \circ h_2 \circ \cdots \circ h_\ell$ is the sequence of all indices h such that W[h] = c in ascending order. This data structure is O(n)-time constructible, is of size O(n), and supports  $O(\log n)$ time next/prev-queries by performing a binary search on one of the sequences. Although we consider only these simple data structures, they do not represent a bottleneck in any of the preprocessing-time, space, and delay-time complexities for the algorithms we propose.

Let a match be a pair (i, j) of indices with  $1 \leq i \leq |X|$  and  $1 \leq j \leq |Y|$ such that X[i] = Y[j]. For any match w, we use  $i_w$  and  $j_w$  to denote the indices such that  $w = (i_w, j_w)$  and use  $c_w$  to denote the character common to  $X[i_w]$ and  $Y[j_w]$ . In addition, we use  $d_w$  (resp.  $a_w$ ) to denote the diagonal (resp. anti-diagonal) coordinate  $j_w - i_w$  (resp.  $i_w + j_w$ ) of w by considering it as a point on a two-dimensional grid. For any matches u and v, let u < v (resp.  $u \leq v$ ) mean that  $i_u < i_v$  and  $j_u < j_v$  (resp.  $i_u \leq i_v$  and  $j_u \leq j_v$ ). Let  $u \leq v$ mean that  $u \leq v$  and at least  $i_u < i_v$  or  $j_u < j_v$ . Furthermore, let  $u \prec v$  mean that u < v and there exists no match w such that u < w < v.

For any character c with  $1 \le c \le \sigma$  and any match w such that  $X[i_w+1\rangle$  and  $Y[j_w+1\rangle$  (resp.  $X\langle i_w-1]$  and  $Y\langle j_w-1]$ ) share c, let next(c, w) (resp. prev(c, w)) denote the match  $(next_X(c, i_w), next_Y(c, j_w))$  (resp.  $(prev_X(c, i_w), prev_Y(c, j_w))$ )). For any string Z that X and Y share, let pref(Z) (resp. suff(Z)) denote the match (i, j) such that  $X\langle i]$  (resp.  $X[i\rangle$ ) is the shortest prefix (resp. suffix) of X that contains Z and j satisfies the same condition as i with respect to Y. Hence, for any character c and string Z such that X and Y share  $Z \circ c$  (resp.  $c \circ Z$ ),  $pref(Z \circ c) = next(c, pref(Z))$  (resp.  $suff(c \circ Z) = prev(c, suff(Z))$ ). Note that for any strings Z' and Z'' both shared by X and Y, X and Y share  $Z' \circ Z''$  if and only if pref(Z') < suff(Z''). Let any match that is pref(Z) (resp. suff(Z)) for some string Z be called a pref-match (resp. suff-match). Note that for any match w, w is a pref-match (resp. suff-match) if and only if either w = (1, 1) (resp. w = (|X|, |Y|)) or there exists a pref-match (resp. suff-match) w' such

that  $w = next(c_w, w')$  (resp.  $w = prev(c_w, w')$ ).

For any sequence S of integers, let  $RMQ_S$  denote the range minimum query (RMQ) data structure [5] for S, which can be constructed in O(|S|) time from S and supports O(1)-time queries of  $RMQ_S(k':k'')$  for any indices k' and k'' with  $1 \le k' \le k'' \le |S|$ , where  $RMQ_S(k':k'')$  is the greatest index k with  $k' \le k \le k''$  such that any element in S[k':k-1] is greater than S[k]. For convenience, we sometimes use -S to denote the sequence  $-S[1] \circ -S[2] \circ \cdots \circ -S[|S|]$ , so that  $RMQ_{-S}$  can be used to support range maximum queries in the sense that  $RMQ_{-S}(k':k'')$  is the greatest index k with  $k' \le k \le k''$  such that any element in S[k':k-1] is less than S[k].

## 3 All-in-one data structure approach algorithm

This section proposes an  $(n^3, n^3, n)$ -algorithm that solves the MCS enumeration problem.

We design the proposed algorithm based on the following lemma, which redefines MCSs.

**Lemma 1 ([22])** For any string Z that X and Y share, Z is an MCS of X and Y if and only if  $pref(Z\langle k]) \prec suff(Z[k+1\rangle)$  for any index k with  $0 \le k \le |Z|$ .

**Proof** If there exists an index k with  $0 \le k \le |Z|$  such that  $pref(Z\langle k]) \prec suff(Z[k+1\rangle)$  does not hold, then there exists a match v such that  $pref(Z\langle k]) < v < suff(Z[k+1\rangle)$ , implying that X and Y share  $Z\langle k] \circ c_v \circ Z[k+1\rangle$ ; otherwise, for any index k with  $1 \le k \le |Z|$  and any character c with  $1 \le c \le \sigma$ , X and Y do not share  $Z\langle k] \circ c \circ Z[k+1\rangle$ , because there exists no match v such that  $pref(Z\langle k]) < v < suff(Z[k+1\rangle)$ .  $\Box$ 

The proposed algorithm uses a directed acyclic graph (DAG) such that each of certain paths represents a distinct MCS of X and Y and vice versa. We call this DAG the *all-MCS graph* and define it as follows (see also Figure 1).

**Definition 1** Let G be the DAG consisting of edges from vertex  $(prev(c_u, v), u)$ to vertex  $(v, next(c_v, u))$  for all pairs of matches u and v such that  $u \prec v$ . The all-MCS graph is defined as the DAG that consists of all edges in G through which a path from ((1, 1), (1, 1)) to ((|X|, |Y|), (|X|, |Y|)) in G passes.

**Lemma 2** The all-MCS graph has a path consisting of  $\ell-1$  edges from  $(v_{k-1}, u_k)$  to  $(v_k, u_{k+1})$  for all indices k with  $1 \le k \le \ell - 1$  such that  $v_0 = u_1 = (1, 1)$  and  $v_{\ell-1} = u_\ell = (|X|, |Y|)$  if and only if  $c_{u_1} \circ c_{u_2} \circ \cdots \circ c_{u_\ell}$  is an MCS of X and Y.

**Proof** To show the "if" part, let Z be an arbitrary MCS of X and Y. For any index k with  $0 \le k \le |Z|$ , let  $u_k = pref(Z\langle k])$  and  $v_k = suff(Z[k+1\rangle)$ , so that  $c_{u_1} \circ c_{u_2} \circ \cdots \circ c_{u_{|Z|}} = c_{v_0} \circ c_{v_1} \circ \cdots \circ c_{v_{|Z|-1}} = Z$ . Since  $v_0 = u_1 = (1,1)$ and  $v_{|Z|-1} = u_{|Z|} = (|X|, |Y|)$  due to Z[1] = 1 and  $Z[|Z|] = \sigma$ , it suffices to show that for any index k with  $1 \le k \le |Z| - 1$ , G has an edge from  $(v_{k-1}, u_k)$ to  $(v_k, u_{k+1})$ . Since  $Z[k\rangle = c_{u_k} \circ Z[k+1\rangle$  (resp.  $Z\langle k+1] = Z\langle k] \circ c_{v_k}$ ),  $v_{k-1} = prev(c_{u_k}, v_k)$  (resp.  $u_{k+1} = next(c_{v_k}, u_k)$ ). Furthermore,  $u_k \prec v_k$  due to Lemma 1. Thus, G has an edge from  $(v_{k-1}, u_k)$  to  $(v_k, u_{k+1})$ .

To show the "only if" part, consider an arbitrary path in G that consists of  $\ell - 1$  edges from  $(v_{k-1}, u_k)$  to  $(v_k, u_{k+1})$  for all indices k with  $1 \le k \le \ell - 1$  such

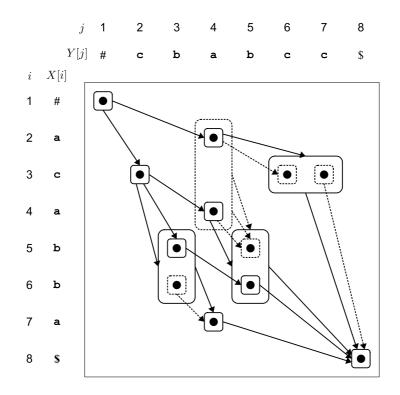


Figure 1: DAG G for X = #acabba\$ and Y = #cbabcc\$ (with characters 1, 2, 3, 4, 5 (=  $\sigma$ ) respectively represented by #, a, b, c, \$ and the concatenation operators  $\circ$  omitted), where each match w is indicated by a bullet at position  $(i_w, j_w)$ , each vertex (w, w') is indicated by a rounded rectangle or square surrounding matches w and w', each edge is indicated by an arrow, and deleting all dotted vertices and edges yields the all-MCS graph

that  $v_0 = u_1 = (1, 1)$  and  $v_{\ell-1} = u_\ell = (|X|, |Y|)$  and let  $Z = c_{u_1} \circ c_{u_2} \circ \cdots \circ c_{u_\ell}$  (=  $c_{v_0} \circ c_{v_1} \circ \cdots \circ c_{v_{\ell-1}}$ ). It can be verified by induction that for any index k with  $0 \le k \le |Z|, u_k = pref(Z\langle k])$  and  $v_k = suff(Z[k+1\rangle)$ . Since  $u_k \prec v_k$  for any index k with  $1 \le k \le |Z|$  due to definition of the all-MCS graph, it follows from Lemma 1 that Z is an MCS of X and Y.  $\Box$ 

The proposed algorithm constructs the all-MCS graph based on the following lemma.

**Lemma 3** The all-MCS graph can be constructed in  $O(n^3)$  time and  $O(n^3)$  space.

**Proof** The all-MCS graph is obtained by constructing G and modifying it as follows.

First of all, we construct  $Table_{next/prev}$  of size  $O(n^2)$  in  $O(n^2)$  time so as to support O(1)-time next/prev-queries. For any vertex (v', u) in G, let G(v', u)denote the sequence of all vertices (v, u') such that G has an edge from (v', u) to (v, u') in an arbitrary order, which represents the set of all outgoing edges from (v', u). Since  $u \prec v$  and  $v' = prev(c_u, v)$  for any such edge,  $u \leq v'$  and at least  $\begin{array}{ll} 1: & (i,j) \leftarrow (|X|, j_u + 1); \\ 2: & \text{while } j \leq |Y|, \\ 3: & \text{if } X[i] = Y[j], \text{ then} \\ 4: & \text{output } (i,j); \\ 5: & (i,j) \leftarrow \left\{ \begin{array}{ll} (prev_X(Y[j],i),j) & \text{if } prev_X(Y[j],i) > i_u; \\ (i,j+1) & \text{otherwise.} \end{array} \right. \end{array}$ 

Figure 2: Procedure  $\mathsf{FindEdges}(u)$ 

 $i_{v'} = i_u$  or  $j_{v'} = j_u$ . Hence, if  $d_{v'} \leq d_u$ , then  $v' = (i_u + (d_u - d_{v'}), j_u)$ ; otherwise,  $v' = (i_u, j_u + (d_{v'} - d_u))$ . Based on this observation, we implement G as a threedimensional array of  $O(n^3)$  elements G[i, j, d] with  $1 \leq i \leq |X|, 1 \leq j \leq |Y|$ , and  $1 - |X| \leq d \leq |Y| - 1$ , where G[i, j, d] is G(v', u), if u = (i, j) and  $d_{v'} = d$ for some vertex (v', u) in G, or the empty sequence, otherwise. This array can be constructed by initializing each element G[i, j, d] to the empty sequence and appending  $(v, next(c_v, u))$  to  $G[i_u, j_u, d_{prev(c_u, v)}]$  for each pair of matches u and v such that  $u \prec v$ . For any match u, Procedure findEdges(u) in Figure 2 outputs all matches v such that  $u \prec v$  in O(n) time because, by induction, just before any execution of line 3 of the procedure, for any index i' with  $1 \leq i' \leq |X|$ ,  $u \prec (i', j)$  if and only if  $i_u < i'$  and X[i'] = Y[j]. Since the number of matches u is  $O(n^2)$ , G can be constructed in  $O(n^3)$  time and  $O(n^3)$  space.

Next, we construct the graph, denoted by G', that consists of all edges from (v', u) to (v, u') in G such that G has a path from (1, 1) to (v', u). Using the breadth-first search algorithm, all such edges in G can be determined in  $O(n^3)$  time. For any vertex (v, u'), let G'(v, u') denote the sequence of all vertices (v', u) such that G' has an edge from (v', u) to (v, u') in an arbitrary order, which represents the set of all incoming edges to (v, u'). We implement G' as the array of elements G'[i, j, d] in almost the same way as G. The only difference is that G'[i, j, d] is G'(v, u'), if u' = (i, j) and  $d_v = d$  for some vertex (v, u') in G'. The reason for this is to allow the breadth-first search algorithm to find all edges from (v', u) to (v, u') in G' such that G' has a path from (v, u') to ((|X|, |Y|), (|X|, |Y|)) in  $O(n^3)$  time. Obviously G' can be constructed from G in  $O(n^3)$  time.

Finally, we construct the graph G'' that consists of all edges from (v'u) to (u, v') in G' such that G' has a path from (v, u') to ((|X|, |Y|), (|X|, |Y|)), which is hence the all-MCS graph. For any vertex (v', u) in G'', let G''(v', u) denote the sequence of all vertices (v, u') such that G'' has an edge from (v', u) to (v, u') in an arbitrary order. We implement G'' as the array of elements G''[i, j, d] in the same way as G. Since the breadth-first search algorithm determines all edges from (v', u) to (v, u') in G' such that G' has a path from (v, u') to ((|X|, |Y|), (|X|, |Y|)) in  $O(n^3)$  time, G'' can be constructed in  $O(n^3)$  time.  $\Box$ 

Let G'' be the array in the proof of Lemma 3, which is our implementation of the all-MCS graph. For any path P in the all-MCS graph from ((1, 1), (1, 1)) to ((|X|, |Y|), (|X|, |Y|)), let id(P) denote the sequence  $r_1 \circ r_2 \circ \cdots \circ r_{\ell-1}$  such that for any index k with  $1 \le k \le \ell - 1$ ,  $(v_k, u_{k+1})$  is the  $r_k$  th element of  $G''(v_{k-1}, u_k)$ , where P consists of  $\ell - 1$  edges from  $(v_{k-1}, u_k)$  to  $(v_k, u_{k+1})$  for all indices k with  $1 \leq k \leq \ell - 1$  such that  $v_0 = u_1 = (1, 1)$  and  $v_{\ell-1} = u_\ell = (|X|, |Y|)$ . Furthermore, let mcs(P) denote the string  $c_{u_1} \circ c_{u_2} \circ \cdots \circ c_{u_\ell}$ . The proposed algorithm outputs all distinct MCSs of X and Y based on the following lemma using G''.

**Lemma 4** If G'' in the proof of Lemma 3 is available, then all distinct MCSs of X and Y can be obtained one by one each in O(n) time.

**Proof** Array G'' allows us to obtain all distinct paths P in the all-MCS graph from ((1,1),(1,1)) to ((|X|,|Y|),(|X|.|Y|)) in lexicographical order of id(P), each in O(n) time in a straightforward way. String mcs(P) for any such P can be determined in O(n) time. Thus, the lemma follows from Lemma 2.  $\Box$ 

Let Algorithm Enum331 be the algorithm that constructs our implementation G'' of the all-MCS graph based on Lemma 3 and outputs all distinct MCSs of X and Y according to Lemma 4. We immediately obtain the following theorem.

**Theorem 1** Algorithm Enum331 is an  $(n^3, n^3, n)$ -algorithm that solves the MCS enumeration problem.

**Remark 1** The delay time achieved by Algorithm Enum331 to output each MCS Z is O(|Z|) rather than O(n). In the next section, we propose an  $(n^2, n^2, n)$ -algorithm, which performs more efficiently with respect to preprocessing time and required space than Algorithm Enum331 but does not necessarily output each MCS Z in O(|Z|) time.

**Remark 2** The all-MCS graph constructed by Algorithm Enum331 can be used not only for enumerating (non-conditional) MCSs but also for finding one of certain particular MCSs or enumerating them. Such particular MCSs include, for example, quasi-LCSs and most stable MCSs. A quasi-LCS is defined as one of the longest MCSs that is not an LCS. Since no quasi-LCS can be obtained only by deleting characters from any LCS, we can think of quasi-LCSs as alternatives to LCSs in searching for meaningful common subsequences. A most stable MCS is defined as an MCS Z that has the greatest number of indices k with  $1 \leq 1$  $k \leq |Z|$  such that  $pref(Z\langle k]) = suff(Z[k))$ . LCSs may have only few characters whose positions in the strings are uniquely determined while most stable MCSs have a maximum number of such characters. Therefore, most stable MCSs could be used to find positional correspondences between the strings. For example, if we consider the same X and Y as in Figure 1, then #ac (resp. #cbb) is the only quasi-LCS (resp. most stable MCS) that X and Y have. It is easy to design a DP algorithm that finds a quasi-LCS (resp. most stable MCS) in  $O(n^3)$  time. The DP table constructed by the algorithm consists of the maximum and second maximum numbers of vertices (resp. the maximum number of vertices (w, w')with w = w' through which a path from ((1,1),(1,1)) to (v',u) passes for all vertices (v', u) in the all-MCS graph. Since each traceback path corresponds to a distinct quasi-LCS (resp. most stable MCS) and vice versa, this DP table can also be used for enumeration.

1:	Let $Z'$ be the string consisting only of a single character 1;
2:	while $Z'$ is nonempty,
3:	if $Z'[ Z' ] \neq \sigma$ , then
4:	append the least $Z'$ -extensible character to $Z'$ ;
5:	otherwise,
6:	output $Z'$ ;
7:	while $Z'[ Z' ]$ is the greatest $Z'\langle  Z'  - 1$ ]-extensible character,
8:	delete the last element from $Z'$ ;
9:	if $Z'$ is nonempty, then
10:	replace the last element of $Z'$ with the least $Z\langle  Z'  - 1]$ -extensible character that is greater than $Z'[ Z' ]$ .

Figure 3: Algorithm Basic

## 4 Prefix extension approach algorithms

This section modifies the  $(\sigma n^2 \log n, n^2, \sigma n \log n)$ -algorithm of Conte et al. [9] for the MCS enumeration problem to obtain  $(n^2, n^2, n)$ - and  $(n^2, n, n \log n)$ -algorithms.

### 4.1 Conte et al. [9]'s prefix-extensible character test

We first introduce the approach adopted by Conte et al. [9] to solve the MCS enumeration problem in our terminology.

Let any string Z' that is a prefix of some MCS of X and Y be called an MCS-prefix. For any MCS-prefix Z', let a character c be Z'-extensible, if  $Z' \circ c$  is also an MCS-prefix. If Z'-extensible characters can be determined somehow, then we can find all distinct MCSs of X and Y one by one in lexicographical order by executing Algorithm Basic in Figure 3 (see also Figure 4). To adopt this straightforward algorithmic approach, Conte et al. [9] developed a clever way to test which characters are Z'-extensible.

For any string Z that X and Y share, let any string  $Z\langle k \rangle \circ c \circ Z[k+1\rangle$  with  $0 \leq k \leq |Z|$  and  $1 \leq c \leq \sigma$  that X and Y share be called a *single-character* insertion derivative of Z, so that Z is an MCS of X and Y if and only if there exists no single-character insertion derivative of Z. For any MCS-prefix Z', let safe(Z') denote the (possibly virtual) match (i, j), where i (resp. j) is the least possible index such that  $pref(Z^*) = (i, j_{pref(Z')})$  (resp.  $pref(Z^*) = (i_{pref(Z')}, j)$ ) for some single-character insertion derivative  $Z^*$  of Z', if any, or |X| + 1 (resp. |Y| + 1), otherwise. Although safe(Z') is not a match when  $i_{safe(Z')} = |X| + 1$  or  $j_{safe(Z')} = |Y| + 1$ , we treat it as a virtual match to allow us to use notations w < safe(Z') and  $w \leq safe(Z')$  for any match w (see Figure 5). Conte et al. [9] revealed which characters are Z'-extensible by their relationship to safe(Z').

**Lemma 5 ([9])** For any MCS-prefix Z' and any character c, c is Z'-extensible if and only if there exists a suff-match v such that  $pref(Z') \prec v \leq safe(Z')$  and  $c_v = c$ .

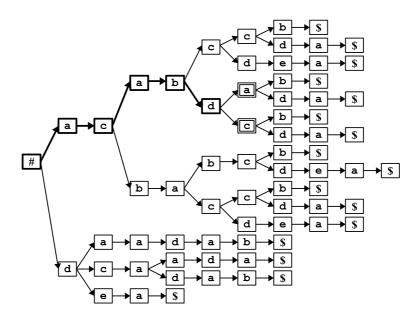


Figure 4: Trie representing all MCSs of X = # dacabdacbcbdea\$ and Y = # acbabcdecaadab\$ (with characters 1, 2, 3, 4, 5, 6, 7 (=  $\sigma$ ) respectively represented by #, a, b, c, d, e, \$ and the concatenation operators  $\circ$  omitted) in lexicographical order, on which Algorithm Basic in Figure 3 performs a preorder tree walk to enumerate them, where, for example, the path indicated by thick nodes and edges represents an MCS-prefix Z' = # acabd, which is obtained by line 10 of the algorithm after # acabcdea\$ is output as the third MCS in the enumeration, and the Z'-extensible characters, which are a and c, are indicated by double-edged nodes

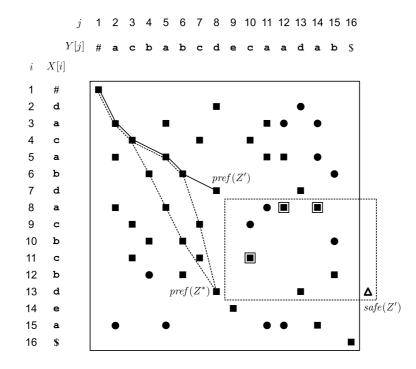


Figure 5: Suff-matches (indicated by square bullets), the other matches (indicated by circular bullets), and the region of matches v such that  $pref(Z') < v \leq safe(Z')$  (surrounded by a dotted rectangle) for the same X, Y, and Z'as Figure 4, where  $Z^*$  is any of #acabcd and #acbabd, which are the singlecharacter insertion derivatives of Z' such that  $i_{safe(Z')} = i_{pref(Z^*)}$ , the triangular open bullet indicates safe(Z'), which is a virtual match in this concrete example, and the bullets indicating suff-matches v with  $pref(Z') \prec v \leq safe(Z')$  are double-edged

**Proof** We only consider the case where there exists a match v such that pref(Z') < v and  $c_v = c$  because otherwise the lemma holds. Let v be an arbitrary suff-match with pref(Z') < v and  $c_v = c$  such that there exists no suff-match v' with  $pref(Z') < v' \leq v$  and  $c_{v'} = c$ . Let Z'' be an arbitrary longest string such that suff(Z'') = v.

To prove the "if" part of the lemma, suppose that  $pref(Z') \prec suff(Z'') \leq safe(Z')$ . For any single-character insertion derivative  $Z^{**}$  of Z'', if  $pref(Z') < suff(Z^{**})$ , then  $suff(Z^{**}) < suff(Z'')$  due to definition of v and Z'', which contradicts that  $pref(Z') \prec suff(Z'')$ . On the other hand, for any single-character insertion derivative  $Z^*$  of Z',  $pref(Z') \leq pref(Z^*)$  because Z' is an MCS-prefix. This implies from definition of safe(Z') that if  $pref(Z^*) < safe(Z')$ , then  $pref(Z') < pref(Z^*)$ . Hence, from  $suff(Z'') \leq safe(Z')$ ,  $pref(Z^*) < suff(Z'')$  contradicts that  $pref(Z') \prec suff(Z'')$ . Thus, there exists no single-character insertion derivative of  $Z' \circ Z''$ .

To prove the "only if" part of the lemma, suppose that there exists no single-character insertion derivative of  $Z' \circ Z''$ . This immediately implies that  $pref(Z') \prec suff(Z'')$ . Furthermore,  $suff(Z'') \leq safe(Z')$  because otherwise it follows from definition of safe(Z') that there exists a single-character insertion

derivative  $Z^*$  of Z' such that X and Y share  $Z^* \circ Z''$ , a contradiction.  $\Box$ 

Conte et al. [9] also gave an inductive method for updating safe(Z') to  $safe(Z' \circ c)$  for any Z'-extensible character c as follows.

**Lemma 6 ([9])** For any MCS-prefix Z' and any Z'-extensible character c,  $i_{safe(Z'\circ c)}$  is the minimum of the following at most three indices. One is |X|+1. Another is the minimum of  $next_X(c, next_X(Y[j], i_{pref(Z')}))$  over all indices j with  $j_{pref(Z')} < j < j_{pref(Z'\circ c)}$  such that  $next_X(Y[j], i_{pref(Z')}) \leq |X|$ , if any. The other is  $next_X(c, i_{safe(Z')})$ , if  $i_{safe(Z')} \leq |X|$ . Index  $j_{safe(Z'\circ c)}$  can be determined analogously by exchanging the roles of X and Y.

**Proof** By symmetry, we show only that the condition of  $i_{safe(Z'\circ c)}$  in the lemma holds. Let  $\mathcal{Z}^*$  be the set of all single-character insertion derivatives  $Z^*$  of Z' such that  $j_{pref(Z^*\circ c)} = j_{pref(Z'\circ c)}$ . If  $\mathcal{Z}^*$  is empty, then  $i_{safe(Z'\circ c)} = |X| + 1$ ; otherwise,  $i_{safe(Z'\circ c)}$  is the minimum of  $next_X(c, i_{pref(Z^*)})$  over all strings  $Z^*$  in  $\mathcal{Z}^*$ . For any  $Z^*$  in  $\mathcal{Z}^*$ ,  $j_{pref(Z^*)} \ge j_{pref(Z')}$  and if  $j_{pref(Z^*)} > j_{pref(Z')}$ , then  $Z^* = Z' \circ Y[j]$  for some index j with  $j_{pref(Z')} < j < j_{pref(Z'\circ c)}$  such that  $next_X(Y[j], i_{pref(Z')}) \le |X|$ . The minimum of  $next_X(c, i_{pref(Z^*)})$  over all strings  $Z^*$  in  $\mathcal{Z}^*$  such that  $j_{pref(Z^*)} > j_{pref(Z')}$  is the minimum of  $next_X(c, next_X(Y[j], i_{pref(Z')}))$  over all indices j with  $j_{pref(Z')} < j < j_{pref(Z'\circ c)}$ . On the other hand, it follows from definition of safe(Z') that if  $i_{safe(Z')} \le |X|$ , then the minimum of  $next_X(c, i_{pref(Z^*)})$  over all strings  $Z^*$  in  $\mathcal{Z}^*$  such that  $j_{pref(Z^*)} = j_{pref(Z')} \le |X|$ , then the minimum of  $next_X(c, i_{pref(Z^*)})$  over all strings  $Z^*$  in  $\mathcal{Z}^*$  such that  $j_{pref(Z^*)} = j_{pref(Z')} \le |X|$ .

Based on Lemma 5, for any MCS-prefix Z', let any suff-match v such that  $pref(Z') \prec v \leq safe(Z')$  be called a witness (or  $c_v$ -witness) of Z'-extensibility. In addition, let any witness v of Z'-extensibility be called *prominent*, if there exists no witness v' of Z'-extensibility such that  $v' \leq v$ . For example, in the case of Figure 5, there exist three witnesses, (8, 12), (8, 14), and (11, 10), of Z'extensibility and only (8, 12) and (11, 10) are prominent due to  $(8, 12) \leq (8, 14)$ . Let ext(Z') denote the sequence of all prominent witnesses of Z'-extensibility in an arbitrary order. The reason why we introduce this sequence is as follows. For any character c with  $1 \le c \le \sigma$  and any c-witness v of Z'-extensibility, at least  $i_v = i_{pref(Z' \circ c)}$  or  $j_v = j_{pref(Z' \circ c)}$  due to  $pref(Z') \prec v$ . This implies that there exist at most two prominent c-witnesses of Z'-extensibility. Furthermore, there exists no prominent c-witness of Z'-extensibility if and only if there exists no c-witness of Z'-extensibility. This implies from Lemma 5 that c is Z'-extensible if and only if there exists a prominent c-witness of Z'-extensibility. Thus, to implement Algorithm Basic so as to run efficiently, we can concentrate on designing an efficient data structure that supports queries of ext(Z') for any MCS-prefix Z'. This is because if ext(Z') is available, then all Z'-extensible characters can be determined in time linear in the number of them.

The  $(\sigma n^2 \log n, n^2, \sigma n \log n)$ -algorithm of Conte et al. [9] can be thought of as adopting an  $O(n^2)$ -space data structure that supports  $O(\sigma \log n)$ -time queries of ext(Z'), which stores all suff-matches to search for a candidate of each of two possible prominent *c*-witnesses of Z'-extensibility in  $O(\log n)$  time. To propose  $(n^2, n^2, n)$ - and  $O(n^2, n, n \log n)$ -algorithms, we develop different data structures to efficiently support queries of ext(Z'). **Remark 3** The delay time achieved by the algorithm of Conte et al. [9] to output each MCS Z is  $O(\sigma|Z|\log n)$  rather than  $O(\sigma n \log n)$ . The space complexity of the algorithm is  $O(\sigma n/\log n + R)$  rather than  $O(n^2)$ , where R is the number of suff-matches. The preprocessing-time complexity is  $O(\sigma n + \sigma M \log n)$  rather than  $O(\sigma n^2 \log n)$ , where M is the number of matches. In contrast, our algorithms proposed in the subsequent sections are designed so that the efficiency depends only on n, independent of  $\sigma$ , |Z|, R, or M. Therefore, strictly speaking, it does not make sense to simply compare the efficiency of their algorithm and ours only with respect to n.

## 4.2 $O(n^2, n^2, n)$ -algorithm

As an implementation of Algorithm Basic based on Conte et al. [9]'s prefixextensible character test (Lemmas 5 and 6), we propose an  $O(n^2, n^2, n)$ -algorithm that solves the MCS enumeration problem, which we denote Algorithm Enum221.

Algorithm Enum221 utilizes an  $O(n^2)$ -time constructible data structure D221 supporting O(|ext(Z')|)-time queries of ext(Z') for any MCS-prefix Z'. Before proceeding to the design of D221, we observe below why this data structure works to output all distinct MCSs of X and Y one by one each in O(n) time.

To simulate Algorithm Basic, Algorithm Enum221 uses Table<sub>next/prev</sub> to support O(1)-time next/prev-queries and maintains  $pref(Z'\langle k])$ ,  $safe(Z'\langle k])$ , and  $alt(Z'\langle k])$  for all indices k with  $1 \leq k \leq |Z'|$  as well as Z', where alt(Z') denotes a sequence of all  $Z'\langle |Z'| - 1$ -extensible characters that are greater than Z'[|Z'|] in an arbitrary order. It is easy to simulate line 1 of Algorithm Basic because pref(Z') = (1, 1), safe(Z') = (|X|+1, |Y|+1), and alt(Z') is the empty sequence. Line 4 is simulated by using D221 to obtain ext(Z') in O(|ext(Z')|)time and scanning ext(Z') to both determine the least Z'-extensible character c and construct  $alt(Z' \circ c)$  in O(|ext(Z')|) time. Furthermore,  $Table_{next/prev}$ is used to obtain  $pref(Z' \circ c) = next(c, pref(Z'))$  in O(1) time and determine  $safe(Z' \circ c)$  based on Lemma 6 in  $O(a_{pref(Z' \circ c)} - a_{pref(Z')})$  time, where we note that  $a_{pref(Z'\circ c)} - a_{pref(Z')} = (i_{pref(Z'\circ c)} - i_{pref(Z')}) + (j_{pref(Z'\circ c)} - j_{pref(Z')})$ . The condition in line 7 holds if and only if alt(Z') is empty. Line 10 is simulated by scanning alt(Z') to decompose it into the least Z'-extensible character c in it and  $alt(Z'\langle |Z'|-1]\circ c)$  in  $O(|ext(Z'\langle |Z'|-1])|)$  time and using  $Table_{next/prev}$  to obtain  $pref(Z'\langle |Z'|-1] \circ c) = next(c, pref(Z'\langle |Z'|-1]))$  in O(1) time and determine  $safe(Z'\langle |Z'|-1]\circ c)$  based on Lemma 6 in  $O(a_{pref(Z'\langle |Z'|-1]\circ c)}-a_{pref(Z'\langle |Z'|-1])})$ time.

From the above implementation of Algorithm Basic adopted by Algorithm Enum221, each MCS Z' of X and Y is obtained in time linear in the sum of  $(a_{pref(Z'\langle k+1 \rangle)} - a_{pref(Z'\langle k \rangle)}) + |ext(Z'\langle k \rangle)|$  over all indices k with  $1 \le k \le |Z'| - 1$ . Since the sum of  $a_{pref(Z'\langle k+1 \rangle)} - a_{pref(Z'\langle k \rangle)}$  over all such indices k is equal to  $a_{Z'} - a_{Z'[1]} = a_{(|X|,|Y|)} - a_{(1,1)} = |X| + |Y| - 2 = O(n)$ , if  $|ext(Z'\langle k \rangle)| = O(a_{pref(Z'\langle k+1 \rangle)} - a_{pref(Z'\langle k \rangle)})$ , then each Z' is output in O(n) time. The following lemma ensures that this delay-time complexity is actually established.

**Lemma 7** For any MCS-prefix Z' and any Z'-extensible character c, the number of Z'-extensible characters is less than  $a_{pref(Z'\circ c)} - a_{pref(Z')}$ , implying that  $|ext(Z')| = O(a_{pref(Z'\circ c)} - a_{pref(Z')})$ .

**Proof** Let  $(i_1, j_1), (i_2, j_2), \ldots, (i_s, j_s)$  be matches  $pref(Z' \circ c)$  for all distinct Z'extensible characters c in ascending order of  $j_{pref(Z' \circ c)}$  (hence also in descending order of  $i_{pref(Z'\circ c)}$  due to  $pref(Z') \prec pref(Z'\circ c)$ ). For any index r with  $1 \leq r \leq s$ , both  $i_{pref(Z')} < i_s < i_{s-1} < \cdots < i_r$  and  $j_{pref(Z')} < j_1 < j_2 < \cdots < j_r$ . This implies that  $a_{(i_r,j_r)} - a_{pref(Z')} = (i_r - i_{pref(Z')}) + (j_r - j_{pref(Z')}) \geq ((s + 1) - r)) + r = s + 1$ .  $\Box$ 

Lemma 7 immediately yields its corollary as follows.

**Corollary 1** If D221 supports O(|ext(Z')|)-time queries of ext(Z') for any MCS-prefix Z', then Algorithm Enum221 uses O(n) space, excluding space for storing Table<sub>next/prev</sub> and D221, to output all distinct MCSs of X and Y one by one each in O(n) time.

To achieve O(|ext(Z')|)-time queries of ext(Z') for any MCS-prefix Z', we define data structure D221 as follows.

**Definition 2** For any index i with  $1 \leq i \leq |X|$ , let  $Suff_i$  denote the sequence of |Y| indices such that for any index j with  $1 \leq j \leq |Y|$ ,  $Suff_i[j]$  is the least index i' with  $i \leq i' \leq |X|$  such that (i', j) is a suff-match, if any, or |X| + 1, otherwise (see Figure 6). Let D221 consist of sequences  $Suff_i$  and the RMQ data structures  $RMQ_{Suff_i}$  for all indices i with  $1 \leq i \leq |X|$ , which is hence of size  $O(n^2)$ .

If D221 is available, then each element v in ext(Z') can be obtained in O(1) in descending order of  $j_v$  inductively as stated below.

**Lemma 8** Let Z' be an arbitrary MCS-prefix and let  $i = i_{pref(Z')} + 1$ . Let  $j_1 \circ j_2 \circ \cdots \circ j_\ell$  be the sequence of indices such that  $j_1 = RMQ_{Suff_i}(j_{pref(Z')} + 1 : \min(j_{safe(Z')}, |Y|)), j_r = RMQ_{Suff_i}(j_{pref(Z')} + 1 : j_{r-1} - 1)$  for any index r with  $2 \le r \le \ell$ ,  $Suff_i[j_\ell] \le \min(i_{safe(Z')}, |X|)$ , and either  $j_\ell = j_{pref(Z')} + 1$  or  $Suff_i[RMQ_{Suff_i}(j_{pref(Z')} + 1 : j_\ell - 1)] > \min(i_{safe(Z')}, |X|)$ . Sequence ext(Z') consists of suff-matches ( $Suff_i[j_r], j_r$ ) for all indices r with  $1 \le r \le \ell$ .

**Proof** Let ext(Z') consist of prominent witnesses  $v_1, v_2, \ldots, v_{|ext(Z')|}$  of Z'-extensibility with  $j_{v_1} > j_{v_2} > \cdots > j_{v_{|ext(Z')|}}$ . Let r be an arbitrary index with  $1 \leq r \leq |ext(Z')|$ . Since  $v_r$  is prominent,  $Suff_i[j_{v_r}] = i_{v_r}$  and there exists no suff-match v such that  $j_{pref(Z')} + 1 \leq j_v \leq j_{v_r} - 1$  and  $i_{pref(Z')} + 1 \leq i_v \leq i_{v_r}$ . Furthermore, if r = 1, then there exists no suff-match v such that  $j_{v_r} < j_v \leq min(j_{safe(Z')}, |Y|)$  and  $i_{pref(Z')} + 1 \leq i_v < i_{v_1}$ ; otherwise, there exists no suff-match v such that  $j_{v_r} + 1 \leq j_v \leq j_{v_{r+1}} - 1$  and  $i_{pref(Z')} + 1 \leq i_v < i_{v_r}$ . Therefore, it can be proven by induction that  $j_{v_r} = j_r$ . Since  $i_{v_{|ext(Z')|}} \leq min(i_{safe(Z')}, |X|)$  and there exists no suff-match v such that  $j_{pref(Z')} + 1 \leq j_v \leq j_{v_{r+1}} - 1$  and  $i_{pref(Z')} + 1 \leq j_v \leq j_{v_{|ext(Z')|}} - 1$  and  $i_{pref(Z')} + 1 \leq i_v \leq min(i_{safe(Z')}, |X|)$ ,  $|ext(Z')| = \ell$ .  $\Box$ 

According to Lemma 8, we can obtain ext(Z') in O(|ext(Z')|) time using D221. Thus, we have the following corollary of the lemma.

**Corollary 2** D221 supports O(|ext(Z')|)-time queries of ext(Z') for any MCS-prefix Z'.

Algorithm Enum221 prepares data structure D221 by constructing sequence  $Suff_i$  inductively for each index i from |X| - 1 to 1 in descending order using Procedure UpdateSuff $(i, Suff_{i+1})$  presented in Figure 7, where the initial

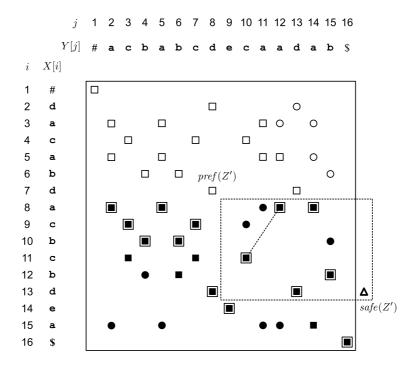


Figure 6: Sequence  $Suff_i = 17 \circ 8 \circ 9 \circ 10 \circ 8 \circ 10 \circ 9 \circ 13 \circ 14 \circ 11 \circ 17 \circ 8 \circ 13 \circ 8 \circ 12 \circ 16$ with  $i = i_{pref(Z')} + 1$  (= 8) and  $ext(Z') = (8, 12) \circ (11, 10)$  for the same X, Y, and Z' as Figure 4, where open (resp. solid) bullets indicate matches w with  $i_w < i$  (resp.  $i_w \ge i$ ), double-edged bullets indicate matches ( $Suff_i[j], j$ ), and the matches ( $Suff_i[j], j$ ) composing ext(Z') are connected by a dotted line

sequence  $Suff_{|X|} = (|X|+1) \circ (|X|+1) \circ \cdots \circ (|X|+1) \circ |X|$  is constructed from scratch. Once each  $Suff_i$  is obtained,  $RMQ_{Suff_i}$  can be constructed in O(n) time [5].

**Lemma 9** For any index i with  $1 \le i \le |X| - 1$ , if  $Table_{next/prev}$  and  $Suff_{i+1}$  are available, then Procedure UpdateSuff(i,  $Suff_{i+1}$ ) outputs  $Suff_i$  in O(n) time.

**Proof** For any index j with  $1 \leq j \leq |Y|$ , if (i, j) is a suff-match, then  $Suff_i[j] = i$ ; otherwise,  $Suff_i[j] = Suff_{i+1}[j]$ . Furthermore, for any index j' with  $1 \leq j' \leq |Y|$ , (i, j') is a suff-match if and only if there exists an index j with  $j' < j \leq |Y|$  such that  $(Suff_{i+1}[j], j)$  is a match (i.e.,  $Suff_{i+1}[j] \neq |X|+1$ ),  $prev_Y(X[i], j) = j'$ , and  $prev_X(X[i], Suff_{i+1}[j]) = i$ . Thus, the procedure determines  $Suff_i$  correctly. Since  $Table_{next/prev}$  supports O(1)-time next/prev-queries, the procedure runs in O(n) time.  $\Box$ 

Lemma 9 immediately implies that the following corollary holds.

**Corollary 3** D221 can be constructed in  $O(n^2)$  time.

Consequently, from Corollaries 1, 2, and 3, we have the following theorem.

**Theorem 2** Algorithm Enum221 is an  $(n^2, n^2, n)$ -algorithm that solves the MCS enumeration problem.

- 1:  $Suff_i \leftarrow Suff_{i+1};$
- 2: for each index j from 1 to |Y|,
- 4:  $Suff_i[prev_Y(X[i], j)] \leftarrow i;$
- 5: output  $Suff_i$ .

Figure 7: Procedure UpdateSuff $(i, Suff_{i+1})$ 

## 4.3 $O(n^2, n, n \log n)$ -algorithm

As another implementation of Algorithm Basic based on Conte et al. [9]'s prefixextensible character test (Lemmas 5 and 6), we propose an  $O(n^2, n, n \log n)$ algorithm that solves the MCS enumeration problem, which we denote Algorithm Enum211.

For any MCS-prefix Z', let step(Z') denote the minimum of  $a_{pref(Z'\circ c)} - a_{pref(Z')}$  over all Z'-extensible characters c. Algorithm Enum211 is almost the same as Algorithm Enum221. The only difference is that Algorithm Enum211 uses  $Index_{next/prev}$  for supporting  $O(\log n)$ -time next/prev-queries and a data structure D211 of size O(n) that supports  $O(step(Z')\log n)$ -time queries of ext(Z'). From this, we immediately have a lemma corresponding to Corollary 1 as follows.

**Lemma 10** If D211 is of size O(n) and supports  $O(step(Z') \log n)$ -time queries of ext(Z') for any MCS-prefix Z', then Algorithm Enum211 uses O(n) space, including space for storing Index<sub>next/prev</sub> and D211, to output all distinct MCSs of X and Y one by one each in  $O(n \log n)$  time.

Below we develop data structure D211, which is of size O(n) and supports  $O(step(Z') \log n)$ -queries of ext(Z') for any MCS-prefix Z'. Our idea for achieving the design of such a data structure is to classify all matches into O(n) types based on their "character-wise diagonal coordinates" and determine a certain unique suff-match for each type to support O(1)-time queries of whether w is a suff-match for any match w. For any match w, let  $\hat{i}_w$  (resp.  $\hat{j}_w$ ) denote the number of indices i (resp. j) with  $1 \leq i \leq i_w$  (resp.  $1 \leq j \leq j_w$ ) such that  $X[i] = c_w$  (resp.  $j(j) = c_w$ ), so that  $i_w$  (resp.  $j_w$ ) is the  $\hat{i}_w$ th (resp.  $\hat{j}_w$ th) least such index i (resp. j). Furthermore, let  $\hat{d}_w$  (resp.  $\hat{a}_w$ ) denote  $\hat{j}_w - \hat{i}_w$  (resp  $\hat{i}_w + \hat{j}_w$ ), which is called the *character-wise diagonal* (resp. anti-diagonal) coordinate of w. The key observation is stated in the following lemma, which claims that there exists a threshold with respect to the character-wise anti-diagonal coordinate that separates the same type matches into suff-matches and others.

**Lemma 11** For any suff-match w and any match v such that  $c_v = c_w$ ,  $\hat{d}_v = \hat{d}_w$ , and  $\hat{a}_v < \hat{a}_w$ , v is also a suff-match.

**Proof** For any string Z'' such that suff(Z'') = w,  $v = suff(c_w(\hat{a}_v - \hat{a}_w)/2 \circ Z'')$ , where  $c_w(\hat{a}_v - \hat{a}_w)/2$  is the string consisting only of  $(\hat{a}_v - \hat{a}_w)/2$  copies of  $c_w$ .  $\Box$ 

For any character c and any index  $\hat{d}$ , let  $th(c, \hat{d})$  denote the suff-match w with  $c_w = c$  and  $\hat{d}_w = \hat{d}$  that has the greatest  $\hat{a}_w$ , if any, or a virtual suff-match

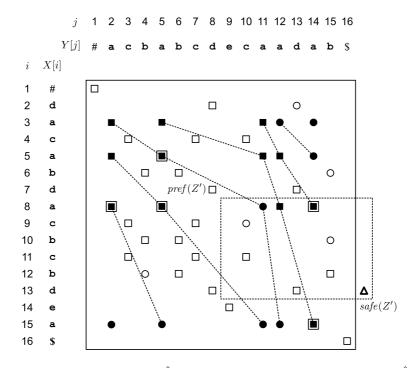


Figure 8: Suff-matches  $th(\mathbf{a}, \hat{d})$ , excluding virtual ones, with  $-3 \leq \hat{d} \leq 4$  (double edged), which defines  $\hat{I}_{\mathbf{a}}^{th} = 3 \circ 3 \circ 3 \circ 2 \circ 4 \circ 3 \circ 0 \circ 0$  and  $\hat{J}_{\mathbf{a}}^{th} = 0 \circ 1 \circ 2 \circ 2 \circ 5 \circ 5 \circ 3 \circ 4$ , for the same X, Y, and Z' as Figure 4, where solid (resp. open) bullets indicate matches w with  $c_w = \mathbf{a}$  (resp.  $c_w \neq \mathbf{a}$ ) and each line or polygonal line connects matches w with  $c_w = \mathbf{a}$  having the same character-wise diagonal coordinate  $\hat{d}_w$ 

 $(\max(0, -\hat{d}), \max(0, \hat{d}))$ , otherwise (see Figure 8). Lemma 11 implies that we can determine whether any match w is a suff-match only from  $\hat{\imath}_{w^{\star}}$  (resp.  $\hat{\jmath}_{w^{\star}}$ ), where  $w^{\star} = th(c_w, \hat{d}_w)$ . That is, w is a suff-match if and only if  $\hat{a}_w \leq \hat{a}_{w^{\star}}$ , which holds if and only if  $\hat{\imath}_w \leq \hat{\imath}_{w^{\star}}$  (resp.  $\hat{\jmath}_w \leq \hat{\jmath}_{w^{\star}}$ ) due to  $\hat{d}_w = \hat{d}_{w^{\star}}$ . Based on this observation, we define D211 as follows.

**Definition 3** For any character c with  $1 \le c \le \sigma$ , let  $\#_{X,c}$  (resp.  $\#_{Y,c}$ ) denote the number of indices i (resp. j) with  $1 \le i \le |X|$  (resp.  $1 \le j \le |Y|$ ) such that X[i] = c (resp. Y[j] = c). Furthermore, let  $\hat{I}_c^{th}$  (resp.  $\hat{J}_c^{th}$ ) denote the sequence of  $\#_{X,c} + \#_{Y,c} - 1$  indices such that  $\hat{I}_c^{th}[\hat{d} + \#_{X,c}] = \hat{\imath}_{w^*}$  (resp.  $\hat{J}_c^{th}[\hat{d} + \#_{X,c}] =$  $\hat{\jmath}_{w^*}$ ) for any index  $\hat{d}$  with  $1 - \#_{X,c} \le \hat{d} \le \#_{Y,c} - 1$ , where  $w^* = th(c, \hat{d})$ . D211 consists of sequences  $\hat{I}_c^{th}$  and  $\hat{J}_c^{th}$  and their range maximum query data structures  $RMQ_{-\hat{I}_c^{th}}$  and  $RMQ_{-\hat{J}_c^{th}}$  for all characters c with  $1 \le c \le \sigma$ . (As auxiliary data, D211 also contains sequence  $\hat{I}$  of length |X| (resp.  $\hat{J}$  of length |Y|), sequence  $\#_X$  (resp.  $\#_Y$ ) of length  $\sigma$ , and sequences  $I_c$  of length  $\#_{X,c}$  (resp.  $J_c$  of length  $\#_{Y,c}$ ) for all characters c with  $1 \le c \le \sigma$  such that for any match w,  $\hat{I}[i_w] = \hat{\imath}_w$ (resp.  $\hat{J}[j_w] = \hat{\jmath}_w$ ),  $\#_X[c_w] = \#_{X,c_w}$  (resp.  $\#_Y[c_w] = \#_{Y,c_w}$ ), and  $I_{c_w}[\hat{\imath}_w] = i_w$ (resp.  $J_c[\hat{\jmath}_w] = j_w$ ), which all can be prepared by a single scan of X (resp. Y) in O(n) time and O(n) space.) For any MCS-prefix Z', let any character c such that  $X[i_{pref(Z')} + 1\rangle$  and  $Y[j_{pref(Z')} + 1\rangle$  share c and  $pref(Z') \prec pref(Z' \circ c)$  be called a Z'-extensible character candidate. Hence, for any match w with pref(Z') < w, if  $pref(Z') \prec w$  does not hold, then there exists a Z'-extensible character candidate c such that  $pref(Z' \circ c) < w$ . This implies that any Z'-extensible character is a Z'-extensible character candidate c, there exist at most two candidates of prominent c-witnesses of Z'-extensibility. One candidate is the suff-match  $v_{\leftarrow}$  such that  $i_{v_{\leftarrow}} = i_{pref(Z'\circ c)}$  and  $j_{v_{\leftarrow}}$  is the least possible j with  $j_{pref(Z'\circ c)} \leq j \leq j_{safe(Z')}$  and Y[j] = c, if any. The other candidate is the suff-match  $v_{\uparrow}$  such that  $j_{v_{\uparrow}} = j_{pref(Z'\circ c)}$  and  $i_{v_{\uparrow}}$  is the least possible i with  $i_{pref(Z'\circ c)} \leq i \leq i_{safe(Z')}$  and X[i] = c, if any. We call these at most two existing candidates the prominent c-witness candidates of Z'-extensibility. Note that for any such candidate v,  $pref(Z') \prec v$  if and only if v is a prominent c-witness of Z'-extensibility. We use D211 to search for the prominent c-witness candidates c based on the following lemma.

**Lemma 12** For any MCS-prefix Z' and any Z'-extensible character candidate c, if Index<sub>next/prev</sub> is available, then D211 can be used to search for any of the prominent c-witness candidates of Z'-extensibility in  $O(\log n)$  time.

**Proof** Since the candidate  $v_{\uparrow}$  with  $j_{v_{\uparrow}} = j_{pref(Z'\circ c)}$  can be searched for in a symmetric manner, we show how to search for the candidate  $v_{\leftarrow}$  with  $i_{v_{\leftarrow}} = i_{pref(Z'\circ c)}$  in  $O(\log n)$  in time.

Let  $w_{\vdash} = pref(Z' \circ c)$  and let  $w_{\dashv}$  be the match  $(i_{pref(Z' \circ c)}, j_{\dashv})$ , where  $j_{\dashv}$  is the greatest index with  $j_{pref(Z' \circ c)} \leq j_{\dashv} \leq j_{safe(Z')}$  such that  $Y[j_{\dashv}] = c$ . These two matches can be determined in  $O(\log n)$  time using  $Index_{next/prev}$ . Since  $v_{\leftarrow}$  is the suff-match v having the least possible  $j_v$  such that  $i_v = i_{w_{\vdash}}$  and  $j_{w_{\vdash}} \leq j_v \leq j_{w_{\dashv}}, v_{\leftarrow}$  exists if and only if there exists a suff-match v such that  $i_v = i_{w_{\vdash}}$  and  $j_{w_{\vdash}} \leq j_v \leq j_{w_{\dashv}}$ . Such a suff-match v exists if and only if there exists a character-wise diagonal coordinate  $\hat{d}$  with  $\hat{d}_{w_{\vdash}} \leq \hat{d} \leq \hat{d}_{w_{\dashv}}$  such that  $\hat{u}_{w_{\vdash}} \leq \hat{i}_{th(c,\hat{d})}$ . Furthermore, such a  $\hat{d}$  exists if and only if

$$\hat{\imath}_{w_{\vdash}} \leq \hat{I}_{c}^{th} [RMQ_{-\hat{I}^{th}} (\hat{d}_{w_{\vdash}} + \#_{X,c} : \hat{d}_{w_{\dashv}} + \#_{X,c})].$$

Thus, D211 can be used to determine whether  $v_{\leftarrow}$  exists in O(1) time. If  $v_{\leftarrow}$  exists, then  $\hat{j}_{w_{\vdash}} \leq \hat{j}_{w_{\dashv}} \leq \hat{j}_{w_{\dashv}}$ . Hence, we can use D211 to determine  $\hat{j}_{v_{\leftarrow}}$  in  $O(\log n)$  time by a binary search based on the fact that for any indices  $\hat{j}, \hat{j}'$ , and  $\hat{j}''$  with  $\hat{j}_{w_{\vdash}} \leq \hat{j} \leq \hat{j}' \leq \hat{j}'' \leq \hat{j}_{w_{\dashv}}$  such that  $\hat{j} \leq \hat{j}_{v_{\leftarrow}} \leq \hat{j}''$ , if

$$\hat{\imath}_{w_{\vdash}} \leq I_{c}^{th}[RMQ_{-\hat{I}_{-}^{th}}((\hat{\jmath} - \hat{\imath}_{w_{\vdash}}) + \#_{X,c} : (\hat{\jmath}' - \hat{\imath}_{w_{\vdash}}) + \#_{X,c})],$$

then  $\hat{j} \leq \hat{j}_{v_{\leftarrow}} \leq \hat{j}'$ ; otherwise,  $\hat{j}' + 1 \leq \hat{j}_{v_{\leftarrow}} \leq \hat{j}''$ .  $\Box$ 

As stated in the following lemma, the number of Z'-extensible character candidates is appropriately small for our purpose, and all are found efficiently.

**Lemma 13** For any MCS-prefix Z', the number of Z'-extensible character candidates is less than step(Z'). If  $Index_{next/prev}$  is available, then the sequence of matches  $pref(Z' \circ c)$  for all Z'-extensible character candidates c in ascending order of  $j_{pref(Z'\circ c)}$  (hence also in descending order of  $i_{pref(Z'\circ c)}$ ) can be determined in  $O(step(Z')\log n)$  time.

- 1:  $Suff_i \leftarrow Suff_{i+1};$
- 2:  $i_{next} \leftarrow next_X(X[i], i)$ , which is determined by scanning  $X[i+1\rangle$ ;
- 3:  $j_{prev} \leftarrow 0$ ;
- 4: for each index j from 1 to |Y|,
- 5: if  $Suff_{i+1}[j] \neq |X| + 1$ ,  $j_{prev} \ge 1$ , and  $Suff_{i+1}[j] \le i_{next}$ , then
- 6:  $Suff_i[j_{prev}] \leftarrow i;$
- 7: if Y[j] = X[i], then
- 8:  $j_{prev} \leftarrow j;$
- 9: output  $Suff_i$ .

Figure 9: Procedure UpdateSuff2 $(i, Suff_{i+1})$ 

**Proof** Let  $S = (i_1, j_1) \circ (i_2, j_2) \circ \cdots \circ (i_s, j_s)$  be the sequence of matches in the lemma. By an argument similar to the proof of Lemma 7, for any index r with  $1 \leq r \leq s$ ,  $a_{(i_r, j_r)} - a_{pref(Z')} \geq s + 1$ . This implies that s < step(Z').

To construct S, we repeatedly extend either prefix  $S\langle p|$  to  $S\langle p+1|$ , if  $a_{(i_p,j_p)} \geq a_{(i_q,j_q)}$ , or suffix  $S[q\rangle$  to  $S[q-1\rangle$ , otherwise, until S[p] = S[q]. Let  $(i_t, j_t)$  be determined to extend either  $S\langle q-1|$  to  $S\langle q|$  or  $S[p+1\rangle$  to  $S[p\rangle$  in the last iteration. Due to the condition as to whether  $S\langle p|$  or  $S[q\rangle$  should be extended,  $a_{(i_t,j_t)} - a_{pref(Z')} = step(Z')$ . For any index p with  $0 \leq p \leq t-1$ ,  $(i_{p+1}, j_{p+1})$  can be determined in  $O((j_{p+1}-j_p)\log n)$  time by finding  $j_{p+1}$ , which is the least index j with  $j_p < j$  such that  $next_X(Y[j], i_{pref(Z')}) < i_p$ , and setting  $i_{p+1}$  to  $next_X(Y[j_{p+1}], i_{pref(Z')})$ , where  $i_0 = |X| + 1$  and  $j_0 = j_{pref(Z')}$ . Therefore, it takes  $O((j_t - j_{pref(Z')})\log n)$  time to obtain  $S\langle t|$ . Analogously, it takes  $O((i_t - i_{pref(Z')})\log n)$  time to obtain  $S[t\rangle$ , completing the proof.  $\Box$ 

From Lemmas 12 and 13, we can obtain ext(Z') for any MCS-prefx Z' in  $O(step(Z') \log n)$  time as follows.

**Lemma 14** For any MCS-prefix Z', if  $Index_{next/prev}$  and D211 are available, then ext(Z') can be obtained in  $O(step(Z') \log n)$  time.

**Proof** Let  $S = (i_1, j_1) \circ (i_2, j_2) \circ \cdots \circ (i_s, j_s)$  be the same sequence of matches as in the proof of Lemma 13, which is hence of length at most step(Z') and obtained in  $O(step(Z') \log n)$  time. Let r be an arbitrary index with  $1 \le r \le s$ . Let v be an arbitrary prominent  $c_{(i_r, j_r)}$ -witness candidate of Z'-extensibility, which can be obtained in  $O(\log n)$  time by Lemma 12. There exists an index p (resp. q) with  $1 \le p \le r - 1$  (resp.  $r + 1 \le q \le s$ ) such that  $(i_p, j_p) < v$ (resp.  $(i_q, j_q) < v$ ) if and only if  $(i_{r-1}, j_{r-1}) < v$  (resp.  $(i_{r+1}, j_{r+1}) < v$ ). Thus, whether v is a witness of Z'-extensibility can be determined in O(1) time.  $\Box$ 

We construct D211 in a straightforward manner by enumerating all suffmatches. To do this in  $O(n^2)$  time and O(n) space, we modify Procedure UpdateSuff so as to run in O(n) time without using  $Table_{next/prev}$  as follows.

**Lemma 15** D211 can be constructed in  $O(n^2)$  time and O(n) space.

**Proof** We initialize all elements  $\hat{I}_c^{th}[\hat{d} + \#_{X,c}]$  (resp.  $\hat{J}_c^{th}[\hat{d} + \#_{X,c}]$ ) of  $\hat{I}_c^{th}$ (resp.  $\hat{J}_c^{th}$ ) to max $(0, -\hat{d})$  (resp. max $(0, \hat{d})$ ). This can be done in O(n) time. Then, for each suff-match v, if  $\hat{I}_{c_v}^{th}[\hat{d}_v + \#_{X,c_v}] < \hat{\imath}_v$  (resp.  $\hat{J}_{c_v}^{th}[\hat{d}_v + \#_{X,c_v}] < \hat{\jmath}_v$ ), then the value of  $\hat{I}_{c_v}^{th}[\hat{d}_v + \#_{X,c_v}]$  (resp.  $\hat{J}_{c_v}^{th}[\hat{d}_v + \#_{X,c_v}]$ ) is updated to  $\hat{i}_v$ (resp.  $\hat{j}_v$ ). All suff-matches are enumerated by inductively constructing Suff<sub>i</sub> for each index i with  $1 \leq i \leq |X| - 1$  in descending order after  $Suff_{|X|}$  is constructed from scratch. We use Procedure UpdateSuff2 $(i, Suff_{i+1})$  in Figure 9 to obtain  $Suff_i$  from  $Suff_{i+1}$ . This procedure uses variables  $i_{next}$  and  $j_{prev}$  to maintain indices  $next_X(X[i], i)$  and  $prev_Y(X[i], j)$ , respectively. Variable  $i_{next}$ is determined by line 2 of the procedure in O(n) time while variable  $j_{prev}$  is maintained dynamically according to the value of variable j by lines 3, 7, and 8. Since  $(Suff_{i+1}[j], j)$  is a match and  $prev_X(X[i], Suff_{i+1}[j]) = i$  if and only if  $Suff_{i+1}[j] \neq |X| + 1$  and  $Suff_{i+1}[j] \leq i_{next}$ , we can prove that Procedure UpdateSuff2 $(i, Suff_{i+1})$  outputs Suff<sub>i</sub> in O(n) time by the same argument as the proof of Lemma 9. Once  $Suff_i$  is obtained, all suff-matches w with  $i_w = i$ can be extracted from it in O(n) time. Thus, all suff-matches can be enumerated in  $O(n^2)$  time and O(n) space.  $\Box$ 

Lemmas 10, 14, and 15 immediately yield the following theorem.

**Theorem 3** Algorithm Enum211 is an  $(n^2, n, n \log n)$ -algorithm that solves the MCS enumeration problem.

## 5 Conclusion

This article considered the problem of enumerating maximal common subsequences (MCSs) of two strings. For any positive integer n and any pair of strings both of length O(n),  $(n^3, n^3, n)$ -,  $(n^2, n^2, n)$ -, and  $(n^2, n, n \log n)$ -algorithms for this problem were proposed, where an  $(f_p(n), f_s(n), f_d(n))$ -algorithm outputs all distinct MCSs of the two strings each in  $O(f_d(n))$  time after performing an  $O(f_p(n))$ -time preprocessing to prepare a data structure of size  $O(f_s(n))$ . Although the  $(n^3, n^3, n)$ -time algorithm is inferior to the  $(n^2, n^2, n)$ -algorithm in terms of efficiency, the data structure constructed by the  $(n^3, n^3, n)$ -time algorithm allows access to only all distinct MCSs without explicitly enumerating them, so it can be used to efficiently find or enumerate certain special MCSs, such as quasi-LCSs and most stable MCSs.

An interesting question remains as to whether it is possible to efficiently enumerate MCSs for an arbitrary number of strings. This is because a naive generalization of any of the algorithms proposed in this article would result in a data structure that is exponential in size with respect to the number of strings. If MCSs of multiple strings are enumerable with the preprocessing-time, space, and delay-time complexities polynomial in the number and length of the strings, then we can treat all common subsequences, including LCSs, which are NP-hard to find, as included in the search scope for significant structures shared by the strings.

## Acknowledgment

This work was supported by JSPS KAKENHI Grant Number JP23K10975.

## References

- A. Abboud, A. Backurs, V.V. Williams, Tight hardness results for LCS and other sequence similarity measures, 2015 IEEE 56th Annual Symposium on Foundations of Computer Science, pp. 59–78 (2015)
- [2] A. Apostolico, Improving the worst-case performance of the Hunt-Szymanski strategy for the longest common subsequence of two strings, Inform. Process. Lett. 23 (1986) 63–69.
- [3] A. Apostolico and C. Guerra, The longest common subsequence problem revisited, Algorithmica 2 (1987) 315–336.
- [4] P. Beame, F.E. Fich, Optimal bounds for the predecessor problem and related problems, J. Comput. Syst. Sci. 65 (2002) 38–72.
- [5] M.A. Bender, M. Farach-Colton, The LCA problem revised, LATIN 2000, G. Gonnet, D. Panario, A. Viola, eds., LNCS 1776, 88–94, 2000.
- [6] Y.-C. Chen, K.-M. Chao, On the generalized constrained longest common subsequence problems, J. Combinatorial Optimization 21 (2011) 383–392.
- [7] F.Y.L. Chin, A. De Santis, A. Ferrara, N.L. Ho, S.K. Kim, A simple algorithm for the constrained sequence problems, Inform. Process. Lett. 90 (2004) 175–179.
- [8] F.Y.L. Chin, C.K. Poon, A fast algorithm for computing longest common subsequences of small alphabet size, J. Inform. Process. 13 (1990) 463–469.
- [9] A. Conte, R. Grossi, G. Punzi, T.Uno, Enumeration of maximal common subsequence between two strings, Algorithmica 84 (2022) 757–783.
- [10] S. Deorovicz, Quadratic-time algorithm for a string constrained LCS problem, Infor. Process. Lett. 112 (2012) 423–426.
- [11] C.B. Fraser, R.W.Irving, M. Middendorf, Maximal common subsequences and minimal common supersequences, Infor. Comput. 124 (1996) 145–153.
- [12] Z. Gotthilf, D. Hermelin, G.M. Landau, M. Lewenstein, Restricted LCS, in: Proc. International Symposium on String Processing and Information Retrieval, 2010, pp. 250–257.
- [13] J.Y. Guo, F.K. Hwang, An almost-linear time and linear space algorithm for the longest common subsequence problem, Inform. Process. Lett. 94 (2005) 131–135.
- [14] D.S. Hirschberg, A linear space algorithm for computing maximal common subsequences, Commun. ACM 18 (1975) 341–343.
- [15] J.W. Hunt, T.G. Szymanski, A fast algorithm for computing longest common subsequences, Comm. ACM 20 (1977) 350–353.
- [16] C.S. Iliopoulos, M.S. Rahman, A new efficient algorithm for computing the longest common subsequence, Theory Comput. Syst. 45 (2009) 355–371.

- [17] D. Maier, The complexity of some problems on subsequences and supersequences, J. ACM 25 (1978) 322–336.
- [18] W,J. Masek, M.S. Paterson, A faster algorithm for computing string edit distances, J. Compt. Syst. Sci. 20 (1980) 18–31.
- [19] E.W. Myers, An O(nd) difference algorithm and its variations, Algorithmica 1 (1986) 251–266.
- [20] N. Nakatsu, Y. Kambayashi, S. Yajima, A longest common subsequence algorithm suitable for similar text strings, Acta Informatica 18 (1982) 171– 179.
- [21] C. Rick, New algorithms for the longest common subsequence problem, Research Report No. 85123-CS, University of Bonn (1994).
- [22] Y. Sakai, Maximal common subsequence algorithms, Theor. Comput. Sci. 793 (2019) 132–139.
- [23] Y.-T. Tsai, The constrained longest common subsequence problem, Inform. Process. Lett. 88 (2003) 173–176.
- [24] R.A. Wagner, M.J. Fischer, The string-to-string correction problem, J. ACM 21 (1974) 168–173.
- [25] L. Wang, X. Wang, Y. Wu, D. Zhu, A dynamic programming solution to a generalized LCS problem, Infor. Process. Lett. 113 (2013) 723–728.