# **XDLM:** Cross-lingual Diffusion Language Model for Machine Translation

Linyao Chen<sup>1</sup>, Aosong Feng<sup>2</sup>, Boming Yang<sup>1</sup>, Zihui Li<sup>1</sup>

<sup>1</sup>University of Tokyo, <sup>2</sup>Yale University chen-linyao217@g.ecc.u-tokyo.ac.jp

#### Abstract

Recently, diffusion models have excelled in image generation tasks and have also been applied to neural language processing (NLP) for controllable text generation. However, the application of diffusion models in a cross-lingual setting is less unexplored. Additionally, while pretraining with diffusion models has been studied within a single language, the potential of cross-lingual pretraining remains understudied. To address these gaps, we propose XDLM, a novel Cross-lingual diffusion model for machine translation, consisting of pretraining and fine-tuning stages. In the pretraining stage, we propose TLDM, a new training objective for mastering the mapping between different languages; in the fine-tuning stage, we build up the translation system based on the pretrained model. We evaluate the result on several machine translation benchmarks and outperformed both diffusion and Transformer baselines. Our code is available in https://github.com/Amayama/XDLM.

#### **1** Introduction

Diffusion-based generative models, or diffusion models (Ho et al., 2020), have recently demonstrated substantial potential for generating highquality output in computer vision (CV). Furthermore, several recent studies have explored their application in natural language processing (NLP), including generation tasks such as machine translation, text summarization, and controllable text generation (Li et al., 2022; Zheng et al., 2023; Gao et al., 2022). Notably, GENIE (Lin et al., 2022) proposes the use of pretraining on diffusion models, leveraging large English corpora and subsequent fine-tuning on downstream tasks. However, there is a lack of research investigating the cross-lingual application of diffusion models, particularly in the context of pretraining.

There are two types of diffusion models: discrete and continuous. Some works focused on the discrete nature of text and have attempted to extend diffusion models to generate high-quality text. The discrete diffusion (Austin et al., 2021; Hoogeboom et al., 2021) model was initially proposed to generate text samples, solved by denoising and resetting the mask state for each token step by step. In the other hand, the continuous diffusion model (Li et al., 2022) was introduced later, which added additional embedding and rounding steps to transform discrete tokens into continuous latent representations, enabling gradient-based methods for controllable text generation. Then, GENIE model (Lin et al., 2022) involves integrating the diffusion model with a Transformer-based model, which resulted in a large-scale language pre-training model based on the diffusion framework. Furthermore, the Difformer model (Gao et al., 2022) has improved the existing diffusion methods by updating the loss function, adding a layer normalization and a noise factor, to establish a more stable diffusion process. (Zheng et al., 2023) introduce a trick of reparameterization to the discrete diffusion, contributing to a simplified training process and a flexible sampling process. Inspired by GENIE, we propose to apply pretraining in a cross-lingual setting with continuous diffusion.

In this paper, we examine the properties of a large-scale multilingual corpus and propose the implementation of cross-lingual pre-training denoising tasks to construct a framework for a crosslingual diffusion model, termed as Cross-Lingual Diffusion Language Model (XDLM). XDLM specifically designs a cross-lingual pre-training task and corresponding objective for multilingual data, enabling the diffusion model to comprehend the mapping relationships between various languages. To the best of our knowledge, this is the inaugural attempt to introduce the concept of crosslingual pretraining to diffusion-based models.

The principal contributions of this work can be summarized as follows:

- We introduce XDLM, the first architecture to the best of our knowledge aiming to incorporate cross-lingual pretraining into diffusionbased text generation.
- We propose a pre-training task, Translation Diffusion Language Modeling (TDLM), along with a corresponding loss function. These enhancements augment the model's capacity to capture contextual correlations across various language domains. We also provide a discussion on potential issues.

# 2 Cross-Lingual Diffusion Language Model

In this section, we present the Cross-lingual Diffusion Language Model (XDLM), which incorporates a pretraining phase on cross-lingual data, utilizing diffusion techniques for the purpose of non-autoregressive machine translation, and a finetuning phase generating corresponding text from one language to another language based on the pretrained model.

**Non-AutoRegressive (NAR) Machine Translation** In machine translation, given the input sequence from a source language  $X = \{x_1, x_2, \ldots, x_{|X|}\}$ , the task is to generate the output sequence of the translation in the target language  $Y = \{y_1, y_2, \ldots, y_{|Y|}\}$ . In this work, we focus on the Non-AutoRegressive (NAR) translation setting with the diffusion model. Typically, it has the following conditional probability:

$$p_{\theta}(Y|X) = \prod_{i=1}^{|Y|} p_{\theta}(y_i|X).$$

Unlike AutoRegressive (AR) text generation, all tokens  $y_i (0 \le i \le |Y|)$  in the generated sequence Y are predicted concurrently. The generation solely depends on the input sequence X, without any dependency on preceding tokens. This attribute presents a challenge in determining the length of the generated sequence. To address this issue, the length prediction of the output sequence is introduced as an auxiliary task (Gu et al., 2017). And the training loss is defined as a weighted sum between the translation loss and the length prediction loss. We apply length prediction in our finetuning phase following RDM(Zheng et al. (2023)).

**Diffusion Models** The Denoising Diffusion Probabilistic Model (DDPM) (Ho et al., 2020) is a parametrized Markov chain, and it is trained using variational inference to generate samples that match the original input data. The diffusion process comprises a noise-adding forward process and a noise-removing backward process, both of which can be viewed as discrete-time Markov processes. During the forward process, the model gradually introduces random noise with different scheduled variance  $\beta_1, ..., \beta_t$ , with the aim of generating a standard Gaussian noise  $x_t$  after t turns. This can be formalized as follows:

$$q(x_{t+1}|x_t) = \mathcal{N}(x_{t+1}; \sqrt{1 - \beta_{t+1}}x_t, \beta_t \mathbf{I}).$$

The backward process, the reverse of the forward process, attempts to reconstruct the target sequence from the standard noise. Like the forward process, this procedure is also applied incrementally and can be formalized as follows:

$$p(x_{t-1}|x_t) = \mathcal{N}(x_{t-1}; \mu_{\theta}^{t-1}, \sigma_{\theta}^{t-1}),$$
$$\mu_{\theta}^{t-1} = \frac{1}{\sqrt{\alpha_t}} (x_t - \frac{\beta_t}{\sqrt{1 - (\alpha_t)}} z_{\theta}(x_t, t)),$$
$$\sigma_{\theta}^{t-1} = \sqrt{\frac{1 - \overline{\alpha_{t-1}}}{1 - \overline{\alpha_t}}} \dot{\beta}_t.$$

where  $\alpha_t = 1 - \beta_t$ ,  $\overline{\alpha_t} = \prod_{i=1}^t \alpha_i$  and  $z_\theta$  comes from the prediction of model parameterized by  $\theta$ . In this work, we apply discrete diffusion for text generating and cross-lingual translation. Based on Zheng et al. (2023), we follow the proposed discrete diffusion model with the following routing mechanism.

$$\begin{aligned} x_{t-1}, v_{t-1} &\sim q(x_{t-1}, v_{t-1} | x_t, x_0) \\ q(v_{t-1} | x_t, x_0) &= q(v_{t-1}) = Bernoulli(\lambda) \end{aligned}$$

$$\begin{aligned} q(x_{t-1}|v_{t-1}, x_t, x_0) &= \\ \begin{cases} v_{t-1}x_t + (1 - v_{t-1}^{(1)})q_{\text{noise}}, & \text{if } x_t = x_0 \\ v_{t-1}x_0 + (1 - v_{t-1}^{(2)})q_{\text{noise}}(x_t), & \text{if } x_t \neq x_0 \end{cases} \end{aligned}$$

Which models the joint distribution over both xand v, where  $q_{noise}(x_t) = \beta_t x_t + (1 - \beta_t) q_{noise}$ and . The sampling process here also takes the reparameterized method, which improves flexibility and expressiveness compared to the vanilla multinomial diffusion process.

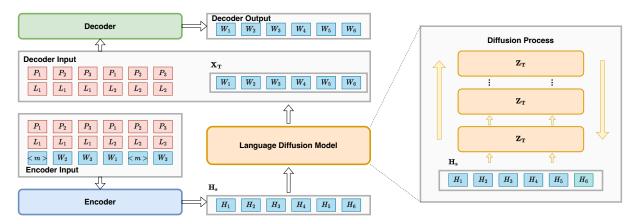


Figure 1: The workflow of Translation Diffusion Language Modeling.

**Translation Diffusion Language Modeling** (TDLM) Unlike previous diffusion model objectives for language modeling that primarily concentrate on monolingual data, we target to exploit cross-lingual modeling capabilities from parallel datasets. Consequently, we propose a pretraining process named Translation Diffusion Language Modeling (TDLM), aiming at enhancing crosslingual pretraining with diffusion models. As illustrated in Figure 1, we first concatenate both source and target sentences and generate the corresponding language and position embedding sequences, and then stack them as the input to the encoder and diffusion model. The language and position embedding sequence is also introduced to the decoder, helping the model to map latent vectors to the generated sentences. In a similar vein to Lin et al. (2023), we random mask 15% of the tokens to the input as (Lample and Conneau, 2019) designed, tasking the model with predicting the noise and its surrounding text based on the cross-lingual context. This denoising setting assists the model in grasping the cross-lingual context.

**Translation Model Setting** In our translation task, we employ a pretrained model based on Translation Diffusion Language Modeling (TDLM) during the fine-tuning stage. This model serves as a robust foundation for comprehending cross-lingual mapping relationships. The Diffusion model operates within an encoder-decoder architecture, where we utilize sentences from both the source and target domains to construct encoder inputs and target inputs, along with their corresponding position embeddings. Furthermore, the language embeddings of the input and output align with the languages presented in the source and target domains. Tokens from the same language as the pretraining process

share identical embeddings, facilitating the model's rapid acclimatization to the source and target domains of the translation task.

### **3** Experiments

#### 3.1 Baselines and Datasets

We conduct a large cross-lingual corpus and two standard benchmarks for cross-lingual translation, which are introduced as follows, and the information of each dataset is shown in Table 1.

- Opus-ENDE<sup>1</sup>: This dataset comprises a large volume of English-German sentence pairs.
- IWSLT14 DE-EN (Cettolo et al., 2014): This benchmark is specifically employed for the German to English translation task.
- WMT14 EN-DE (Bojar et al., 2014): This benchmark is designated for the English to German translation task.

Dataset	Usage	Train	Test	Valid
Opus-ENDE	pretrain	9,323,066	5,000	5,000
IWSLT14	finetune	160,240	6,750	7,283
WMT14	finetune	4,496,988	3,003	3,000

Table 1: Dataset statistics.

We use the origin datasets with the same split and do not apply distillation on the dataset. Besides, we follow the data processing introduced by fairseq  $^2$  and use the joint vocabulary as the pretrained model. We compare with three groups of baselines:

<sup>&</sup>lt;sup>1</sup>https://opus.nlpl.eu/

<sup>&</sup>lt;sup>2</sup>https://github.com/facebookresearch/ fairseq

- Auto-regressive model: Transformers (Vaswani et al., 2017). Which generates sentences in an auto-regressive manner. We follow the setting and the results introduced by (Gao et al., 2022), beam search with a beam size of 5 is used during generation.
- **Continuous Diffusion**: SeqDiffuSeq (Yuan et al., 2022), DiffuSeq (Gong et al., 2022), Difformer (Gao et al., 2022). Which generates the sentences from a continuous latent space. We evaluate Difformer in the origin dataset without knowledge distillation on WMT14 dataset.
- Discrete Diffusion: CMLM (Ghazvininejad et al., 2019), RDM (Zheng et al., 2023). Which generates sentences by denoising for each token gradually. We implement the RDM based on the same data setting and batch setting as our models.

## 3.2 Experimental Settings

**Model Framework** We constructed our XDLM on an encoder-decoder architecture, with both the encoder and decoder comprising six Transformer layers. We set the hidden size of the model to 512 with eight attention heads.

**Pretraining Stage Setting** During the pretraining stage, we formulate the pretraining task on the large-scale corpus mentioned above. We initialize pretraining with a weight decay rate of 0.0005 and a dropout rate of 0.2. We set the maximum number of tokens in each batch to 4k and provided 30k warm-up steps. Besides, the max length of both the source and target language is 256, aiming to make the input sentence a proper length.

**Fine-tuning Stage Setting** We apply fine-tuning on corresponding datasets, leveraging the robust foundation established from the pretraining datasets. The parameter setting for the fine-tuning process is primarily based on the pretraining stage, but with a smaller learning rate of 5e-5.

## 3.3 Main result

To ascertain the efficacy of pretraining on XDLM, we fine-tuned the model across several machine translation tasks, with comparative results in Table 2. Our model demonstrates superior performance relative to certain continuous diffusion models, with the exception of Difformer. However, it exhibits comparable effectiveness to some discrete diffusion models, such as CMLM on the WMT14 dataset.

During the evaluation phase, we assess the BLEU score at both word and BPE (Byte Pair Encoding) levels, each requiring different tokenization scales. A comparison of the two tokenization methods is depicted in Table 3. Our findings indicate that our model performs more effectively when evaluated at the BPE level tokenization across two datasets, registering an improvement of approximately 5%. This enhancement can be attributed to the fact that different tokenization levels help mitigate the complexity of the problems.

### 4 Ablation Study

Study on the Denoising Capacity at Intermediate Steps We also focus on the denoising capacity in each diffusion step. In the reverse process, XDLM apply T diffusion steps to the Gaussian noise  $Z_T$ , generating correspond output y after all intermediate steps. Figure 2 shows the change of BLEU scores with the increasing of reverse steps. We can find for different decoding settings, our model can reach a stable result after 10 iterations, which shows out the effectiveness of our model.




Figure 2: The effect of generation iterations on the BLEU score.

**Discussion** In this section, we concentrate on the factors that contribute to the comparatively lower performance of our model relative to other models. One may have noticed that our method is not able to perform against the original RDM method, we discuss a few reasons in this section. Firstly, prior research such as RDM leverages a substantial batch size coupled with an extensive number of training iterations, a strategy that has been shown

Model	Туре	IWTLS14 (De-En)	WMT14 (En-De)
Transformer	Seq2seq	33.91	27.37
Diffuseq (b=10)	Continuous Diffusion	28.78	15.37
Seqdiffuseq (b=10)	<b>Continuous Diffusion</b>	30.03	17.14
Difformer (b=20)	Continuous Diffusion	34.13	21.42
RDM	Discrete Diffusion	34.49	22.30
CMLM	Discrete Diffusion	31.76	20.03
XLDM (ours)	Discrete Diffusion	23.78	20.30

Table 2: Model Performance.

	IWSLT14	WMT14
word level	18.38	15.20
BPE level	23.78	20.30

Table 3: The BLUE results under different tokenization levels.

to enhance performance. Due to our machine limitations, we failed to conduct the experiments with the same level. Secondly, in terms of our pretraining configuration, we employ a pretraining dataset with an expanded vocabulary size to construct the Byte Pair Encoding (BPE) codes. This approach, while comprehensive, inadvertently increases the complexity of the problem and introduces out-ofvocabulary words that the model must interpret. Such challenges are not typically encountered in previous works. This discrepancy in methodology could potentially account for the performance differential observed.

## 5 Conclusion and Future Work

In this study, we propose an innovative architecture that integrates cross-lingual pretraining into diffusion-based text generation. This is achieved through a carefully designed pretraining task. We compare our model with some previous works under automated evaluation method. Looking forward, we plan to extend our model to include additional languages, with the aim of constructing a robust multilingual model capable of handling more extensive cross-lingual translation tasks.

## References

Jacob Austin, Daniel D Johnson, Jonathan Ho, Daniel Tarlow, and Rianne van den Berg. 2021. Structured denoising diffusion models in discrete state-spaces. Advances in Neural Information Processing Systems, 34:17981–17993.

- Ondřej Bojar, Christian Buck, Christian Federmann, Barry Haddow, Philipp Koehn, Johannes Leveling, Christof Monz, Pavel Pecina, Matt Post, Herve Saint-Amand, Radu Soricut, Lucia Specia, and Aleš Tamchyna. 2014. Findings of the 2014 workshop on statistical machine translation. In Proceedings of the Ninth Workshop on Statistical Machine Translation, pages 12–58, Baltimore, Maryland, USA. Association for Computational Linguistics.
- Mauro Cettolo, Jan Niehues, Sebastian Stüker, Luisa Bentivogli, and Marcello Federico. 2014. Report on the 11th IWSLT evaluation campaign. In *Proceedings of the 11th International Workshop on Spoken Language Translation: Evaluation Campaign*, pages 2–17, Lake Tahoe, California.
- Zhujin Gao, Junliang Guo, Xu Tan, Yongxin Zhu, Fang Zhang, Jiang Bian, and Linli Xu. 2022. Difformer: Empowering diffusion model on embedding space for text generation. arXiv preprint arXiv:2212.09412.
- Marjan Ghazvininejad, Omer Levy, Yinhan Liu, and Luke Zettlemoyer. 2019. Mask-predict: Parallel decoding of conditional masked language models. *arXiv preprint arXiv:1904.09324*.
- Shansan Gong, Mukai Li, Jiangtao Feng, Zhiyong Wu, and LingPeng Kong. 2022. Diffuseq: Sequence to sequence text generation with diffusion models. *arXiv preprint arXiv:2210.08933*.
- Jiatao Gu, James Bradbury, Caiming Xiong, Victor OK Li, and Richard Socher. 2017. Nonautoregressive neural machine translation. *arXiv* preprint arXiv:1711.02281.
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. 2020. Denoising diffusion probabilistic models. Advances in Neural Information Processing Systems, 33:6840– 6851.
- Emiel Hoogeboom, Didrik Nielsen, Priyank Jaini, Patrick Forré, and Max Welling. 2021. Argmax flows and multinomial diffusion: Learning categorical distributions. Advances in Neural Information Processing Systems, 34:12454–12465.

- Guillaume Lample and Alexis Conneau. 2019. Crosslingual language model pretraining. *arXiv preprint arXiv:1901.07291*.
- Xiang Li, John Thickstun, Ishaan Gulrajani, Percy S Liang, and Tatsunori B Hashimoto. 2022. Diffusionlm improves controllable text generation. *Advances in Neural Information Processing Systems*, 35:4328– 4343.
- Zhenghao Lin, Yeyun Gong, Yelong Shen, Tong Wu, Zhihao Fan, Chen Lin, Weizhu Chen, and Nan Duan. 2022. Genie: Large scale pre-training for text generation with diffusion model. *arXiv preprint arXiv:2212.11685*.
- Zhenghao Lin, Yeyun Gong, Yelong Shen, Tong Wu, Zhihao Fan, Chen Lin, Nan Duan, and Weizhu Chen. 2023. Text generation with diffusion language models: A pre-training approach with continuous paragraph denoise.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems*, 30.
- Hongyi Yuan, Zheng Yuan, Chuanqi Tan, Fei Huang, and Songfang Huang. 2022. Seqdiffuseq: Text diffusion with encoder-decoder transformers. *arXiv preprint arXiv:2212.10325*.
- Lin Zheng, Jianbo Yuan, Lei Yu, and Lingpeng Kong. 2023. A reparameterized discrete diffusion model for text generation. *arXiv preprint arXiv:2302.05737*.