# Towards Controllable Natural Language Inference through Lexical Inference Types

Yingji Zhang<sup>1†</sup>, Danilo S. Carvalho<sup>1</sup>, Ian Pratt-Hartmann<sup>1</sup>, André Freitas<sup>1,2</sup>

Department of Computer Science, University of Manchester, United Kingdom<sup>1</sup> Idiap Research Institute, Switzerland<sup>2</sup>

{firstname.lastname}@[postgrad.]<sup>†</sup>manchester.ac.uk

#### Abstract

Explainable natural language inference aims to provide a mechanism to produce explanatory (abductive) inference chains which ground claims to their supporting premises. A recent corpus called EntailmentBank strives to advance this task by explaining the answer to a question using an entailment tree (Dalvi et al., 2021). They employ the T5 model to directly generate the tree, which can explain how the answer is inferred. However, it lacks the ability to explain and control the generation of intermediate steps, which is crucial for the multi-hop inference process. In this work, we focus on proposing a controlled natural language inference architecture for multi-premise explanatory inference. To improve control and enable explanatory analysis over the generation, we define lexical inference types based on Abstract Meaning Representation (AMR) graph and modify the architecture of T5 to learn a latent sentence representation (T5 bottleneck) conditioned on said type information. We also deliver a dataset of approximately 5000 annotated explanatory inference steps, with wellgrounded lexical-symbolic operations. Experimental results indicate that the inference typing induced at the T5 bottleneck can help T5 to generate a conclusion under explicit control.

#### 1 Introduction

Explanation-based Natural Language Inference (NLI) aims to provide a mechanism to produce explanatory (abductive) inference chains which ground claims to their supporting premises (Thayaparan et al., 2020). This inference process allows a systematic way to support the construction of a step-wise explanation hierarchy, via a particular type of textual entailment which encodes claim-premise relationships at different levels of abstraction. This type of inference is particularly relevant in scientific domains, where reasoning needs to be grounded on sets of known facts and plausible and verifiable abstraction steps. One common way




Figure 1: Example of entailment tree. Three steps (1, 2, 3) are present from bottom to top.

of organising these explanatory chains is with the support of entailment trees (Figure 1), a hierarchical structure linking multiple layers of multiple premises to claims. Recent datasets such as the EntailmentBank (Dalvi et al., 2021) provide curated collections of such entailment trees.

Although large-scale pretrained language models, such as T5 (Raffel et al., 2020), have been a fundamental component of explanation-based NLI models due to their transferability across different NLI tasks (Thayaparan et al., 2020), the controllability and step-wise explainability of its internal reasoning have not been fully addressed. For example, Dalvi et al. (2021) deploy T5 as the baseline for generating an entailment tree given a set of premises directly, which can explain how the final conclusion is inferred but cannot explain how the intermediate steps are generated. In this case, the multi-hop explanation-based NLI based on T5 cannot be fully controlled and explained, which is also a potential source of semantic drift, namely when one or more inference steps do not lead to the inferred conclusion.

Delivering a step-wise explainable NLI from a language model requires mechanisms which can define a quasi-symbolic inference behaviour from lexical patterns. For example, looking at each premiseclaim step in Figure 1, there are clear patterns of symbolic inference behaviour such as substitution (step 2), conjunction (step 1), and specification (step 3). Those lexical inference patterns (named here inference types) reflect a step-wise/localised semantic change that can guide a T5-based model to perform explainable inference operations. More importantly, we may control the inference process by manipulating those types at each inference step. For example, given two premises: *milk is a kind of liquid* and *liquids can flow*, we can infer the conclusion *milk can flow* by substituting *liquid* with *milk* or *both milk and liquids can flow* by conjunction, when the inference types are *argument substitution* and *conjunction*, respectively.

To deliver an explainable and controllable inference process at each step of the entailment tree, this work focuses on the task of generating a next-step conclusion given two premises. We define a set of universal lexical inference types based on symbolic transformations over explanatory sentences grounded on AMR (Banarescu et al., 2013). By incorporating these implicit lexical transformation patterns behind inference data as explicit labels, the reasoning process can be better controlled.

To incorporate inference type information into the language model, we explore T5 as an inference model with latent sentence representation (named T5 bottleneck) as the semantic information can be controlled over the sentence space (Hu et al., 2017; Logeswaran et al., 2018). More importantly, the sentence space can be carefully designed in a disentangled manner and optimized by joint loss terms (Bao et al., 2019b; John et al., 2019) to better guide the inference behaviour in the Encoder and the generation of the Decoder.

In summary, this work proposes a mechanism to induce controllable inference behaviour for explanation-based NLI and comprises two contributions: (1) We define a set of fine-grained lexical inference types which reflect quasi-symbolic premises-claim entailment mechanisms. Said type information is injected into the language model using T5 bottleneck, a modification of the original architecture to elicit latent sentence representations. This modification preserves most of the original model's generation capabilities while allowing a more explicit internal projection of the explanatory sentences, which has the potential to better guide the inference and generation processes by manipulating the latent spaces. (2) a systematically annotated corpus of lexical inference types over entailment trees in EntailmentBank corpus (Dalvi

#### et al., 2021).

### 2 Related work

Multi-step textual entailment Multi-step textual entailment refers to the generation of reasoning mechanisms that can interpret how an answer is inferred by given pieces of step-wise evidence (as shown in Figure 1). Clark et al. (2020) first framed the use of transformer-based approaches, such as RoBERTa (Liu et al., 2019), as a soft NLI reasoner. Based on their work, Tafjord et al. (2020) introduced ProofWriter, a model which is built on T5 for generating an answer to a question, taking into account facts and rules. Both works aim to control the inference process by natural language rules. E.g., given a fact: Erin is young and a rule: if someone is young then they are big, a conclusion can be inferred Erin is big. Recent work (Dalvi et al., 2021) focused on more natural and complex inference patterns where abstraction, specification, generalisation, and rule-based deduction are included in their corpus (the EntailmentBank dataset). Their model, EntailmentWriter (T5), can directly generate entailment trees to explain the inference process. However, the proposed model does not have specific mechanisms for step-wise symbolic control. In this work, we propose to control the inference process by guiding its generation through explanatory lexical inference types.

Latent sentence embedding Latent sentence embeddings are widely deployed in AutoEncoder setup, such as Variational (Kingma and Welling, 2013), Denoising (Vincent et al., 2008), Adversarial (Makhzani et al., 2016). Due to their explainability and controllability, they have been applied in various tasks, including story generation (Fang et al., 2021a), dialogue generation (Zhao et al., 2017), text style transfer (John et al., 2019; Shen et al., 2020), text paraphrasing (Bao et al., 2019a), among others. However, those models are less explored in the NLI task. As the first step, this work introduces the T5 bottleneck and evaluates it on the NLI task.

Exploring the utilization of sentence embedding to enhance reasoning and generation is a novel and less-explored avenue (Lee et al., 2019). One potential approach is to focus on learning disentangled sentence embeddings in which different semantic information can be separate (Bao et al., 2019a; John et al., 2019; Zhang et al., 2022, 2023; Carvalho et al., 2023). This separability can precisely control the generation process in the Decoder, which can avoid the semantic drift issue. Meanwhile, the inference process in the Encoder can be potentially optimized by incorporating multi-task loss terms that constrain the latent space (Bao et al., 2019a) (e.g., predicting the inference behaviour according to inference types). Therefore, this work proposes incorporating the inference level through T5 bottleneck.

### **3** Defining lexical inference types

Valentino et al. (2021a) has demonstrated that stepwise explanation-based natural language inference cannot be directly framed as pure logical reasoning. Explanatory chains, while looking plausible at first inspection, commonly have subtler incompleteness and consistency problems from a logical point of view. At the same time, explanatory chains correspond to definable inference patterns and localised symbolic operations over the sentence structure. Motivated by this middle ground between logical representations and lexico-semantic inference patterns, in this section, we introduce a set of granular inference types grounded on the abstract meaning representations of explanatory sentences.

Based on the inference types described in (Dalvi et al., 2021), we contribute to this work with the derivation of a more granular set of sentencelevel lexico-semantic inference types. In order to systematically ground these sentence-level inference types, Abstract Meaning Representation (Banarescu et al., 2013) (AMR) graphs are used as a mechanism to precisely define the symbolic operations entailed in the multi-hop inference process - linking the transformations from premises to the conclusion through these granular symbolic operations. Please note that AMR is not used as a representation mechanism in the proposed architecture, but only to precisely ground these symbolic operations within a well-defined semantic representation structure.

Table 1 describes the original inference types from the EntailmenBank corpus (which were more informally defined), contrasting them to the corresponding AMR- grounded and fine-grained operation inference types. The AMR formalisation of lexical inference patterns allows for the definition of a more granular inference typing system, grounded on localised symbolic operations over semantic representations of sentences. Next, we define each lexico-semantic inference type and the corresponding symbolic forms.

The substitution category refers to obtaining a conclusion by replacing a predicate/argument term from one premise with a predicate/argument term from the other premise. Possible variations of this category include *argument* (ARG) substitution, predicate (PRED) substitution, and frame (PRED+ARG) substitution. In this category, most entailment relations are straightforward. One premise is used to connect two terms which are usually connected by *is a kind of, is a part of, is a source of, means, is, are,* etc. This can be symbolically represented as a subgraph substitution operation over the premise graphs, as illustrated in Figure 2.

P1: a scar on the knee is a kind of scar

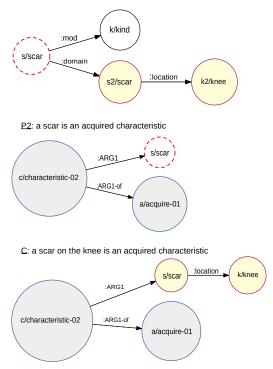


Figure 2: AMR argument substitution.

The *PRED substitution* category works in a similar manner, but replacing a predicate term. The two predicates are usually linked by the following patterns:  $v_1$  is a kind of  $v_2$ , to  $v_1$  something means to  $v_2$  something, v something has a negative impact on that something, etc. The frame (*PRED+ARG*) substitution category combines both previous categories by replacing a frame (predicate subgraph) of one of the premises with one from the other premise.

The *further specification* or *conjunction* categories allows for obtaining a conclusion by joining

Original inference type	AMR op inference type	Prop.	Example entailment relation
	ARG substitution (ARG-SUB)	19%	<ul><li>P1: a scar on the knee is a kind of scar</li><li>P2: a scar is an acquired characteristic</li><li>C: a scar on the knee is an acquired characteristic</li></ul>
Substitution	PRED substitution (PRED-SUB)	5%	P1: food contains nutrients and energy for living things P2: to contain something can mean to store something C: food stores nutrients and energy for living things
	Frame substitution (FRAME-SUB)	20%	P1: the formation of diamonds requires intense pressure P2: the pressure is intense deep below earth 's crust C: the formation of diamonds occurs deep below the crust of the earth
Inference from Rule	Conditional frame insertion/substitution (COND-FRAME)	12%	<ul><li>P1: if something is renewable then that something is not a fossil</li><li>P2: fuel wood is a renewable resource</li><li>C: wood is not a fossil fuel</li></ul>
	ARG insertion (ARG-INS)	18%	<ul><li>P1: solar energy comes from the sun</li><li>P2: solar energy is a kind of energy</li><li>P3: solar energy is a kind of energy that comes from the sun</li></ul>
Further Specification or Conjunction	Frame conjunction (FRAME-CONJ)	6%	P1: photosynthesis stores energy P2: respiration releases energy C: photosynthesis stores energy and respiration releases energy
Infer Class from Properties	ARG/PRED generalisation (ARG/PRED-GEN)	1%	P1: rock is a hard material P2: granite is a hard material C: granite is a kind of rock
Property Inheritance	ARG substitution (Property Inheritance) (ARG-SUB-PROP)	0.4%	P1: blacktop is made of asphalt concrete P2: asphalt has a smooth surface C: a blacktop has a smooth surface
	Example (EXAMPLE)	0.9%	a shelter can be used for living in by raccoons some raccoons live in hollow logs an example of a shelter is a raccon living in a hollow log
Unknown	If then (IFT)	0.8%	an optical telescope requires visible light for human to use clouds / dusts block visible light if there is clouds or dusts, then the optical telescope cannot be used
	Others (UNK)	16%	spiral is a kind of shape galaxies can be classified by shape spiral galaxy is a type of galaxy

Table 1: Example of inference types. Their abbreviations are described in the parentheses, which is used in the paper. The Prop. represents the proportion of each category. The size of corpus is 5134 in our task.

both premises. It includes *ARG insertion, frame insertion* and *frame conjunction*. In the case of *ARG insertion*, the conclusion is obtained by connecting an argument from one of the premises to a frame of the other, as illustrated in Figure 3. As for *frame conjunction/disjunction*, the conclusion is obtained by joining the premises graphs through a conjunction/disjunction node (*and*) or (*or*).

The *inference from rule* category from (Dalvi et al., 2021) comprises a specific case of insertion or substitution categorised as *conditional frame insertion/substitution*, where a frame is inserted or replaced as an argument of a premise following a conditional path in the other premise, as illustrated in Figure 4.

The inference type infer class from properties


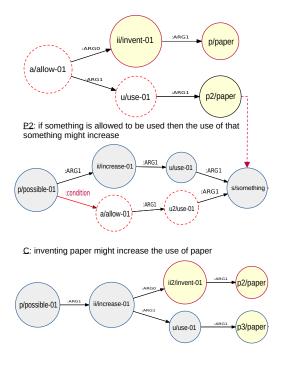


Figure 3: AMR argument insertion.

has been re-categorised as ARG or PRED gener-

P1: inventing paper allows paper to be used



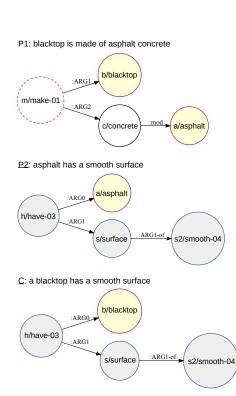


Figure 4: AMR conditional frame insertion.

*alisation*, where a new *:domain* relation frame is created if both premise graphs differ by a single predicate/argument term, as illustrated in Figure 5. *Property inheritance*, on the other hand, is a special case of *ARG substitution*, where one of the premises describes a *is made of* relationship between the entity in the other premise and its replacement, as illustrated in Figure 6.




Figure 5: AMR argument generalisation.

Finally, the *other inference types* category includes *example*, *if-then*, and *others*. Those inference types are defined according to the key lexical characteristic of the conclusion, as system-

Figure 6: AMR argument substitution (property inheritance).

atic AMR transformations which could be applied without rephrasing the underlying explanatory sentences could not be determined. For example, the *if-then* category refers to a conclusion that has an *if then* sentence structure in which both premises do not contain it. The *example* category is a conclusion with the signalling word *example*, which does not appear in the either premise. As for other unknown categories, we do not further specify them, as they either require knowledge outside of the scope of the premises or do not have a consistent symbolic transformation expression. An additional subtype called *premise copy* was included for the cases where the conclusion has the same graph as one of the premises.

Annotation procedure Annotation was performed manually for a set of 5000 entailment triples (two premises, one conclusion) from the EntailmentBank corpus (Dalvi et al., 2021), according to Algorithm in Appendix A. Graph subset relations and root matching are relaxed for nonargument (:ARG\*, op\*) edges, meaning relations such as *:manner* or *:time* can be ignored for this purpose. Two annotators were used in this process, on a consensus-based annotation scheme where a first annotator defined the transformations and a second annotator verified and refined the annotation scheme, in two iterations.

### **4** Controlled inference architecture

In this section, we describe the methodological framework behind the construction of the T5 sentence bottleneck, which is illustrated in Figure 7. The inference types are injected at the token level at either the input embeddings for the encoder or to the decoder embeddings (see Section 5.2). The first case provides typing information to the sentence embeddings, the latter provides contextual bias for the token generation by the decoder.

**Sentence embedding** While designing the sentence bottleneck, We compare the four most frequently used methods to transform token embeddings into sentence embeddings for a variety of current NLP tasks: (1) Mean pooling: calculating the mean of each dimension on all token embeddings and feeding the resulting vector into a multilayer perceptron to obtain the sentence embedding (used in SentenceBERT (Reimers and Gurevych, 2019)). (2) multi-layer perceptron (MLP): applying an MLP to perform dimensionality reduction on token embeddings, and concatenating them together as sentence embedding, which can be described as:

$$z = \operatorname{concat} \left[ \operatorname{MLP}_1(x_1); ...; \operatorname{MLP}_T(x_T) \right]$$

where  $MLP_i(x_i)$  represents the *i*-th neural network for input representation of token  $x_i$ , *z* is the latent sentence representation, and *T* is 70 in the experiment. (3) multi-head attention: feeding each token embedding into the multi-head attention and considering the first output embedding as the sentence embedding (Montero et al., 2021), described as the next equation:

$$z =$$
MultiHead  $\left(XW^{q}, XW^{k}, XW^{v}\right)[0]$ 

where  $X = [x_1, ..., x_T]$  and  $W^q$ ,  $W^k$ , and  $W^v$ are the weights for learning q, k, v embeddings in self-attention, respectively. (4) Sentence T5: reloading the weights from the pre-trained sentence T5 (Ni et al., 2021) as sentence embeddings. This process is similar to mean pooling, however the pre-trained sentence representations may deliver better performance.

**Decoder connection** We consider four common strategies to inject sentence embeddings into the decoder. (1) Cross-attention input embedding (CA

Input): reconstructing the token embeddings from a sentence representation and directly feeding them into the cross-attention layers of the decoder. This mechanism is described in the next equation, where  $\hat{Y}$  is the reconstruction of decoder input sequence  $Y = [y_1, ..., y_K]$ .

$$\hat{Y} =$$
MultiHead  $\left( YW^{q}, MLP(z)W^{k}, MLP(z)W^{v} \right)$ 

(2) Cross-attention KV embedding (CA KV): instead of reconstructing the token embeddings, it consists of directly learning the Key and Value that is used in the cross-attention mechanism. This is the strategy used in Optimus (Li et al., 2020), which is formalised in the following equation, where MLP<sub>k</sub> and MLP<sub>v</sub> are neural layers for learning k v embeddings.

$$\hat{Y} =$$
MultiHead $(YW^q, MLP_k(z), MLP_v(z))$ 

(3) Non-cross-attention input connection (NCA Input): reconstructing the token embeddings and element-wisely adding them with the word embeddings, positional embeddings of the decoder, which is similar to (Fang et al., 2021b). (4) Non-cross-attention output connection (NCA Output): reconstructing the token embeddings and adding them with the output embedding of the decoder.

### **5** Experiments

#### 5.1 Analysing the T5 bottleneck baselines

In the experimental analysis, we analyze the performance of the T5 bottleneck on the target NLI task (conclusion generation from premises). We use the base version as the baseline for T5 and sentence bottleneck T5. The sentence representation dimension size is set to 768 for all experiments.

**Syllogism-style NLI** Firstly, we compare the effect of different architectures on the performance of sentence bottleneck T5. We quantitatively evaluate the performance of different architectures. Table 3 illustrates the test losses. From it, we can observe that (1) pooling is always better than MLP and MHA. (2) cross-attention always outperforms non cross-attention. (3) pre-trained pooling is better than non pre-trained pooling. (4) reconstructing token embedding as the input of cross-attention is better than reconstructing Key and Value weights. Therefore, the best combination is using pre-trained

#### c: blacktop has smooth surface

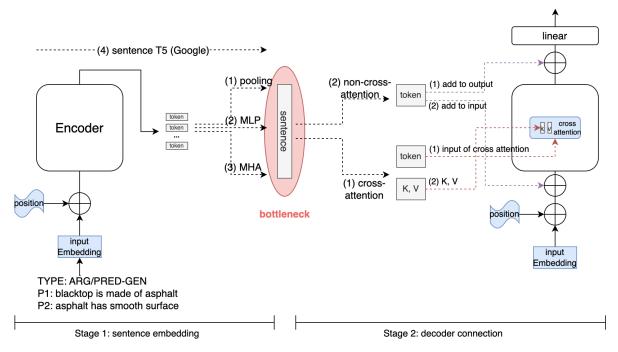


Figure 7: The architecture design of sentence bottleneck T5, which can be separated in two stages: sentence embedding and decoder connection. The sentence embedding aims to transform token embeddings into a sentence (single) embedding. Decoder connection aims to connect the encoder and decoder.

Premises	Original T5	Sentence bottleneck T5	Golden conclusion
P1: a plant / living thing re- quires nutrients to grow	food is an essential ingredient for a plant to grow	food is a kind of fertilizer that can be used by plants	a plant requires food to grow
P2: food contains nutrients for living things			

Table 2: Examples for original T5 and sentence bottleneck T5.

sentenceT5 as the sentence encoder and reconstructing the token embedding as the input of crossattention (**conclusion1**). We also record the loss of T5 for comparison purposes.

baseline	Test loss (cross entropy) ↓						
Т5	Sentence Embedding	CA Input	CA KV	NCA Input	NCA Output		
	Pooling	1.41	1.44	1.86	2.42		
bottleneck	MLP	1.71	1.94	2.09	2.62		
DOWICIICCK	MHA	1.51	2.24	2.31	3.03		
	sentenceT5	1.24	1.42	1.81	2.22		
T5 (base)			0.61				

Table 3: Comparison of test loss (CA: cross-attention, NCA: non-cross-attention).

Additionally, we also qualitatively evaluate the models' performances in this task. We implement T5 and sentence bottleneck T5 (pre-trained sentenceT5 and CA input) as our baselines. As illustrated in Table 2, we can observe that both baselines

can generate proper conclusions, although they are not identical to the golden conclusions. E.g., *food is an essential ingredient for a plant to grow* from the original T5 compared with the golden conclusion: *a plant requires food to grow*. Additional examples can be found in Appendix C.

**Explanation retrieval** We evaluate the performance of the sentence embedding bottleneck using the of multi-hop explanatory inference as an explanation retrieval task (Valentino et al., 2021b) in which sentence embeddings from premises are required for determining the conclusion. Given a question-and-answer pair, it reconstructs the entailment tree by searching the explanations from a fact bank (WorldTree, (Jansen et al., 2018)) in an iterative fashion using a dense sentence encoder. In this case, we can replace the dense sentence encoder with the propsoed T5 bottleneck baseline to evaluate its sentence embedding. We compare

the T5 bottleneck with Bert(base) (Devlin et al., 2019) and pretrained Optimus (large VAE, Li et al. (2020)) and evaluate them via mean average precision (MAP). Those are not fine-tuned on the target dataset (WorldTree, (Jansen et al., 2018)). Table 4 illustrated the performance of SCAR with different dense encoders. We can observe that the T5 bottleneck outperforms Optimus to represent the explanatory sentences, indicating that it has the potential to deliver better inference and generation via sentence space.

Dense Encoder	t	MAP(×100)
	1	38.62
Bert(base, 768)	2	39.34
Bert(base, 708)	3	38.88
	4	38.71
		34.47
T5 h - #1	2	35.28
T5 bottleneck(base, 768)	3	34.50
	4	34.47
		28.21
Optimus(769)	2	29.35
Optimus(768)	3	28.35
	4	28.27

Table 4: Evaluating sentence embedding on SCAR where t represents the depth of entailment tree.

#### 5.2 Analysing the lexical inference types

In this experiment, we evaluate the impact of the granular inference types (using the new annotated EntailmentBank corpus) on the performance of the baseline models, including T5(small), Bart(base) (Lewis et al., 2019), T5 bottleneck, and Optimus (Li et al., 2020). We focus on three target questions: 1. Can the inference type information help model training and inference? If this is the case, the model trained with the inference types should achieve higher scores (such as BLEU (Papineni et al., 2002) and BLEURT (Sellam et al., 2020)) on the test set, and lower test loss.

**2.** Can the inference type information be used to control the inference? If the inference type rules are learned by the model, during inference, we could potentially control the generated conclusion, while keeping it valid, by modifying the inference type.

**3.** Can the model predict the correct inference type? If the inference type information is supporting and consistent with model inference, the model would be able to predict the correct the inference type, given the paired multi-premise and conclusion.

We consider three ways to inject inference-type information into the architecture. These three

mechanisms are described below, where p1, p2, and con are the premises and conclusion, respectively, and </s> is a special token in T5 for separating different sentences.

1. The inference type as the prefix for the premises at the Encoder. This can be used to control the generation of conclusions by modifying the inference type during inference. The input format of the encoder can be described as:

*the inference type is [type]* </s > p1 </s > p2**2.** The inference type as the prefix for the conclusion in the Decoder, which is the common way to control the generation of transformer-based models (Li and Liang, 2021; Qian et al., 2022). The input format of the decoder is described as:

</s> the inference type is [type]. con 3. The inference type at the end of the conclusion in the Decoder, which can help us to check whether T5 generates correct inference types. The input format of the decoder is described as:

</s> con. the inference type is [type]

Quantitative evaluation We first quantitatively evaluate model performance based on five metrics: test loss (cross-entropy), perplexity, BLEURT, BLEU, and cosine similarity of Google sentenceT5. As illustrated in Table 5, we can observe that all baselines with inference type information always have lower test losses and perplexities (PPLs), which means the inference type can help the training process of the model (conclusion2). Moreover, for all baselines, feeding the inference types into the model can achieve a consistently positive impact over BLEU, Cosine, and BLEURT metrics, which indicates that the inference types can help the NLI process (conclusion3). We also conducted ablation studies on the inference types, which are included in the supplementary material (Appendix **G**).

Additionally, we can observe that the T5 sentence bottleneck as a baseline has a lower BLEURT score. Therefore, we qualitatively evaluate its inference performance by checking some cases with negative scores. We find that some conclusions with lower scores are semantically equivalent to the golden ones. For example, the pred conclusion: *burning coal and burning oil are two sulfur dioxide emitters* which achieves -0.52 scores compared with the golden conclusion: *burning coal and oil emit sulfur dioxide*. Therefore, we argue that BLEURT scores are not always reliable, especially for evaluating the correctness of the entailment in

Baseline	INJ	BLEU	Cosine	BLEURT	Loss $\downarrow$	$\text{PPL}\downarrow$
	base	lines wit	hout bott	leneck		
Т5	DE	0.55	0.96	0.30	0.53	1.44
original	DP	0.59	0.96	0.34	0.58	1.57
e	EP	0.65	0.97	0.45	0.52	1.41
(small)	NO	0.54	0.96	0.22	0.69	2.22
Т5	DE	0.46	0.96	0.23	0.49	1.33
original	DP	0.53	0.96	0.25	0.51	1.38
e	EP	0.61	0.97	0.39	0.45	1.22
(base)	NO	0.57	0.96	0.33	0.61	1.65
	DE	0.44	0.94	0.03	0.55	1.49
Bart	DP	0.38	0.93	-0.42	0.48	1.30
(base)	EP	0.57	0.96	0.23	0.58	1.57
	NO	0.54	0.96	0.17	<u>0.63</u>	<u>1.71</u>
	bas	elines w	ith bottle	eneck		
Т5	DE	0.35	0.91	-0.15	0.84	2.31
bottleneck	DP	0.39	0.91	-0.13	0.86	2.36
(base, 768)	EP	0.42	0.92	-0.07	1.23	3.42
(base, 708)	NO	0.35	0.91	-0.20	1.24	3.45
	DE	0.26	0.80	-1.11	0.87	2.38
Optimus	DP	0.25	0.79	-1.14	0.85	2.33
(BERT-GPT2, 768)	EP	0.09	0.74	-1.17	1.11	3.03
	NO	0.07	0.74	-1.20	1.13	3.09

Table 5: Quantitative evaluation of test cases (best and worst results are highlighted in bold and underlined, respectively). Specification for abbreviation. INJ: ways for injecting the information of inference types into the model, it includes DE: decoder end, DP: decoder prefix, EP: encoder prefix, NO: no inference type. PPL is perplexity, Loss is cross entropy.

this task (**conclusion4**). Further examples are included in Table 10 in Appendix D.

Controllability evaluation Secondly, we qualitatively evaluate the controllability of conclusion generation by modifying the inference type before feeding it into the Encoder. As illustrated in Tables 6 and 7, we can observe that the conclusion can be controlled according to the different inference types, which indicates that our inference type modelling approach can improve inference control (conclusion5). For example, when the type is ARG substitution (ARG-SUB), the model can generate the blacktop is made of smooth surface by replacing the argument asphalt concrete with smooth surface. And the conclusions are changed to asphalt and blacktop have the same surface when the inference type is the conjunction (FRAME-CONJ). Table 7 also illustrates how the sentence bottleneck can incorporate contextual information relevant to the type transformation, for example generating a pumpkin is a kind of plant, when plant is not in the premises. More examples are provided in Appendix E.

**Inference types prediction** Lastly, we check the prediction of the inference type from the original T5(base). In terms of qualitative evaluation, the




Table 6: Controllable generation over original T5(base) (ARG-SUB: argument substitution, ARG/PRED-GEN: argument/predicate generalisation. ARG-SUB-PROP: property inheritance. ARG-INS: argument insertion, FRAME-CON: frame conjunction, IFT: if...then...).

analysis of prediction errors can also help us to understand how T5 infers a conclusion. In table 8, we can observe that the predicted inference type is highly related to the conclusion. For example, the predicted (PRED) conclusion *a classroom is usually measured in a si unit for measuring length* can be obtained by replacing *meter* with *a si unit for measuring length*. This is also a reasonable conclusion. More examples are provided in the Appendix F.

As for the quantitative evaluation, we calculate the accuracy of inference-type prediction. Specifically, during inference, instead of feeding a start token  $\langle s \rangle$  to trigger the Decoder, we feed the conclusion into the Decoder directly. Therefore, it can try to generate the inference type based on the entailment representation learned from crossattention. The accuracy is 40 %, which indicates the model cannot accurately predict the inference type according to the information from Decoder. This result is consistent with results from Table 5, in that the best way to inject inference type into the model is through the encoder instead of the decoder.

#### 6 Conclusion

In this work, we focus on the development of a model for multi-hop explanatory natural language inference. At the center of the architecture is the P1: a pumpkin contains seeds

P2: fruit contains seeds

ARG-INS: a fruit in a pumpkin contains seeds

FRAME-CONJ: a pumpkin and fruit both contains seeds

FRAME-SUB: fruit is a kind of pumpkin

ARG-INS: fruit is a part of pumpkin that contains seeds

FRAME-CONJ: a fruit contains seeds

FRAME-SUB: a pumpkin is a kind of plant

P1: eating something has a negative impact on that something

P2: some animals eat cacti

ARG-INS: some animals have a negative impact on cacti by eating cacti

PRED-SUB: some animals may have a negative impact on cacti

FRAME-SUB: eating cacti has a negative impact on that cacti

ARG-INS: some animals have a negative impact on cacti by eating cacti

PRED-SUB: animals have a negative impact on cacti

FRAME-SUB: eating cacti has a negative impact on that cacti

Table 7: Controllable generation comparison between original T5(base) (top) and T5 bottleneck (bottom) (ARG-INS: argument insertion, PRED-SUB: predicate substitution, FRAME-CONJ: frame conjunction, FRAME-SUB: frame substitution).

introduction of two key modelling mechanisms: (i) the injection of granular inference types and (ii) the introduction of a T5 sentence bottleneck. The combination of those mechanisms allow effective inference control at a cost of fluency performance.

We concentrate on the task of generating a conclusion based on two premises. In the experiment, we first modify the architecture of the original T5 into sentence bottleneck T5, as the latent sentence representation has more potential for control of T5 sentence generation. From the qualitative and quantitative performance evaluation of both architectures, we found that both can perform well in P1: meters m are a metric / si unit used for measuring length

P2: a classroom is usually measured in meter

GOLD: meter is the si unit that can be used to measure a classroom GOLD Type: ARG-INS

PRED: a classroom is usually measured in a si unit for measuring length PRED Type: FRAME-SUB

Table 8: Example of wrong inference type predicted by the original T5(base).

our task. Secondly, we argue that the lexical inference type can help model training and control. We could empirically observe improvement in controlling the conclusion generation and better training results.

In the future, we will explore the reasoning process via the T5 sentence bottleneck, where the structure (such as AMR) and content (such as Bag-of-Words) information are disentangled in its latent space. The disentangled latent space has the potential to better guide the inference process of the Encoder and the generation of the Decoder.

#### 7 Limitations

Evaluation metrics: as described in Table 5 the metrics, such as BLEURT, cannot accurately reflect the correctness of generated conclusion. Therefore, how to quantitatively evaluate the correctness of predicted conclusions from the inference side should be considered in the future.

#### References

- Laura Banarescu, Claire Bonial, Shu Cai, Madalina Georgescu, Kira Griffitt, Ulf Hermjakob, Kevin Knight, Philipp Koehn, Martha Palmer, and Nathan Schneider. 2013. Abstract meaning representation for sembanking. In *Proceedings of the 7th linguistic annotation workshop and interoperability with discourse*, pages 178–186.
- Yu Bao, Hao Zhou, Shujian Huang, Lei Li, Lili Mou, Olga Vechtomova, Xin-yu Dai, and Jiajun Chen. 2019a. Generating sentences from disentangled syntactic and semantic spaces. In *Proceedings of the* 57th Annual Meeting of the Association for Computational Linguistics, pages 6008–6019, Florence, Italy. Association for Computational Linguistics.
- Yu Bao, Hao Zhou, Shujian Huang, Lei Li, Lili Mou, Olga Vechtomova, Xinyu Dai, and Jiajun Chen.

2019b. Generating sentences from disentangled syntactic and semantic spaces. In *Proceedings of the* 57th Annual Meeting of the Association for Computational Linguistics, pages 6008–6019.

- Danilo S. Carvalho, Yingji Zhang, Giangiacomo Mercatali, and Andre Freitas. 2023. Learning disentangled representations for natural language definitions. In *Findings of the European chapter of Association for Computational Linguistics (Findings of EACL)*. Association for Computational Linguistics.
- Peter Clark, Oyvind Tafjord, and Kyle Richardson. 2020. Transformers as soft reasoners over language.
- Bhavana Dalvi, Peter Jansen, Oyvind Tafjord, Zhengnan Xie, Hannah Smith, Leighanna Pipatanangkura, and Peter Clark. 2021. Explaining answers with entailment trees. *arXiv preprint arXiv:2104.08661*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding.
- Le Fang, Tao Zeng, Chaochun Liu, Liefeng Bo, Wen Dong, and Changyou Chen. 2021a. Transformerbased conditional variational autoencoder for controllable story generation.
- Le Fang, Tao Zeng, Chaochun Liu, Liefeng Bo, Wen Dong, and Changyou Chen. 2021b. Transformerbased conditional variational autoencoder for controllable story generation.
- Zhiting Hu, Zichao Yang, Xiaodan Liang, Ruslan Salakhutdinov, and Eric P. Xing. 2017. Toward controlled generation of text.
- Peter Jansen, Elizabeth Wainwright, Steven Marmorstein, and Clayton Morrison. 2018. WorldTree: A corpus of explanation graphs for elementary science questions supporting multi-hop inference. In Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018), Miyazaki, Japan. European Language Resources Association (ELRA).
- Vineet John, Lili Mou, Hareesh Bahuleyan, and Olga Vechtomova. 2019. Disentangled representation learning for non-parallel text style transfer. In Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics, pages 424–434.
- Diederik P Kingma and Max Welling. 2013. Autoencoding variational bayes. *arXiv preprint arXiv:1312.6114*.
- Dennis Lee, Christian Szegedy, Markus N. Rabe, Sarah M. Loos, and Kshitij Bansal. 2019. Mathematical reasoning in latent space.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Ves Stoyanov, and Luke Zettlemoyer. 2019. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension.

- Chunyuan Li, Xiang Gao, Yuan Li, Baolin Peng, Xiujun Li, Yizhe Zhang, and Jianfeng Gao. 2020. Optimus: Organizing sentences via pre-trained modeling of a latent space. In Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP), pages 4678–4699.
- Xiang Lisa Li and Percy Liang. 2021. Prefix-tuning: Optimizing continuous prompts for generation. *arXiv preprint arXiv:2101.00190*.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach.
- Lajanugen Logeswaran, Honglak Lee, and Samy Bengio. 2018. Content preserving text generation with attribute controls.
- Alireza Makhzani, Jonathon Shlens, Navdeep Jaitly, Ian Goodfellow, and Brendan Frey. 2016. Adversarial autoencoders.
- Ivan Montero, Nikolaos Pappas, and Noah A Smith. 2021. Sentence bottleneck autoencoders from transformer language models. *arXiv preprint arXiv:2109.00055*.
- Jianmo Ni, Gustavo Hernández Ábrego, Noah Constant, Ji Ma, Keith B. Hall, Daniel Cer, and Yinfei Yang. 2021. Sentence-t5: Scalable sentence encoders from pre-trained text-to-text models.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the* 40th annual meeting of the Association for Computational Linguistics, pages 311–318.
- Jing Qian, Li Dong, Yelong Shen, Furu Wei, and Weizhu Chen. 2022. Controllable natural language generation with contrastive prefixes. *arXiv preprint arXiv:2202.13257*.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, Peter J Liu, et al. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(140):1–67.
- Nils Reimers and Iryna Gurevych. 2019. Sentence-bert: Sentence embeddings using siamese bert-networks. *arXiv preprint arXiv:1908.10084.*
- Thibault Sellam, Dipanjan Das, and Ankur P. Parikh. 2020. Bleurt: Learning robust metrics for text generation.
- Tianxiao Shen, Jonas Mueller, Regina Barzilay, and Tommi Jaakkola. 2020. Educating text autoencoders: Latent representation guidance via denoising. In *International Conference on Machine Learning*, pages 8719–8729. PMLR.

- Oyvind Tafjord, Bhavana Dalvi Mishra, and Peter Clark. 2020. Proofwriter: Generating implications, proofs, and abductive statements over natural language.
- Mokanarangan Thayaparan, Marco Valentino, and André Freitas. 2020. A survey on explainability in machine reading comprehension.
- Marco Valentino, Ian Pratt-Hartmann, and André Freitas. 2021a. Do natural language explanations represent valid logical arguments? verifying entailment in explainable nli gold standards.
- Marco Valentino, Mokanarangan Thayaparan, Deborah Ferreira, and André Freitas. 2021b. Hybrid autoregressive inference for scalable multi-hop explanation regeneration.
- Pascal Vincent, Hugo Larochelle, Yoshua Bengio, and Pierre-Antoine Manzagol. 2008. Extracting and composing robust features with denoising autoencoders. In *Proceedings of the 25th International Conference* on Machine Learning, ICML '08, page 1096–1103, New York, NY, USA. Association for Computing Machinery.
- Yingji Zhang, Danilo S. Carvalho, Ian Pratt-Hartmann, and André Freitas. 2022. Quasi-symbolic explanatory nli via disentanglement: A geometrical examination.
- Yingji Zhang, Danilo S. Carvalho, Ian Pratt-Hartmann, and André Freitas. 2023. Learning disentangled semantic spaces of explanations via invertible neural networks.
- Tiancheng Zhao, Ran Zhao, and Maxine Eskenazi. 2017. Learning discourse-level diversity for neural dialog models using conditional variational autoencoders. In Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 654–664, Vancouver, Canada. Association for Computational Linguistics.

## A Annotation procedure

Algorithm 1 Annotation procedure

```
1: Find premise P_x most similar to the conclusion C, P_{\bar{x}} being the other premise.
 2: if G_x = G_c or G_{\bar{x}} = G_c then
        type = PREM-COPY
 3:
 4: else if P_x and C differ by one word w then
        if w is a verb then
 5:
 6:
            type = ARG-SUB
 7:
        else
            type = PRED-SUB
 8:
 9:
        end if
10: else
        Get AMR graphs G_1, G_2, G_c for P_1, P_2 and C respectively. P_x \to G_x.
11:
        if \exists :ARG*(x, a) \in C and a \subset P_{\bar{x}} then
12:
            if \exists :condition(root(G_x), root(G_{\bar{x}})) then
13:
                type = COND-FRAME
14:
            else if root(a) is a noun then
15:
                if root(G_{\bar{x}}) = "make-01" and
16:
17: \exists :ARG*(root(G_{\bar{x}}, a) then
                     type = ARG-SUB-PROP
18:
19:
                else
                     type = ARG-SUB
20:
                end if
21:
22:
            else
                type = FRAME-SUB
23:
            end if
24:
25:
        else if G_x \subset G_c and G_{\bar{x}} \subset G_C then
            type = FRAME-CONJ
26:
        else if \exists x, y : \text{domain}(root(G_x), x) and : \text{domain}(root(G_{\bar{x}}, y) \text{ and } : \text{op*}(\text{``and''}, x) \in G_c and
27:
    :op^*(``and'', y) \in G_c then
            type = FRAME-CONJ
28:
        else if G_x \subset G_c then
29:
            d \leftarrow G_c - G_x
30:
            if root(d) is a noun then
31:
                type = ARG-INS
32:
33:
            else
                type = FRAME-INS
34:
            end if
35:
        else if \exists :domain(root(G_c), y) and (root(G_c) \in G_x and y \in G_{\bar{x}}) or (root(G_c) \in G_{\bar{x}} and y \in G_x)
36:
    then
            type = ARG/PRED-GEN
37:
38:
        else
            type = UNK
39:
        end if
40:
41: end if
```

# **B** Implementation details

1. Size of Sentence Representation: in this work, we consider 1000 as the size of the sentence embedding. Usually, the performance of the model improves as the size increases.

Different sentence dim setup						
Size	32	64	128	256	512	1000
Loss	1.59	1.42	1.36	1.32	1.29	1.26

Table 9: The loss with different sentence dim in sentence bottleneck T5.

- 2. Multi-head Attention (MHA): in the experiment, MHA consists of 8 layers, each layer containing 12 heads. The dimensions of Query, Key, and Value are 64 in each head. The dimension of token embedding is 768.
- 3. Max epoch: 40, learning rate: 5e-5. During fine-tuning the sentence bottleneck T5, we first freeze the pre-trained parameters in the first epoch and fine-tune all parameters for the remaining epochs.
- 4. The implementation of Optimus is based on their original code (Li et al., 2020)<sup>1</sup>. It is initialised with a pretrained checkpoint with  $\beta=0$ .

<sup>&</sup>lt;sup>1</sup>https://github.com/ChunyuanLI/Optimus

# **C** More Examples for Both Baselines

Table 10 shows more examples generated from both baselines.

Premises	Original T5	Sentence bottleneck T5	Golden conclusion
P1: a human is a kind of object	a child is a kind of object	a child is a kind of object	a child is a kind of object
P2: a child is a kind of young human			
P1: a plant / living thing requires nutrients to grow	food is an essential ingredient for a plant to grow	food is a kind of fertilizer that can be used by plants	a plant requires food to grow
P2: food contains nutrients for living things			
P1: bees have a positive impact on plant reproduction	helping bees has a positive im- pact on plant reproduction	helping bees has a positive impact on plant reproduc- tion	bees help plant reproduction
P2: helping something has a pos- itive impact on that something			
P1: a doorbell is a kind of electric device	closing an electric circuit causes a doorbell to function	closing of a doorbell causes the doorbell to function	an electric circuit causes a doorbell to function
P2: closing an electric circuit causes an electrical device to function			
P1: an animal gets the energy it needs to run from food	an animal gets the energy it needs to run from food	a dog gets the energy it needs to run from food	a dog gets the energy it needs to run from food
P2: a dog is a kind of animal			
P1: if something is made of min- erals then that something con- tains minerals	rock contains minerals	a rock is a kind of rock	a rock contains minerals
P2: rock is made of minerals			
P1: ocean water is made of hy- drogen and oxygen	ocean water is more common on earth than on earth	ocean water is more com- mon than oxygen on earth	oxygen is the most common element found in the com- pounds that make up ocean water
P2: oxygen is more common than hydrogen on earth			
	water will change from a liquid to a solid by decreasing temper- ature		
P2: temperature is a measure of heat energy			
to perform a process then that	if something is required to do photosynthesis then that some- thing can be absorbed to do pho- tosynthesis	perform photosynthesis then	perform photosynthesis then that something can be ab-
P2: photosynthesis is a kind of process			
P1: volvox is a kind of protist	volvox is a protist	volvox is a kind of protist that reproduces sexually	volvox is a kind of protist that reproduces sexually
P2: volvox reproduces sexually			

Table 10: More examples for original T5 and sentence bottleneck T5.

# **D** More Examples with Low BLEURT Scores

In this part, we show the conclusions from sentence bottleneck T5 without inference type that have BLEURT scores lower than 0.

Premises	Sentence bottleneck T5	Golden conclusion	BLEURT
P1: feeling is when an living thing senses through touch	soft feelings is when an animal senses soft sensations through touch	soft is a kind of feeling	-0.52
P2: soft is a kind of touch sensation			
P1: photosynthesis is a kind of pro- cess in which plants convert carbon dioxide and water and solar energy into carbohydrates and food and oxy- gen for themselves	a plant is a source of oxygen through photosynthesis	plants are a source of carbohydrates through photosynthesis	-0.08
P2: if a plant uses a process to con- vert something into something else then that plant is a source of that something else through that process			
ide	burning coal and burning oil are two sulfur dioxide emitters	burning coal and oil emit sulfur diox- ide	-0.15
P2: burning oil emits sulfur dioxide			
P1: a leaf is a part of a green plant	chlorophyll is a part of green plants	a leaf is a part of a green plant that contains chlorophyll	-0.15
P2: leaves contain chlorophyll			
P1: some bacteria are good for hu- nans by helping digestion	an example of good digestion is stomach acid breaking down food	some bacteria are good for humans by helping to break down food	-0.34
P2: digestion is when stomach acid breaks down food			
P1: producing thrust causes an ani- mal to move	a squid producing thrust causes an animal to move	a squid produces thrust by pushing water out of its body	-0.07
P2: a squid produces a stream of water out of its body that causes it to move			
P1: the iron nail has rusted	rusting is when iron reacts chemi- cally with water and oxygen	a chemical reaction has happened on the iron nail	-0.95
P2: rusting is when iron chemically reacts with water and oxygen			
P1: metal is an electrical conductor	metal is an electrical conductor and metal is a thermal conductor	metal can conduct electricity and heat	-0.12
P2: metal is a thermal conductor			
P1: a needle is a part of a pine tree	a pine tree has a needle part and a leaf part	a needle is a kind of leaf that is a part of a pine tree	-0.15
P2: a needle is a kind of leaf			
P1: helium is a kind of element	helium and pure substances are both elements	helium is a pure substance	-0.10
P2: elements are pure substances			

Table 11: T5 bottleneck: more examples with low BLEURT scores.

# E Additional Examples with Controllable Prefix

We also display some controllable conclusions based on both the Original T5 and T5 bottleneck, where the inference type is fed as the prefix of premises.

Premises	Inference Type	Original T5
P1: a pumpkin contains seeds	ARG-INS	a fruit in a pumpkin contains seeds
P2: fruit contains seeds	FRAME-CONJ	a pumpkin and fruit both contain seeds
	IFT	if a pumpkin contains fruit then the fruit may contain seeds
	EXAMPLE	fruit is an example of pumpkins being sown
	ARG/PRED-GEN	a pumpkin is a kind of fruit
	ARG-SUB	fruit can contain pumpkin seeds
	UNK	a pumpkin can contain seeds
	FRAME-SUB	fruit is a kind of pumpkin
P1: sunlight is a kind of solar energy	ARG-INS	solar energy is a kind of resource for plants that uses water
P2: water and sunlight are resources for plants	FRAME-CONJ	water and sunlight are resources for plants and are kinds of solar energy
	UNK	the resources for plants include water and solar energy
	ARG-SUB	water and solar energy are resources for plants
P1: to move something can mean to transfer something	ARG-SUB	flowing can mean to transfer energy
P2: flowing is a kind of movement for energy	INF	if something flows, then that energy will flow
	FRAME-CONJ	moving can transfer energy and mean flowing
	ARG-INS	flowing can be a kind of transfer of energy to another entity
	ARG/PRED-GEN	transferring energy with flowing can be seen as transferring energy
P1: if a pot is exposed to a stove then that pot may become hot	COND-FRAME	the pot will become hot
P2: the pot is exposed to a stove	EXAMPLE	an example of hot pot is a pot exposed to a stove
P1: eating something has a negative impact on that something	FRAME-SUB	eating cacti has a negative impact on that cacti
P2: some animals eat cacti	PRED-SUB	some animals may have a negative impact or cacti
	ARG-INS	some animals have a negative impact on cacti by eating cacti
	EXAMPLE	cooking cacti is an example of a negative impac on a cactus
	INF	if a cactus has a negative impact on an animal that cactus could be devoured
P1: seeing requires light	ARG-SUB	reading requires light
P2: reading requires seeing	ARG-INS	light is a kind of requirement for reading
	INF	if light is moving then reading may be taken
	EXAMPLE	a light bulb will be used for reading
	UNK	light will help you read

Table 12: Original T5: controllable NLI via inference type.

Premises	Inference Type	T5 bottleneck
P1: a pumpkin contains seeds	ARG-INS	fruit is part of a pumpkin that contains seeds
P2: fruit contains seeds	FRAME-CONJ	a fruit contains seeds
	FRAME-SUB	a pumpkin is a kind of plant
P1: sunlight is a kind of solar energy	ARG-INS	water is a kind of resource that is used by plants for growth
P2: water and sunlight are resources for plants	FRAME-CONJ	plants and water are resources that require water and energy
	ARG-SUB	plants use water and sunlight to produce energy
P1: if a pot is exposed to a stove then that pot may become hot	COND-FRAME	the pot may become hot
P2: the pot is exposed to a stove	ARG/PRED-GEN	the pot may be a source of heat
P1: eating something has a negative impact on that something	FRAME-SUB	eating cacti has a negative impact on that cacti
P2: some animals eat cacti	PRED-SUB	animals have a negative impact on cacti
	ARG-INS	some animals have a negative impact on cacti by eating cacti
P1: seeing requires light	ARG-SUB	reading requires light
P2: reading requires seeing	FRAME-CONJ	reading and feeling can both be used
	INF	if something is visible then that something will be seen

Table 13: T5 bottleneck: controllable NLI via inference type.

# F More Examples with failure prediction of inference type

Premises	Original T5	Golden conclusion	PRED type	GOLD type
	webbed feet have a positive impact on an aquatic animal's adaptation		FRAME-SUB	ARG/PRED- GEN
P2: an adaptation has a positive impact on an animal's survival				
P1: burning something is a kind of action	burning something requires burning something	if something occurs by burning something else, then burning that some- thing else is required for that something to occur		FRAME-SUB
P2: if something occurs by per- forming an action, then that ac- tion is required for that some- thing to occur				
P1: food contains nutrients	a protein is a kind of food that contains a protein	food contains proteins	ARG-INS	ARG-SUB
P2: a protein is a kind of nutrient				
P1: the environment has changed from a body of water to mountains	the atmosphere is found on the surface of earth	the environments on the crustal surface of earth have changed from a body of water to moun- tains	FRAME-SUB	ARG-INS
P2: environments are found on the crustal surface of earth				
P1: ocean water is made of hy- drogen and oxygen	ocean water is becoming more common on earth	oxygen is the most common element found in the compounds that make up ocean water	FRAME-SUB	ARG-INS
P2: oxygen is more common than hydrogen on earth				
P1: bees have a positive impact on plant reproduction	help of bees has a positive im- pact on plant reproduction	bees help plant repro- duction	ARG-SUB	PRED-SUB
P2: helping something has a pos- itive impact on that something				

Table 14: Original T5: failure prediction of inference type.

# G Ablation studies

In this context, we remove the inference types from the dataset and evaluate the T5 model performance using the same metrics. In this case, we can compare the model performance trained with or without that inference-type data. From Table 15, we can observe that the baselines (T5 small and base) achieve higher BLEU and BLEURT scores without the data with further specification (FUR), Inference from rule (INF-RULE), and unknown (UNK) inference type, respectively. This result indicates that the T5 cannot generalize well over those inference types. Besides, removing the UNK inference type from data can achieve lower loss and PPL, which indicates that it has a negative impact on model training.

Remove	T5	BLEU	BLEURT	Cosine	Loss ↓	$PPL\downarrow$
FRAME-SUB	small	0.50	0.19	0.95	0.95	2.58
FRAME-SUB	base	0.60	0.33	0.96	0.72	1.95
ARG-INS	small	0.54	0.27	0.95	0.82	2.22
ARO-INS	base	0.63	0.46	0.97	0.64	1.73
FRAME-CONJ	small	0.53	0.26	0.96	0.84	2.28
TRAME-CONJ	base	0.60	0.35	0.96	0.65	1.76
COND-FRAME	small	0.55	0.25	0.96	0.88	2.39
COND-FRAME	base	0.59	0.36	0.96	0.69	1.87
UNK	small	0.55	0.23	0.95	0.53	1.44
UNK	base	0.62	0.40	0.96	0.58	1.57
No	small	0.54	0.22	0.96	0.69	2.22
No	base	0.57	0.33	0.96	0.61	1.65

Table 15: Ablation study over inference type (FRAME-SUB: Frame substitution, ARG-INS: ARG insertion, FRAME-CONJ: Frame conjunction, COND-FRAME: conditional frame insertion/substitution, UNK: unknown, No: no inference types are removed).