

DSAC-T: Distributional Soft Actor-Critic with Three Refinements

Jingliang Duan, Wenxuan Wang, Liming Xiao, Jiaxin Gao, and Shengbo Eben Li*

Abstract—Reinforcement learning (RL) has proven to be highly effective in tackling complex decision-making and control tasks. However, prevalent model-free RL methods often face severe performance degradation due to the well-known overestimation issue. In response to this problem, we recently introduced an off-policy RL algorithm, called distributional soft actor-critic (DSAC or DSAC-v1), which can effectively improve the value estimation accuracy by learning a continuous Gaussian value distribution. Nonetheless, standard DSAC has its own shortcomings, including occasionally unstable learning processes and the necessity for task-specific reward scaling, which may hinder its overall performance and adaptability in some special tasks. This paper further introduces three important refinements to standard DSAC in order to address these shortcomings. These refinements consist of expected value substituting, twin value distribution learning, and variance-based critic gradient adjusting. The modified RL algorithm is named as DSAC with three refinements (DSAC-T or DSAC-v2), and its performances are systematically evaluated on a diverse set of benchmark tasks. Without any task-specific hyperparameter tuning, DSAC-T surpasses or matches a lot of mainstream model-free RL algorithms, including SAC, TD3, DDPG, TRPO, and PPO, in all tested environments. Additionally, DSAC-T, unlike its standard version, ensures a highly stable learning process and delivers similar performance across varying reward scales.

Index Terms—Reinforcement Learning, Dynamic Programming, Optimal Control, Neural Network

I. INTRODUCTION

REINFORCEMENT learning (RL) driven by the integration of high-capacity function approximators, such as neural networks, have succeeded in various demanding tasks, ranging from gaming scenarios to robotic control systems [1]–[3]. Despite these achievements, typical model-free RL methods tend to learn unrealistically high state–action values, thereby leading to significant dips in performance. This problem is referred to as value overestimation, which is caused by the maximization operator of Bellman equation applied to noisy value estimates. Such a phenomenon is especially prevalent in deep RL setups due to inaccuracies in value function approximation, as seen in methods like deep Q-network (DQN) [4] and deep deterministic policy gradient (DDPG) [5].

J. Duan and W. Wang contribute equally to this work. All correspondences should be sent to S. Li with email: lishb04@gmail.com.

J. Duan and L. Xiao are with the School of Mechanical Engineering, University of Science and Technology Beijing, China, 100083. Email: duanj1@ustb.edu.cn, xlming@xs.ustb.edu.cn.

W. Wang, J. Gao, and S. E. Li are with the School of Vehicle and Mobility, Tsinghua University, Beijing, China, 100084. Email: wxw.sora@gmail.com, gaojiaxin2017@163.com, lishbo@tsinghua.edu.cn.

Double Q-learning, introduced by Hasselt *et al.* [6], is a pioneering method to mitigate overestimation. It achieves this ability by learning two distinct action-value functions, which decouple the maximization operation into action selection and action evaluation. A deep version of this approach, known as double DQN [7], leverages the current Q-network to determine the greedy action, whereas its corresponding target Q-network is utilized to evaluate this action, resulting in a reduced estimation bias in comparison to traditional DQN methods [4]. One shortcoming of these two methods is that they are limited to handling only discrete action spaces. To deal with continuous action spaces, Fujimoto *et al.* [8] proposed clipped double Q-learning, an actor-critic-based approach that incorporates the minimum value between two Q-estimates in formulating the learning objective for both Q-value and policy functions. Since then, this scheme has been widely adopted in mainstream RL algorithms, including twin delayed deep deterministic policy gradient (TD3) [8] and soft actor-critic (SAC) [9], [10], yielding substantial performance enhancements.

The employment of a distributional value function is a new design trend for overestimation mitigation. In [11], we have introduced a standard version of the distributional soft actor-critic algorithm (also termed DSAC-v1) to enhance value estimation accuracy by learning a Gaussian distribution of random returns. The standard DSAC aims to learn a distributional value function instead of focusing solely on its expected value (i.e., Q-value). Mathematical analysis has shown that the overestimation bias is inversely proportional to the variance of the value distribution, which builds the theoretical foundation of overestimation mitigation caused by system randomness and approximation errors. However, the standard DSAC has certain limitations. One significant issue is occasional learning instability, which arises from the process of learning continuous Gaussian value distribution. This approach, which incorporates return randomness into the critic gradient, deviates from conventional RL that focuses solely on expected return [12], potentially leading to unstable critic updates. Another challenge is its sensitivity to reward scaling. Standard DSAC employs a fixed boundary for clipping target returns, and the update magnitude of the Q-value is inversely related to the variance of the value distribution. Consequently, this design necessitates manual adjustments of the reward scale for different tasks to align with the fixed clipping boundary and to maintain a balanced Q-value update size. Such a requirement for task-specific tuning limits the adaptability of DSAC across a range of tasks.

This study proposes an innovative variant of DSAC, which we refer to as DSAC with three refinements (abbreviated

as DSAC-T or DSAC-v2). To mitigate occasional learning instability and reward scaling sensitivity, this new algorithm incorporates three important refinements to standard DSAC, including expected value substituting, twin value distribution learning, and variance-based critic gradient adjusting. Our empirical experiments show that DSAC-T outperforms or matches lots of mainstreaming model-free RL algorithms, including SAC, TD3, DDPG, TRPO, and PPO, across all benchmarked tasks. Moreover, compared with standard DSAC [11], DSAC-T exhibits better learning stability and diminishes the necessity for task-specific parameter adjustment. Interested readers can access the source code at <https://github.com/Jingliang-Duan/DSAC-T>. Additionally, DSAC-T is integrated into our self-developed open-source RL toolkit, named GOPS¹ [13]. The key contributions of this paper are as follows:

- 1) We divide the update gradient of value distribution into two parts: (a) mean-related gradient, which incorporates the first-order term of random returns, and (b) variance-related gradient, which includes the second-order term of random returns. While standard DSAC reduces the randomness of variance-related gradient by introducing a target return clipping boundary into gradient calculation, it overlooks the randomness reduction of mean-related gradient. DSAC-T uses expected value substituting to stabilize mean-value updates, where the random target return is replaced by a more stable target Q-value, essentially the expected value of the target return. This adjustment leads to a similar update rule as non-distributional methods like SAC. Our empirical experiments show that this refinement significantly improves learning stability in practical applications.
- 2) In contrast to standard DSAC, which learns single value distribution, we introduce a distributional version of clipped double Q-learning, called twin value distribution learning. Specifically, DSAC-T trains two independent value distributions and employs the distribution with the lowest Q-value to calculate the gradients for both value distribution and policy function. This approach can further reduce potential overestimation bias, and moreover, it tends to introduce slight underestimation. Underestimation is preferred over overestimation because returns from underestimated actions do not propagate during the critic update.
- 3) During value distribution learning, standard DSAC employs a fixed clipping boundary for target return to prevent gradient explosions, but it is very sensitive to different reward scales. Additionally, the update size of the mean value of value distribution in standard DSAC is modulated by the variance, which can further exacerbate learning sensitivity in relation to reward scales. DSAC-T addresses this issue by implementing a variance-based critic gradient adjusting technique, involving substituting the fixed boundary with a variance-based value and imposing a variance-based gradient scalar to modulate the update size. This refinement significantly enhances the learning robustness to different reward magnitudes

and markedly reduces the need for task-specific hyperparameter adjustments.

The paper is organized as follows. Section II describes some preliminaries of RL. Section III introduces a distributional soft policy iteration framework for DSAC algorithm design. Section IV proposes DSAC-T by incorporating three new tricks. Section V shows the effectiveness of DSAC-T. Section VII concludes this paper.

II. PRELIMINARIES

In this study, we focus on the standard setting of reinforcement learning (RL), where an agent interacts with an environment in discrete time steps. The environment can be represented as a Markov decision process. Both state space \mathcal{S} and action space \mathcal{A} are assumed to be continuous. The agent receives feedback from the environment through a bounded reward signal $r(s_t, a_t)$. The state transition probability is described as $p(s_{t+1}|s_t, a_t)$, mapping a given (s_t, a_t) to a probability distribution over the next state s_{t+1} . For simplicity, we denote the current and next state-action pairs as (s, a) and (s', a') , respectively. The agent's behavior is defined by a stochastic policy $\pi(a_t|s_t)$, which maps a given state to a probability distribution over possible actions. The state and state-action distributions induced by π are denoted as $\rho_\pi(s)$ and $\rho_\pi(s, a)$, respectively.

A. Maximum Entropy RL

The aim of conventional RL is to find a policy that optimizes the expected accumulated return. In this study, we consider an entropy-augmented objective function [14], which supplements the reward signal with policy entropy:

$$J_\pi = \mathbb{E}_{(s_i \geq t, a_i \geq t) \sim \rho_\pi} \left[\sum_{i=t}^{\infty} \gamma^{i-t} [r_i + \alpha \mathcal{H}(\pi(\cdot|s_i))] \right], \quad (1)$$

where $\gamma \in (0, 1)$ is the discount factor, α is the temperature coefficient, and the policy entropy \mathcal{H} is expressed as

$$\mathcal{H}(\pi(\cdot|s)) = \mathbb{E}_{a \sim \pi(\cdot|s)} [-\log \pi(a|s)].$$

We denote the entropy-augmented accumulated return from s_t as $G_t = \sum_{i=t}^{\infty} \gamma^{i-t} [r_i - \alpha \log \pi(a_i|s_i)]$, also referred to as soft return. The soft Q of π is given as

$$Q^\pi(s_t, a_t) = r_t + \gamma \mathbb{E}_{(s_i > t, a_i > t) \sim \rho_\pi} [G_{t+1}], \quad (2)$$

which delineates the expected soft return for choosing a_t in state s_t and subsequently following policy π .

The ideal policy can be found through a maximum entropy variant of policy iteration. This framework consists of two alternating stages: (a) soft policy evaluation and (b) soft policy improvement, collectively known as soft policy iteration. Provided a policy π , we can continually apply the self-consistency operator \mathcal{T}^π under policy π to learn the soft Q-value, which is depicted as follows:

$$\mathcal{T}^\pi Q^\pi(s, a) = r + \gamma \mathbb{E}_{s' \sim p, a' \sim \pi} [Q^\pi(s', a') - \alpha \log \pi(a'|s')]. \quad (3)$$

¹Access GOPS at <https://github.com/Intelligent-Driving-Laboratory/GOPS>

On the other hand, the objective of soft policy improvement is to identify a new policy π_{new} that surpasses the current policy π_{old} , such that $J_{\pi_{\text{new}}} \geq J_{\pi_{\text{old}}}$. Therefore, the policy can be updated directly by maximizing the entropy-augmented objective (1), which is equivalent to

$$\pi_{\text{new}} = \arg \max_{\pi} \mathbb{E}_{s \sim \rho_{\pi}, a \sim \pi} [Q^{\pi_{\text{old}}}(s, a) - \alpha \log \pi(a|s)]. \quad (4)$$

Any soft policy iteration algorithms that alternate between (3) and (4) can gradually converge to the optimal maximum entropy policy. This property has been mathematically proved in [14] and [9].

III. DISTRIBUTIONAL SOFT ACTOR-CRITIC

This section begins by introducing the distributional soft policy iteration (DSPI) framework, which was derived in our previous work [11]. This framework extends maximum entropy RL into a distributional learning version. Subsequently, we outline the standard DSAC algorithm (i.e., DSAC-v1) that roots in this framework.

A. Distributional Soft Policy Iteration

Let us first define a random variable called soft state-action return:

$$Z^{\pi}(s_t, a_t) := r_t + \gamma G_{t+1},$$

which is a function of policy π and state-action pair (s_t, a_t) . The randomness of this variable is attributed to state transition and policy. From (2), we can observe that

$$Q^{\pi}(s, a) = \mathbb{E}[Z^{\pi}(s, a)]. \quad (5)$$

One needs to model the distribution of random variable $Z^{\pi}(s, a)$. We define the function $\mathcal{Z}^{\pi}(Z^{\pi}(s, a)|s, a)$ as a mapping from (s, a) to a distribution over the soft state-action return $Z^{\pi}(s, a)$. This mapping is referred to as soft state-action return distribution or simply value distribution. Relying on this definition, the distributional version of the self-consistency operator in (3) becomes

$$\mathcal{T}_{\mathcal{D}}^{\pi} Z(s, a) \stackrel{D}{=} r + \gamma(Z(s', a') - \alpha \log \pi(a'|s')), \quad (6)$$

where $s' \sim p$, $a' \sim \pi$, and $A \stackrel{D}{=} B$ indicates that two random variables, A and B , have identical probability laws.

We have proved that DSPI, which alternates between (4) and (6), converges uniformly to the optimal policy. Details can be found in [11, Appendix A]. Equation (6) defines a new random variable $\mathcal{T}_{\mathcal{D}}^{\pi} Z(s, a)$, and its distribution is denoted as $\mathcal{T}_{\mathcal{D}}^{\pi} \mathcal{Z}(\cdot|s, a)$. To solve (6), we can update the value distribution by

$$\mathcal{Z}_{\text{new}} = \arg \min_{\mathcal{Z}} \mathbb{E}_{(s, a) \sim \rho_{\pi}} [D_{\text{KL}}(\mathcal{T}_{\mathcal{D}}^{\pi} \mathcal{Z}_{\text{old}}(\cdot|s, a), \mathcal{Z}(\cdot|s, a))], \quad (7)$$

where D_{KL} is the Kullback-Leibler (KL) divergence. Note that D_{KL} can be replaced by other distance measures of two distributions. In fact, DSPI serves as the basic framework for developing distributional soft actor-critic algorithms, including DSAC-v1 in [11] and DSAC-T in this paper.

B. Standard DSAC Algorithm

To handle continuous state and action spaces, our previous study has proposed a standard version of DSAC (termed DSAC-v1), which employs neural networks as the approximators of both value function and policy function [11]. The value distribution and stochastic policy are parameterized as $\mathcal{Z}_{\theta}(\cdot|s, a)$ and $\pi_{\phi}(\cdot|s)$, where θ and ϕ are network parameters. Here, we model these two parameterized functions as diagonal Gaussian, with mean and standard deviation as their outputs. Similar to most RL methods, this algorithm follows a cycle of policy evaluation (critic update) and policy improvement (actor update).

1) *Policy Evaluation:* According to (7), the critic is updated by minimizing

$$J_{\mathcal{Z}}(\theta) = \mathbb{E}_{(s, a) \sim \mathcal{B}} [D_{\text{KL}}(\mathcal{T}_{\mathcal{D}}^{\pi_{\bar{\phi}}} \mathcal{Z}_{\bar{\theta}}(\cdot|s, a), \mathcal{Z}_{\theta}(\cdot|s, a))], \quad (8)$$

where \mathcal{B} denotes the replay buffer of historical samples, while $\bar{\theta}$ and $\bar{\phi}$ are the parameters of target networks. Given that $\mathcal{T}_{\mathcal{D}}^{\pi_{\bar{\phi}}} \mathcal{Z}_{\bar{\theta}}(\cdot|s, a)$ is unknown, we develop a sample-based version of (8):

$$J_{\mathcal{Z}}(\theta) = - \mathbb{E}_{\substack{(s, a, r, s') \sim \mathcal{B}, a' \sim \pi_{\bar{\phi}}, \\ Z(s', a') \sim \mathcal{Z}_{\bar{\theta}}(\cdot|s', a')}} [\log \mathcal{P}(y_z | \mathcal{Z}_{\theta}(\cdot|s, a))], \quad (9)$$

where y_z is the target value for random return:

$$y_z = r + \gamma(Z(s', a') - \alpha \log \pi_{\bar{\phi}}(a'|s')). \quad (10)$$

For simplicity of exposition, the subscript $(s, a, r, s') \sim \mathcal{B}$, $a' \sim \pi_{\bar{\phi}}$, $Z(s', a') \sim \mathcal{Z}_{\bar{\theta}}(\cdot|s', a')$ of \mathbb{E} will be dropped if it can be inferred from the context. Given that \mathcal{Z}_{θ} is assumed to be Gaussian, it can be expressed as $\mathcal{Z}_{\theta}(\cdot|s, a) = \mathcal{N}(Q_{\theta}(s, a), \sigma_{\theta}(s, a)^2)$, where $Q_{\theta}(s, a)$ and $\sigma_{\theta}(s, a)$ are the mean and standard deviation of value distribution. Combining this with (9), the critic update gradient is

$$\begin{aligned} \nabla_{\theta} J_{\mathcal{Z}}(\theta) &= \mathbb{E} \left[\nabla_{\theta} \frac{(y_z - Q_{\theta}(s, a))^2}{2\sigma_{\theta}(s, a)^2} + \frac{\nabla_{\theta} \sigma_{\theta}(s, a)}{\sigma_{\theta}(s, a)} \right] \\ &= \mathbb{E} \left[\underbrace{-\frac{(y_z - Q_{\theta}(s, a))}{\sigma_{\theta}(s, a)^2} \nabla_{\theta} Q_{\theta}(s, a)}_{\text{mean-related gradient}} \right. \\ &\quad \left. - \underbrace{\frac{(y_z - Q_{\theta}(s, a))^2 - \sigma_{\theta}(s, a)^2}{\sigma_{\theta}(s, a)^3} \nabla_{\theta} \sigma_{\theta}(s, a)}_{\text{variance-related gradient}} \right]. \end{aligned} \quad (11)$$

The critic gradient consists of two components: mean-related gradient and variance-related gradient. The difference between y_z and $Q_{\theta}(s, a)$ can be viewed as a random version of the temporal difference (TD) error. The presence of squared TD error in the variance-related gradient makes the critic gradient $\nabla_{\theta} J_{\mathcal{Z}}(\theta)$ susceptible to explode as $|\text{TD}| \rightarrow \infty$, which may lead to learning instability. To mitigate this issue, we use a technique that clips y_z in the variance-related gradient term, ensuring it stays in proximity to the mean value of the current value distribution. This technique lends stability to the learning progression of standard deviation $\sigma_{\theta}(s, a)$. The clipping function is defined as

$$C(y_z; b) := \text{clip}(y_z, Q_{\theta}(s, a) - b, Q_{\theta}(s, a) + b), \quad (12)$$

where b is the clipping boundary. After clipping, the critic gradient (11) becomes

$$\begin{aligned} \nabla_{\theta} J_{\mathcal{Z}}(\theta) \approx \mathbb{E} \left[- \frac{(y_z - Q_{\theta}(s, a))}{\sigma_{\theta}(s, a)^2} \nabla_{\theta} Q_{\theta}(s, a) \right. \\ \left. - \frac{(C(y_z; b) - Q_{\theta}(s, a))^2 - \sigma_{\theta}(s, a)^2}{\sigma_{\theta}(s, a)^3} \nabla_{\theta} \sigma_{\theta}(s, a) \right]. \end{aligned} \quad (13)$$

Moreover, the target networks employ a slow-moving update mechanism to ensure a relatively stable target distribution for critic updating.

2) *Policy Improvement*: The actor is improved by maximizing a parameterized version of (4):

$$\begin{aligned} J_{\pi}(\phi) &= \mathbb{E}_{s \sim \mathcal{B}, a \sim \pi_{\phi}} \left[\mathbb{E}_{Z(s, a) \sim \mathcal{Z}_{\theta}(\cdot|s, a)} [Z(s, a)] - \alpha \log(\pi_{\phi}(a|s)) \right] \\ &= \mathbb{E}_{s \sim \mathcal{B}, a \sim \pi_{\phi}} [Q_{\theta}(s, a) - \alpha \log(\pi_{\phi}(a|s))], \end{aligned} \quad (14)$$

whose gradient can be trivially estimated using the reparameterization trick [11]. In contrast to Q-values, the value distribution offers a richer set of predictions for policy learning. As an illustration, one can choose to incorporate the variance of the value distribution into objective (14) to promote risk-sensitive policy learning [15].

The temperature parameter α plays an important role in balancing exploitation and exploration. Following similar idea in [10], we update this parameter using

$$\alpha \leftarrow \alpha - \beta_{\alpha} \mathbb{E}_{s \sim \mathcal{B}, a \sim \pi_{\phi}} [-\log \pi_{\phi}(a|s) - \overline{\mathcal{H}}], \quad (15)$$

where $\overline{\mathcal{H}}$ stands for the target entropy and β_{α} is the learning rate. Drawing from the discussion above, standard DSAC can be implemented by iterative updating the value distribution, policy, and temperature parameter through stochastic gradient descent (refer to [11] for more details).

IV. DSAC WITH THREE REFINEMENTS (DSAC-T)

The previous section introduces a standard DSAC algorithm that incorporates a distributional value function rather than an expected value function in critic and actor updates. This algorithm is practically useful, but occasionally leads to unstable learning processes in some tasks. Moreover, it requires task-specific hyperparameter tuning, which is inconvenient in fast task setups. In this section, we add three important refinements to standard DSAC, aiming to bolster learning stability and diminish sensitivity to reward scaling. These three refinements include expected value substituting, twin value distribution learning, and variance-based critic gradient adjusting. As a result, we develop an enhanced version of DSAC, named DSAC with three refinements (DSAC-T) or, alternatively, DSAC-v2.

A. Expected value substituting

As delineated in (13), DSAC-v1 reduces the randomness in the variance-related gradient through clipping the random target return. Nonetheless, this method cannot address the high randomness in the mean-related gradient prompted by the random target return. To rectify this issue, our basic idea

is to replace the random target return with a steadier surrogate function.

We initially turn our attention to the target value used for Q-network updates in non-distributional methods:

$$y_q = r + \gamma(Q_{\bar{\theta}}(s', a') - \alpha \log \pi_{\bar{\phi}}(a'|s')), \quad (16)$$

where $a' \sim \pi_{\bar{\phi}}(\cdot|s')$. Compared with target Q-value y_q in (16), the target return y_z in (10) contains more randomness due to the value distribution \mathcal{Z} . As indicated by the critic update gradient in (13), this can lead to instability during the learning of value distribution.

From (5), we can show the equivalence between y_z and y_q :

$$\begin{aligned} \mathbb{E}_{Z(s', a') \sim \mathcal{Z}_{\bar{\theta}}(s', a')} \left[y_z \Big|_{a' \sim \pi_{\bar{\phi}}, Z(s', a') \sim \mathcal{Z}_{\bar{\theta}}(\cdot|s', a')} \right] \\ = r + \gamma(Q_{\bar{\theta}}(s', a') - \alpha \log \pi_{\bar{\phi}}(a'|s')) \Big|_{a' \sim \pi_{\bar{\phi}}} \\ = y_q. \end{aligned} \quad (17)$$

Leveraging this equivalence, we can substitute the first occurrence of y_z in (13) with y_q . Then, we rewrite (13) as

$$\begin{aligned} \nabla_{\theta} J_{\mathcal{Z}}(\theta) \approx \mathbb{E} \left[- \frac{(y_q - Q_{\theta}(s, a))}{\sigma_{\theta}(s, a)^2} \nabla_{\theta} Q_{\theta}(s, a) \right. \\ \left. - \frac{(C(y_z; b) - Q_{\theta}(s, a))^2 - \sigma_{\theta}(s, a)^2}{\sigma_{\theta}(s, a)^3} \nabla_{\theta} \sigma_{\theta}(s, a) \right]. \end{aligned} \quad (18)$$

Since y_q is more certain than y_z , this modified critic gradient can reduce the high randomness in the mean-related gradient. Note that $y_q - Q_{\theta}(s, a)$ precisely represents the TD error. Consequently, the first term in (18) is equivalent to the update gradient of Q-value in non-distributional RL methods, but scaled by an adjustment factor $\sigma_{\theta}(s, a)^2$. By viewing $Q_{\theta}(s, a)$ and $\sigma_{\theta}(s, a)$ as independent entities, the new Q-value learning mechanism delineated by (18) parallels existing RL methods like soft actor-critic (SAC) [9], which ensures comparable learning stability.

B. Twin value distribution learning

The second refinement is a distributional variation of clipped double Q-learning [8], called twin value distribution learning. Specifically, we parameterize two value distributions, characterized by parameters θ_1 and θ_2 , which are trained independently. The value distribution with the smaller mean value is chosen to construct critic and actor gradients. For critic updating, we define the index of the chosen value distribution as

$$\bar{i} := \arg \min_{i=1,2} Q_{\bar{\theta}_i}(s', a') \Big|_{a' \sim \pi_{\bar{\phi}}(\cdot|s')}. \quad (19)$$

Subsequently, we use $\bar{\theta}_{\bar{i}}$ to evaluate the target return in (10) and the target Q-value in (16). The expressions for these target evaluations are shown as follows:

$$\begin{aligned} y_z^{\min} &= r + \gamma(Z(s', a') - \alpha \log \pi_{\bar{\phi}}(a'|s')) \Big|_{Z(s', a') \sim \mathcal{Z}_{\bar{\theta}_{\bar{i}}}(\cdot|s', a')}, \\ y_q^{\min} &= r + \gamma(Q_{\bar{\theta}_{\bar{i}}}(s', a') - \alpha \log \pi_{\bar{\phi}}(a'|s')). \end{aligned} \quad (20)$$

By inserting (20) into (18), it follows that

$$\begin{aligned} \nabla_{\theta_i} J_{\mathcal{Z}}(\theta_i) \approx & \mathbb{E} \left[- \frac{(y_q^{\min} - Q_{\theta_i}(s, a))}{\sigma_{\theta_i}(s, a)^2} \nabla_{\theta_i} Q_{\theta_i}(s, a) \right. \\ & \left. - \frac{(C(y_z^{\min}; b) - Q_{\theta_i}(s, a))^2 - \sigma_{\theta_i}(s, a)^2}{\sigma_{\theta_i}(s, a)^3} \nabla_{\theta_i} \sigma_{\theta_i}(s, a) \right]. \end{aligned} \quad (21)$$

In a similar manner, the actor objective undergoes a revision of twin value distributions:

$$J_{\pi}(\phi) = \mathbb{E}_{s \sim \mathcal{B}, a \sim \pi_{\phi}} [\min_{i=1,2} Q_{\theta_i}(s, a) - \alpha \log(\pi_{\phi}(a|s))]. \quad (22)$$

In contrast to the single value distribution used in DSAC-1, DSAC-T employs the minimization of twin value distributions to shape the target distribution in the critic update. This approach is able to further mitigate overestimation bias, and moreover, it has the tendency to yield slight underestimation. It is important to highlight that minor underestimation is generally more desirable than overestimation. This is because overestimated action values can propagate during learning, whereas underestimated actions typically get sidestepped by the policy, preventing their values from propagating. Additionally, the underestimation of Q-values can serve as a performance lower bound for policy optimization, which is helpful to improve learning stability.

C. Variance-based critic gradient adjusting

As per (12), DSAC-v1 adopts a fixed clipping boundary to prevent gradient explosions. The choice of this clipping boundary is of significant importance, as a smaller value can impact the accuracy of variance learning, while a larger value may lead to a huge gradient norm. An improper selection of clipping boundaries may severely hinder learning performance. It is important to recognize that the mean and variance of value distribution have a direct relationship with reward magnitudes. This indicates that different reward scales typically correspond to distinct optimal clipping boundary designs. Moreover, reward magnitudes can vary not only across diverse tasks but also evolve over time as the policy improves during training. Therefore, DSAC-v1 often needs manual adjustment of reward scales for each specific task, which is a non-trivial job in itself.

To alleviate this sensitivity to reward scaling, our refined version automates the clipping boundary determination by

$$b = \xi \mathbb{E}_{(s,a) \sim \mathcal{B}} [\sigma_{\theta_i}(s, a)], \quad (23)$$

where ξ is a constant parameter that controls the clipping range. In this setup, the boundary can adapt to varying reward magnitudes across varied tasks and training phases. Compared to the direct adjustment of b , selecting ξ is more straightforward, as (23) inherently correlates with reward magnitude. Typically, we can set $\xi = 3$ following the three-sigma rule. While this refinement is straightforward, it is remarkably effective, eliminating the necessity for task-specific hyperparameter fine-tuning.

As previously noted, the update size of the mean value $Q_{\theta}(s, a)$ in DSAC is modulated by the variance, as shown in the denominator of (26). This variance sensitivity distinguishes

DSAC from non-distributional RL algorithms, which may also lead to sensitivity in learning with respect to reward scales. To address this, we introduce a gradient scalar ω , leading to the scaled objective function expressed in (8):

$$J_{\mathcal{Z}}^{\text{scale}}(\theta) = \omega \mathbb{E}_{(s,a) \sim \mathcal{B}} [D_{\text{KL}}(\mathcal{T}_{\mathcal{D}}^{\pi_{\phi}} \mathcal{Z}_{\bar{\theta}}(\cdot|s, a), \mathcal{Z}_{\theta}(\cdot|s, a))], \quad (24)$$

where

$$\omega = \mathbb{E}_{(s,a) \sim \mathcal{B}} [\sigma_{\theta}(s, a)^2]. \quad (25)$$

By using a moving average technique for both ω and b , the corresponding gradient for each value distribution is

$$\begin{aligned} \nabla_{\theta_i} J_{\mathcal{Z}}^{\text{scale}}(\theta_i) \approx & (\omega_i + \epsilon_{\omega}) \mathbb{E} \left[- \frac{(y_q^{\min} - Q_{\theta_i}(s, a))}{\sigma_{\theta_i}(s, a)^2 + \epsilon} \nabla_{\theta_i} Q_{\theta_i}(s, a) \right. \\ & \left. - \frac{(C(y_z^{\min}; b_i) - Q_{\theta_i}(s, a))^2 - \sigma_{\theta_i}(s, a)^2}{\sigma_{\theta_i}(s, a)^3 + \epsilon} \nabla_{\theta_i} \sigma_{\theta_i}(s, a) \right], \end{aligned} \quad (26)$$

where ϵ and ϵ_{ω} are small positive numbers. The ϵ is introduced to prevent gradient explosion when $\sigma_{\theta_i}(s, a) \rightarrow 0$, while ϵ_{ω} is used to prevent gradient disappearance as $\omega_i \rightarrow 0$.

The update rules for b_i and ω_i , with τ as the synchronization rate, are detailed as

$$\begin{aligned} b_i & \leftarrow \tau \xi \mathbb{E}_{(s,a) \sim \mathcal{B}} [\sigma_{\theta_i}(s, a)] + (1 - \tau) b_i, \\ \omega_i & \leftarrow \tau \mathbb{E}_{(s,a) \sim \mathcal{B}} [\sigma_{\theta_i}(s, a)^2] + (1 - \tau) \omega_i. \end{aligned} \quad (27)$$

Finally, DSAC-T is detailed in Algorithm 1.

Algorithm 1 DSAC-T

Input: $\theta_1, \theta_2, \phi, \alpha, \beta_{\mathcal{Z}}, \beta_{\pi}, \beta_{\alpha}, \tau$
Initialize target networks: $\bar{\theta}_1 \leftarrow \theta_1, \bar{\theta}_2 \leftarrow \theta_2, \bar{\phi} \leftarrow \phi$
for each iteration **do**
 for each sampling step **do**
 Calculate action $a \sim \pi_{\phi}(a|s)$
 Get reward r and new state s'
 Store samples (s, a, r, s') in buffer \mathcal{B}
 end for
 for each update step **do**
 Sample data from \mathcal{B}
 Update critic using $\theta \leftarrow \theta - \beta_{\mathcal{Z}} J_{\mathcal{Z}}^{\text{scale}}(\theta)$
 Update actor using $\phi \leftarrow \phi + \beta_{\pi} \nabla_{\phi} J_{\pi}(\phi)$
 Update temperature using (15)
 Update target networks using
 $\bar{\theta} \leftarrow \tau \theta + (1 - \tau) \bar{\theta}, \bar{\phi} \leftarrow \tau \phi + (1 - \tau) \bar{\phi}$
 end for
end for

V. EXPERIMENTAL VALIDATION

We assess the performance of DSAC-T by conducting a series of continuous control tasks facilitated through the OpenAI Gym interface. The benchmark tasks utilized in this study are depicted in Fig. 1, including ten vector-input-based control tasks (Humanoid, Ant, HalfCheetah, Walker2d, InvertedDoublePendulum, HopperReacher, Pusher, Racher, Swimmer, and

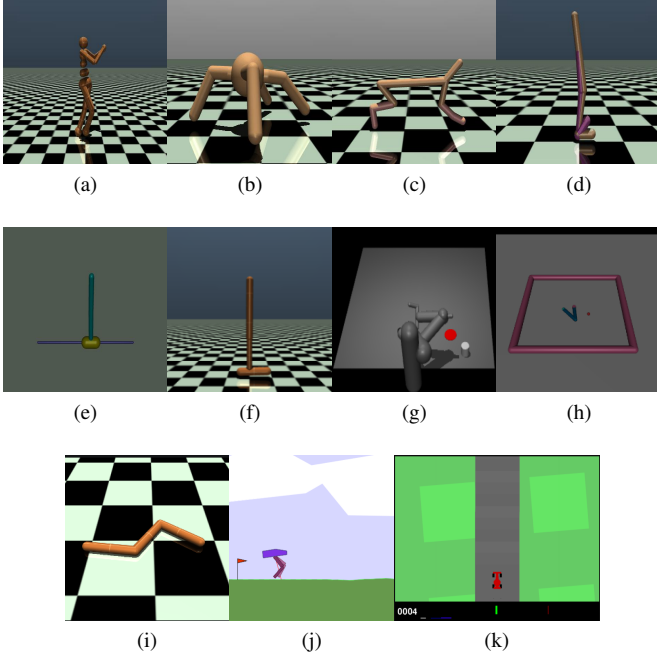


Fig. 1. Benchmarks. (a) Humanoid-v3: $(s \times a) \in \mathbb{R}^{376} \times \mathbb{R}^{17}$. (b) Ant-v3: $(s \times a) \in \mathbb{R}^{111} \times \mathbb{R}^8$. (c) HalfCheetah-v3: $(s \times a) \in \mathbb{R}^{17} \times \mathbb{R}^6$. (d) Walker2d-v3: $(s \times a) \in \mathbb{R}^{17} \times \mathbb{R}^6$. (e) InvertedDoublePendulum-v3: $(s \times a) \in \mathbb{R}^6 \times \mathbb{R}^1$. (f) Hopper-v3: $(s \times a) \in \mathbb{R}^{11} \times \mathbb{R}^3$. (g) Pusher-v2: $(s \times a) \in \mathbb{R}^{23} \times \mathbb{R}^7$. (h) Reacher-v2: $(s \times a) \in \mathbb{R}^{11} \times \mathbb{R}^2$. (i) Swimmer-v3: $(s \times a) \in \mathbb{R}^8 \times \mathbb{R}^2$. (j) BipedalWalker-v3: $(s \times a) \in \mathbb{R}^{24} \times \mathbb{R}^4$. (k) CarRacing-v1: $(s \times a) \in \mathbb{R}^{96 \times 96 \times 3} \times \mathbb{R}^2$ (image-input)

Bipedalwalker) and one image-input-based control task (Car-Racing). All baseline algorithms used are accessible in GOPS [13], an open-source RL solver developed with PyTorch.

A. Baselines

Our algorithm is evaluated against well-known model-free algorithms. These include deep deterministic policy gradient (DDPG) [5], trust region policy optimization (TRPO) [16], proximal policy optimization (PPO) [17], twin delayed deep deterministic policy gradient (TD3) [8], and soft actor-critic (SAC) [10]. These baselines have been widely tested and employed across a range of demanding domains. By comparing with these algorithms, we aim to provide an objective evaluation of DSAC-T. We also draw comparisons between DSAC-T and DSAC-v1, where DSAC-T employs an adaptive clipping boundary with $\xi = 3$ and DSAC-v1 utilizes a fixed value of $b = 20$.

To maintain fairness in comparison, our DSAC-T algorithm is also implemented in GOPS, ensuring an identical modular architecture. For the value distribution and stochastic policy, we employ a diagonal Gaussian distribution. Specifically, each neural network projects the input states to the mean and standard deviation. The Adam optimization method is employed for all parameter updates. All algorithms, including baselines and DSAC-T, follow a similar network architecture and use equivalent hyperparameters. Specifically, for tasks with vector inputs, we implement a multi-layer perceptron architecture for both the actor and critic networks. Each of these networks

comprises three hidden layers, with each layer containing 256 units and using GELU activations. For tasks involving image inputs, an extra encoding network is integrated. This network is tailored for embedding three-channel image observations into a 256-dimensional hidden state, comprising six sequential convolutional layers with RELU activation functions. These layers are characterized by convolutional kernels of sizes $[4, 3, 3, 3, 3, 3]$ and strides $[2, 2, 2, 2, 1, 1]$. More detailed hyperparameters are provided in Table I.

TABLE I
DETAILED HYPERPARAMETERS.

Hyperparameters	Value
<i>Shared</i>	
Optimizer	Adam ($\beta_1 = 0.9, \beta_2 = 0.999$)
Actor learning rate	$1e-4$
Critic learning rate	$1e-4$
Discount factor (γ)	0.99
Policy update interval	2
Target smoothing coefficient (τ)	0.005
Reward scale	1
<i>Maximum-entropy framework</i>	
Learning rate of α	$3e-4$
Expected entropy ($\overline{\mathcal{H}}$)	$\overline{\mathcal{H}} = -\dim(\mathcal{A})$
<i>Deterministic policy</i>	
Exploration noise	$\epsilon \sim \mathcal{N}(0, 0.1^2)$
<i>Off-policy</i>	
Replay buffer size	1×10^6
Sample batch size	20
<i>On-policy</i>	
Sample batch size	2000
Replay batch size	2000

B. Results

We conducted five separate tests for each algorithm, using distinct but consistent random seeds across all algorithms. Learning curves and policy performance are presented in Fig. 2 and Table II, respectively. Our results reveal that DSAC-T surpasses (at least matches) the performance of all baseline algorithms across all benchmark tasks. Taking Humanoid-v3 as an example, compared with SAC, TD3, PPO, DDPG, and TRPO, our algorithm shows relative improvements of 16.0%, 92.3%, 57.7%, 104.7%, and 1022.2%, respectively. These results suggest that DSAC-T sets a new standard of performance for model-free RL algorithms. Moreover, compared to its predecessor (DSAC-v1), this new version (DSAC-T) has achieved substantial enhancements in both learning stability and final outcomes.

Table III showcases the relative estimation bias for each algorithm. While both DSAC-v1 and DDPG utilize a single critic (excluding the target critic) in an off-policy manner, DSAC-v1 exhibits lower overestimation bias overall. This suggests that value distribution learning can partly counteract overestimation issues. By incorporating the twin value distribution learning technique, DSAC-T further reduces overestimation bias, leading to a minor underestimation in certain benchmarks. As a result, DSAC-T achieves enhanced learning stability compared to DSAC-v1. Guided by the principle that underestimation is preferred over overestimation when biases are of similar magnitude, the estimation accuracy of

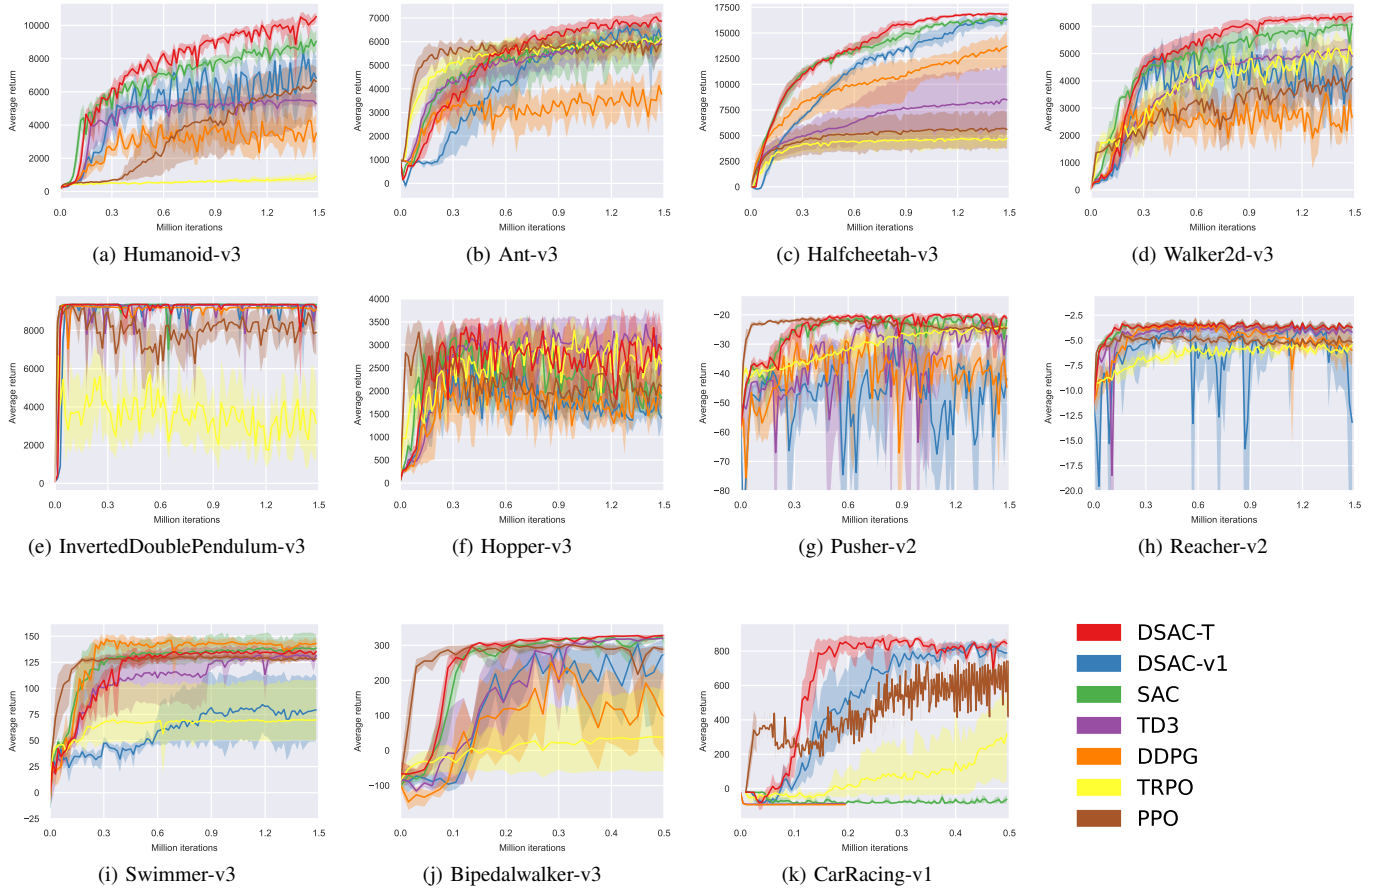


Fig. 2. Training curves on benchmarks. The solid lines correspond to mean and shaded regions correspond to 95% confidence interval over five runs. The iteration of PPO and TRPO is counted by the number of network updates.

DSAC-T either surpasses or at least aligns with all off-policy baselines across most benchmarks. Even when compared to on-policy baselines like PPO and TRPO, DSAC-T consistently demonstrates a significant advantage in estimation accuracy across many benchmarks.

C. Ablation Studies

Subsequently, we carry out ablation studies to evaluate the impact of individual refinement within DSAC-T.

1) *Learning stability*: As displayed in Fig. 3, DSAC-T outshines its variants, DSAC-T without expected value substituting (which calculates the critic gradient using (13) instead of (18)) and DSAC-T with a single value distribution, in both learning stability and overall performance. This confirms the significant contributions of the expected value substitution technique, defined by (18), and the twin value distribution learning technique to learning stability and efficacy. Moreover, the ascending trajectory of the training curve reveals that the inclusion of the expected value substituting refinement also accelerates learning by reducing gradient randomness.

2) *Sensitivity to reward scaling*: Fig. 4 illustrates the comparative performance of DSAC-T and DSAC-T without variance-based critic gradient adjusting (using a fixed boundary value $b = 20$) across varied reward scales. DSAC-T

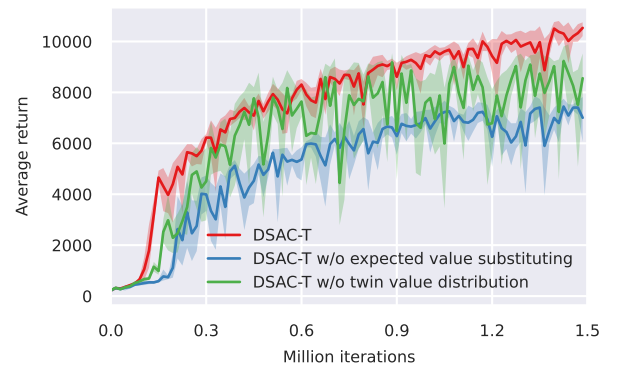


Fig. 3. Training curves in Humanoid-v3 over five runs, comparing ablation over expected value substituting and twin value distribution learning.

maintains similar performance across diverse reward magnitudes, in contrast to DSAC-T without gradient adjusting, which exhibits significant sensitivity to the alterations in reward scales. Notably, it struggles to learn an effective policy under lower reward scales, specifically at 0.01 and 0.1. This comparison emphasizes the efficacy of incorporating a variance-based clipping boundary and gradient scalar in DSAC-T, which significantly reduces the need for adjusting hyperparameters to suit specific tasks.

TABLE II

AVERAGE FINAL RETURN. COMPUTED AS THE MEAN OF THE HIGHEST RETURN VALUES OBSERVED IN THE FINAL 10% OF ITERATION STEPS PER RUN, WITH AN EVALUATION INTERVAL OF 15,000 ITERATIONS. THE MAXIMUM VALUE FOR EACH TASK IS BOLDED. \pm CORRESPONDS TO STANDARD DEVIATION OVER FIVE RUNS.

Task	DSAC-T	DSAC-v1	SAC	TD3	DDPG	TRPO	PPO
Humanoid-v3	10829 \pm 243	9074 \pm 286	9335 \pm 695	5631 \pm 435	5291 \pm 662	965 \pm 555	6869 \pm 1563
Ant-v3	7086 \pm 261	6862 \pm 53	6427 \pm 804	6184 \pm 486	4549 \pm 788	6203 \pm 578	6156 \pm 185
Halfcheetah-v3	17025 \pm 157	16541 \pm 514	16573 \pm 224	8632 \pm 4041	13970 \pm 2083	4785 \pm 967	5789 \pm 2200
Walker2d-v3	6424 \pm 147	5413 \pm 865	6200 \pm 263	5237 \pm 335	4095 \pm 68	5502 \pm 593	4831 \pm 637
Inverteddoublependulum-v3	9360 \pm 0	9359 \pm 1	9360 \pm 0	9347 \pm 15	9183 \pm 9	6259 \pm 2065	9356 \pm 2
Hopper-v3	3660 \pm 533	2135 \pm 434	2483 \pm 943	3569 \pm 455	2644 \pm 659	3474 \pm 400	2647 \pm 482
Pusher-v2	-19 \pm 1	-26 \pm 1	-20 \pm 0	-21 \pm 1	-30 \pm 6	-23 \pm 2	-23 \pm 1
Reacher-v2	-3 \pm 0	-4 \pm 2	-3 \pm 0	-3 \pm 0	-4 \pm 1	-5 \pm 1	-4 \pm 0
Swimmer-v3	138 \pm 6	84 \pm 36	140 \pm 14	134 \pm 5	146 \pm 4	70 \pm 38	130 \pm 2
Bipedalwalker-v3	330 \pm 3	319 \pm 2	327 \pm 1	322 \pm 2	306 \pm 9	40 \pm 137	303 \pm 3
CarRacing-v1	903 \pm 7	890 \pm 12	-12 \pm 8	-89 \pm 5	-93 \pm 0	363 \pm 323	776 \pm 98

TABLE III

AVERAGE RELATIVE VALUE ESTIMATION BIAS OVER FIVE RUNS. THE RELATIVE BIAS IS COMPUTED USING (ESTIMATE Q-VALUE – TRUE Q-VALUE), WHERE TRUE Q-VALUE IS ASSESSED BASED ON THE DISCOUNTED ACCUMULATION OF SAMPLED REWARDS. THE BEST VALUE IS BOLDED. THE SUPERSCRIPIT * INDICATES SUPERIOR ESTIMATION ACCURACY OF DSAC-T OVER OFF-POLICY BASELINES INCLUDING SAC, TD3, AND DDPG. MEANWHILE, \dagger DENOTES SUPERIOR ESTIMATION ACCURACY OF DSAC-T OVER ON-POLICY BASELINES LIKE TRPO AND PPO. WHEN BIASES ARE COMPARABLE, UNDERESTIMATION IS MORE FAVORABLE THAN OVERESTIMATION.

Task	DSAC-T	DSAC-v1	SAC	TD3	DDPG	TRPO	PPO
Humanoid-v3	-42.29*\dagger	207.25	-81.69	-226.05	48.80	18.72	17.28
Ant-v3	-10.55*\dagger	39.04	-25.31	-327.33	89.36	13.36	8.37
Halfcheetah-v3	23.95 \dagger	73.02	-4.82	-341.37	31.81	603.82	95.20
Walker2d-v3	-0.79*\dagger	72.94	-5.49	-60.05	128.54	5.90	1.80
Inverteddoublependulum-v3	2.60*	77.12	5.68	-560.99	57632.34	3.32	1.57
Hopper-v3	-5.13*\dagger	19.47	-6.00	-27.86	74.85	2.65	4.83
Pusher-v2	-6.83* \dagger	-4.71	-7.02	-10.76	1.19	-10.35	-8.68
Reacher-v2	-5.46	-5.38	-5.44	-10.13	-0.28	-6.87	-4.99
Swimmer-v3	0.60	1.90	-0.07	-1.00	0.10	0.15	0.02
Bipedalwalker-v3	-3.80*	0.17	-3.98	-9.78	10.99	-0.72	-3.12
CarRacing-v1	-117.07	26.13	-0.38	1.09	1.10	-2.93	26.95

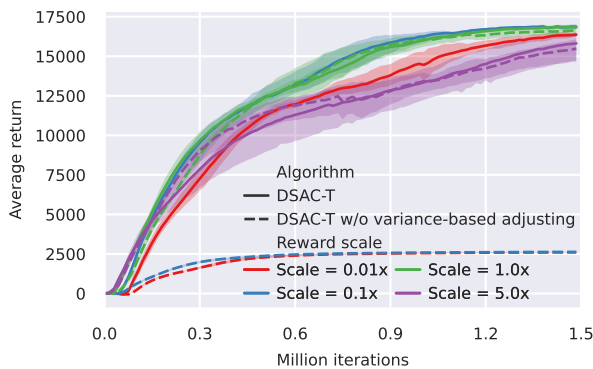


Fig. 4. Training curves in Halfcheetah-v3 over five runs with different reward scales, comparing ablation over variance-based critic gradient adjusting.

VI. RELATED WORK

The concept of distributional RL, which involves modeling the distribution of returns with its expectation representing the value function, was initially introduced in [18]. Since then, numerous distributional RL algorithms have emerged, catering to both discrete control settings [19]–[23] and continuous control settings [24], [25]. Building on the insights gained from distributional RL research, Dabney *et al.* [26] observed from mouse experiments that the brain represents potential future rewards not as a single mean but as a probability

distribution.

Prevalent distributional RL studies typically shaped the value distribution utilizing either a discrete probability density function or a quantile function, resulting in a scenario where the mean value is not directly accessible but must be approximated based on a weighted average of finite quantiles. When the objective is to find a policy that maximizes the expected return, the evaluation accuracy of the mean value (i.e., Q-value) becomes crucial, even more so than the overall accuracy of the distribution. In this study, we directly learn a continuous probability density function for random returns, predicated on a Gaussian assumption, with Q-value as a direct output of the parameterized critic function. The theoretical findings presented in [11] demonstrate that this approach effectively mitigates Q-value overestimation. Furthermore, the introduction of twin value distribution learning has further reduced the overestimation bias, facilitating improved policy performance. Our ongoing work involves conducting a comprehensive analysis of various value distribution learning methods to continue advancing the field of distributional RL.

VII. CONCLUSION

In this study, we introduce an enhanced variant of the distributional soft actor-critic algorithm, termed DSAC with three refinements (DSAC-T), aimed at mitigating issues related to learning instability and sensitivity to reward scaling. These

refinements encompass expected value substituting, twin value distribution learning, and variance-based critic gradient adjusting. Specifically, we achieve improved stability by replacing the random target return term of the mean-related gradient with a more stable target Q-value. This is coupled with the deployment of a twin value distribution learning scheme. Empirical results substantiate the claim that these two refinements significantly improve learning stability, thereby boosting policy performance. To counter the reward scaling sensitivity, the third refinement introduces an adaptive variance-based clipping boundary for random target returns, along with an adaptive critic gradient scalar. Experiment results demonstrate that DSAC-T exhibits a noteworthy performance enhancement when compared to mainstream model-free RL methods, including SAC, TD3, DDPG, PPO, and TRPO.

REFERENCES

- [1] S. E. Li, *Reinforcement Learning for Sequential Decision and Optimal Control*. Springer Verlag, Singapore, 2023.
- [2] D. Silver, A. Huang, C. J. Maddison, A. Guez, L. Sifre, G. Van Den Driessche, J. Schrittwieser, I. Antonoglou, V. Panneershelvam, M. Lanctot, *et al.*, “Mastering the game of Go with deep neural networks and tree search,” *Nature*, vol. 529, no. 7587, p. 484, 2016.
- [3] D. Silver, J. Schrittwieser, K. Simonyan, I. Antonoglou, A. Huang, A. Guez, T. Hubert, L. Baker, M. Lai, A. Bolton, *et al.*, “Mastering the game of go without human knowledge,” *Nature*, vol. 550, no. 7676, p. 354, 2017.
- [4] V. Mnih, K. Kavukcuoglu, D. Silver, A. A. Rusu, J. Veness, M. G. Bellemare, A. Graves, M. Riedmiller, A. K. Fidjeland, G. Ostrovski, *et al.*, “Human-level control through deep reinforcement learning,” *Nature*, vol. 518, no. 7540, p. 529, 2015.
- [5] T. P. Lillicrap, J. J. Hunt, A. Pritzel, N. Heess, T. Erez, Y. Tassa, D. Silver, and D. Wierstra, “Continuous control with deep reinforcement learning,” in *4th International Conference on Learning Representations (ICLR 2016)*, (San Juan, Puerto Rico), 2016.
- [6] H. van Hasselt, “Double Q-learning,” in *23rd Advances in Neural Information Processing Systems (NeurIPS 2010)*, (Vancouver, British Columbia, Canada), pp. 2613–2621, 2010.
- [7] H. van Hasselt, A. Guez, and D. Silver, “Deep reinforcement learning with double Q-learning,” in *Proceedings of the 30th Conference on Artificial Intelligence (AAAI 2016)*, (Phoenix, Arizona, USA), pp. 2094–2100, 2016.
- [8] S. Fujimoto, H. van Hoof, and D. Meger, “Addressing function approximation error in actor-critic methods,” in *Proceedings of the 35th International Conference on Machine Learning (ICML 2018)*, (Stockholmsmässan, Stockholm Sweden), pp. 1587–1596, PMLR, 2018.
- [9] T. Haarnoja, A. Zhou, P. Abbeel, and S. Levine, “Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor,” in *Proceedings of the 35th International Conference on Machine Learning (ICML 2018)*, (Stockholmsmässan, Stockholm Sweden), pp. 1861–1870, PMLR, 2018.
- [10] T. Haarnoja, A. Zhou, K. Hartikainen, G. Tucker, S. Ha, J. Tan, V. Kumar, H. Zhu, A. Gupta, P. Abbeel, *et al.*, “Soft actor-critic algorithms and applications,” *arXiv preprint arXiv:1812.05905*, 2018.
- [11] J. Duan, Y. Guan, S. E. Li, Y. Ren, Q. Sun, and B. Cheng, “Distributional soft actor-critic: Off-policy reinforcement learning for addressing value estimation errors,” *IEEE Transactions on Neural Networks and Learning Systems*, vol. 33, no. 11, pp. 6584–6598, 2021.
- [12] Y. Guan, S. E. Li, J. Duan, J. Li, Y. Ren, Q. Sun, and B. Cheng, “Direct and indirect reinforcement learning,” *International Journal of Intelligent Systems*, vol. 36, no. 8, pp. 4439–4467, 2021.
- [13] W. Wang, Y. Zhang, J. Gao, Y. Jiang, Y. Yang, Z. Zheng, W. Zou, J. Li, C. Zhang, W. Cao, *et al.*, “GOPS: A general optimal control problem solver for autonomous driving and industrial control applications,” *Communications in Transportation Research*, vol. 3, p. 100096, 2023.
- [14] T. Haarnoja, H. Tang, P. Abbeel, and S. Levine, “Reinforcement learning with deep energy-based policies,” in *Proceedings of the 34th International Conference on Machine Learning (ICML 2017)*, (Sydney, NSW, Australia), pp. 1352–1361, PMLR, 2017.
- [15] Y. Ren, J. Duan, S. E. Li, Y. Guan, and Q. Sun, “Improving generalization of reinforcement learning with minimax distributional soft actor-critic,” in *23rd IEEE International Conference on Intelligent Transportation Systems (IEEE ITSC 2020)*, (Rhodes, Greece), IEEE, 2020.
- [16] J. Schulman, S. Levine, P. Abbeel, M. I. Jordan, and P. Moritz, “Trust region policy optimization,” in *Proceedings of the 32nd International Conference on Machine Learning (ICML 2015)*, (Lille, France), pp. 1889–1897, 2015.
- [17] J. Schulman, F. Wolski, P. Dhariwal, A. Radford, and O. Klimov, “Proximal policy optimization algorithms,” *arXiv preprint arXiv:1707.06347*, 2017.
- [18] M. G. Bellemare, W. Dabney, and R. Munos, “A distributional perspective on reinforcement learning,” in *Proceedings of the 34th International Conference on Machine Learning (ICML 2017)*, (Sydney, NSW, Australia), pp. 449–458, PMLR, 2017.
- [19] W. Dabney, M. Rowland, M. G. Bellemare, and R. Munos, “Distributional reinforcement learning with quantile regression,” in *Proceedings of the 32nd Conference on Artificial Intelligence (AAAI 2018)*, (New Orleans, Louisiana, USA), pp. 2892–2901, 2018.
- [20] W. Dabney, G. Ostrovski, D. Silver, and R. Munos, “Implicit quantile networks for distributional reinforcement learning,” in *Proceedings of the 35th International Conference on Machine Learning (ICML 2018)*, (Stockholmsmässan, Stockholm Sweden), pp. 1096–1105, PMLR, 2018.
- [21] D. Yang, L. Zhao, Z. Lin, T. Qin, J. Bian, and T.-Y. Liu, “Fully parameterized quantile function for distributional reinforcement learning,” *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- [22] M. Rowland, R. Dadashi, S. Kumar, R. Munos, M. G. Bellemare, and W. Dabney, “Statistics and samples in distributional reinforcement learning,” in *Proceedings of the 36th International Conference on Machine Learning (ICML 2019)*, (Long Beach, CA, USA), pp. 5528–5536, PMLR, 2019.
- [23] B. Mavrin, H. Yao, L. Kong, K. Wu, and Y. Yu, “Distributional reinforcement learning for efficient exploration,” in *Proceedings of the 36th International Conference on Machine Learning (ICML 2019)*, (Long Beach, CA, USA), pp. 4424–4434, PMLR, 2019.
- [24] G. Barth-Maron, M. W. Hoffman, D. Budden, W. Dabney, D. Horgan, D. TB, A. Muldal, N. Heess, and T. P. Lillicrap, “Distributed distributional deterministic policy gradients,” in *6th International Conference on Learning Representations (ICLR 2018)*, (Vancouver, BC, Canada), 2018.
- [25] C. Tessler, G. Tennenholtz, and S. Mannor, “Distributional policy optimization: An alternative approach for continuous control,” *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- [26] W. Dabney, Z. Kurth-Nelson, N. Uchida, C. K. Starkweather, D. Hassabis, R. Munos, and M. Botvinick, “A distributional code for value in dopamine-based reinforcement learning,” *Nature*, pp. 1–5, 2020.