

DAGC: Data-Volume-Aware Adaptive Sparsification Gradient Compression for Distributed Machine Learning in Mobile Computing

Rongwei Lu, *Student Member, IEEE*, Yutong Jiang, Yinan Mao, *Student Member, IEEE*, Chen Tang, Bin Chen, *Member, IEEE*, Laizhong Cui, *Senior Member, IEEE*, Zhi Wang, *Senior Member, IEEE*

Abstract—Distributed machine learning (DML) in mobile environments faces significant communication bottlenecks. Gradient compression has emerged as an effective solution to this issue, offering substantial benefits in environments with limited bandwidth and metered data. Yet, they encounter severe performance drop in non-IID environments due to a one-size-fits-all compression approach, which does not account for the varying data volumes across workers. Assigning varying compression ratios to workers with distinct data distributions and volumes is thus a promising solution. This study introduces an analysis of distributed SGD with non-uniform compression, which reveals that the convergence rate—indicative of the iterations needed to achieve a certain accuracy—is influenced by compression ratios applied to workers with differing volumes. Accordingly, we frame relative compression ratio assignment as an n -variables chi-square nonlinear optimization problem, constrained by a fixed and limited communication budget. We propose DAGC-R, which assigns the worker handling larger data volumes the conservative compression. Recognizing the computational limitations of mobile devices, we DAGC-A, which are computationally less demanding and enhances the robustness of the absolute gradient compressor in non-IID scenarios. Our experiments confirm that both the DAGC-A and DAGC-R can achieve better performance when dealing with highly imbalanced data volume distribution and restricted communication.

Index Terms—Distributed Machine Learning, Non-IID, Data-Aware Adaptive Gradient Compression

I. INTRODUCTION

WITH the ubiquity of mobile devices and the advancements in machine learning [1], there is a burgeoning interest in DML using these portable platforms. Despite

Rongwei Lu, Yinan Mao and Zhi Wang are with the Tsinghua-Berkeley Shenzhen Institute, Tsinghua Shenzhen International Graduate School, Tsinghua University, Shenzhen 518000, China (e-mail: lrw21@mails.tsinghua.edu.cn; maoyin21@mails.tsinghua.edu.cn; wangzhi@sz.tsinghua.edu.cn)

Yutong Jiang is with the School of Software Technology & International School of Information Science and Engineering, Dalian University of Technology, Dalian 116024 (e-mail: jiangyutong0123@gmail.com). Yutong Jiang has been pre-admitted to Tsinghua Shenzhen International Graduate School when doing this work.

Chen Tang is with the Department Of Computer Science and Technology, Tsinghua University, Beijing 10084, China (e-mail: genprtung@gmail.com)

Bin Chen is with the Department of Computer Science and Technology, Harbin Institute of Technology Shenzhen, Shenzhen 518000, China (e-mail: chenbin2021@hit.edu.cn)

Laizhong Cui is with the College of Computer Science and Software Engineering, Shenzhen University, Shenzhen 518060, China (e-mail: cuiliz@szu.edu.cn)

its potential, this paradigm is significantly constrained by communication bottlenecks, particularly as the number of devices scales up. Gradient compression algorithms have been recognized as an effective countermeasure to this challenge, offering not only a reduction in communication volumes but also a cost-effective solution in bandwidth-limited and per-traffic billing mobile environments.

However, in non-IID scenarios, the performance of lossy gradient compression algorithms deteriorates, leading to poorer model convergence when contrasted with IID datasets configurations [2], [3]. For instance, the same gradient compression algorithm [4] (with the hyperparameter set to 10%) reduces the accuracy by only 0.7% compared to the bulk synchronous parallel (BSP) [5] as a baseline in IID scenarios. However, this margin widens dramatically to a 10.4% decrease in accuracy under non-IID conditions [3]. The reason for the accuracy degradation is that they use the same aggressive gradient compression ratios for different workers, while different workers usually have different data volumes and distributions [6]–[8]. To illustrate, within the Flickr-mammal dataset (denoted as Flickr in the following) [3], the worker with the largest data volume has 78% more samples than the worker with the second largest data volume (divided by subcontinent). Similarly, in the Google Landmark dataset v2 [9], the disparity is even more pronounced, with the worker with the largest data volumes having at least 213% more images than its peers, with the division based on continent.

To facilitate our discussion, we introduce the terms *large workers* and *small workers* to refer to workers with correspondingly large or small data volumes, respectively, and use *worker size* to denote the quantity of local data samples. Current gradient compression algorithms commonly overlook the variation in *worker size*. Even in studies like SkewScout [3] that suggest adaptive algorithms to modulate gradient compression ratios in line with data distribution disparities, *large workers* are subjected to the same stringent compression ratios as their smaller counterparts, leading to the loss of vital information that could otherwise expedite model convergence.

Our empirical analysis yields critical findings for the formulation of a data-volume-aware gradient compression approach. Primarily, we find that a one-size-fits-all compression strategy falls short in non-IID settings with communication constraints, as workers with diverse data volumes and distributions require tailored compression ratios. Furthermore, a gradient compression strategy that assigns proportionally higher compression

ratios to *large workers* can reduce the training iterations while achieving equivalent accuracy, in contrast to a uniform strategy. Leveraging these findings, we advocate for an adaptive gradient compression algorithm that adjusts compression ratios¹ based on *worker size*, thereby optimizing the balance between compression efficiency and communication overhead.

The technical challenge in designing this algorithm is: given a fixed total communication budget, how to determine the compression ratio for each worker? To tackle this issue, firstly we derive the convergence rate of distributed SGD with error-feedback and different gradient compression ratios (denoted as non-uniform D-EF-SGD) with the relative compressors (e.g., Top- k [11], [12] and Random- k [10]). We define the number of workers as n , the compression ratio and the training weight of the i -th worker as δ_i and p_i respectively. Our results demonstrate that in the communication-constraint non-IID scenarios, non-uniform D-EF-SGD with the relative compressor converges linearly at the rates of $\mathcal{O}\left(\frac{\sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}}}{\sqrt{\delta_{\min}}}\right)$. Our analysis generalize the previous work [12]–[14], which forced $\delta_i = \delta_j, \forall i, j \in [1, n]$. Secondly, we formulate finding a proper assignment of δ_i as an n -variable chi-square nonlinear optimization problem with one constraint. We divide this problem into an n -variable chi-square nonlinear optimization problem with one constraint, amenable to solution via the Lagrange multiplier method, and the task of finding the minimal value of a one-dimensional function. Finally, we find the optimal δ_i by traversing the minimum value of Φ for n cases.

Similarly, we solve the technical challenge under the absolute compressor [15]. We derive the convergence rate of non-uniform D-EF-SGD using the absolute compressor. We define the threshold of worker i as λ_i and reveal that non-uniform D-EF-SGD with the absolute compressor converges as $\mathcal{O}\left(\sqrt{\sum_{i=1}^n p_i^2 \lambda_i^2}\right)$. Then, we add the communication constraint and formulate the task of identifying the optimal λ_i as a symmetric optimization problem, which can be solved directly using the Lagrange multiplier method.

Based on these analyses, we propose DAGC (Fig. 1 is a graphical illustration), a low-cost data-aware adaptive gradient compression algorithm which strategically allocates different compression ratios depending on the *worker size*. DAGC consists of two compressors, DAGC-R for relative compressors and DAGC-A for absolute compressors. We have $\frac{\delta_i}{\delta_j} \approx \left(\frac{p_i}{p_j}\right)^{2/3}$ in DAGC-R and $\frac{\lambda_i}{\lambda_j} = \left(\frac{p_i}{p_j}\right)^{2/3}$ in DAGC-A. Both align with the conclusion drawn from our measurement study, which advocate the assignment of higher compression ratios to workers with larger p_i . The time complexity of DAGC-R (as well as DAGC-A) to find the optimal δ_i (λ_i) is $\mathcal{O}(n)$ ($\mathcal{O}(1)$).

In a word, the contributions of our work are summarized as below.

- We experimentally reveal that setting higher compression ratios to *large workers* converges faster than the uniform

¹In this work, the compression ratio is defined as the ratio of the compressed data divided by the uncompressed data, referring to the gradient compression part of Sec. II in [10].

compression under the fixed and limited communication volume, saving up to 33.75% iterations for Logistic on FMNIST.

- We generalize the convergence analysis of D-EF-SGD with both relative [16] and absolute compressors [15] to the context of non-uniform compression, where nodes are endowed with different compression ratios and training weights. Under the communication-constraint non-IID scenarios, we show the iteration complexity of $\mathcal{O}\left(\frac{\sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}}}{\sqrt{\delta_{\min}}}\right)$ for the relative compressor and $\mathcal{O}\left(\sqrt{\sum_{i=1}^n p_i^2 \lambda_i^2}\right)$ for the absolute compressor.
- We propose two novel adaptive compression algorithms, DAGC-R and DAGC-A, designed to for optimizing compression rate allocation in relative and absolute compressors, respectively. DAGC-R is developed by solving an n -variable chi-square nonlinear asymmetric optimization problem with a communication constraint. In DAGC-R, it has $\frac{\delta_i}{\delta_j} \approx \left(\frac{p_i}{p_j}\right)^{2/3}$. Similarly, DAGC-A is developed by solving an n -variable chi-square nonlinear symmetrical optimization problem subject to the same constraint and has $\frac{\lambda_i}{\lambda_j} = \left(\frac{p_i}{p_j}\right)^{2/3}$. DAGC-A and DAGC-R converge the fastest in communication-constraint non-IID scenarios.
- We employ DAGC-A and DAGC-R in both the real-world non-IID and artificially partitioned non-IID datasets. The experimental results confirm the correctness of our theory and show that our design can save up to 26.19% of iterations to converge to the same accuracy compared to the uniform compression.

The remainder of this paper is organized as follows. We introduce the preliminaries in Sec. II. We empirically demonstrate a faster convergence when *large workers* are set high compression ratios in Sec. III. We derive the convergence rate of non-uniform D-EF-SGD using the relative (as well as the absolute) compressor and propose DAGC-R (DAGC-A) in Sec. IV (Sec. V). We show experimental results in Sec. VI. We discuss the related work in Sec. VII, and present the conclusion in Sec. VIII. We showcase the proof of theorems in Appendix.

II. PRELIMINARIES

We specifically concentrate on DML in data-parallel mode using the D-EF-SGD algorithms alongside sparsification compressors. Our aim is to overcome the challenges posed by non-IID scenarios. To provide a comprehensive understanding, we will briefly delve into the concepts of DML, non-IID, and gradient compression, including the properties of relative and absolute compressors.

DML: The distribution problem is taken consideration in this project.

$$f^* := \min_{\mathbf{x}} \left[f(\mathbf{x}) := \sum_{i=1}^n p_i f_i(\mathbf{x}) \right],$$

In this research, we consider the objective function f , which is divided into n terms $f_i, i \in [n]$. p_i is the training weight of the worker i . Each p_i value should be greater than or equal to 0, and the summation of all p_i values equals 1. To facilitate

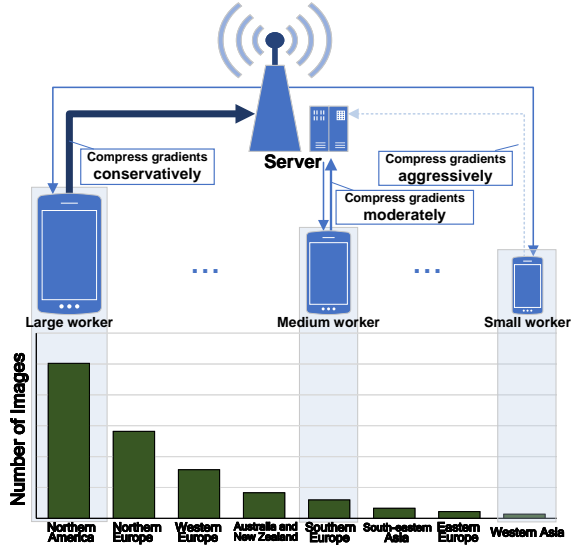


Fig. 1: High-level design of DAGC. DAGC sets different compression ratios to workers depending on the *worker size*. *Large workers* (i.e., the workers with large data volumes and similarly to *small* and *medium workers*) are assigned conservative compression ratios, and *small workers* adopt aggressive compression ratios. The bar chart of the number of samples owned by each worker refers to Fig. 13 in [3].

explanation, we assign sequence numbers to the workers based on their training weights², with $p_i \geq p_{i+1}, \forall i \in [n-1]$.

Non-IID: The non-IID scenario in this study focuses on the size and classification of datasets stored by distributed workers. This poses a significant challenge in modern DML, like Federated Learning [17], [18] and distributed training in edge computing [19]–[21]. Workers may have imbalanced numbers of samples and categories, which can be attributed to variations in their geographic locations and user-facing orientations. The skewness in the distribution of data labels across devices/locations is a common type of non-IID, and is the focus of this research [3].

Gradient compression: Unlike compressing the model [22], [23] for inference speedup, gradient compression focuses on compressing the gradient to reducing the traffic volume during the communication phase. Concerning compression tactics [24], compression approach can be categorized into (i) quantization [25]–[27], which converts high precision to low precision, consequently diminishing the number of transmitted bits; (ii) sparsification [15], [28], which retains solely certain elements of the gradient while assigning 0 to others; (iii) low-rank [29], which breaks down the gradient matrix to acquire multiple low-rank matrices.

According to whether the compression error (or variance) is independent of the gradient \mathbf{x} , the compressors can be categorized as absolute or relative compressors [15]:

- *The relative compressor:* We represent the relative compressor as \mathbf{C}_δ and the compression ratio as δ . \mathbf{C}_δ is a mapping

that has the property $\mathbb{R}^d \rightarrow \mathbb{R}^d$:

$$\mathbb{E}_{\mathbf{C}_\delta} \|\mathbf{C}_\delta(\mathbf{x}) - \mathbf{x}\|^2 \leq (1 - \delta) \|\mathbf{x}\|^2.$$

- *The absolute compressor:* The absolute compressor is characterized by a hyperparameter commonly referred to as the threshold, with higher threshold values indicating more aggressive compression. We denote the threshold as λ , and the absolute compressor as \mathbf{C}_λ . \mathbf{C}_λ is a mapping: $\mathbb{R}^d \rightarrow \mathbb{R}^d$, having the property:

$$\mathbb{E}_{\mathbf{C}_\lambda} \|\mathbf{C}_\lambda(\mathbf{x}) - \mathbf{x}\|^2 \leq d\lambda^2,$$

where d is the number of parameters of the model.

Distributed SGD with error-feedback and sparsification compressors (D-EF-SGD): D-EF-SGD [30] and Distributed Quantized SGD (D-QSGD) [31], [32] are two of the most dominant compressors in modern DML. In communication-constrained non-IID scenarios, D-EF-SGD has two advantages: first, it achieves lower compression ratios³ (i.e., transmits less information), which is favorable for resource-constrained scenarios; second, D-EF-SGD has a lower dependence on ζ , and thus is more suitable for highly skewed non-IID scenarios [13]. For these reasons, we focus on D-EF-SGD rather than D-QSGD.

III. MOTIVATING EXAMPLES

In this section, we aim to validate the following two points through a series of motivating experiments: 1) In communication-constrained environments, a compression strategy with different compression ratios can achieve faster convergence compared to uniform compression. 2) A strategy that sets higher compression ratios for *large workers* usually achieves faster convergence than those for *small workers*, reducing the number of iterations by up to 33.75%. To verify this conclusion, two non-uniform compression strategies are used in this paper: 1) *Non-uniform compression I* gives higher compression ratios to large workers and lower compression ratios to small workers; 2) *Non-uniform compression II* gives lower compression ratios to large workers and higher compression ratios to small workers.

To provide empirical evidence for our research, we performed two tasks: Image Classification (abbreviated as F-MNIST [35]) and Speech Recognition (abbreviated as SCs [36]) using LSTM on Speech Commands. This approach ensures the generalizability of our experimental findings. To gain a better understanding of the results, we divided the workers into two categories: large workers and small workers. Our setup consisted of 11 workers, with one large worker having a local dataset that accounted for 50% of the global dataset, and 10 small workers, each with datasets accounting for 5%. In these experiments, we imposed communication constraints, specifically an average compression ratio of aggressive compression Ratio $k_{min} = 0.1\%$ as described in the

³ $\frac{1}{32}$ is the most tiny compression ratio of D-QSGD [33], [34], nearly 3.4%, while less than 0.1% denotes the compression ratio of sparsification constrain [16]. Meanwhile, the compression ratio of D-QSGD is discrete. It emphasizes to adaptively adjust more complicated ratios. This issue is also discussed in the design of DC2 [10].

²The order of the training weight keeps the same in the following paper.

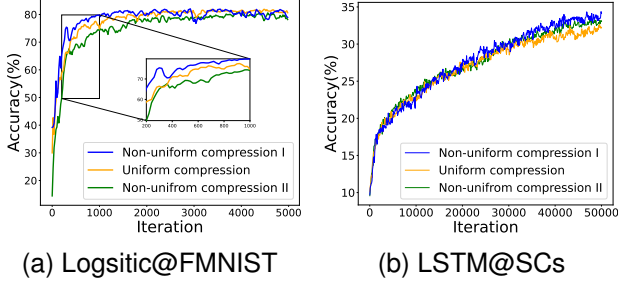


Fig. 2: The accuracy curves (Accuracy vs. Iteration) of Logistic@FMNIST (a) and LSTM@SCs (b) using different relative compression strategies. In scheme I (as well as scheme II), large Workers are set lower (higher) compression ratios. The uniform compression is a one-size-fits-all strategy. Among these three strategies, non-uniform compression scheme I exhibits optimal performance.

appendix experiments [15], while maintaining consistent total communication volume (i.e., fixing $\sum_{i=1}^n \delta_i$).

Logistic on FMNIST: It can be observed from Fig. 2a that the initial stages witness faster progress in Non-uniform compression I ($\delta_1 = 1\%$, and $\delta_i = 0.01\%$, $i \in [2, n]$) when compared to two alternative strategies. In order to attain an identical accuracy level of 80%, it is worth noting that the employment of Non-uniform compression I ($\delta_i = 0.1\%$, $i \in [1, n]$) results in a substantial reduction of around 33.75% in the number of iterations required (from an initial count of 1600 iterations down to 1060 iterations), as compared to the uniform compression approach. Furthermore, FMNIST exhibits a higher level of ease in terms of convergence, whereby a 0.1% compression ratio is indicative of a conservative compression measure. It is noteworthy that under such circumstances, the performance of Non-uniform compression I is optimized, whereas Non-uniform compression II ($\delta_1 = 0.01\%$, and $\delta_i = 0.11\%$, $i \in [2, n]$) experiences a relatively weaker performance.

LSTM on SCs: Fig. 2b demonstrates that, in the context of fixed communication volume, the model utilizing the non-uniform compression strategy I exhibits the fastest convergence. To attain the same level of accuracy (32%), the non-uniform compression strategy I diminishes the training time by 17.59% and 11.44%, as compared to the uniform compression strategy (reducing iterations from 43,200 to 35,600) and the non-uniform strategy II (reducing iterations from 40,200 to 35,600), respectively. Notably, achieving convergence on the SCs dataset proves more arduous when contrasted with FMNIST and CIAFR-10, and attaining a compression ratio of 0.1% is exceptionally ambitious for SCs. It is evident that, even after 50,000 iterations, training remains incomplete. Consequently, both non-uniform compression I and II surpass uniform compression, signifying their superiority. The specific compression ratios employed correspond to those utilized for Logistic on FMNIST.

In conclusion, the aforementioned empirical findings affirm the inadequacy of uniform compression as an optimal strategy when confronted with discrepancies in worker size. Conversely, the proposed approach, which assigns higher

TABLE I: Notation list.

Notation	Description
n	the number of workers
p_i	the training weight of the i -th node
δ_i/λ_i	the compression ratio/threshold of node i under the relative/absolute compressor
$\mathbf{C}_{\delta_i}/\mathbf{C}_{\lambda_i}$	the relative/absolute compressor and the hyper-parameter is δ_i/λ_i
\mathbf{x}_t	the global model in the t -th iteration
γ	learning rate
$\mathbf{g}^i(\mathbf{x}_t)$	the stochastic gradient of \mathbf{x}_t
\mathbf{e}_t^i	the local error term of node i in the t -th iteration
$\hat{\Delta}_t^i$	the compressed gradients transferred to the server from node i in the t -th iteration
$\tilde{\Delta}_t^i$	the compressed gradients transferred to the server from node i in the t -th iteration
ζ_i	the distance of node i from the local distribution to the global distribution
σ^2	the upper variance bound of the noise of gradients

compression ratios to *large workers*, stands as an efficacious means of enhancing training speed.

IV. DAGC-R

In this section, our primary focus is to address the central issue of this research: **Given the total amount of communication, how can we theoretically ascertain the best compression ratio for each worker using the relative compressor?**

Initially, we outline the convergence speed of non-uniform D-EF-SGD with the relative compressor, taking into account the non-convex, convex, and strongly convex scenarios. (Theorems in Sec. IV-B and the proof in Appendix)

Subsequently, we represent this challenge as an n -variable chi-square nonlinear asymmetrical optimization problem that comes with one constraint. (**Theorem 4** in Sec. IV-D)

Lastly, we propose our design DAGC-R in Sec. IV-E.

We tabulate the notations in Table I. Additionally, we showcase the pseudo-code of non-uniform D-EF-SGD in Algorithm 1.

A. Regularity assumptions

We adopt Assumptions 1-4 in [13]. Specifically, we assume functions are L -smooth with the gradient noise of SGD presumed to exhibit zero mean and a variance of σ^2 . We gauge data heterogeneity using constants $\zeta_i^2 > 0$ and $Z^2 \geq 1$, which cap the variance among the n workers. In **Theorem 2, 3**, we posit that objective functions are μ -convex.

B. Convergence rate of non-uniform D-EF-SGD with the relative compressor

Theorem 1 (Non-convex convergence rate of non-uniform D-EF-SGD with the relative compressor). *Consider a function*

Algorithm 1: Non-uniform D-EF-SGD

Input: n, γ, p_i , compressor \mathbf{C} , compression parameters $\delta_1, \dots, \delta_n$ or $\lambda_1, \dots, \lambda_n$, initial parameters \mathbf{x}_0 , initial local error $\mathbf{e}_0^i = \mathbf{0}_d$

Output: \mathbf{x}_T

```

1 for  $t = 0, \dots, T - 1$  do
  /* Worker does */
2   for  $i = 1, \dots, n$  do
3     Receive  $\mathbf{x}_t$  from the server;
4      $\mathbf{g}_t^i := \mathbf{g}^i(\mathbf{x}_t)$ ;
5     if  $\mathbf{C}$  is the relative compressor then
6        $\hat{\Delta}_t^i := \mathbf{C}_{\delta_i}(\mathbf{e}_t^i + \mathbf{g}_t^i)$ ;
7     else
8        $\hat{\Delta}_t^i := \mathbf{C}_{\lambda_i}(\mathbf{e}_t^i + \mathbf{g}_t^i)$ ;
9     end
10     $\mathbf{e}_{t+1}^i := \mathbf{e}_t^i + \mathbf{g}_t^i - \hat{\Delta}_t^i$ ;
11    Upload  $\hat{\Delta}_t^i$ ;
12  end
  /* Server does */
13  Gather all  $\hat{\Delta}_t^i$ ;
14   $\mathbf{x}_{t+1} := \mathbf{x}_t - \gamma \sum_{i=1}^n p_i \hat{\Delta}_t^i$ ;
15  Send  $\mathbf{x}_{t+1}$  to all workers
16 end
17 Return  $\mathbf{x}_T$ ;
```

f , which is mapping from \mathbb{R}^d to \mathbb{R} and L -consistent. We can find a learning rate γ such that $\gamma \leq \frac{1}{4LZ} \frac{\delta_{\min}}{\sqrt{nC_Z}}$, where $C_Z = \sum_{i=1}^n \frac{\delta_{\min}}{\delta_i} p_i^2$. This means that the maximum number of

$$\mathcal{O}\left(\frac{\sigma^2 \sum_{i=1}^n p_i^2}{\epsilon^2} + \frac{\sqrt{n}(\zeta \sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}} + \sigma \sqrt{\sum_{i=1}^n p_i^2})}{\epsilon^{\frac{3}{2}} \sqrt{\delta_{\min}}}\right) + \frac{\sqrt{n}LZ \sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}}}{\epsilon \sqrt{\delta_{\min}}} \cdot LF_0 \quad (1)$$

iterations of non-uniform D-EF-SGD with the relative compressor ensures $\mathbb{E}f(\mathbf{x}_{final}) - f^* \leq \epsilon$, where F_0 is at least $f(\mathbf{x}_0) - f^*$, and $\mathbf{x}_{final} = \mathbf{x}_t$ refers to a version \mathbf{x}_t from the set $\{\mathbf{x}_0, \dots, \mathbf{x}_{T-1}\}$, picked randomly.

Theorem 2 (Convex convergence rate of non-uniform D-EF-SGD with the relative compressor, i.e., $\mu = 0$). Consider a function f , which is mapping from \mathbb{R}^d to \mathbb{R} , L -consistent and μ -convex. We can find a learning rate γ such that $\gamma \leq \frac{1}{14LZ} \frac{\delta_{\min}}{\sqrt{nC_Z}}$, where $C_Z = \sum_{i=1}^n \frac{\delta_{\min}}{\delta_i} p_i^2$. This means that the maximum number of

$$\mathcal{O}\left(\frac{\sigma^2 \sum_{i=1}^n p_i^2}{\epsilon^2} + \frac{\sqrt{n}L(\zeta \sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}} + \sigma \sqrt{\sum_{i=1}^n p_i^2})}{\epsilon^{3/2} \sqrt{\delta_{\min}}}\right) + \frac{\sqrt{n}LZ \sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}}}{\epsilon \sqrt{\delta_{\min}}} \cdot R_0^2 \quad (2)$$

iterations of non-uniform D-EF-SGD with the relative compressor ensures $\mathbb{E}f(\mathbf{x}_{final}) - f^* \leq \epsilon$, where R_0^2 is at least

$\|\mathbf{x}_0 - \mathbf{x}_*\|$, and $\mathbf{x}_{final} = \mathbf{x}_t$ refers to a version \mathbf{x}_t from the set $\{\mathbf{x}_0, \dots, \mathbf{x}_{T-1}\}$, picked randomly.

Theorem 3 (Strong convex convergence rate of non-uniform D-EF-SGD with the relative compressor, i.e., $\mu > 0$). Consider a function f , which is mapping from \mathbb{R}^d to \mathbb{R} , L -consistent and μ -convex. We can find a learning rate γ such that $\gamma \leq \frac{1}{14LZ} \frac{\delta_{\min}}{\sqrt{nC_Z}}$, where $C_Z = \sum_{i=1}^n \frac{\delta_{\min}}{\delta_i} p_i^2$. This means that the maximum number of

$$\tilde{\mathcal{O}}\left(\frac{\sigma^2 \sum_{i=1}^n p_i^2}{\mu \epsilon} + \frac{\sqrt{n}L(\zeta \sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}} + \sigma \sqrt{\sum_{i=1}^n p_i^2})}{\mu \sqrt{\delta_{\min}} \epsilon}\right) + \frac{\sqrt{n}LZ \sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}}}{\mu \sqrt{\delta_{\min}}} \quad (3)$$

iterations of non-uniform D-EF-SGD with the relative compressor ensures $\mathbb{E}f(\mathbf{x}_{final}) - f^* \leq \epsilon$, and $\mathbf{x}_{final} = \mathbf{x}_t$ refers to a version \mathbf{x}_t from the sequence $\{\mathbf{x}_0, \dots, \mathbf{x}_{T-1}\}$, selected probabilistically based on $(1 - \min\{\frac{\mu\gamma}{2}, \frac{\delta_{\min}}{4}\})^{-t}$.

In our subsequent evaluation of the rate of convergence, our primary emphasis is on **Theorem 3**, and the others are similar.

C. Analysis of convergence rate of non-uniform D-EF-SGD with the relative compressor

To make the analysis more straightforward, we introduce a function of n variables, $\Phi(\delta_1, \dots, \delta_n) = \frac{\sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}}}{\sqrt{\delta_{\min}}}$, and incorporate an additional assumption, termed **Assumption***, relevant to this study's context.

Assumption*: Within the context of a communication-restricted non-IID setting, it's posited that the magnitude of $(\sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}})\zeta$ surpasses $\sqrt{\sum_{i=1}^n p_i^2}$.

In the bandwidth-constrained non-iid mobile environment, primarily, the accuracy decline due to gradient compression means that the data heterogeneity, ζ , isn't significantly lower than the gradient noise, σ . Moreover, δ_i augments ζ by a magnitude, making **Assumption*** valid.

We dissect the convergence speed under two circumstances:

- *Without gradient noise* ($\sigma = 0$): non-uniform D-EF-SGD with the relative compressor shows sublinear convergence at a pace of $\mathcal{O}(\frac{\sqrt{n}L\zeta}{\mu\sqrt{\epsilon}}\Phi(\delta_1, \dots, \delta_n))$. With a positive ζ , $\Phi(\delta_1, \dots, \delta_n)$ directly influences this pace.
- *With gradient noise* ($\sigma \neq 0$): If ϵ is an infinitesimal of a higher order than δ_{\min} , the convergence happens at $\mathcal{O}(\frac{\sigma^2 \sum_{i=1}^n p_i^2}{\mu \epsilon})$, unaffected by δ_{\min} and ζ . When the order of magnitude of ϵ matches or surpasses δ_{\min} , the term $\mathcal{O}(\frac{\sqrt{n}L\zeta}{\mu\sqrt{\epsilon}}\Phi(\delta_1, \dots, \delta_n))$ has a dominant effect due to **Assumption***.

In subsequent evaluations, the cases considered are $\sigma = 0$ and $\sigma > 0$, with ϵ and δ on par in magnitude. In this way, non-uniform D-EF-SGD with the relative compressor has a convergence rate of $\mathcal{O}(\frac{\sqrt{n}L\zeta}{\mu\sqrt{\epsilon}}\Phi(\delta_1, \dots, \delta_n))$. Essentially, in a communication-restricted non-IID environment, the convergence slows down in proportion to $\Phi(\delta_1, \dots, \delta_n)$. Concerning situations where ϵ surpasses δ with $\sigma > 0$, prior research [12], [14], [37] has covered this and we do not revisit.

Algorithm 2: DAGC-R

Input: n, p_i , average compression ratio $\bar{\delta}$
Output: $\delta_1, \dots, \delta_n$
 /* The value of ϕ_j represent the minimal $\Phi(\delta_1, \dots, \delta_n)$ when δ_j is the least among all δ_i . */

```

1 Set  $\phi_{min} = +\infty$ ;
2 for  $j = n, n-1, \dots, 1$  do
3   if  $j == n$  then
4     Calculate  $\phi_j$  using the right side of equation (5);
5   else
6     if  $p_j == p_{j-1}$  then
7       /* When weights are repeated, bypass this computation. */
8        $\phi_j = \phi_{min}$ ;
9     else
10    Calculate  $\phi_j$  using the right side of equation (4);
11  end
12 end
13 if  $\phi_j < \phi_{min}$  then
14    $\phi_{min} = \phi_j$  and adjust the optimal values for  $\delta_1, \dots, \delta_n$ ;
15 end
16 Return  $\delta_1, \dots, \delta_n$ ;

```

D. The optimal compression ratios

Theorem 4 (Optimal δ_i). *Under the premise that the overall communication traffic is fixed, which is, $\sum_{i=1}^n \delta_i = n\bar{\delta}$, the following equation emerges. We set $\delta_j = \delta_{min} = \min\{\delta_1, \dots, \delta_n\}$ and denote $P := \sum_{i=1}^n p_i^{2/3}$. The minimal value for $\Phi(\delta_1, \dots, \delta_n)$ can be split into two distinct situations:*

- j is not equal to n

$$\Phi(\delta_1, \dots, \delta_n) \geq \frac{1}{n\bar{\delta}_j} (p_j(1 + Q_j) + p_n Q_j(1 + Q_j)), \quad (4)$$

where $Q_j = \frac{P - p_j^{2/3}}{p_n^{2/3}}$. (4) becomes equal when $\delta_j = \frac{n\bar{\delta}}{Q_j + 1}$ and

$$\delta_i = \frac{n\bar{\delta}}{Q_j + 1} \frac{p_i^{2/3}}{p_n^{2/3}}, i \neq j.$$

- j is equal to n

$$\Phi(\delta_1, \dots, \delta_n) \geq \frac{1}{n\bar{\delta}} (p_j(1 + Q_j) + p_{n-1} Q_j(1 + Q_j)), \quad (5)$$

where $Q_j = \frac{P - p_j^{2/3}}{p_{n-1}^{2/3}}$. (5) becomes equal when $\delta_j = \frac{n\bar{\delta}}{Q_j + 1}$ and

$$\delta_i = \frac{n\bar{\delta}}{Q_j + 1} \frac{p_i^{2/3}}{p_{n-1}^{2/3}}, i \neq j.$$

E. DAGC-R

The pseudo-code of DAGC is presented in Algorithm 2. DAGC is structured in the following manner: 1) it computes n localized optimal solutions by cycling through j in **Theorem 4**, where $\delta_j = \min\{\delta_1, \dots, \delta_n\}$, ranging from 1 to n ,

and 2) it modifies δ_i for each i within the set $[n]$ whenever $\Phi(\delta_1, \dots, \delta_n)$ registers a lower value. The concluding compression ratios emerge as the best parameters.

This procedure is computationally efficient. The time complexity for a single pass-through stands at $\mathcal{O}(n)$. For a specified non-IID partition, it's only necessary to calculate the best δ_i for every worker once. If $\bar{\delta}$ transitions to a different compression ratio, labeled as $\bar{\delta}_{new}$, then $\delta_i = \delta_i \frac{\bar{\delta}_{new}}{\bar{\delta}}$ can be employed to adjust the compression ratios. This allows our design to work well with other adaptive gradient algorithms that adaptively change $\bar{\delta}$ over time.

V. DAGC-A

In this section, we address the technical challenge encountered under the absolute compressor, *i.e.*, **Given the limited communication budget, what is the optimal λ_i ?**

Initially, we outline the convergence speed of non-uniform D-EF-SGD with absolute compressors (Theorems in Sec. V-A). Then, we formulate the challenge as an n -variable chi-square nonlinear symmetrical optimization problem with the traffic budget. We propose DAGC-A based on **Theorem 8**.

A. Convergence rate of non-uniform D-EF-SGD with the absolute compressor

Theorem 5 (Non-convex convergence rate of non-uniform D-EF-SGD with the absolute compressor). *Consider a function f , which is mapping from \mathbb{R}^d to \mathbb{R} and L -consistent. We can find a learning rate γ such that $\gamma \leq \frac{1}{4L}$. Then there exists a stepsize $\gamma \leq \frac{1}{4L}$. This means that the maximum number of*

$$\mathcal{O}\left(\frac{\sigma^2 \sum_{i=1}^n p_i^2}{\epsilon^2} + \frac{\sqrt{nd \sum_{i=1}^n p_i^2 \lambda_i^2}}{\epsilon^{\frac{3}{2}}} + \frac{1}{\epsilon}\right) \cdot LF_0 \quad (6)$$

iterations of non-uniform D-EF-SGD with the relative compressor ensures $\mathbb{E}f(\mathbf{x}_{final}) - f^* \leq \epsilon$, where F_0 is at least $f(\mathbf{x}_0) - f^*$, and $\mathbf{x}_{final} = \mathbf{x}_t$ refers to a version \mathbf{x}_t from the set $\{\mathbf{x}_0, \dots, \mathbf{x}_{T-1}\}$, picked randomly.

Theorem 6 (Convex convergence rate of non-uniform D-EF-SGD with the absolute compressor, *i.e.*, $\mu = 0$). *Consider a function f , which is mapping from \mathbb{R}^d to \mathbb{R} , L -consistent and μ -convex. We can find a learning rate γ such that $\gamma \leq \frac{1}{4L}$. This means that the maximum number of*

$$\mathcal{O}\left(\frac{\sigma^2 \sum_{i=1}^n p_i^2}{\epsilon^2} + \frac{\sqrt{nLd \sum_{i=1}^n p_i^2 \lambda_i^2}}{\epsilon^{\frac{3}{2}}} + \frac{L}{\epsilon}\right) \cdot R_0^2 \quad (7)$$

iterations of non-uniform D-EF-SGD with the relative compressor ensures $\mathbb{E}f(\mathbf{x}_{final}) - f^* \leq \epsilon$, where R_0^2 is at least $\|\mathbf{x}_0 - \mathbf{x}_*\|$, and $\mathbf{x}_{final} = \mathbf{x}_t$ refers to a version \mathbf{x}_t from the set $\{\mathbf{x}_0, \dots, \mathbf{x}_{T-1}\}$, picked randomly.

Theorem 7 (Strong convex convergence rate of non-uniform D-EF-SGD with the absolute compressor, *i.e.*, $\mu > 0$). *Consider a function f , which is mapping from \mathbb{R}^d to \mathbb{R} , L -consistent and μ -convex. We can find a learning rate γ such that $\gamma \leq \frac{1}{4L}$. This means that the maximum number of*

$$\tilde{\mathcal{O}}\left(\frac{\sigma^2 \sum_{i=1}^n p_i^2}{\mu\epsilon} + \frac{\sqrt{nLd \sum_{i=1}^n p_i^2 \lambda_i^2}}{\mu\sqrt{\epsilon}} + \frac{L}{\mu}\right) \quad (8)$$

iterations of non-uniform D-EF-SGD with the relative compressor ensures $\mathbb{E}f(\mathbf{x}_{final}) - f^* \leq \epsilon$, and $\mathbf{x}_{final} = \mathbf{x}_t$ refers to a version \mathbf{x}_t from the sequence $\{\mathbf{x}_0, \dots, \mathbf{x}_{T-1}\}$, selected probabilistically based on $(1 - \frac{\mu\gamma}{2})^{-t}$.

We predominantly direct our attention to **Theorem 7**. Analogous to the analysis of non-uniform D-EF-SGD with the absolute compressor, our focus is constrained to scenarios wherein $\sigma = 0$ or during initial training phases. Under these circumstances, the non-uniform D-EF-SGD with the absolute compressor converges at a rate of $\mathcal{O}(\sqrt{\sum_{i=1}^n p_i^2 \lambda_i^2})$.

B. The optimal compression ratios and DAGC-A

We demonstrate firstly the theorem on the optimal λ_i , i.e., **Theorem 8**, and then DAGC-A.

Theorem 8 (Conversion from λ to δ and optimal λ_i). *In the non-IID scenario that the total communication traffic is predetermined and constrained, we have*

$$\lambda \propto \frac{1}{\delta} \quad (9)$$

and the optimal λ_i satisfying

$$\lambda_i = \frac{\bar{\lambda}P}{n} p_i^{-\frac{2}{3}}, \forall i \in [n], \quad (10)$$

where $P = \sum_{i=1}^n p_i^{\frac{2}{3}}$ and $\bar{\lambda} = \frac{n}{\sum_{i=1}^n \frac{1}{\lambda_i}}$.

Remark. **Theorem 8** contains two parts. The first one shows the relationship between λ and δ in communication-constrained environments with non-iid datasets. This relativity fills a blank in the field of relative compressors used in non-iid environments. The previous work [15] only presents a conversion formula applying to IID scenarios⁴. In the second part, we demonstrate the formula for the optimal λ_i , based on which we show the pseudo-code of DAGC-A in Algorithm 3. The time complexity of computation for the former is $\mathcal{O}(1)$ while that for the latter is $\mathcal{O}(n)$. The reason for this simplicity is that we make a one-step approximation to the computation of λ_i to δ_i , i.e., $\frac{p_i}{p_j} = (\frac{\lambda_i}{\lambda_j})^{-\frac{3}{2}}$. This simplification takes into account the constrained arithmetic in edge computing. We sacrifice some performance to reduce the time complexity of DAGC from $\mathcal{O}(n)$ to $\mathcal{O}(1)$.

We use the Lagrange multiplier method to prove **Theorem 8**. More details can be seen in Appendix.

VI. EVALUATION EXPERIMENTS

The following questions are addressed by this evaluation:

- If the communication budget is limited and fixed, does DAGC surpass uniform compression in real-world datasets? (Fig. 3 in Sec. VI-B)

⁴The formula, demonstrated in end of the appendix of the work [15], is $\lambda \propto \frac{1}{\sqrt{\delta}}$. They derived this equation by taking $\zeta = 0$, equal to IID environments.

Algorithm 3: DAGC-A

Input: n, p_i and the average threshold $\bar{\lambda}$

Output: thresholds $\lambda_1, \dots, \lambda_n$

```

1  $P = \sum_{i=1}^n p_i^{\frac{2}{3}}$ ;
2 for  $i = 1, \dots, n$  do
   | /* calculating  $\lambda_i$  depending on
   |   Theorem 8
   | */
3    $\lambda_i = \frac{\bar{\lambda}P}{n} p_i^{-\frac{2}{3}}$ 
4 end
5 Return  $\lambda_1, \dots, \lambda_n$ ;

```

- As the size distribution becomes more imbalanced and the compression becomes more aggressive, will DAGC exhibit better performance? (Table III in Sec. VI-C and Table IV in Sec. VI-E)

We showcase the superior performance of DAGC in both real-world non-IID and artificially partitioned non-IID datasets, particularly when confronted with highly imbalanced size distribution and constrained communication.

A. Experimental settings

Environment: The experiments are conducted on an Ubuntu 18.04.6 LTS server environment. The server is equipped with an Intel Xeon Silver 4210 CPU @2.20GHz and 4 Nvidia GeForce GTX 3090 GPUs, each with 24GB memory. Python version 3.8.12 is utilized, along with various libraries compatible with this Python version. For machine learning purposes, PyTorch 1.11.0 with CUDA 11.3 is employed as the primary toolkit.

Non-IID type: We run the experiments in two non-IID types:

- *Artificial non-IID data partition:* In order to simulate label imbalance, we assign a portion of samples from each label to individual workers based on the Dirichlet distribution. The concentration parameter is set to 0.5. This partitioning strategy is widely adopted for generating non-IID data [39]–[41].

- *Real-world datasets:* We utilize the Flickr [3] dataset as our real-world dataset. The dataset is downloaded from <https://doi.org/10.5281/zenodo.3676081> and the images are divided based on the subcontinent they belong to. After excluding damaged images and accounting for network limitations that prevented the download of certain images, we have a total of 15 workers. The data distribution is illustrated in Fig. 3a.

Experiment tasks: The experimental settings in this study encompass four different types, involving tasks related to image classification and speech recognition in Tab. II. The Convolutional Neural Network (CNN) employed consists of four layers, as mentioned earlier [6]. VGG-11s [42] is a simplified version of the VGG-11 architecture [43]. The LSTM model utilized has 2 hidden layers with a size of 128. In order to mitigate the accuracy loss caused by non-IID, all of these models exclude the batch normalization layer [3].

We denote A@B as the task, which uses the B datasets to train A model. In CNN@CIFAR-10, the batch size is 32 and the step-size is 0.01. In VGG11s@Flickr, the batch size is 32 and the learning rate is 0.1.

TABLE II: Summary of the experiment settings used in this work.

Task	Model	Dataset	non-IID type	Quality metric	Training iterations	Experiment Section
Image Classification	Logistic	FMNIST [35]	Artificially	Top-1 Accuracy	5,000	Sec. III
	CNN	CIFAR-10 [38]	Artificially		10,000	Sec. VI
	VGG11s	Flickr [3]	Real-world		10,000	Sec. VI
Speech Recognition	LSTM	SCs [36]	Artificially	Top-1 Accuracy	10,000	Sec. III, VI

For the Speech Recognition task, we utilize the Speech Commands dataset [36] (referred to as SCs). From SCs, we select the 10 categories with the highest number of samples. Specifically, we extract 4,000 samples from each of these categories, with 3,000 samples allocated for training purposes and the remaining 1,000 samples reserved for testing. The batch size is 8 and the step-size is 0.1 in LSTM@SCs.

Baselines:

In our comparative analysis, DAGC is evaluated against established uniform compression strategies. For DAGC-R, Top- δ^5 and ACCORDION [44] serve as the baselines. In the case of DAGC-A, Hard-threshold (denoted as Ht) and ACCORDION are the selected baselines. ACCORDION is the state-of-the-art sparsified adaptive gradient compression algorithm, which compresses the gradient using aggressive compression in the critical regime and the conservative compression if not. Specifically, within the relative compressor, ACCORDION’s aggressive (conservative) compression ratio is set to δ_{\min} (δ_{\max}). Conversely, under the absolute compression, the aggressive compression threshold is set to λ_{\max} .

The number of workers and the worker size: This experimental setting is specifically for generating artificial non-IID data partitions. We set the number of workers equal to 10. The worker size does not undergo a dichotomous division (as used in Sec. III for simplicity). Instead, p_i is an arithmetic series. To increase the randomness of the series and to better match real-world datasets, we incorporate a Dirichlet distribution (with a concentration parameter of 0.5) into p_i , $i \in [2, n - 1]$. This results in an approximate arithmetic series that remains in descending order. This approach allows us to generate artificially non-IID datasets with different worker sizes in Federated Learning [40], [45]. To measure the imbalance of datasets, we define the skew ratio (abbreviated as SR) as p_1/p_n .

B. DAGC-R in Real-world non-IID Scenarios

The experimental results indicate that the performance of DAGC-R surpasses Top- δ with the uniform compression and ACCORDION in real-world scenarios with fixed communication volumes.

Fig. 3a displays the data distribution of Flickr [3] (sliced by subcontinent), which has a skew ratio of 4,997 ($\approx \frac{79958}{16}$). We find out the 10 categories with the highest number of labels in all the images and select these 10 categories of images from 15 workers as the training dataset.

From Fig. 3b, it can be seen that at an average compression rate $\bar{\delta} = 10\%$, DAGC-R converges almost as fast as Top- δ and both are slightly faster than ACCORDION.

⁵This algorithm is also written as ‘Top-k’ in other literature [16], [28].

TABLE III: Accuracy of different relative gradient compression algorithms under different SR and average relative compression ratios $\bar{\delta}$. SR increasing indicates a greater imbalance among the size distribution of datasets. $\bar{\delta}$ quantifies the extent to which communication is limited. Numbers demonstrate that DAGC-R surpasses the performance of the uniform compression both tasks. The superiority is particularly notable in environments where worker size distribution is highly uneven and communication bandwidth is constrained.

Model @Dataset	SR	$\bar{\delta}$	DAGC-R	Top- δ	ACCORDION	
CNN @CIFAR-10	10	10%	70.02%	70.14%	69.77%	
		1%	69.66%	69.68%	69.60%	
		0.1%	68.85%	68.72%	68.77%	
	100	10%	68.68%	68.79%	68.59%	
		1%	69.25%	68.87%	68.46%	
		0.1%	69.29%	67.36%	67.93%	
	1,000	10%	68.00%	68.12%	67.89%	
		1%	68.06%	67.28%	66.49%	
		0.1%	68.25%	67.35%	67.75%	
	LSTM @SCs	10	10%	78.40%	78.53%	77.93%
			1%	77.10%	76.37%	76.87%
			0.1%	77.07%	76.23%	76.93%
100		10%	75.17%	75.50%	74.70%	
		1%	74.60%	73.53%	73.87%	
		0.1%	73.33%	71.53%	70.70%	
1,000		10%	73.03%	72.87%	71.43%	
		1%	72.67%	71.17%	72.03%	
		0.1%	71.80%	70.27%	71.13%	

Fig. 3c shows that DAGC-R converges faster than Top- δ in the early stages, and then gradually equalizes with Top- δ later on. DAGC-R has always been faster than ACCORDION.

The training accuracy curve in Fig. 3d shows that at $\delta = 0.1\%$, DAGC-R consistently has the a superior performance compared to Top- δ and ACCORDION. DAGC-R achieves the same accuracy (70%) with 16.65% and 13.46% fewer iterations (from 8,410 iterations and 8,100 iterations to 7,010 iterations) relative to Top- δ and ACCORDION, respectively.

Overall, DAGC-R outperforms Top- δ with the uniform compression and ACCORDION in the normal compression interval with fixed communication volumes.

C. DAGC-R in Artificially Partitioned non-IID Scenarios

The detailed experimental results presented in Table III illustrate the outperformance of DAGC-R compared to Top- δ and ACCORDION in the case of highly skewed datasets.

Comparison of different skew ratios: The superiority of DAGC-R in both CNN@CIFAR10 and LSTM@SCs tasks becomes more obvious as the skew ratio increases. DAGC-R, Top- δ and ACCORDION perform similarly when SR = 10. But when SR increases to 1,000, the accuracy of DAGC-R is a higher than Top- δ and ACCORDION.

Comparison of different $\bar{\delta}$: DAGC-R is always the best in both tasks regardless of the skew ratio, when $\bar{\delta} = 0.1\%$.

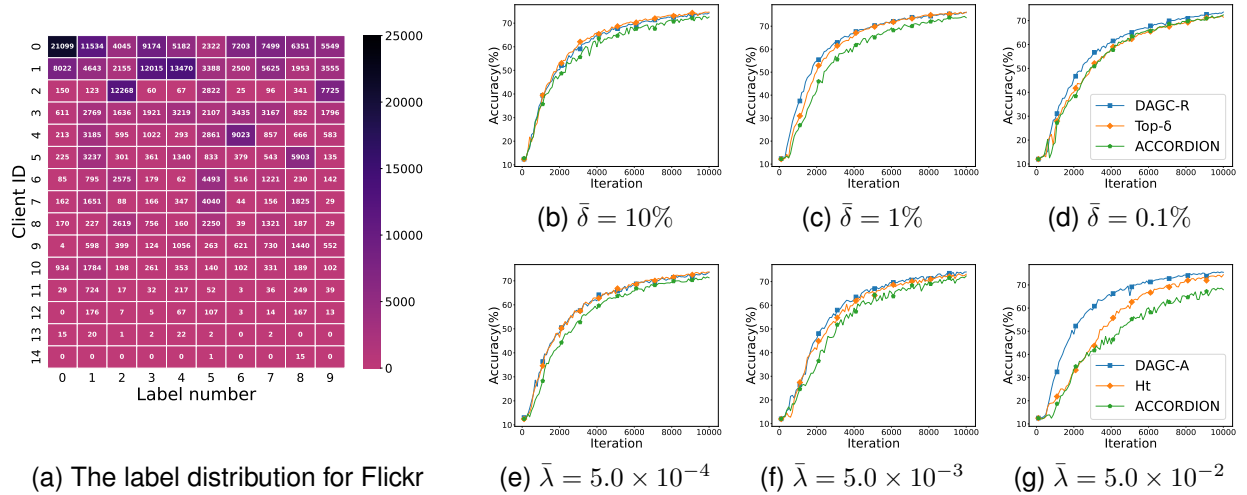


Fig. 3: The label distribution for Flickr (a) and training curves (Accuracy vs. Iterations) for VGG11s@Flickr under the relative compression ((b)-(d)) and the absolute compression ((e)-(g)) on different compression levels (left to right). DAGC outperforms other uniform compression strategies facing limited communication under the fixed budget.

This suggests that DAGC-R is suitable for situations where communications are extremely limited.

D. DAGC-A in Real-world non-IID Scenarios

The experimental results show that DAGC-A outperforms hard-threshold and ACCORDION in the real-world non-IID dataset.

Fig. 3e illustrates that in the conservative case of compression, where $\bar{\lambda} = 5.0 \times 10^{-4}$, DAGC-A and hard-threshold perform similarly but both outperform ACCORDION.

From Fig. 3f, we can see that when $\bar{\lambda} = 5.0 \times 10^{-3}$, DAGC-A maintains the same convergence rate of hard-threshold at the beginning, but is gradually faster than hard-threshold and ACCORDION as the training progresses. For example, to achieve 60% accuracy, DAGC-A has 11.61% and 24.09% fewer iterations (from 3,530 iterations and 4,110 iterations to 3,120 iterations) than hard-threshold and ACCORDION, respectively.

Fig. 3g shows that under very aggressive compression, DAGC-A converges much faster than hard-threshold and ACCORDION, especially in the first half of the training stage exhibiting a very clear advantage. DAGC-A ultimately saves 25.43% of training time (from 6,960 iterations to 5,190 iterations) over hard-threshold to reach 70% accuracy, while ACCORDION does not reach same accuracy until the end of training.

On the whole, DAGC-A has excellent performance in real non-IID data scenarios, and the advantage over hard-threshold and ACCORDION becomes more pronounced as compression becomes more aggressive.

E. DAGC-A in Artificially Partitioned non-IID Scenarios

The experimental results illustrate that DAGC-A performs better than Ht and ACCORDION in extremely communication-constrained situations and datasets with high skew ratios. The detailed experimental results are in Table IV.

TABLE IV: Accuracy of different absolute gradient compression algorithms under different SR and average absolute compression thresholds $\bar{\lambda}$. A larger $\bar{\lambda}$ represents a more aggressive compression. DAGC-A also surpasses the performance of the uniform absolute compressors in communication-constrained non-IID scenarios.

Model @Dataset	SR	$\bar{\lambda}$	DAGC-A	Ht	ACCORDION
CNN @CIFAR-10	10	5.0×10^{-4}	69.79%	69.73%	69.89%
		5.0×10^{-3}	68.52%	68.06%	68.39%
		5.0×10^{-2}	63.69%	62.34%	61.80%
	100	5.0×10^{-4}	69.12%	69.31%	68.37%
		5.0×10^{-3}	68.25%	67.59%	67.65%
		5.0×10^{-2}	63.47%	56.93%	60.33%
	1,000	5.0×10^{-4}	68.04%	68.12%	67.28%
		5.0×10^{-3}	67.27%	66.58%	66.87%
		5.0×10^{-2}	64.17%	56.45%	63.54%
LSTM @SCs	10	5.0×10^{-4}	77.63%	78.03%	76.60%
		5.0×10^{-3}	76.60%	76.90%	76.73%
		5.0×10^{-2}	75.27%	73.97%	73.43%
	100	5.0×10^{-4}	75.10%	74.83%	75.40%
		5.0×10^{-3}	74.13%	73.93%	72.60%
		5.0×10^{-2}	73.37%	70.90%	72.13%
	1,000	5.0×10^{-4}	72.13%	72.10%	71.10%
		5.0×10^{-3}	71.97%	70.57%	70.70%
		5.0×10^{-2}	70.17%	67.53%	68.70%

Comparison of different skew ratios: DAGC-A behaves more prominently when the skew ratio is relatively large. In the CNN@CIFAR10 task, fixing $\bar{\lambda} = 5.0 \times 10^{-2}$, the training accuracy of DAGC-A is 1.35%, 6.54%, and 7.72% higher than that of Ht for the skew ratio of 10, 100, 1,000, respectively. In the LSTM@SCs task, DAGC-A always performs best when SR = 1,000, while it only performs best when SR = 10 with average $\bar{\lambda} = 5.0 \times 10^{-4}$.

Comparison of different $\bar{\lambda}$: When the average lambda is larger, which means that in more aggressive compression, DAGC-A always achieves the highest accuracy after the same number of iterations. Keeping the skew ratio constant, the advantage of DAGC-A in both CNN@CIFAR10 and LSTM@SCs tasks becomes more obvious as $\bar{\lambda}$ increases.

VII. RELATED WORKS

Communication optimization in communication-constraint non-IID scenarios aims to solve the communication bottleneck, while eliminating the accuracy degradation due to non-IID datasets. The work [46] proposes the Delayed Gradient Averaging algorithm, which enhances the DML efficiency by delaying the gradient averaging step, allowing simultaneous local computation and communication. The work [47] proposes a completely parallelizable federated learning algorithm, P-FedAvg, which extends the traditional FedAvg by allowing multiple parameter servers to collaboratively train a model, ensuring efficient convergence and scalability in a Parallel Federated Learning architecture. A Resource-efficient federated learning system is proposed in the work [48] to tackle issues of resource heterogeneity in federated learning. There are also some works that propose to use a hierarchical architecture for DML in mobile environments, which matches the structure of LAN-WAN. The work [49] first propose a hierarchical architecture in communication-constrained non-IID scenarios. The work [50] verifies the convergence of the hierarchical PS architecture in such scenarios. This work [51] proposes a training scheduling strategy for DML in the LAN-WAN architecture. However, these methods neither mitigate the accuracy degradation brought about by non-IID scenarios, nor are they friendly to mobile communication environments that charge by data usage. Compared to these methods, gradient compression algorithms save more communication cost savings in a per-traffic billing mobile network environment [52], [53].

Adaptive gradient compression offers us the ability to fine-tune compression parameters, a feature not often available in traditional algorithms [54], [55]. This has the added benefit of enhancing their robustness, particularly in varying scenarios that involve dynamic network environments and data heterogeneity. DC2 [10], a control setup based on network latency for handling compression, was proposed. This innovative system ensures timely completion of model training, even amidst fluctuating network conditions. This patent [56] introduces the system design of a statistical-based gradient compression method for a distributed training system that is based on [57]. The work [58] proposes a systematic examination of the trade-off between compression and model accuracy in Federated Learning, introducing an adaptation framework to optimize the compression rate in each iteration for improved model accuracy while reducing network traffic. The work proposes a transmission strategy, called FedLC [59], which combines model compression, forward error correction, and retransmission to improve the network utilization in federated learning with lossy communication. The study introduced SkewScout [3], aiming to enhance the robustness of algorithms particularly in non-IID scenarios. SkewScout, a system-level approach, achieves this by dynamically modulating the compression ratio according to the disparity in loss among workers - a parameter that is notoriously challenging to evaluate. Consequently, the implementation of SkewScout becomes a complex task.

Theoretically optimizing gradient compression: Some works [32] attempt to improve the convergence rate, *i.e.*,

tighter upper bounds and lower time complexity, to optimize existing compression algorithms for mobile scenarios with communication constraints and heterogeneous data. The work [60], [61] utilizes smoothness matrices to boost existing compressors in both theory and practice. The study undertook a comparison between D-QSGD and D-EF-SGD in non-IID conditions, integrating bias correction [13] to enhance their data-dependency. The paper also provided a theoretical analysis of the robustness of the hard threshold sparsification algorithm which transmits solely the absolute gradient values exceeding a fixed hard threshold [15]. The findings indicate that compared to Top- δ , this algorithm is more resilient when dealing with non-IID challenges.

Data-aware methods: There have been studies that put forward the idea of data-aware node selection in DML. They introduced a technique [62] that uses data volumes as a criterion for worker selection within Federated Learning. This stands in contrast to the traditional gradient-based methods [63]. These experiments confirmed that the data-volume-oriented node selection approach is superior to the uniform selection tactic in non-IID situations. This gives an indication that allowing *large workers* to transmit more data could potentially be advantageous. Yet there doesn't seem to be any existing studies introducing data-aware algorithms in the gradient compression domain. In our study, we are introducing a data-aware gradient compression algorithm, accompanied by an in-depth theoretical analysis.

VIII. CONCLUSION

In the study, we introduce an innovative gradient compression algorithm, drawing from a fresh perspective, *i.e.*, the unevenness in data volume sizes - to enhance its robustness with non-IID datasets. As an initial step, we present empirical evidence supporting the idea that assigning higher compression ratios to workers dealing with larger data volumes can accelerate convergence. Following this, we establish the convergence rate for non-uniform D-EF-SGD when applied in conjunction with either relative or absolute compressors. The convergence rate of non-uniform D-EF-SGD in the context of the relative compressor is $\mathcal{O}\left(\frac{\sum_{i=1}^n \frac{p_i}{\sqrt{\delta_i}}}{\sqrt{\delta_{min}}}\right)$ in the communication-constraint non-IID environment. By minimizing this ratio, we propose DAGC-R, which sets $\frac{\delta_i}{\delta_j} \approx \left(\frac{p_i}{p_j}\right)^{2/3}$ and can converge faster than the uniform compression. In the same way, we propose DAGC-R, where $\left(\frac{\lambda_i}{\lambda_j}\right)^{2/3} = \frac{p_i}{p_j}$. By the way, we represent that $\lambda \propto \delta$ in the bandwidth-constraint non-IID mobile environments, which extends the boundary of the conversion formula between the relative compression ratio and the absolute threshold from IID to non-IID. We assess the effectiveness of DAGC by conducting tests on both real-world data and artificially partitioned non-IID datasets. The results of these evaluation experiments showcase that DAGC has the capability to reduce the number of iterations by as much as 26.19% on data derived from Flickr. Furthermore, on artificially separated non-IID datasets, it enhanced the accuracy by a substantial 2.78%.

IX. APPENDIX

A. Proof of **Theorem 1, 2, 3**

We define a virtual sequence that aids in our derivation, referring to [14]:

$$\tilde{\mathbf{x}}_0 = \mathbf{x}_0, \quad \tilde{\mathbf{x}}_{t+1} := \tilde{\mathbf{x}}_t - \gamma \sum_{i=1}^n p_i g_t^i.$$

The error term that illustrates the gap between the virtual sequence and the actual sequence is represented as

$$\tilde{\mathbf{x}}_t - \mathbf{x}_t = \gamma \sum_{i=1}^n p_i \mathbf{e}_t^i.$$

For further discussion, let's define $G_t := \mathbf{E} \|\nabla f(x_t)\|^2$, $E_t = \sum_{i=1}^n p_i^2 \mathbb{E} \|\mathbf{e}_t^i\|^2$, $\tilde{F}_t := \mathbf{E} f(\tilde{\mathbf{x}}_t) - f^*$ and $F_t := \mathbf{E} f(\mathbf{x}_t) - f^*$.

Lemma 1. *Considering a function f , which is L -smooth. If the learning rate γ is less than or equal to $\frac{1}{4L}$, the following is true for the iterations of non-uniform D-EF-SGD with relative compression:*

$$\tilde{F}_{t+1} \leq \tilde{F}_t - \frac{\gamma}{4} G_t + \gamma^2 \frac{L \sum_{i=1}^n p_i^2 \sigma^2}{2} + \gamma^3 \frac{nL^2}{2} E_t. \quad (11)$$

If f is exhibits μ -convexity, the following is observed

$$X_{t+1} \leq (1 - \frac{\gamma\mu}{2}) X_t - \frac{\gamma}{2} F_t + \gamma^2 \sum_{i=1}^n p_i^2 \sigma^2 + 3\gamma^3 nL E_t. \quad (12)$$

Proof. Similar to the analysis in [13], [14], we conclude

$$\begin{aligned} \tilde{F}_{t+1} &\leq \tilde{F}_t - \frac{\gamma}{4} G_t + \gamma^2 \frac{L}{2} \mathbb{E} \left\| \sum_{i=1}^n p_i \xi_t^i \right\|^2 \\ &\quad + \gamma^3 \frac{L^2}{2} \mathbb{E} \|\tilde{\mathbf{x}}_t - \mathbf{x}_t\|^2, \\ X_{t+1} &\leq (1 - \frac{\gamma\mu}{2}) X_t - \frac{\gamma}{2} F_t + \gamma^2 \mathbb{E} \left\| \sum_{i=1}^n p_i \xi_t^i \right\|^2 \\ &\quad + 3\gamma^3 L \mathbb{E} \|\tilde{\mathbf{x}}_t - \mathbf{x}_t\|^2. \end{aligned}$$

With the independent ξ_t^i and **Assumption 3** in [13], the following equation emerges:

$$\mathbb{E}_{\xi_t} \left\| \sum_{i=1}^n p_i \xi_t^i \right\|^2 = \sum_{i=1}^n p_i^2 \mathbb{E}_{\xi_t} \|\xi_t^i\|^2 \leq \sum_{i=1}^n p_i^2 \sigma^2.$$

Additionally, we derive:

$$\mathbb{E} \|\tilde{\mathbf{x}}_t - \mathbf{x}_t\|^2 = \mathbb{E} \left\| \sum_{i=1}^n p_i \mathbf{e}_t^i \right\|^2 \leq 6n \sum_{i=1}^n p_i^2 \mathbb{E} \|\mathbf{e}_t^i\|^2 = nE_t.$$

Consequently, our targeted outcomes are achieved.

Lemma 2. *It holds*

$$\begin{aligned} E_{t+1} &\leq (1 - \frac{\delta_{min}}{2}) E_t + \sum_{i=1}^n p_i^2 \sigma^2 \\ &\quad + \frac{2}{\delta_{min}} (C_\zeta \zeta^2 + C_Z Z^2 G_t), \end{aligned} \quad (13)$$

where $C_\zeta = C_Z = \sum_{i=1}^n \frac{\delta_{min}}{\delta_i} p_i^2$.

Proof. With the analysis in [14] and [13], it follows

$$\begin{aligned} \mathbb{E}_{\xi_t^i, C_\zeta} \|\mathbf{e}_{t+1}^i\|^2 &\leq (1 - \frac{\delta}{2}) \|\mathbf{e}_t^i\|^2 + \frac{2}{\delta} \|\nabla f_i(\mathbf{x}_t)\|^2 + (1 - \delta) \sigma^2 \\ &\leq (1 - \frac{\delta}{2}) \|\mathbf{e}_t^i\|^2 + \frac{2}{\delta} (\zeta_i^2 + Z^2 \|\nabla f(\mathbf{x}_t)\|^2) + \sigma^2. \end{aligned} \quad (14)$$

The final inequality is based on **Assumption 4** as cited in [13]. Then we incorporate the distinct compression ratios from various workers into Eq. 14 and aggregate the outcomes:

$$\begin{aligned} E_{t+1} &\leq (1 - \frac{\delta_{min}}{2}) \sum_{i=1}^n p_i^2 \|\mathbf{e}_t^i\|^2 \\ &\quad + \frac{2}{\delta_{min}} \left(\sum_{i=1}^n \frac{\delta_{min}}{\delta_i} p_i^2 \right) (\zeta^2 + Z^2 G_t) + \sum_{i=1}^n p_i^2 \sigma^2, \end{aligned}$$

where $\delta_{min} = \min\{\delta_1, \dots, \delta_n\}$, $\zeta = \max\{\zeta_1, \dots, \zeta_n\}$.

Lemma 3 (Lyapunov function). *Considering a function f , which is L -smooth. If the learning rate γ is less than or equal to $\frac{\delta_{min}}{4LZ\sqrt{nC_Z}}$. Then it holds*

$$\begin{aligned} \Xi_{t+1} &\leq \Xi_t - \frac{\gamma}{8} G_t + \gamma^2 \frac{L \sum_{i=1}^n p_i^2 \delta^2}{2} + \\ &\quad \gamma^3 \left(\frac{L^2 n}{\delta_{min}} \right) \left(\frac{2C_\zeta \zeta^2}{\delta_{min}} + \sum_{i=1}^n p_i^2 \sigma^2 \right), \end{aligned} \quad (15)$$

where $\Xi_t := \tilde{F}_t + bE_t$, $b = \frac{\gamma^3 L^2 n}{\delta_{min}}$. Additionally, assuming f is both L -smooth and μ -convex and γ is less or equal to $\frac{\delta_{min}}{14LZ\sqrt{nC_Z}}$, the following holds:

$$\begin{aligned} \Psi_{t+1} &\leq \left(1 - \min \left\{ \frac{\gamma\mu}{2}, \frac{\delta}{4} \right\} \right) \Psi_t - \frac{1}{8L} G_t + \gamma^2 \sum_{i=1}^n p_i^2 \sigma^2 \\ &\quad + \gamma^3 \left(\frac{12Ln}{\delta_{min}} \right) \left(\frac{2C_\zeta \zeta^2}{\delta_{min}} + \sum_{i=1}^n p_i^2 \sigma^2 \right), \end{aligned} \quad (16)$$

where $\Psi_t := X_t + aE_t$ with $a = \frac{12\gamma^3 nL}{\delta_{min}}$.

Proof. For smooth functions, we incorporate Eq. 11 and 13 into the right side of the expression $\Xi_{t+1} := \tilde{F}_{t+1} + bE_{t+1}$.

In the case of convex functions, we introduce Eq. 12 into the right side of the expression $\Psi_{t+1} := X_{t+1} + aE_{t+1}$. This concludes the entire proof.

For the function that is non-convex, by integrating Eq. 15 with Appendix F's Lemma 27 from [13], we successfully validate **Theorem 1**. When addressing a convex function where $\mu = 0$, by employing Eq. 16 in conjunction with Lemma 27 from [13] found in Appendix F, we confirm **Theorem 2**. For the function showcasing strong convexity characterized by $\mu > 0$, using Eq. 16 and referring to Lemma 25 in Appendix F of [13], we establish the truth of **Theorem 3**.

⁶The inequality follows from the fact that $\|\sum_{i=1}^k a_i\|^2 \leq k \sum_{i=1}^k \|a_i\|^2$.

B. Proof of Theorem 4

It's essential to recognize that the primary challenge can be converted to discerning the local optimal solution for the function $\Phi(\delta_1, \dots, \delta_n) = \frac{\frac{p_1}{\sqrt{\delta_1}} + \dots + \frac{p_n}{\sqrt{\delta_n}}}{\sqrt{\delta_{\min}}}$ taking into account the constraint $\sum_{i=1}^n \delta_i = n\bar{\delta}$ and the condition $\delta_i > 0$ for all values of i ranging from 1 to n . The demonstration of **Theorem 4** is broken down into two phases. In the initial phase, the problem with n variables and a single constraint is recast into an optimization problem with only one variable, as depicted by Eq. 4. In the subsequent phase, the minimum for this single-variable optimization issue is determined.

Lemma 4. Suppose that $a_i, b_i > 0, \forall i \in \{1, \dots, n\}$ with $\sum_{i=1}^n a_i = A$ (A is a constant), b_i are constants, we have

$$\sum_{i=1}^n \frac{b_i}{\sqrt{a_i}} \geq A^{-\frac{1}{2}} \left(\sum_{i=1}^n b_i^{\frac{2}{3}} \right)^{\frac{3}{2}}. \quad (17)$$

The inequality takes equal if $a_i = Ab_i^{\frac{3}{2}} \left(\sum_{i=1}^n b_i^{\frac{2}{3}} \right)^{-1}$.

Proof. With the equality constrain on a_i , we define a Lagrangian function as follows:

$$\mathbb{L} = \sum_{i=1}^n \frac{b_i}{\sqrt{a_i}} + \sigma \left(\sum_{i=1}^n a_i - A \right).$$

Based on the condition for optimality, we can deduce:

$$\begin{cases} \frac{\partial \mathbb{L}}{\partial \sigma} = \sum_{i=1}^n a_i - A = 0 \\ \frac{\partial \mathbb{L}}{\partial a_i} = -\frac{1}{2} b_i a_i^{-\frac{3}{2}} + \sigma = 0, \forall i \in \{1, \dots, n\} \end{cases}.$$

From the system of equations provided, we can deduce the sought-after result.

With **Lemma 4**, the function $\Phi(\delta_1, \dots, \delta_n)$ is transformed into a one-dimensional function. Supposing $\delta_{\min} = \delta_j \leq \min\{\delta_i\}, i \in \{1, \dots, n\} \setminus \{j\}$, we define $b_i = p_i$ if $i \in [1, j-1]$, and for others $b_i = p_{i+1}$. We also set $a_i = \delta_i$ and $A = (n\bar{\delta} - \delta_j)$.

$$\Phi(\delta_1, \dots, \delta_n) \geq \frac{p_j}{\delta_j} + \frac{(P - p_j^{\frac{2}{3}})^{\frac{3}{2}}}{\sqrt{(n\bar{\delta} - \delta_j)\delta_j}}, \text{ where } P = \sum_{i=1}^n p_i^{\frac{2}{3}}, \quad (18)$$

and Eq. 18 is achieved when $\delta_i = (n\bar{\delta} - \delta_j) p_i^{\frac{2}{3}} (P - p_j^{\frac{2}{3}})^{-1}, i \neq j$. Given that p_i is sorted in descending sequence, $\min\{\delta_i\}$ is δ_n if $j \in \{1, \dots, n-1\}$, or else $\min\{\delta_i\}$ is δ_{n-1} .

Taking into account that the minimum of the right side of Eq. 18 depends on the range of δ_j , we'll evaluate the scenarios for $j \in [1, n-1]$ and $j = n$ separately.

• If $j \in [1, n-1]$, we have

$$\delta_{\min} = \delta_j = \frac{(n\bar{\delta} - \delta_j) p_n^{\frac{2}{3}}}{P - p_j^{\frac{2}{3}}}.$$

By setting $Q_j = \frac{P - p_j^{\frac{2}{3}}}{p_n^{\frac{2}{3}}}, j \in [1, n-1]$ and using $\delta_j \leq \min\{\delta_i\}$. We deduce the range for $\delta_j \in (0, \frac{n\bar{\delta}}{Q_j+1}]$. By defining

$$H(\delta_j) = \frac{p_j}{\delta_j} + \frac{(P - p_j^{\frac{2}{3}})^{\frac{3}{2}}}{\sqrt{(n\bar{\delta} - \delta_j)\delta_j}}, \text{ we can compute the derivative of } H(\delta_j):$$

$$H'(\delta_j) = -p_j \delta_j^{-2} - \frac{1}{2} (P - p_j^{\frac{2}{3}})^{\frac{3}{2}} [(n\bar{\delta} - \delta_j)\delta_j]^{-\frac{3}{2}} (n\bar{\delta} - 2\delta_j) < 0.$$

Thus we get the minimum of $H(\delta_j)$ at $\delta_j = \frac{n\bar{\delta}}{Q_j+1}$:

$$H(\delta_j) \geq H\left(\frac{n\bar{\delta}}{Q_j+1}\right) = \frac{1}{n\bar{\delta}} (p_n Q_j (1 + Q_j) + p_j (1 + Q_j)). \quad (19)$$

We combine Eq. 18 and 19 and complete the first case ($j \neq n$) in the proof.

• If $j = n$, we set $Q_n = \frac{P - p_n^{\frac{2}{3}}}{p_{n-1}^{\frac{2}{3}}}$ and have

$$\min\{\delta_i\} = \delta_{n-1} = \frac{n\bar{\delta} - \delta_n}{Q_n}.$$

We get the range of δ_n is $(0, \frac{n\bar{\delta}}{Q_n+1}]$. In this range, $H'(\delta_j) < 0$ (the proof process is the same as $j \neq n$). We have

$$H(\delta_j) \geq H\left(\frac{n\bar{\delta}}{Q_n+1}\right) = \frac{1}{n\bar{\delta}} (p_n (1 + Q_n) + p_{n-1} Q_n (1 + Q_n)). \quad (20)$$

We combine Eq. 18 and 20 and complete the second case ($j = n$) in the proof.

C. Proof of Theorem 5, 6, 7

Lemma 5. Let f be L -smooth. If the stepsize $\gamma \leq \frac{1}{4L}$, then it holds for the iterates of non-uniform D-EF-SGD with the absolute compressor with the absolute compressor:

$$\tilde{F}_{t+1} \leq \tilde{F}_t - \frac{\gamma}{4} G_t + \gamma^2 \frac{L \sum_{i=1}^n p_i^2 \sigma^2}{2} + \gamma^3 \frac{nL^2 d}{2} \sum_{i=1}^n p_i^2 \lambda_i^2. \quad (21)$$

If f is in addition μ -convex, we have

$$X_{t+1} \leq \left(1 - \frac{\gamma\mu}{2}\right) X_t - \frac{\gamma}{2} F_t + \gamma^2 \sum_{i=1}^n p_i^2 \sigma^2 + 3\gamma^3 nLd \sum_{i=1}^n p_i^2 \lambda_i^2. \quad (22)$$

Proof. According to the property of the absolute compressor, we have

$$E_t \leq d \sum_{i=1}^n p_i \lambda_i^2. \quad (23)$$

We combine the property and Lemma 1 and complete the proof.

For functions that is non-convexity, by incorporating Eq. 21 with Lemma 27 from Appendix F of [13], we can validate **Theorem 5**. When dealing with convex functions where $\mu = 0$, integrating Eq. 22 with Lemma 27 from Appendix F of [13] allows us to substantiate **Theorem 6**. For functions exhibiting pronounced convexity (where $\mu > 0$), by merging Eq. 22 with Lemma 25 from Appendix F of [13], we prove **Theorem 7**.

D. Proof of Theorem 8

Note that the condition is that the total communication traffic is constrained. Previous work [15] demonstrated a conversion formula from the threshold λ_i to the relative compression ratio δ_i in IID scenarios, *i.e.*, $\lambda_i = \frac{D}{\sqrt{\delta_i}}$. This formula can not apply to this work, for that we focus on communication-constrained non-IID scenarios.

To get the optimal λ_i , we assume that $\frac{\delta_i}{\delta_j} = \left(\frac{\lambda_i}{\lambda_j}\right)^\Gamma$. Here, $\Gamma < 0$ since δ_i is negatively correlated to γ_i . Then we have $\sum_{i=1}^n \lambda_i^\Gamma = n\bar{\lambda}^\Gamma$ according to $\sum_{i=1}^n \delta_i = n\bar{\delta}$ in Sec. IX-B.

We use the Lagrange multiplier method and define a Lagrangian function as follows:

$$\mathbb{L} = \sum_{i=1}^n p_i^2 \lambda_i^2 + \sigma \left(\sum_{i=1}^n \lambda_i^\Gamma - n\bar{\lambda}^\Gamma \right).$$

By the optimality condition, we have

$$\begin{cases} \frac{\partial \mathbb{L}}{\partial \lambda_i} = 2p_i^2 \lambda_i + \sigma \Gamma \lambda_i^{\Gamma-1} = 0, \forall i \in \{1, \dots, n\} \\ \frac{\partial \mathbb{L}}{\partial \sigma} = \sum_{i=1}^n \lambda_i^\Gamma - n\bar{\lambda}^\Gamma = 0 \end{cases}.$$

According to $\frac{\partial \mathbb{L}}{\partial \lambda_i} = 0$, we have $\frac{p_i}{p_j} = \left(\frac{\lambda_i}{\lambda_j}\right)^{\frac{\Gamma}{2}-1}$. We combine this result with the property of DAGC-R, *i.e.*, $\frac{\delta_i}{\delta_j} \approx \left(\frac{p_i}{p_j}\right)^{2/3}$, resulting in $\Gamma \approx -1$. Which means $\lambda_i \propto \frac{1}{\delta_i}$ and $\frac{p_i}{p_j} \approx \left(\frac{\lambda_i}{\lambda_j}\right)^{-\frac{3}{2}}$.

For ease of calculation, we next use the equation, *i.e.*, $\frac{p_i}{p_j} = \left(\frac{\lambda_i}{\lambda_j}\right)^{-\frac{3}{2}}$, rather than approximately equal. In this way, we have

$$\begin{cases} 2p_i^2 \lambda_i - \sigma \lambda_i^{-2} = 0, \forall i \in \{1, \dots, n\} \\ \sum_{i=1}^n \lambda_i^{-1} - n\bar{\lambda}^{-1} = 0 \end{cases}.$$

By solving system of equations above, the proof completes.

REFERENCES

- [1] S. Bubeck, V. Chandrasekaran, R. Eldan, *et al.*, “Sparks of artificial general intelligence: Early experiments with gpt-4,” *arXiv preprint arXiv:2303.12712*, 2023.
- [2] B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas, “Communication-efficient learning of deep networks from decentralized data,” in *Artificial Intelligence and Statistics*, PMLR, 2017, pp. 1273–1282.
- [3] K. Hsieh, A. Phanishayee, O. Mutlu, and P. Gibbons, “The non-iid data quagmire of decentralized machine learning,” in *International Conference on Machine Learning*, PMLR, 2020, pp. 4387–4398.
- [4] K. Hsieh, A. Harlap, N. Vijaykumar, *et al.*, “Gaia: {geo-distributed} machine learning approaching {lan} speeds,” in *14th USENIX Symposium on Networked Systems Design and Implementation*, 2017, pp. 629–647.
- [5] L. G. Valiant, “A bridging model for parallel computation,” *Communications of the ACM*, vol. 33, no. 8, pp. 103–111, 1990.
- [6] T. Li, A. K. Sahu, A. Talwalkar, and V. Smith, “Federated learning: Challenges, methods, and future directions,” *IEEE Signal Processing Magazine*, vol. 37, no. 3, pp. 50–60, 2020.
- [7] J. Wang, Q. Liu, H. Liang, G. Joshi, and H. V. Poor, “Tackling the objective inconsistency problem in heterogeneous federated optimization,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 7611–7623, 2020.
- [8] T. Li, A. K. Sahu, M. Zaheer, M. Sanjabi, A. Talwalkar, and V. Smith, “Federated optimization in heterogeneous networks,” *Machine Learning and Systems*, vol. 2, pp. 429–450, 2020.
- [9] T. Weyand, A. Araraju, B. Cao, and J. Sim, “Google landmarks dataset v2 - a large-scale benchmark for instance-level recognition and retrieval,” in *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2020.
- [10] A. M. Abdelmoniem and M. Canini, “Dc2: Delay-aware compression control for distributed machine learning,” in *IEEE Conference on Computer Communications 2021*, 2021, pp. 1–10. DOI: 10.1109/INFOCOM42981.2021.9488810.
- [11] Y. Lin, S. Han, H. Mao, Y. Wang, and B. Dally, “Deep gradient compression: Reducing the communication bandwidth for distributed training,” in *ICLR*, 2018.
- [12] S. U. Stich, J.-B. Cordonnier, and M. Jaggi, “Sparsified sgd with memory,” *Advances in Neural Information Processing Systems*, vol. 31, 2018.
- [13] S. U. Stich, “On communication compression for distributed optimization on heterogeneous data,” *arXiv preprint arXiv:2009.02388*, 2020.
- [14] S. U. Stich and S. P. Karimireddy, “The error-feedback framework: Better rates for sgd with delayed gradients and compressed updates,” *Journal of Machine Learning Research*, vol. 21, pp. 1–36, 2020.
- [15] A. Sahu, A. Dutta, A. M. Abdelmoniem, T. Banerjee, M. Canini, and P. Kalnis, “Rethinking gradient sparsification as total error minimization,” *Advances in Neural Information Processing Systems*, vol. 34, 2021.
- [16] A. F. Aji and K. Heafield, “Sparse communication for distributed gradient descent,” *arXiv preprint arXiv:1704.05021*, 2017.
- [17] X. Liu, L. Zhu, S.-T. Xia, Y. Jiang, and X. Yang, “Gdst: Global distillation self-training for semi-supervised federated learning,” in *2021 IEEE Global Communications Conference (GLOBECOM)*, IEEE, 2021, pp. 1–6.
- [18] A. M. Abdelmoniem, C.-Y. Ho, P. Papageorgiou, and M. Canini, “A comprehensive empirical study of heterogeneity in federated learning,” *IEEE Internet of Things Journal*, 2023.
- [19] Y. Mao, B. He, S. Zhou, C. Ma, and Z. Wang, “Collaborative edge caching: A meta reinforcement learning approach with edge sampling,” in *2023 IEEE International Conference on Multimedia and Expo (ICME)*, 2023, pp. 972–977. DOI: 10.1109/ICME55011.2023.00171.
- [20] Y. Mao, S. Zhou, H. Liu, Z. Wang, and W. Zhu, “Dynamic edge caching via online meta-rl,” in *2023 International Joint Conference on Neural Networks (IJCNN)*, 2023, pp. 01–10. DOI: 10.1109/IJCNN54540.2023.10191608.
- [21] S. Xie, Y. Xue, Y. Zhu, and Z. Wang, “Cost Effective MLaaS Federation: A Combinatorial Reinforcement Learning Approach,” in *IEEE INFOCOM 2022-IEEE Conference on Computer Communications*, IEEE, 2022, pp. 1–10.
- [22] C. Tang, K. Ouyang, Z. Wang, *et al.*, “Mixed-precision neural network quantization via learned layer-wise importance,” in *European Conference on Computer Vision*, Springer, 2022, pp. 259–275.
- [23] C. Tang, L. L. Zhang, H. Jiang, *et al.*, “Elasticvit: Conflict-aware supernet training for deploying fast vision transformer on diverse mobile devices,” in *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2023.
- [24] H. Xu, C.-Y. Ho, A. M. Abdelmoniem, *et al.*, “Grace: A compressed communication framework for distributed machine learning,” in *IEEE International Conference on Distributed Computing Systems*, 2021.
- [25] J. Bernstein, Y.-X. Wang, K. Azizzadenesheli, and A. Anandkumar, “Signsgd: Compressed optimization for non-convex problems,” in *International Conference on Machine Learning*, PMLR, 2018, pp. 560–569.
- [26] J. Wu, W. Huang, J. Huang, and T. Zhang, “Error compensated quantized sgd and its applications to large-scale distributed optimization,” in *International Conference on Machine Learning*, PMLR, 2018, pp. 5325–5333.
- [27] D. Basu, D. Data, C. Karakus, and S. Diggavi, “Qsparse-local-sgd: Distributed sgd with quantization, sparsification and local computations,” *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- [28] D. Alistarh, T. Hoefler, M. Johansson, N. Konstantinov, S. Khirirat, and C. Renggli, “The convergence of sparsified gradient methods,” *Advances in Neural Information Processing Systems*, vol. 31, 2018.
- [29] T. Vogels, S. P. Karimireddy, and M. Jaggi, “Powersgd: Practical low-rank gradient compression for distributed optimization,” *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- [30] F. Sattler, S. Wiedemann, K.-R. Müller, and W. Samek, “Robust and communication-efficient federated learning from non-iid data,” *IEEE Transactions on Neural Networks and Learning systems*, vol. 31, no. 9, pp. 3400–3413, 2019.
- [31] L. Cui, X. Su, Y. Zhou, and Y. Pan, “Slashing communication traffic in federated learning by transmitting clustered model updates,” *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 8, pp. 2572–2589, 2021.
- [32] M. M. Amiri, D. Gunduz, S. R. Kulkarni, and H. V. Poor, “Federated Learning With Quantized Global Model Updates,” *arXiv e-prints*,

- arXiv:2006.10672, arXiv:2006.10672, Jun. 2020. arXiv: 2006.10672 [cs.LG].
- [33] J. Bernstein, Y.-X. Wang, K. Azizzadenesheli, and A. Anandkumar, "SignSGD: Compressed optimisation for non-convex problems," in *International Conference on Machine Learning*, J. Dy and A. Krause, Eds., ser. Machine Learning Research, vol. 80, PMLR, 2018, pp. 560–569.
- [34] D. Alistarh, D. Grubic, J. Li, R. Tomioka, and M. Vojnovic, "Qsgd: Communication-efficient sgd via gradient quantization and encoding," *Advances in Neural Information Processing Systems*, vol. 30, I. Guyon, U. V. Luxburg, S. Bengio, et al., Eds., 2017.
- [35] H. Xiao, K. Rasul, and R. Vollgraf, "Fashion-mnist: A novel image dataset for benchmarking machine learning algorithms," *arXiv preprint arXiv:1708.07747*, 2017.
- [36] P. Warden, "Speech commands: A dataset for limited-vocabulary speech recognition," *arXiv preprint arXiv:1804.03209*, 2018.
- [37] S. P. Karimireddy, Q. Rebjock, S. Stich, and M. Jaggi, "Error feedback fixes signsgd and other gradient compression schemes," in *International Conference on Machine Learning*, PMLR, 2019, pp. 3252–3261.
- [38] A. Krizhevsky, G. Hinton, et al., "Learning multiple layers of features from tiny images," 2009.
- [39] Q. Li, B. He, and D. Song, "Practical one-shot federated learning for cross-silo setting," *arXiv preprint arXiv:2010.01017*, 2020.
- [40] Q. Li, Y. Diao, Q. Chen, and B. He, "Federated learning on non-iid data silos: An experimental study," in *IEEE International Conference on Data Engineering*, 2022.
- [41] H. Wang, M. Yurochkin, Y. Sun, D. Papailiopoulos, and Y. Khazaeni, "Federated learning with matched averaging," *arXiv preprint arXiv:2002.06440*, 2020.
- [42] K. Simonyan and A. Zisserman, "Very deep convolutional networks for large-scale image recognition," *arXiv preprint arXiv:1409.1556*, 2014.
- [43] F. Sattler, S. Wiedemann, K.-R. Müller, and W. Samek, "Sparse binary compression: Towards distributed deep learning with minimal communication," in *International Joint Conference on Neural Networks*, IEEE, 2019, pp. 1–8.
- [44] S. Agarwal, H. Wang, K. Lee, S. Venkataraman, and D. Papailiopoulos, "Adaptive gradient communication via critical learning regime identification," *Machine Learning and Systems*, vol. 3, pp. 55–80, 2021.
- [45] J. Wang, Q. Liu, H. Liang, G. Joshi, and H. V. Poor, "Tackling the objective inconsistency problem in heterogeneous federated optimization," *Advances in Neural Information Processing Systems*, vol. 33, pp. 7611–7623, 2020.
- [46] L. Zhu, H. Lin, Y. Lu, Y. Lin, and S. Han, "Delayed gradient averaging: Tolerate the communication latency for federated learning," *Advances in Neural Information Processing Systems*, vol. 34, pp. 29995–30007, 2021.
- [47] X. Liu, Z. Zhong, Y. Zhou, et al., "Accelerating federated learning via parallel servers: A theoretically guaranteed approach," *IEEE/ACM Transactions on Networking*, vol. 30, no. 5, pp. 2201–2215, 2022.
- [48] A. M. Abdelmoniem, A. N. Sahu, M. Canini, and S. A. Fahmy, "Refl: Resource-efficient federated learning," in *Proceedings of the Eighteenth European Conference on Computer Systems*, 2023, pp. 215–232.
- [49] L. Liu, J. Zhang, S. Song, and K. B. Letaief, "Client-edge-cloud hierarchical federated learning," in *ICC 2020-2020 IEEE International Conference on Communications (ICC)*, IEEE, 2020, pp. 1–6.
- [50] J. Wang, S. Wang, R.-R. Chen, and M. Ji, "Demystifying why local aggregation helps: Convergence analysis of hierarchical sgd," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 36, 2022, pp. 8548–8556.
- [51] J. Yuan, M. Xu, X. Ma, A. Zhou, X. Liu, and S. Wang, "Hierarchical federated learning through lan-wan orchestration," *arXiv preprint arXiv:2010.11612*, 2020.
- [52] A. Malekijoo, M. J. Fadaeieslam, H. Malekijoo, M. Homayounfar, F. Alizadeh-Shabdiz, and R. Rawassizadeh, "Fedzip: A compression framework for communication-efficient federated learning," *arXiv preprint arXiv:2102.01593*, 2021.
- [53] F. Haddadpour, M. M. Kamani, A. Mokhtari, and M. Mahdavi, "Federated learning with compression: Unified analysis and sharp guarantees," in *International Conference on Artificial Intelligence and Statistics*, PMLR, 2021, pp. 2350–2358.
- [54] J. Guo, W. Liu, W. Wang, et al., "Accelerating distributed deep learning by adaptive gradient quantization," in *IEEE International Conference on Acoustics, Speech and Signal Processing*, IEEE, 2020, pp. 1603–1607.
- [55] J. Wang and G. Joshi, "Adaptive communication strategies to achieve the best error-runtime trade-off in local-update sgd," *Machine Learning and Systems*, vol. 1, pp. 212–229, 2019.
- [56] A. M. Abdelmoniem, A. Elzanaty, M. Canini, and M.-S. Alouini, *Statistical-based gradient compression method for distributed training system*, 2022.
- [57] A. M. Abdelmoniem, A. Elzanaty, M.-S. Alouini, and M. Canini, "An efficient statistical-based gradient compression technique for distributed training systems," *Proceedings of Machine Learning and Systems*, vol. 3, pp. 297–322, 2021.
- [58] L. Cui, X. Su, Y. Zhou, and J. Liu, "Optimal rate adaption in federated learning with compressed communications," in *IEEE INFOCOM 2022-IEEE Conference on Computer Communications*, IEEE, 2022, pp. 1459–1468.
- [59] X. Su, Y. Zhou, L. Cui, and J. Liu, "On model transmission strategies in federated learning with lossy communications," *IEEE Transactions on Parallel and Distributed Systems*, vol. 34, no. 4, pp. 1173–1185, 2023. DOI: 10.1109/TPDS.2023.3240883.
- [60] M. Safaryan, F. Hanzely, and P. Richtárik, "Smoothness matrices beat smoothness constants: Better communication compression techniques for distributed optimization," *Advances in Neural Information Processing Systems*, vol. 34, pp. 25 688–25 702, 2021.
- [61] B. Wang, M. Safaryan, and P. Richtárik, "Theoretically better and numerically faster distributed optimization with smoothness-aware quantization techniques," *Advances in Neural Information Processing Systems*, vol. 35, pp. 9841–9852, 2022.
- [62] C. Dupuy, T. G. Roosta, L. Long, C. Chung, R. Gupta, and S. Avestimehr, "Learnings from federated learning in the real world," in *IEEE International Conference on Acoustics, Speech and Signal Processing*, 2022. [Online]. Available: <https://www.amazon.science/publications/learnings-from-federated-learning-in-the-real-world>.
- [63] H. Wu and P. Wang, "Node selection toward faster convergence for federated learning on non-iid data," *IEEE Transactions on Network Science and Engineering*, 2022.