

Advances in 3D Neural Stylization: A Survey

Yingshu Chen^{1*}, Guocheng Shao¹, Ka Chun Shum¹, Binh-Son Hua²,
Sai-Kit Yeung¹

^{1*}Hong Kong University of Science and Technology.

²Trinity College Dublin.

*Corresponding author(s). E-mail(s): ychengw@connect.ust.hk;

Contributing authors: {gshao,kcshum}@connect.ust.hk; binhson.hua@tcd.ie; saikit@ust.hk;

Abstract

Modern artificial intelligence offers a novel and transformative approach to creating digital art across diverse styles and modalities like images, videos and 3D data, unleashing the power of creativity and revolutionizing the way that we perceive and interact with visual content. This paper reports on recent advances in stylized 3D asset creation and manipulation with the expressive power of neural networks. We establish a taxonomy for neural stylization, considering crucial design choices such as scene representation, guidance data, optimization strategies, and output styles. Building on such taxonomy, our survey first revisits the background of neural stylization on 2D images, and then presents in-depth discussions on recent neural stylization methods for 3D data, accompanied by a mini-benchmark evaluating selected neural field stylization methods. Based on the insights gained from the survey, we highlight the practical significance, open challenges, future research, and potential impacts of neural stylization, which facilitates researchers and practitioners to navigate the rapidly evolving landscape of 3D content creation using modern artificial intelligence.

Keywords: 3D Stylization, Neural Style Transfer, Neural Stylization

1 Introduction

Digital art and visual design have been prevailing in our daily living spaces, expressing visually captivating aesthetics, unique tastes, and emotions of human beings. With the prosperity of artificial intelligence (AI), there emerges a new generation of toolsets for visual content creation such as generative image synthesis (Stable Diffusion, DALL·E 3, Midjourney) (Midjourney, 2023; OpenAI, 2023; Rombach et al., 2022), and video synthesis (Sora, RunwayML) (OpenAI, 2024; Runway, 2023). AI-based visual content creation can also be extended to the 3D domain, notably by lifting images to 3D scenes (LUMA AI) (Luma, 2023), and creative

text-guided 3D generation and design (DreamFusion, Meshy, SplineAI) (Meshy, 2024; Poole et al., 2023; Spline, 2023).

It’s noteworthy that the nature of visual concepts in our living space is tied to a critical factor: style. Formally, style is a way to express individuality and creativity in different mediums and practices. In relevant industries like animation, architectural and interior design, gaming, augmented reality, virtual reality, and artwork creation, assets are often created in styles such that they altogether harmonize to create an intended look and feel of the final scenes. A common practice is to first create the assets, and then post-process

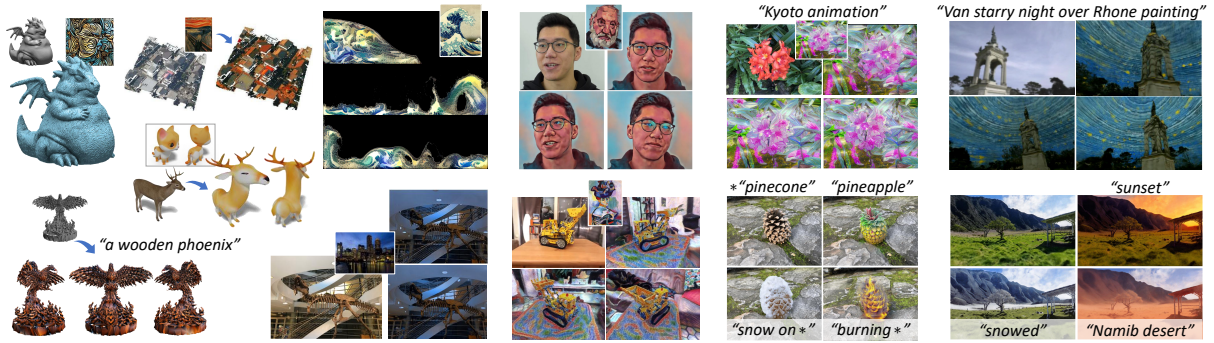


Fig. 1: The survey delves into the realm of neural stylization on diverse 3D representations, including meshes, point clouds, volume, and neural fields. The neural stylization with visual, textual and geometric features retrieved from large-scale neural models empowers artistic, photorealistic, and semantic style transformation of the geometry and appearance of 3D scenes. Images adapted from X. Cao et al. (2020); Haque et al. (2023); H. Liu et al. (2018); Ma et al. (2023); H. Song et al. (2023); Y. Wang et al. (2023); Yin et al. (2021); K. Zhang et al. (2022); Y. Zhang, He, et al. (2023).

them to match some styles, often known as *stylization*. The advent of modern deep learning has led to the emergence of *neural stylization*, a family of methods that automatically create visual content in styles, facilitating the exploration of aesthetics in the creation of visual data. Neural stylization is applicable to visual data in general, including images, videos, and 3D data. Unlike image stylization, which has been well developed in the past decade, neural stylization for 3D data remains an open area to explore for new creative vistas and practical applications.

This report delves into the latest developments in the creation of 3D digital art using neural stylization methods, as shown in Fig. 1. Neural stylization can facilitate automated design and creation of explicit meshes, textures and volumetric assets, which supports seamless usage in the traditional rendering pipeline, accelerating labor-intensive manual tasks such as modeling, texturing, and simulation. Neural stylization also enables efficient and controllable manipulation or transformation of neural scenes, which typically utilizes neural networks instead of shaders to generate images (Fig. 2). Interestingly, neural stylization has shown practical importance in various applications, including 3D texture design and artistic simulation in movie making (Hoffman et al., 2023; Kanyuk et al., 2023; Navarro & Rice, 2021), virtual production (Manzanaque, 2023), mixed reality experiences (Taniguchi, 2019; Tseng et al., 2022), and artwork creation (Guljajeva & Canet, 2022).

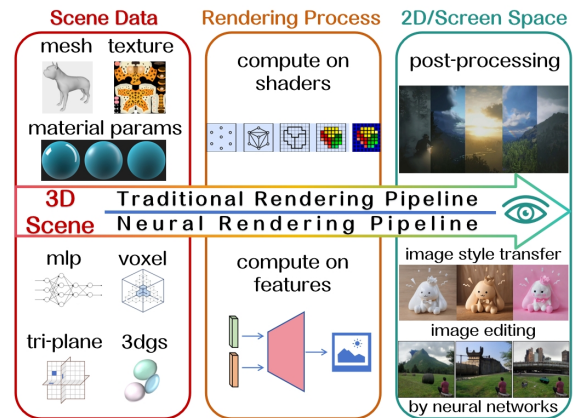


Fig. 2: A general overview of mesh-based and radiance field-based rendering pipelines. Images adapted from Avrahami et al. (2022); G. Chen and Wang (2024); G. Kim et al. (2024); Spline (2023); Yin et al. (2021).

Despite its advantages, performing neural stylization in 3D presents new technical challenges such as multi-view consistency, view sampling and rendering, as well as robustness issues including the relative scarcity of 3D datasets, and memory consumption for training and inference. This report provides a comprehensive discussion and summary of advanced 3D neural stylization techniques that address these challenges, highlighting the power of neural rendering (Tewari et al., 2022), vision-language models (Radford et al., 2021), and

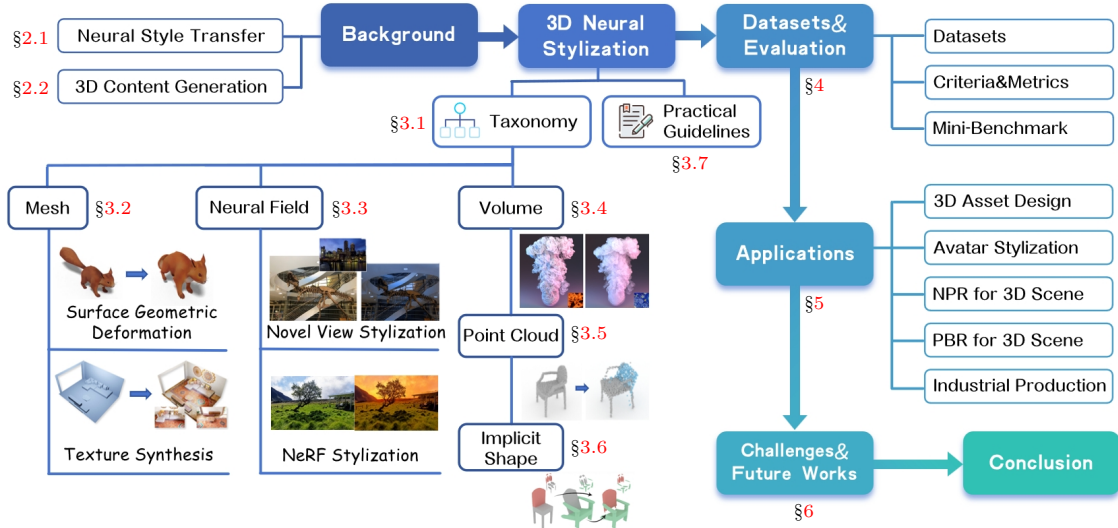


Fig. 3: Structure of our survey.

large-scale generative models (Rombach et al., 2022).

The structure of this report is depicted in Fig. 3, which is outlined as follows: Sec. 2 reviews fundamentals of 2D neural stylization and important visual or textural feature priors, which act as components or backbones of 3D neural stylization techniques. In Sec. 3, we introduce a taxonomy for neural stylization and discuss advanced stylization methods on various types of 3D representations in depth with summaries of practical tips to guide future works. In Sec. 4, we summarize popular datasets and evaluation metrics for 3D stylization, and particularly, we deliver a mini-benchmark of 3D artistic stylization to serve as a reference for performance evaluations. Sec. 5 introduces diverse applications of 3D neural stylization, demonstrating its practical value in a wide range of domains. Finally, Sec. 6 highlights promising research directions with practical significance.

1.1 Definition and Terminologies

Definition 1. *3D neural stylization refers to the process that employs deep learning techniques and stylization algorithms to generate stylized 3D digital assets or the stylized rendering from these assets, including the alteration of appearance and/or geometry.*

3D neural stylization is well connected to the following terminologies and techniques.

- **Neural Style Transfer (NST)** refers to a class of algorithms that manipulate digital images, or videos, in order to adopt the appearance or visual style of target reference while preserving original content features. It can be regarded as a foundation of 3D neural stylization, as most image-guided 3D stylization methods rely on it. We refer to former surveys (Jing et al., 2019; Singh et al., 2021; Zhan et al., 2023) and provide a concise review in Sec. 2.1.

- **Neural Rendering** is a class of techniques that “learn to render and/or represent a scene from real-world imagery, which can be an unordered set of images, or structured, multi-view images or videos” (Tewari et al., 2022), several works of which focus on the generation of photorealistic rendering from the neural representations. Instead, neural stylization aims at modifying the visual appearance and aesthetic characteristics of existing digital representations and obtaining artistic or photorealistic rendering results. We refer readers to existing surveys for insight into neural rendering (Tewari et al., 2020, 2022), neural fields (Y. Xie et al., 2022) and image generation (Zhan et al., 2023).

- **Non-photorealistic Rendering (NPR)** is an area of computer graphics that enables abstract stylized rendering for either 3D models, 3D images or 2D images, such as toon shading, Gooch shading (A. Gooch et al., 1998), stroke-based painterly rendering (Haerberli, 1990; Hertzmann,

1998), patch-based texture synthesis and transfer (Efros & Freeman, 2001; Hertzmann et al., 2001). Mainly leveraging programmable shaders and image-processing techniques, NPR has been widely used in the realms of animation making, digital content creation (Artineering, 2018) and game development (McGuire et al., 2010). However, these techniques require creating handcrafted style patterns and rules, which are labor-intensive and entail domain expertise. In contrast, neural stylization enables fast production with arbitrary style references and has been applied to accelerate cinematic digital production (Hoffman et al., 2023; Joshi et al., 2017; Navarro & Rice, 2021).

- **Neural Scene Editing** has become more practical in the recent few years thanks to the contribution of large language models (LLMs) and vision-language models (VLMs) (J. Li et al., 2023; Radford et al., 2021). Editing methods focus on adding, modifying, or removing objects in a scene, or manipulating some regions of interest. By contrast, stylization methods focus on the transfer of overall appearance and the adoption of specific aesthetic characteristics. Still, stylization methods share critical ideas with editing methods, and some of the methods covered in this survey can also apply to scene editing (Bao et al., 2023; Koo et al., 2023; H. Song et al., 2023).

1.2 Related Surveys

In the literature, there exist comprehensive surveys on 2D neural style transfer (Jing et al., 2019; Singh et al., 2021), surveys on generative image models (Croitoru et al., 2023; L. Yang et al., 2023; Zhan et al., 2023), and surveys on neural field representations (Y. Xie et al., 2022) and rendering (Tewari et al., 2020, 2022). Our survey aims to explore the potential of connecting neural stylization techniques with both traditional and advanced 3D representations, thereby offering valuable resources for style-based 3D digital designs. To the best of our knowledge, this paper is the first comprehensive review to summarize neural stylization techniques and applications specifically tailored to 3D data, highlighting the immense capabilities of neural stylization in the 3D domain.

2 Background

In this section, we provide a brief discussion on neural style transfer for images, which serves as the fundamental building block for discussing 3D neural stylization. This includes methods that leverage visual or textual guidance for image style transfer and manipulation (Sec. 2.1). We also discuss generic methods for 3D content generation with a focus on the state-of-the-art diffusion models for 3D generation (Sec. 2.2).

2.1 Neural Style Transfer

The basic idea of neural style transfer is to reproduce the style of a reference image for an input image, keeping the original content of the input. The content representation of an image can be extracted by predicting its features using a pre-trained or trainable encoder (X. Huang et al., 2018; Simonyan & Zisserman, 2015). The style representation can be represented by a Gram matrix, which is a dot-product matrix measuring the relevance of each pair of features extracted by a pre-trained network (Gatys et al., 2016). Alternatively, the style of an image can also be characterized by the spatially invariant statistics (i.e. channel-wise mean and variance) of features (Dumoulin et al., 2017; X. Huang & Belongie, 2017). With the rise of vision-language pre-trained models (J. Li et al., 2023; Radford et al., 2021), it is possible to use CLIP embedding to represent the style of an image or a text prompt (Gal et al., 2022; Kwon & Ye, 2022). In Fig. 4, we provide a high-level pipeline comparison of different types of neural style transfer methods including single-style transfer via optimization, arbitrary style transfer, and image-to-image translation. We discuss each type of method, below.

Single Style Transfer

One simple method for neural style transfer (Fig. 4a) is to optimize from a white noise image to obtain a new image that shares the content of a source image and the style of a reference image (Gatys et al., 2016). Given a content source image c and a style reference image s , the optimization can be done by minimizing a combined objective: $\mathcal{L}_{total} = \mathcal{L}_c(c, cs) + \lambda\mathcal{L}_s(s, cs)$, where the total loss consists of a content loss \mathcal{L}_c of the squared-error of VGG features between content

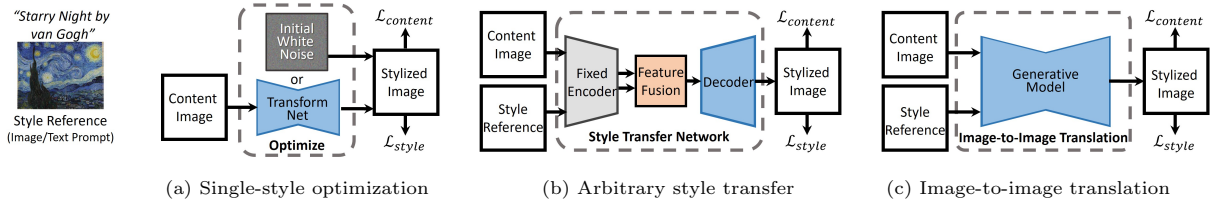


Fig. 4: Pipeline comparisons of 2D neural style transfer. (a) Single-style transfer via optimization (Gatys et al., 2016; Johnson et al., 2016; Kwon & Ye, 2022). (b) Arbitrary style transfer via feature fusion or transformation (X. Huang & Belongie, 2017; X. Li et al., 2019; S. Liu et al., 2021). (c) Image-to-image translation with style condition via generative models (Deng et al., 2022; X. Huang et al., 2018; Wen et al., 2023; Y. Zhang, Huang, et al., 2023).

image c and output stylized image cs , and a Gram matrix style loss \mathcal{L}_s between style image s and output stylized image. λ is a hyperparameter.

Instead of optimizing an image for each transfer, we can train a single feed-forward network with a perceptual loss to perform style transfer for arbitrary content images (Johnson et al., 2016). At inference, real-time stylization can be performed simply by forwarding an arbitrary content image through the network. Although performing network inference is much faster than running an optimization, one still needs to retrain the network for each different style.

The rise of vision-language models (Radford et al., 2021) leads to the possibility of performing style transfer using text prompts as guidance. Given CLIP with a text encoder and an image encoder sharing the same latent embedding space (Radford et al., 2021), text-guided image style transfer can be achieved by maximizing text-image semantic similarity as the style loss, usually formulated by the CLIP loss defined by

$$\mathcal{L}_{clip}(cs, s_{sty}) = 1 - sim(E_I(cs), E_T(s_{sty})), \quad (1)$$

where cs and s_{sty} are the stylized image and style text prompt, E_I and E_T are the pre-trained CLIP image encoder and text encoder, respectively. $sim(A, B)$ is the cosine similarity between two feature vectors. One can also use the directional CLIP loss (Gal et al., 2022; Patashnik et al., 2021) to achieve better style transfer quality:

$$\mathcal{L}_{dir}(c, cs, s_{src}, s_{sty}) = 1 - sim(\Delta I, \Delta T), \quad (2)$$

where $\Delta I = E_I(cs) - E_I(c)$, $\Delta T = E_T(s_{sty}) - E_T(s_{src})$, c is the content image, cs is the stylized image, s_{src} and s_{sty} are the source (content) style prompt and target style prompt. An example of s_{src} and s_{sty} can be “Photo” and “Picasso style painting”, respectively (Kwon & Ye, 2022). Since CLIP does not support high-resolution image embedding, a patch-wise version of the directional CLIP loss with augmented patches can be used for better artistic semantic texture transfer (Kwon & Ye, 2022).

Arbitrary Style Transfer: AdaIN and LST

To enable the model to transfer arbitrary styles without re-training, one can employ an autoencoder with style fusion (Fig. 4b). Particularly, to fuse the content and style features, we can use adaptive instance normalization (AdaIN) that directly regulates the mean and variance of the feature maps of the content image to match those of the target style image (X. Huang & Belongie, 2017):

$$AdaIN(c, s) = \sigma(F(s)) \left(\frac{F(c) - \mu(F(c))}{\sigma(F(c))} \right) + \mu(F(s)), \quad (3)$$

where each VGG feature map $F(\cdot)$ is normalized separately. The transformed feature maps are fed into a learned decoder to generate the final output.

Alternatively, we can fuse content and style features by learning an affine feature transformation matrix T from content features $F(c)$ and style features $F(s)$ through a convolutional neural network, as proposed by linear style transfer (LST) (X. Li et al., 2019):

$$LST(c, s) = T \cdot (F(c) - \mu(F(c))) + \mu(F(s)). \quad (4)$$

Generative Models for Style Transfer

In addition to optimization-based and feed-forward inference methods, neural style transfer can be achieved via image synthesis tasks such as image-to-image translation and generative models. Particularly, image-to-image translation (I2I) achieves style transfer by translating an image from one source domain to a target domain using a generative model such as a generative adversarial network (GAN) (Goodfellow et al., 2014) (Fig. 4c). Deterministic I2I translation methods focus on task-specific domain-to-domain translation and does not require style guidance via reference images (Isola et al., 2017; M. Liu et al., 2017; Zhu et al., 2017). Multi-modal I2I translation models enable translation based on examples or latent features (H. Chang et al., 2020; Y. Chen, Vu, et al., 2022; X. Huang et al., 2018; Lee et al., 2018). While GAN-based I2I models generate high-fidelity images, they are domain-specific and resource-consuming for training compared to traditional methods (Fig. 4a and 4b).

Recently, diffusion models have demonstrated state-of-the-art performance for image synthesis (Rombach et al., 2022), and therefore it is natural to consider these models for style transfer. Early diffusion models, however, may not excel in some I2I tasks, such as super-resolution, which requires generating results aligned with ground-truth images or provided guidance. To address the issue, one can concatenate the source image with the noise map as input and then follow the regular diffusion model training process to synthesize the translated image (Batzolis et al., 2021; Saharia, Chan, Chang, et al., 2022; Sasaki et al., 2021). Alternatively, one can adapt the diffusion process for I2I translation by training separate source and target diffusion models on their respective image domains (Su et al., 2023). At inference, a source image is encoded by the source model to produce a noisy map, which is then denoised by the target model to complete the I2I translation.

A particular strength of diffusion models that contributes to their wide adoption is their ability to learn across different data modality. Similarly to the spirit of CLIP loss for style transfer, text-guided diffusion models leverage textual embedding of the text prompt to condition image generation, and thus allows style transfer via text-to-image

generation and text-guided I2I translation (OpenAI, 2023; Rombach et al., 2022; Saharia, Chan, Saxena, et al., 2022). Among the publicly available pre-trained diffusion models, Stable Diffusion (Rombach et al., 2022) and ControlNet (L. Zhang et al., 2023) have gained popular attention and have been adopted into a wide range of applications. Stable Diffusion is built upon a latent diffusion model (LDM) (Rombach et al., 2022) where the diffusion process is applied to the latent space rather than directly on color pixels. This latent diffusion model largely improves efficiency and suits numerous manipulation tasks like image super-resolution, image inpainting and enables controllable editing of images, such as changing facial expressions, adding/removing objects, and adjusting lighting, with segmentation maps or sketches as guidance. ControlNet (L. Zhang et al., 2023) greatly enhances the power of Stable Diffusion with controllability. Inspired by HyperNetwork (Ha et al., 2016) and LoRA (E. Hu et al., 2022), ControlNet locks a pre-trained diffusion model and fine-tunes a learnable copy in parallel. The trainable copy accepts as input a source image and a target condition, and then concatenates outputs of intermediate layers back to the locked model for conditioning and to avoid overfitting. ControlNet is adaptable for a wide range of customized image domains for I2I translation and efficiently fine-tunes from a pre-trained model instead of training heavily from scratch.

An alternative diffusion-based method adaptable for style transfer is Instruct-Pix2Pix (Brooks et al., 2023), which opts to train from scratch a text-guided I2I translation model by directly building an image-prompt-image dataset. It uses LLM (e.g. GPT-3 (Brown et al., 2020)) to automatically generate ground-truth text prompts and adopts Prompt-to-Prompt (2023) to generate paired images. The model then trains on these pairs from scratch following the usual diffusion process except for concatenating the source image to its first network layer as condition information.

2.2 3D Content Generation

Equipped with a background in neural style transfer, let us now briefly discuss 3D content generation methods, which serve as the background and provide valuable insights for 3D neural stylization subsequently.

3D Representations

In contrast to image representations, there are various representations for learning to generate 3D content. Conventional 3D representations are mostly explicit representations including triangle and polygon meshes, point clouds, and voxel grids (or volumes). Some implicit representations, such as signed distance functions (SDF) and their truncated versions (TSDF), also gain popularity to represent implicit shapes. The advances in deep learning have spurred an increasing interest in using neural networks to represent 3D data as neural fields, notably neural radiance fields (NeRF) (Mildenhall et al., 2020) and Gaussian splats (Kerbl et al., 2023). We refer readers to the existing survey for a comprehensive overview of neural fields for visual computing (Y. Xie et al., 2022).

3D Generative Models

Existing 3D generative models have explored different types of 3D representations such as point clouds, voxel grids, meshes, and implicit fields (Z. Chen & Zhang, 2019; Masci et al., 2015; Qi et al., 2017; Z. Wu et al., 2015; Zhao et al., 2021). 3D data-driven generative models are trained with large-scale 3D assets with diverse appearances and shapes, which are challenging to collect (A. Chang et al., 2015; Deitke, Schwenk, et al., 2023; Y. Liu et al., 2019). Inspired by neural volume rendering, there appeared a group of 3D-aware image synthesis works learning 3D generation from accessible 2D data (Chan et al., 2022; Gu et al., 2022; Nguyen-Phuoc et al., 2020; Niemeyer & Geiger, 2021). Since the slow and resource-intensive nature of volume rendering results in long training time and low resolution, one can leverage a reduced 3D representation such as tri-planes in GAN framework for efficient and high-quality image and 3D data generation (Chan et al., 2022).

3D Generation via Diffusion Priors

In a similar spirit to 3D-aware image synthesis, it is of great interest to generate 3D data from priors learned by 2D diffusion models (OpenAI, 2023; Ruiz et al., 2023). DreamFusion (Poole et al., 2023) proposed a 3D generation pipeline that optimizes a NeRF by leveraging a text-guided diffusion model as the critic to the NeRF rendered images (Fig. 5). The gradient function for optimization is a weighted average of noise residual multiplied by

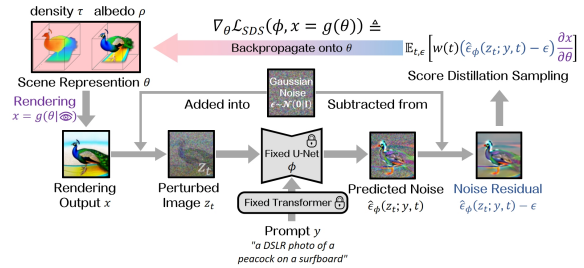


Fig. 5: 3D generation architecture with score distillation sampling loss. A pre-trained denoising U-Net supervises NeRF optimization. Image adapted from Poole et al. (2023).

the Jacobian of the rendering process, also known as score distillation sampling (SDS).

Several variants have been proposed to resolve serious problems in the SDS loss such as oversaturation, over-smoothing, and lack of details, generating more realistic and high-definition 3D objects. Variational score distillation (VSD) trains a LoRA model to better estimate the data distribution of rendered images for effective updating (Z. Wang et al., 2023). Delta denoising score (DDS) computes the difference between two SDS scores as guidance (Hertz, Aberman, & Cohen-Or, 2023), while posterior distillation sampling (PDS) aligns the stochastic latents of the source image and the target image instead of noise variables (Koo et al., 2024). Further works explore instilling geometric information to score distillation (H. Yang et al., 2023; Yeh et al., 2024).

Moreover, 3D datasets are also exploited to provide geometric priors such as canonical coordinates map (W. Li et al., 2024) and normal map (Long et al., 2024) for better multi-view consistency. Zero-1-to-3 (R. Liu et al., 2023) proposed the view-conditioned diffusion that accepts a rotation angle as an extra condition, which synthesizes novel views based on any single view of a 3D model. Recent 3D generation works further improve the visual quality by combining 2D priors from text-to-image diffusion and 3D-aware priors from view-conditioned diffusion (Qian et al., 2024; J. Sun et al., 2024).

3 3D Neural Stylization

In this section, we first establish a taxonomy for neural stylization and give an example of the

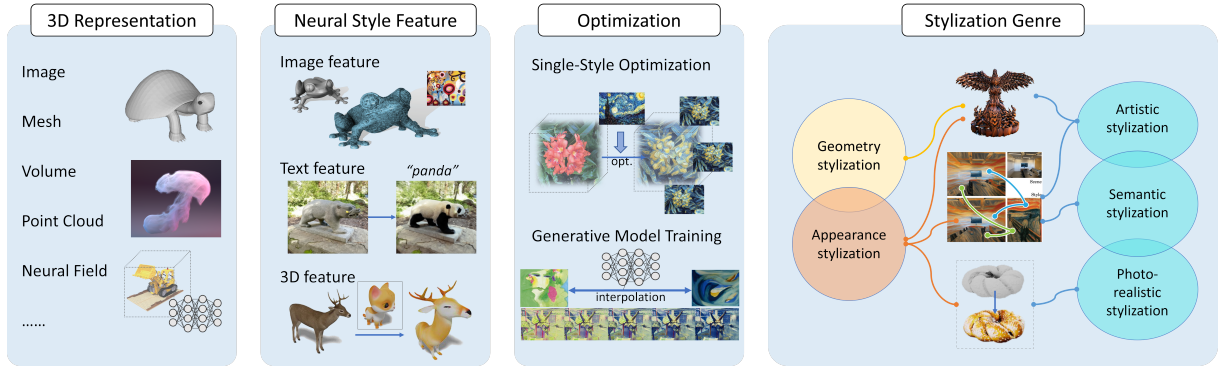


Fig. 6: Taxonomy of neural stylization. Images from Aurand et al. (2022); D. Chen et al. (2023); Haque et al. (2023); H. Liu et al. (2018); K. Liu et al. (2023); Mildenhall et al. (2020); Pang et al. (2023); Richardson et al. (2023); Yin et al. (2021); K. Zhang et al. (2022).

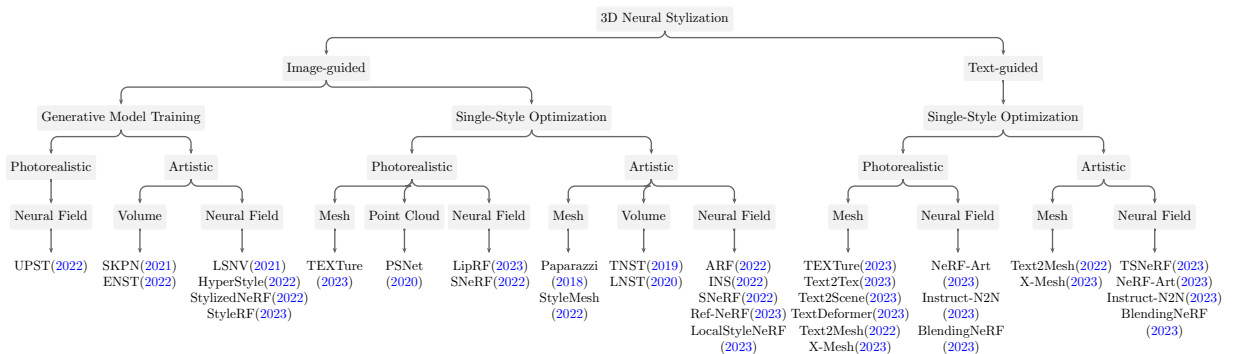


Fig. 7: Hierarchical classification of selected image- and text-guided 3D neural stylization methods.

categorization of selected 3D neural stylization methods (Sec. 3.1). In the subsequent sections, we will discuss state-of-the-art 3D neural stylization techniques on diverse 3D representations, such as meshes (Sec. 3.2), neural fields (Sec. 3.3), volumetric data (Sec. 3.4), point clouds (Sec. 3.5), and implicit shapes (Sec. 3.6). We then discuss a set of guidelines for practical implementations of 3D stylization (Sec. 3.7).

3.1 Taxonomy

Our taxonomy for neural stylization methods consists of the following aspects:

- *Representations.* We categorize stylization methods based on data representations such as image, mesh, volume, point cloud, and neural field.
- *Neural Style Feature.* We categorize based on image visual features, textual semantic features, or 3D latent features derived from pre-trained

models, typically neural classifiers or generative models.

- *Optimization.* This refers to optimization-based or prediction-based stylization methods with single, multiple, or arbitrary styles supported.
- *Stylization Genres.* This refers to different types of stylization, mainly including geometry stylization operating on asset shape and surface patterns, and appearance stylization focusing on color, texture and visual patterns to align with specific styles from artistic paintings to realistic concepts.

To guide the reader through the main section of this survey, we illustrate the taxonomy in Fig. 6, and provide a hierarchical classification of the 3D stylization methods in Fig. 7. Let us now discuss 3D neural stylization methods by following the categorization based on 3D representations, below.

Method	Input	Guidance	Output	Scene	Optimization	Style Genre	</>
3DStyleNet (2021)	textured mesh	points, image	textured mesh	object	generative	geo.&app.	✗
Point-UV Diffusion(2023)	mesh	points, image or text	textured mesh	object	generative	appearance	🔗
Paparazzi (2018)	mesh	image	mesh	object	single-style	geometry, artistic	🔗
StyleMesh (2022)	RGBD imgs, rec. mesh	image	texture	room	single-style	appearance, artistic	🔗
Text2Mesh (2022)	mesh	text or image	vertex-colored mesh	object	single-style	geo.&app.	🔗
X-Mesh (2023)	mesh	text	vertex-colored mesh	object	single-style	geo.&app.	🔗
Text2Scene (2023)	meshes, segment labels	image & text	vertex-colored mesh	room w/ objects	single-style	appearance	🔗
TextDeformer(2023)	mesh	text	mesh	object	single-style	geometry	🔗
TEXTure (2023)	mesh	text or image	textured mesh	object	single-style	appearance	🔗
Text2Tex (2023)	mesh	text	textured mesh	object	single-style	appearance	🔗
TexFusion (2023)	mesh	text	textured mesh	object	single-style	appearance	✗
3DStyle-Diffusion(2023)	mesh	text	textured mesh	object	single-style	appearance	🔗
SceneTex (2024)	mesh	text	textured mesh	room	single-style	appearance	🔗

Table 1: Summary of selected mesh-based neural stylization.

3.2 Mesh-based Stylization

In computer graphics and 3D modeling, a mesh is a collection of vertices, edges, and faces that define an object’s geometric structure. Objects represented by meshes can store additional appearance attributes, such as vertex color, materials, UV coordinates and texture maps. Powered by neural networks, neural networks such as MLPs represent these attributes including neural texture (Oechsle et al., 2019; Thies et al., 2019), neural reflectance field (Baatz et al., 2022), neural visibility field (Srinivasan et al., 2021), neural vertex (Lei et al., 2022; Ma et al., 2023; Michel et al., 2022), etc. By using differentiable renderers (Fuji Tsang et al., 2022; Laine et al., 2020; Ravi et al., 2020), we can optimize these explicit or implicit attribute representations for 3D geometry manipulation and appearance editing. For example, one can predict vertex positions and colors (Michel et al., 2022), SVBRDF parameters and normals (Lei et al., 2022), and synthesize new texture images (Richardson et al., 2023). The following sections cover critical techniques for mesh-based stylization, including geometric deformation (Sec. 3.2.1) and texture synthesis (Sec. 3.2.2) to align with a provided image, text, or 3D shape guidance. Table 1 shows a comparison of recent mesh-based stylization methods.

3.2.1 Surface Geometric Deformation

3D neural stylization enables deforming mesh geometry to align with artistic visual patterns or a specified shape, guided by visual references or textual descriptions. This capability facilitates creative 3D modeling such as surface engraving effect (H. Liu et al., 2018) and geometry morphing (Gao et al., 2023). Existing works learn geometry

variations in the form of vertex position displacement, e.g., explicit displacement via differentiable rendering (H. Liu et al., 2018) and implicit displacement via neural networks (Gao et al., 2023; Ma et al., 2023; Michel et al., 2022).

For example, Paparazzi is a neural stylization method based on differentiable rendering that allows the propagation of changes in the image domain to changes of the mesh vertex positions (H. Liu et al., 2018). It takes a triangle mesh as input, and applies latent VGG content and style losses (Sec. 2.1, Gatys et al. (2016)) between rendered image(s) and gray-scale style image to update vertex positions. After convergence, the mesh surface is stylized with artistic strokes and motifs from the style image.

With CLIP loss (Sec. 2.1, Eq. 1), recent works explored text-guided mesh geometric and/or appearance alteration (Ma et al., 2023; Michel et al., 2022). Text2Mesh (2022) and X-Mesh (2023) incorporate Neural Style Field, which is composed of an MLP network that maps vertex coordinates to vertex color (offset) and vertex position offset. The stylized mesh, with updated vertex colors and vertex positions, is rendered into multiple colored and gray-scale images, which are used for computing CLIP loss against a given text prompt. Besides updating with the CLIP loss, X-Mesh (Ma et al., 2023) employs an attention module to directly include the prompt CLIP embedding as additional input along with the vertex coordinate embeddings. Accordingly, X-Mesh achieves fast convergence in a few minutes for high-quality stylized results. TextDeformer (Gao et al., 2023) upgraded the local CLIP-guided mesh geometric stylization (Michel et al., 2022; C. Wang et al., 2022) through Jacobians for global and smooth mesh deformation

(Aigerman et al., 2022). Instead of learning position displacement directly, they assign Jacobians by matrices for each triangle and solve a Poisson problem (Aigerman et al., 2022) to compute the corresponding vertex deformation map, which largely achieves deformation with low-frequency to high-frequency details.

Alternatively, 3DStyleNet (Yin et al., 2021) learns to perform joint geometric and texture style transformation from one 3D object to another, and interpolation of geometric and texture style. This method consists of a 3D geometric part-aware style transfer network and a 2D texture style transfer network. The authors innovatively abstracted the geometries of an object with a set of 3D Gaussian ellipsoids and employed a learned 3D part-aware semantics affine transformation field based on Linear Blend Skinning (LBS) model (Lindholm et al., 2001). Meanwhile, they transfer the mesh texture using regular image style transfer techniques (Sec. 2.1 LST (2019)). The two networks are pre-trained with non-textured mesh models (A. Chang et al., 2015; Renderpeople, 2023; TurboSquid, 2023) and images (WikiArt (2016) and COCO (2014)) respectively. They are then jointly optimized by part-aware, content and style losses through rendered multi-views via a differentiable renderer (Laine et al., 2020).

3.2.2 Texture Synthesis

Mesh textures are essential for representing complex visual appearance with color and patterns, for which image- or text-guided neural style transfer are well developed (Sec. 2.1). Several methods have explored texture transformation and synthesis using visual features such as VGG features and diffusion priors (T. Cao et al., 2023; Höllein et al., 2022; Lei et al., 2022; Richardson et al., 2023; H. Yang et al., 2023). We categorize these methods based on their optimization and learning techniques and discuss them below.

Optimize via 2D Features. With an artistic image reference, StyleMesh (Höllein et al., 2022) proposed a depth- and angle-aware texture optimization scheme for the 3D reconstructed indoor room. It optimizes an explicit texture image by backpropagating gradients computed from 2D content and style losses (Sec. 2.1, Gatys et al. (2016)) between each view of the scene and the style reference image. This method leverages depth and

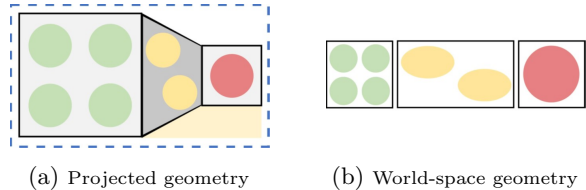


Fig. 8: Stretched pattern artifacts from stylization in screen space. Image adapted from Kato et al. (2018).

normal information from the mesh, mitigating artifacts such as view-dependent stretch and size artifacts that commonly arise from conventional 2D losses in 3D scenarios, as shown in Fig. 8. Nonetheless, StyleMesh largely relies on posed images under reconstructed scenes and ground-truth depths.

Optimizing mesh appearance colors with style descriptions using CLIP is effective but may not always achieve realistic results (Lei et al., 2022; Ma et al., 2023; Michel et al., 2022). Recently, text-to-image diffusion models have gained popularity for their ability to synthesize high-fidelity images. Therefore, researchers start to explore lifting 2D diffusion priors for 3D generation (R. Chen et al., 2023; C. Lin et al., 2023; Poole et al., 2023; Z. Wang et al., 2023) and stylization (D. Chen et al., 2023; H. Yang et al., 2023; Youwang et al., 2024; Zeng et al., 2024). Among these, TEXTure (Richardson et al., 2023) is a text-guided 3D texture painting method that iteratively paints the texture in a view-by-view manner. To maintain 3D consistency, each view drawing iteration is guided by a view-dependent trimap that indicates the “keep”, “refine”, and “generate” regions to control the amount of newly generated content for the texture. Alongside the trimap, a rendered RGB and depth map are fed into a pre-trained depth-to-image diffusion model (Sec. 2.1, ControlNet (2023)) to obtain a synthesized view. This synthesis is finally projected back to the texture map via optimization. Apart from texturing, TEXTure supports various tasks such as texture transfer, texture editing, and multi-view image transfer.

A concurrent work to TEXTure is Text2Tex (D. Chen et al., 2023), which inpaints likewise the texture images from different views progressively with the help of the confident trimap and a depth-to-image ControlNet (2023). This method presets some axis-aligned viewpoints and

alternatively updates the next best view (see Table 4), which follows a more robust automatic view scheduling strategy addressing the blurriness and stretching artifacts. Paint3D (Zeng et al., 2024) employs coarse-to-fine UV diffusion models to further refine incomplete areas of multi-view inpainted texture in high definition. Based on an indoor room scenario, DreamSpace (B. Yang et al., 2024) synthesizes an indoor panorama with additional inpainting with diffusion models (L. Zhang et al., 2023) for more consistent texture synthesis.

Optimize in Latent Space. While running the entire generative diffusion process for multi-view painting provides an efficient approach for texture synthesis, it often results in inconsistent texture patterns and overall style. Instead, TexFusion (T. Cao et al., 2023) updates a 3D consistent latent texture at each denoising step from multi-views conditioned on previous denoising steps. To ensure consistency, the final texture image is optimized by distilling multi-view images decoded by a pre-trained depth-conditioned diffusion model (Sec. 2.1, Stable Diffusion (2022)) and with a neural color field mapping 3D coordinates to RGB values (Müller et al., 2022). Similarly, Knodt and Gao (2023) updates a latent texture map from multi-view via MultiDiffusion (Bar-Tal et al., 2023), a multi-window joint diffusion technique for multi-view consistency.

Optimize via Score Distillation. Inspired by score distillation sampling (SDS) techniques (Sec. 2.2, Fig. 5), several works employ SDS and its variants for texture optimization, focusing on a single object or a single room (D. Chen et al., 2024; Y. Guo et al., 2023; T. Wu et al., 2023; H. Yang et al., 2023; Yeh et al., 2024). In particular, TextureDreamer (Yeh et al., 2024) and 3DStyle-Diffusion (H. Yang et al., 2023) adopt a neural field representation with BRDF parameters (Lei et al., 2022) to facilitate photorealistic rendering. Both works (H. Yang et al., 2023; Yeh et al., 2024) incorporate geometry-conditioned score distillation from ControlNet (2023), leveraging additional inputs such as depth, normal, and camera pose. Additionally, Decorate3D (Y. Guo et al., 2023) and HyperDreamer (T. Wu et al., 2023) utilize super-resolution diffusion techniques to enhance the synthesis of textures at higher resolutions.

Optimize with 3D Shape Supervision. Point-UV Diffusion (X. Yu et al., 2023) explores texture synthesis leveraging the shape attributes such as

vertex coordinates, normals, and segment masks of the mesh model. The proposed coarse-to-fine texture synthesis framework that combines a point diffusion network (Z. Liu et al., 2019; L. Zhou et al., 2021) and a UV diffusion network enables unconditioned texture synthesis for arbitrary mesh models of each training category in the ShapeNet dataset (A. Chang et al., 2015). The pipeline can also receive additional image or text guidance using the CLIP encoder. Given a mesh and style visual or textual guidance, the point diffusion model generates color for sampled points from the mesh, which are then projected onto 2D UV space to create a coarse texture image. Subsequently, the UV diffusion model utilizes the coarse texture and additional shape attributes to predict the high-fidelity texture.

3.3 Neural Field-based Stylization

A neural field is “a field that is parameterized fully or in part by a neural network” (Po et al., 2023). The advanced 3D representations of neural fields, especially neural radiance fields (NeRFs) (Kerbl et al., 2023; Mildenhall et al., 2020; Müller et al., 2022; C. Sun et al., 2022), store scene geometry and appearance in a neural network or explicit data structure, enabling photorealistic rendering and 3D stylization in the latent space. Compared to mesh models (Fig. 2), which rely on texture maps to store various visual information like albedo, roughness, metalness, baked lighting, etc., neural fields store learned features that are mapped to an RGB image during rendering. Therefore, we can either stylize novel views during rendering without modifying the original neural field (Sec. 3.3.1), or stylize the neural field itself by updating the stored latent features (Sec. 3.3.2). Methods that stylize novel views learn a universal style transformation module for 3D-aware view features, thus avoiding additional training for each input style instance. While the other approaches that stylize neural fields require optimization for every single style or input reference set, the stylized neural field assets allow regular neural rendering, thus supporting seamless usage in related tools and software. Table 2 summarizes neural field-based stylization works, in terms of taxonomy and technical comparison. Please refer to the related surveys for a comprehensive review of neural fields and their

Method	Base Technique	3D Repr.(Struct.)	Feature	Scene	Optimization	Style Genre	</>
LSNV (2021)	FVS(2020), LST(2019)	point cloud	image	bounded/unbounded	generative	appearance, artistic	↗
HyperStyle (2022)	NeRF++(2020), HyperNet(2016)	NeRF	image	unbounded	generative	appearance, artistic	↗
StyleRF (2023)	TensoRF(2022), SICT(2023), LST(2019)	NeRF (grid)	images	bounded	generative	appearance, artistic	↗
StylizedNeRF(2022)	NeRF(2020), AdaIN(2017)	NeRF	image	bounded/unbounded	generative	appearance, artistic	↗
UPST-NeRF (2022)	DVGO(2022), I2I-GAN	NeRF (grid)	image	bounded	generative	appearance, photoreal	↗
FPRF (2024)	K-Planes(2023),AdaIN(2017)	NeRF (grid)	images	unbounded	generative	appearance, photoreal	↗
ARF (2022)	Plenoxels(2022), NNFM(2022)	NeRF (grid)	image	bounded/unbounded	single-style	appearance, artistic	↗
INS 2022	NeRF(2020), Gatys <i>et al.</i> (2016)	NeRF, SDF	image	bounded	single/multi-style	appearance, artistic	↗
SNeRF (2022)	any NeRF, any NST	NeRF	image	bounded/unbounded	single-style	app.(&geo.), artistic	✗
LipNeRF (2023)	Plenoxels(2022)	NeRF (grid)	image	bounded/unbounded	single-style	appearance, photoreal	✗
Ref-NeRF 2023	Plenoxels(2022), any 2D edit	NeRF (grid)	image(s)	bounded/unbounded	single-style	appearance	↗
LocalStyleNeRF (2023)	iNGP(2022), NNFM(2022)	NeRF(hash grid)	image	room	single/multi-style	appearance, artistic	↗
SINE (2023)	NeRF(2020),DIF(2021), DINO(2021)	NeRF	image	bounded/unbounded	single-style	geo.&app.	↗
NeRF-Art (2023)	VolSDF(2021), CLIP(2021)	NeRF	text	bounded	single-style	appearance	↗
Instruct-N2N (2023)	Nerfacto(2023), InstructPix2Pix(2023)	NeRF (hash grid)	text	bounded/unbounded	single-style	geo.&app.	↗
BlendingNeRF (2023)	NeRF(2020), CLIP(2021)	NeRF	text	object	single-style	geo.&app.	✗

Table 2: Summary of selected neural field stylization methods. 3D Repr., Struct., geo., app. refer to 3D representation, data structure, geometry and appearance, respectively.

applications (G. Chen & Wang, 2024; Y. Xie et al., 2022).

3.3.1 Novel View Stylization

A straightforward approach to stylize a 3D scene is to stylize its novel views (H. Huang et al., 2021). However, it is known that a simple combination of existing 2D stylization and novel view synthesis methods would lead to blurry and inconsistent results. Instead, LSNV (H. Huang et al., 2021) proposed a feed-forward point cloud feature transformation model that first reconstructs a 3D point cloud by back-projecting the points in feature maps extracted from multi-view images following depth guidance, and then feeds these features into the transformation network (similar to LST (2019) in Sec. 2.1) to obtain stylized point cloud features, which can be decoded to render novel views.

Similarly to neural style transfer, one can also perform arbitrary style transfer for novel views of a NeRF scene (Chiang et al., 2022; Y. Huang et al., 2022; G. Kim et al., 2024; K. Liu et al., 2023). This involves a two-phase process consisting of geometry reconstruction training (NeRF training) and appearance stylization training. Chiang *et al.* (2022) proposed to transfer arbitrary artistic style to novel views on NeRF++ representation (K. Zhang et al., 2020) for large outdoor 360° unbounded scenes. In the reconstruction phase, they separate geometry (density output) and appearance (view-dependent color output) into two branches, as illustrated in Fig. 9. In the stylization phase, they fix the geometry branch and use an MLP hypernetwork (Ha et al., 2016) with style features from a pre-trained VAE encoder to

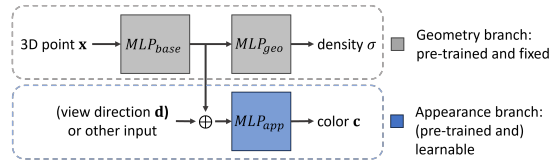


Fig. 9: Canonical NeRF with geometry and appearance branches in 3D stylization.

update the parameters of the appearance branch. Since NeRF++ cannot support high-resolution image rendering at a fast speed, they propose to do small-patch sub-sampling (Schwarz et al., 2020) to compute content and style losses (X. Huang & Belongie, 2017).

As discussed in Sec. 2.1, AdaIN and LST are two mainstream techniques for arbitrary style transfer, which are adapted in StylizedNeRF (Y. Huang et al., 2022) and StyleRF (K. Liu et al., 2023) respectively. StylizedNeRF applies a mutual learning strategy between a 2D arbitrary style transfer AdaIN (X. Huang & Belongie, 2017) model and a NeRF to achieve multi-view consistency and stylization of NeRF appearance. Specifically, they pre-train the style transfer model under the supervision of multi-view content, as well as style and additional consistency loss. During the mutual learning, they jointly train the style transfer model and a new appearance MLP branch with NeRF’s fixed geometry branch.

StyleRF (K. Liu et al., 2023) employs a similar style transformation mechanism to LSNV, learning a 3D feature grid lifted from pre-trained VGG, and then applying linear style transformation on the weighted features of sampled points in the ray marching process of NeRF (A. Chen et al., 2022).

Finally, a 2D CNN decoder is used to generate stylized views. StyleRF also conducts two-stage training, the stage of feature grid learning and reconstruction without viewing direction input (based on TensoRF (A. Chen et al., 2022)), and the stage of stylization training with fixed geometry. Moreover, StyleRF illustrated its advantage of data-driven style training for style interpolation and multi-style transfer with a 3D mask.

Later works further explore arbitrary photo-realistic style transfer (Y. Chen, Yuan, et al., 2022), unbounded urban-scale scene style transfer (G. Kim et al., 2024) based on K-Planes representation and 2D-to-3D lifted DINO semantic features (Caron et al., 2021; Fridovich-Keil et al., 2023), and point cloud or mesh reconstruction of stylized novel views (Ibrahimli et al., 2024).

3.3.2 NeRF Stylization and Editing

In this section, we explore stylizing a neural radiance field (NeRF) by updating the scene information and features stored in neural networks or explicit data structure, rather than processing in the rendering phase. Most NeRF-based approaches for appearance optimization follow a two-step procedure (Fan et al., 2022; Pang et al., 2023; K. Zhang et al., 2022; Y. Zhang, He, et al., 2023). Initially, the scene’s geometry and appearance are reconstructed from multiple posed views before stylization. Subsequently, during the optimization of the appearance style, the geometry can be either fixed or self-distilled during stylization, as depicted in Fig. 9. Notably, some methods incorporate geometry updates during the stylization phase (Haque et al., 2023; Nguyen-Phuoc et al., 2022; C. Wang et al., 2023).

A General Optimization Framework

Nguyen-Phuoc et al. (2022) proposed SNeRF, a general alternating optimization pipeline for novel view stylization by arbitrary off-the-shelf 2D style transfer methods and any NeRF methods (Fig. 10). The proposed method follows a sequential process. Firstly, they reconstruct the NeRF scene with original content multi-views. Next, they iteratively stylize rendered multi-views and use stylized views to fine-tune the NeRF in a loop. Through several iterations, the entire NeRF representation gradually becomes 3D-aware stylized. Haque et al. (2023) further extended the frame-

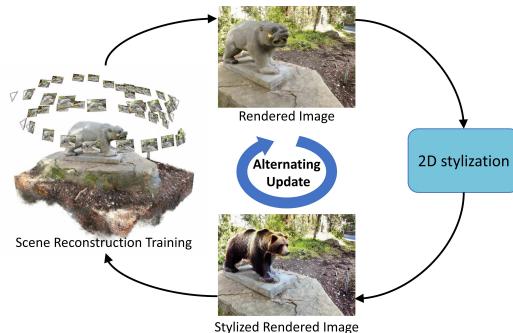


Fig. 10: A general framework for NeRF stylization through alternating updates of multi-views (Haque et al., 2023; Nguyen-Phuoc et al., 2022). Images adapted from Haque et al. (2023).

work for text-guided NeRF editing and introduced Instruct-NeRF2NeRF, which edits a NeRF scene by leveraging 2D diffusion priors. Similar to SNeRF (2022), they adopted an iterative process to update training views and the NeRF scene alternatively (Fig. 10). They replace a training view by editing a rendered view from a training viewpoint using an off-the-shelf image-to-image diffusion model, e.g., Instruct-Pix2Pix (Brooks et al., 2023), then continue NeRF training on the updated training data.

Extensive experiments validated the flexibility of this general framework, showcasing its compatibility with off-the-shelf 2D style transfer methods across a range of NeRF or NeRF variants. Although with promising results, this framework suffers from time-consuming limitation due to its iterative nature, and is vulnerable to variations in stylized views leading to style dilution and inconsistency. To address this issue, ViCA-NeRF (Dong & Wang, 2023) employs view-consistency-aware NeRF editing, which establishes explicit connections between different views and propagates the editing information from edited to unedited views.

Image-guided NeRF Stylization

Image-guided neural style transfer (Sec. 2.1) has undergone significant development over the years and has inspired a multitude of works focusing on image-guided NeRF stylization. Similarly, most works follow a two-step optimization process, including NeRF reconstruction and appearance stylization stages.

Notably, ARF (K. Zhang et al., 2022) introduced the artistic radiance field approach, utilizing content loss (Gatys et al., 2016) and nearest neighbor feature matching (NNFM) style loss (Eq. 5) to optimize and stylize the appearance of a reconstructed NeRF scene with an exemplar style image. NNFM minimizes the cosine distance on VGG features between style reference and rendered image:

$$\mathcal{L}_{nnfm} = \frac{1}{N} \sum_{i,j} \min_{i',j'} \text{sim}(F(cs)_{ij}, F(s)_{i'j'}), \quad (5)$$

where $F(\cdot)_{ij}$ denotes the feature vector at pixel location (i, j) of the feature map $F(\cdot)$. Experiments validated NNFM loss in NeRF stylization yields more visually appealing results than typical Gram matrix loss (Gatys et al., 2016) or CNNMRF loss (C. Li & Wand, 2016).

However, ARF still lacks explicit semantic correspondences. To address this limitation, Ref-NPR (Y. Zhang, He, et al., 2023) proposed to first stylize a single view using structure-preserving 2D-stylization algorithms (Sec. 2.1) or manual editing, and then use this stylized reference view to construct a reference voxel dictionary for the scene, which enables matching of semantics and color features between edited view and the scene.

Referring to the disentanglement of content and style representations for style transfer (X. Huang et al., 2018; Lee et al., 2018), Fan et al. (2022) proposed a generalizable model consisting of a style MLP and a content MLP to separately encode the style image and input scene, and an amalgamation MLP to output both final color and density, fusing style and content features. Additionally, Pang et al. (2023) considered semantic style matching and added additional segmentation output in the geometry branch with an extra segmentation MLP after the hash encoding process of iNGP (Müller et al., 2022). Both works proposed to use conditional style representations by feeding a one-hot vector or style index to the neural field, enabling conditional stylization for several styles (Fan et al., 2022; Pang et al., 2023).

Apart from the artistic style transfer approaches, LipRF (Z. Zhang et al., 2023) addressed the challenges in 3D photorealistic stylization by leveraging a Lipschitz MLP to transform the radiance appearance field during

the stylization training stage. The scene views are first stylized by 2D photorealistic style transfer methods (Z. Wu et al., 2022; Yoo et al., 2019) and then used to train the Lipschitz MLP.

Text-guided NeRF Stylization

The recent increasingly developed vision-language models and text-to-image diffusion models (Sec. 2.1) inspire the community to develop works on text-guided or text-to-image guided 3D scene stylization and editing (Bao et al., 2023; Haque et al., 2023; Sella et al., 2023; Shum et al., 2024; H. Song et al., 2023; C. Wang et al., 2022, 2023; Y. Wang et al., 2023; Zhuang et al., 2023). Here we provide a brief discussion on some advances in text-guided NeRF stylization, showcasing their potential for rapid prototyping and customization of 3D asset designs.

NeRF-Art (C. Wang et al., 2023) proposed text-guided NeRF stylization with profound semantics. Unlike simple color and shape stylization for objects in CLIP-NeRF (C. Wang et al., 2022) using a CLIP-based matching loss (Eq. 1), NeRF-Art realizes complex stylization on diverse shapes and scenes, such as turning a human face into a Tolkien elf. This method proposed to fine-tune the pre-trained NeRF (Yariv et al., 2021) using relatively direction CLIP loss (Eq. 2), local and global contrastive CLIP-based loss (T. Chen et al., 2020), perceptual loss (Johnson et al., 2016) and a weight regularization (Barron et al., 2022) for sharper details. The follow-up work Y. Wang et al. (2023) further enhances the semantics-aware stylization with a semantic contrastive loss and fine-tuned CLIP with ArtBench artwork database (Liao et al., 2022) for accurate artistic textual embedding.

Instead, SINE (Bao et al., 2023) employs a two-branch editing field to learn geometric and appearance adjustments. Given an edited view of a pre-trained NeRF scene, the method establishes the mesh prior using either DIF (Deng et al., 2021) for specific object categories or using ARAP (Sorkine & Alexa, 2007) with depth estimation (Bhat et al., 2021) and 2D feature matching (Jiang et al., 2021), and then composes the texture prior based on semantic features and structural self-similarity (Caron et al., 2021; Tumanyan et al., 2022). To preserve irrelevant areas, it distills a semantic feature field from DINO (Caron et al., 2021) and clusters features in the edited region of the edited view.

To achieve precise manipulation of specific regions, Blending-NeRF (H. Song et al., 2023) leverages CLIPSeg (Lüddecke & Ecker, 2022), a pre-trained image segmentation model, and employs a region loss for supervision.

To support editing, DreamEditor (Zhuang et al., 2023) directly uses 2D diffusion priors to enable precise editing while keeping irrelevant regions untouched. Specifically, this method transforms the NeRF into a mesh-based neural field by marching cubes (Lorenson & Cline, 1987) and distillation, with each mesh vertex assigned geometry and color features. To localize the edit regions aligned with a text prompt, the method leverages DreamBooth (Ruiz et al., 2023) to fine-tune Stable Diffusion (Rombach et al., 2022) using sampled views from a spherical viewing trajectory centered on the scene, and then retrieve 2D attention maps (Hertz, Mokady, et al., 2023) as view masks that are later back-projected to 3D scene forming the 3D editing mask. Finally, geometry and color features, as well as mesh vertex positions in the 3D masked region are jointly optimized by the SDS loss (Sec. 2.2). Similar to implicit shape deformation methods (Bao et al., 2023; Gao et al., 2023), DreamEditor employs mesh vertex regularizers, including Laplacian rigidity losses (Sumner et al., 2007) among neighbor vertices, for smooth mesh deformation.

Facing the limitation of slow optimization in NeRF editing, ED-NeRF (J. Park et al., 2024) proposed to edit a latent NeRF using 2D latent diffusion priors (Rombach et al., 2022), improving editing efficiency. However, multi-view rendering of latent features lacks geometry consistency. Therefore, they introduce a novel refinement layer with ResNet blocks and self-attention layers to refine inconsistent multi-view latent features. During editing, ED-NeRF employs delta denoising score (DDS) (Hertz, Aberman, & Cohen-Or, 2023) which is a difference between two SDS scores conditioned on two different text prompts, and a masked DDS for the target region segmented by CLIPSeg (Lüddecke & Ecker, 2022) and SAM (Kirillov et al., 2023) to keep irrelevant regions unchanged.

3.4 Volume Stylization

Compared to other representations, volume is an intuitive representation of 3D data, as naturally extended from 2D image representation. 3D neural

stylization can be performed on a volume representation, e.g., image-guided neural style transfer on volumetric simulation, particularly dynamic smoke (B. Kim et al., 2019) and fluids (B. Kim et al., 2020). Table 3 summarizes works for volumetric stylization.

In B. Kim et al. (2019), they use pre-trained Inception CNN model (Szegedy et al., 2016) as the single-view feature extractor and apply content loss and style loss (Sec. 2.1) for semantics-aware abstract style transfer. They proposed a transport-based neural style transfer (TNST) method on grid-based voxels to optimize a velocity field (i.e., voxel movement) from several multi-views from Poisson sampling around a small area of the trajectory, and use a differentiable smoke renderer to render grayscale images to represent pixel-wise volume density. For temporal consistency among frames during smoke simulation, they compose a linear combination of the recursive aligned velocity fields of neighbor frames for the velocity field of the current frame. Later in B. Kim et al. (2020), they adopt particle-based attributes from multi-scale grids, and optimize attributes of position, density, and color per particle, which intrinsically ensures better temporal consistency than recursive alignment of velocity fields (B. Kim et al., 2019). It largely improves efficiency by directly smoothing density gradients in stylization from adjacent frames for temporal consistency, and by stylizing only keyframes and interpolating particle attributes in between.

Subsequently, one can use a feed-forward network to achieve fast volumetric stylization (Aurand et al., 2022), reaching production-level quality (Hoffman et al., 2023; Kanyuk et al., 2023). One can also learn an arbitrary appearance style transfer model for volumetric simulation via a volume autoencoder (J. Guo et al., 2021).

3.5 Point Cloud Stylization

A point cloud is a discrete set of data points in 3D space, which may represent 3D shapes or objects. Each point can enclose additional attributes such as colors, normals (Pfister et al., 2000) and spherical harmonic coefficients (Kerbl et al., 2023) for rendering, or latent features (H. Huang et al., 2021) for 3D stylization.

There are a few works that attempted stylization for point clouds (Table 3). For example,

Method	Input	Guidance	Output	Scene	Optimization	Style Genre	</>
TNST (2019)	volume	image	volume	dynamic smoke	single-style	geometry, artistic	↗
LNST (2020)	volume	image	volume	fluid	single-style	geo.&app., artistic	↗
SKPN (2021)	volume	image	volume	dynamic/static model	generative	appearance	X
ENST (2022)	volume	image	volume	smoke	multi-style, generative	geometry	X
PSNet (2020)	colored point cloud	image	colored point cloud	object	single-style	geo.&app., photoreal	↗
PointInverter (2023)	point cloud	none	point cloud	object	generative	geometry	X
NeuralWavelet (2024)	implicit shape	none	implicit shape	object	generative	geometry	↗
SPAGHETTI (2022)	implicit shape	none	implicit shape	object	generative	geometry	↗
SALAD (2023)	implicit shape	none, or text	implicit shape	object	generative	geometry	↗

Table 3: Summary of selected neural stylization works for volume, point clouds and implicit shapes.

PSNet (X. Cao et al., 2020) is a PointNet-based (Qi et al., 2017) stylization network for point cloud color and geometry style transfer with a point cloud example or an image example. Similar to representing content and style features from a pre-trained model (Gatys et al., 2016), PSNet uses a PointNet-based classifier with two separate shared MLPs to extract intermediate outputs as geometry/content representation and regard the Gram-matrix of these outputs as appearance/style representation. PSNet utilizes point-cloud-based content and style losses (Gatys et al., 2016) to optimize geometry and/or appearance color of the source point cloud, simply replacing VGG features with PSNet features. Since the Gram-based style representation is invariant to the number or the order of the input points, an example style image treated as a set of points can stylize source colored point cloud with only the target color style without shape deformation. For point clouds generated by a generative model, one can learn to map a point cloud to the latent space for editing. PointInverter (J. Kim et al., 2023) employed 3D point cloud GAN inversion and introduced an efficient way to conduct a 3D point cloud mapping to the latent space of a 3D GAN based on SP-GAN, a sphere-guided 3D point cloud generator (R. Li et al., 2021). PointInverter resolves the point ordering issue during 3D point cloud inversion, while preserving point correspondences, which enables point editing in latent space.

3.6 Implicit Shape Editing

An implicit primitive shape is a 3D surface represented by an implicit distance function, such as a signed distance function (SDF) or truncated signed distance function (TSDF). Powered by learning-based techniques, neural implicit shapes can represent 3D geometry as occupancy networks

(Mescheder et al., 2019; Peng et al., 2020), distance fields (J. Park et al., 2019), volumetric radiance fields (Mildenhall et al., 2020), and Gaussian mixture models (GMMs). These neural continuous implicit representations have gained significant attention in the field of 3D shape generation and editing (Table 3).

Particularly, NeuralWavelet (J. Hu et al., 2024) utilized a compact wavelet representation consisting of coarse and detail coefficient volumes and designed a pair of diffusion generative models for coarse and detail 3D shape generation. During shape learning, an encoder is jointly trained to map the coarse coefficient volume to a condensed latent code. This latent code serves as a controllable condition for shape generation, inversion, and manipulation. Recent approaches such as SPAGHETTI (Hertz et al., 2022) and SALAD (Koo et al., 2023) adopted 3D generative models equipped with a hybrid representation that employs part-level disentanglement, extrinsic approximate shape and intrinsic geometric details disentanglement. In the hybrid representation, each part of the 3D shape is characterized by a set of extrinsic parameters, which form a Gaussian ellipsoid in 3D space (formulated by a 3D position with a covariance), capturing the approximate shape structure of that particular part. This part-level extrinsic-intrinsic disentanglement enables 3D shape generation and implicit shape manipulation such as local adjustment and part mixing. SALAD further incorporates text-guided shape part segmentation (Koo et al., 2022) and performs text-guided shape completion. These methods utilizing hybrid representations and incorporating text guidance offer promising advancements in 3D shape generation, editing, and manipulation, allowing for more intuitive and controlled transformations of 3D shapes.

3.7 Practical Guidelines

This section discusses practical aspects of 3D neural stylization methods, summarizing several design choices including 3D consistency, controllability, generalization, efficiency.

3D Consistency. A particular challenge when performing stylization of 3D data is to ensure that view consistency is achieved so that the styles appear similar across views. We discuss common strategies to achieve view consistency, as follows.

- *View Sampling.* A reasonable camera sampling strategy is necessary for multi-view optimization without posed views. A common strategy is to (randomly) sample around pre-defined principal cameras or along the camera trajectory, as summarized in Table 4. Michel et al. (2022) devised a new training view selection scheme that samples view around an anchor view with the highest CLIP similarity with the target prompt. Data augmentation is a common trick as well, such as random perspective transformation and random resize plus crop (Ma et al., 2023; Michel et al., 2022), rendering with random backgrounds (Hwang et al., 2023), mirroring and rotating subject elements (Aurand et al., 2022).

- *Constant Geometry.* Appearance-only 3D stylization requires keeping 3D geometry constant before and after stylization. The frequently used strategy is to fix geometry during the stylization stage. Particularly, some neural field stylization works use hyper MLPs to predict stylized appearance branch parameters for stylization while fixing geometry branch parameters for 3D geometric consistency (Y. Chen, Yuan, et al., 2022; Chiang et al., 2022; Y. Wang et al., 2023).

- *View-independent Appearance.* Some works of appearance stylization tend to maintain multi-view color consistency. However, some 3D representations may lead to multi-view appearance inconsistency, for example, view-dependent effects in radiance fields. To preserve multi-view color consistency, scenes are often optimized without viewing direction input in radiance fields, sacrificing view-dependent effects for better multi-view appearance consistency (K. Liu et al., 2023; Pang et al., 2023; K. Zhang et al., 2022; Y. Zhang, He, et al., 2023).

- *2D Priors.* With the growing popularity of large-scale pre-trained vision models including VGG, CLIP, DINO, and diffusion models (Caron et

Literature	Cam	#View	Aug	Sampling Criteria
Paparazzi (2018)	orth.	1	✗	uniform on offset surface, face vertex normal
Text2Mesh (2022)	pers.	5 ^a	✓	text-guided anchor view, sample around anchor
Text2Scene (2023)	pers.	20 ^b	✓	random sample, evenly cover whole scene
TEXTure (2023)	pers.	8 ^b	✗	around object (incl. top/bottom)
Text2Tex (2023)	pers.	6+20 ^{b,c}	✗	axis-align, face surface normal
TNST (2019)	orth.	9	✗	look at object, sample around a path
SKPN (2021)	pers.	4	✗	random sample in a path
ENST (2022)	pers.	1	✓	sample in a path

^a total views equals views per iteration;

^b total views;

^c 6 views for generation, 20 out of 36 predefined views for refinement.

Table 4: Summary of training view sampling in selected 3D neural stylization methods on object data. “Cam” refers to camera type such as orthogonal or perspective camera. “#View” is the sample number of views for each iteration/frame, unless indicated otherwise. “Aug” indicates rendered view augmentation.

al., 2021; Radford et al., 2021; Rombach et al., 2022; Simonyan & Zisserman, 2015; L. Zhang et al., 2023), 3D-aware stylization can be achieved through multi-view optimization utilizing these 2D visual priors (Bao et al., 2023; Haque et al., 2023; Koo et al., 2024; C. Wang et al., 2023; K. Zhang et al., 2022).

- *3D Priors.* With numerous well-collected 3D datasets, pre-trained point cloud priors (R. Li et al., 2021; Nichol et al., 2022; Qi et al., 2017) are popular to represent coarse geometry and facilitate geometric deformation among mesh, point cloud stylization works (X. Cao et al., 2020; J. Kim et al., 2023; Yin et al., 2021). Some other works leverage additional geometry guidance, such as depth map, normal map, and camera pose, for precise control of 3D-aware synthesis (Y. Guo et al., 2023; Höllein et al., 2022; X. Yu et al., 2023)

Controllability. Stylization requires diversity and flexibility for users to design assets. We summarize some common strategies for different levels of control in 3D stylization.

- *Pre-trained Diffusion Models.* State-of-the-art diffusion models provide powerful controllability for content creation. For example, TextureDreamer (Yeh et al., 2024) uses DreamBooth (Ruiz et al., 2023) to distill texture information from input reference images, and ControlNet (Sec. 2.1, 2023) to process additional 2D conditions, such as depth, normal, and edge maps.

- *Semantic Alignment.* Pre-trained segmentation models (e.g. Segment Anything (2023)), semantic labels or descriptions can be integrated to empower semantics-aware stylization. Table 5 shows some semantic matching tricks commonly used in 3D neural stylization. Some text-guided approaches rely on deliberate textual descriptions for local stylization (Ma et al., 2023; Michel et al., 2022; Y. Wang et al., 2023), while some approaches consider explicit visual semantic matching such as Text2Scene with 3D label inputs (Hwang et al., 2023). Gao et al. (2023) proposed a regularization term to preserve identity for smooth deformation. Some approaches consider using or lifting explicit semantic matching with off-the-shelf tools (Y. Huang et al., 2022; G. Kim et al., 2024; Pang et al., 2023; H. Song et al., 2023; Y. Zhang, He, et al., 2023). In addition, the reviewed works (C. Wang et al., 2023; Y. Wang et al., 2023) demonstrated that contrastive learning can effectively improve the learning of directional cues, such as textual semantics, in text-guided stylization.

- *Explicit Representation.* An explicit scene representation allows much easier control and more precise manipulation. For example, *DreamEditor* (Zhuang et al., 2023) transforms the NeRF into a mesh-based neural field with each mesh vertex assigned geometry and color features; Y. Chen, Chen, et al. (2024); Hertz et al. (2022); Koo et al. (2023) use explicit 3D Gaussians for editing.

- *3D Shape Inversion.* A commonly adopted technique for shape manipulation is 3D shape inversion, which inverts 3D representation into latent space learned by large-scale pre-trained 3D generative models (Nichol et al., 2022; Qi et al., 2017). This approach enables shape editing in latent space and has been explored in various stylization works such as NeuralWavelet (2022), SPAGHETTI (2022), PointInverter (2023), and SALAD (2023).

Efficiency. Efficiency in 3D stylization is influenced by various factors such as style optimization

Literature	Semantic Matching Technique
Text2Mesh (2022); X-Mesh (2023)	Design a text prompt for part-level localization and stylization.
TextDeformer (2023)	Use the identity-preserving term to keep deformation not far from input mesh.
Text2Scene (2023)	3D instance mesh label for instance-level stylization.
TSNeRF (2023)	Design a text prompt for part-level localization and stylization.
StyleRF (2023)	Obtain 3D mask by NeRF-based object segmentation.
Ref-NeRF (2023)	Semantic matched edited view as reference; Propagate style features to other views.
LocalStyleNeRF (2023)	Train NeRF to obtain 3D segmentation from multi-view segmentation maps.
SINE (2023)	Extract edited view’s semantic features; Compute pixel-wise feature distance between edited region and training views.
ED-NeRF(2024); BlendingNeRF (2023)	Off-the-shelf text-guided segmentation model to segment each view for semantic-aware training.
DreamEditor (2023)	2D attention maps in Diffusion as view masks, which are projected to 3D.

Table 5: Summary of semantic alignment in selected 3D neural stylization methods.

methods and 3D representations. To enhance efficiency and minimize resource consumption, we present several tricks for efficiency improvement.

- *Optimize in Coarse-to-Fine Manner.* Instead of direct stylization in final high resolution, some works operate 3D style optimization in the low resolution and then apply decoding or super-resolution techniques for higher optimization efficiency. For example, T. Cao et al. (2023); Knodt and Gao (2023) optimize latent features for 3D consistency and efficient diffusion. Y. Guo et al. (2023); T. Wu et al. (2023) employ super-resolution models and X. Yu et al. (2023); Zeng et al. (2024) use texture refinement models to obtain high-quality outputs.

- *Scene Representations.* For neural fields, there are various advanced representations for fast training or rendering, such as Plenoxels (2022), SNeRG (2021), iNGP (2022), DVGO (2022), TensoRF (2022), MobileNeRF (2023) and 3DGS (2024). Table 2 features neural field stylization methods with applied base reconstruction techniques. Some 3D representations also tend to use advanced neural fields to represent style features such as neural style fields for meshes in Ma et al. (2023); Michel et al. (2022).

- *Optimize Rendering and Back-propagation.* In NeRF stylization, naive NeRF-based rendering is memory-intensive for a bulk of ray samplings and point queries, but style losses are based on full images. Therefore, some use patch-based

training (Chiang et al., 2022), deferred gradient back-propagation (K. Zhang et al., 2022), and some separate forward and back-forward steps with full-res computation and patch-wise back-propagation (C. Wang et al., 2023; Y. Wang et al., 2023; Z. Zhang et al., 2023).

- *Feed-forward Networks.* Instead of optimizing scene representation parameters, some works used feed-forward networks for efficient training/inference (Aurand et al., 2022; J. Chen et al., 2024; H. Huang et al., 2021; Ma et al., 2023).

Generalization. Stylization techniques across different scenarios and datasets are crucial for real-world applications, such as gaming or entertainment industries. We discuss some designs for generalization here.

- *Universal Style Transfer Module.* Data-driven 3D neural stylization models train a universal 3D style transfer module that can generalize to new styles in a zero-shot manner. This type of work usually operates on novel view rendering rather than optimizing the scene features, as discussed in Sec. 3.3.1.
- *General Optimization Framework.* As presented in Sec. 3.3.2, SNeRF (Nguyen-Phuoc et al., 2022) and Instruct-NeRF2NeRF (Haque et al., 2023) introduced a general framework for a single scene optimization with either image or textual reference. They apply to any scene, any style, either geometry or appearance stylization.

4 Datasets and Evaluation

In this section, we summarize the frequently used datasets for 3D neural stylization, introduce existing evaluation metrics and criteria for 2D and 3D stylization, and provide a mini-benchmark on artistic stylization of neural fields as a reference for future works.

4.1 Datasets

Datasets are essential for effective training and thorough validating of 3D stylization models in terms of applicable scenarios, stylization diversity, etc. Table 6 illustrates selected popular 3D and 2D datasets for the evaluation of 3D neural stylization works, identifying their modality, scale, and other noteworthy features.

4.2 Criteria and Metrics

We derive several critical aspects from the state-of-the-art 3D neural stylization works for evaluating 3D stylization performance.

- **Perceptual Similarity.** Stylization aims to transform a subject into a target style while preserving the original content. PSNR, SSIM, MSSIM and LPIPS (R. Zhang et al., 2018) are classic metrics for measuring structure and appearance similarity between images, so are applicable for rendering results from stylized 3D scenes. Especially, LPIPS considers image latent features, while other metrics compute the pixel-wise similarity of different images. For text-guided methods, CLIP similarity and CLIP directional similarity discussed in Sec. 2.1 are prevailing choices to measure the semantic similarity between image and text prompt.

- **Multi-view Consistency.** Explicit 3D representations inherently provide multi-view geometry consistency. To measure multi-view appearance consistency, some 3D stylization works refer to video temporal short-range and long-range consistency evaluation (Lai et al., 2018), using warping difference error and the warped LPIPS, via optical flow estimation or depth estimation (Chiang et al., 2022; Höllein et al., 2022; H. Huang et al., 2021; K. Liu et al., 2023; Nguyen-Phuoc et al., 2022). CLIP can also be applied to evaluate multi-view semantic consistency by encoding adjacent views to CLIP space as proposed in Haque et al. (2023); Ma et al. (2023). Additionally, X-Mesh (Ma et al., 2023) introduced MES that takes both text-image conformity and multi-view consistency into consideration, which calculates the average of cosine similarity between 24 uniformly sampled views and the target prompt.

- **Visual Quality.** For image synthesis, we expect synthesized images to look natural and contain as few artifacts as possible. The inception score (IS) (Salimans et al., 2016) is designed to measure the image quality and diversity of generated images. Another popular metric is Frechet Inception Distance (FID) (Heusel et al., 2017), which compares the distribution of generated images with the distribution of real images. It works well to decide if generated images are similar to objects in the target domain. For instance, TSNeRF (Y. Wang et al., 2023) used FID to evaluate the distance

	Dataset Name	Content	#Scenes or Images	Synthetic/Real	Highlights	<>
Mesh	TurboSquid (2023)	(textured) mesh model	N/A	synthetic	Professional publicly shared 3D models	↗
	CGTrader (2023)	(textured) mesh model	1.81M	synthetic	Professional publicly shared 3D models	↗
	ShapeNet (2015)	mesh model	3M	synthetic	Annotated 3D CAD object models	↗
	COSEG (2011)	mesh model	172	synthetic	Shapes with segment annotations	↗
	ModelNet (2015)	mesh model	151,128	synthetic	3D CAD object models	↗
	Thing10K (2016)	mesh model	10K	synthetic	3D-printing models	↗
	Objaverse 1.0/XL (2023; 2023)	(textured) mesh model	800K/10M+	synthetic	Annotated 3D objects and scenes sourced from Sketchfab	↗
Pt.	DensePoint (2019)	colored point cloud	10,454	synthetic	Point clouds built on ShapeNet and ShapeNetPart (2016)	↗
View Synthesis	DTU (MVS) (2014)	multi-views, MVS	124	real	Scanned objects	↗
	LLFF (2019)	multi-views	24	real	Forward-facing scenes	↗
	NeRF-Real (2020)	multi-views	2	real	Centered objects with background 360° images	↗
	NeRF-Synthetic (2020)	posed multi-views	8	synthetic	Centered objects w/o background 360° images rendered by Blender	↗
	Tanks and Temples (2017)	multi-views	21	real	Large indoor and outdoor scenes	↗
	Real Lego (2022)	multi-views	1	real	Centered Lego with background 360° images	↗
	Mip-NeRF 360 (2022)	multi-views	9	real	Inward-facing object-centric 360° indoor and outdoor scenes	↗
Style	WikiArt (2016)	painting	79,433/23,815 ^a	real	Artistic paintings from WikiArt	↗
	DPST (2017)	photo	60	real	Photorealistic stylish photos	↗
	COCO (2014)	photo	83K/41K ^a	real	Large-scale objects in context	↗

Table 6: Popular datasets for performance evaluation on 3D neural stylization. Pt. is the abbreviation of point cloud. ^aTrain/Test sets.

between stylized rendered views and the target art database.

• **Robustness and Efficiency.** For model robustness, Ref-NPR (Y. Zhang, He, et al., 2023) proposed to measure PSNR between rendered results around a specific view angle. It is not essential for general 3D neural stylization evaluation, but it can be taken as a robustness reference. As for the training and inference efficiency, current methods can be classified into different types in terms of data requirement, training time, and rendering speed. Later, X-Mesh (Ma et al., 2023) introduced ITS to quantitatively evaluate the convergence rate of the model. The number of iterations required to reach the target MES represents the training efficiency.

• **User Study.** The above metrics do not necessarily reflect and align with human bias, especially for subjective factors such as naturalness and attractiveness. Therefore, conducting a user study is usually a suitable option. A typical user study involves steps including recruiting participants, preparing study materials and questionnaires, collecting answers, and analyzing statistics. In 3D stylization, the most frequently evaluated metrics are “stylization quality” and “temporal consistency” (Y. Chen, Yuan, et al., 2022; Chiang et al., 2022; H. Huang et al., 2021; K. Liu et al., 2023).

4.3 Mini-benchmark of 3D Artistic Stylization

Image-guided artistic stylization for neural field scenes is mostly developed among the reviewed

works. In this section, we evaluated state-of-the-art neural field stylization generative models LSNV (2021), HyperStyle (2022), StyleRF (2023) and single-style per-scene stylization works ARF (2022), INS (2022), SNeRF (2022), Ref-NeRF (2023) over eight scenes from three public datasets, including object scenes (chair, mic) in NeRF-Synthetic (Mildenhall et al., 2020) that are inward-facing 360° objects without background, forward-facing real scenes (fern, flower, horns, trex) in LLFF dataset (Mildenhall et al., 2019), and large unbounded real scenes (Truck, Playground) in Tanks and Temples dataset (Knapitsch et al., 2017). Particularly, masked large scenes Caterpillar and Truck without background (Knapitsch et al., 2017) are instead used for StyleRF and INS.

We evaluated multi-view consistency and style similarity for each artistic novel view stylization method, and visual quality using FID and KID for some arbitrary style transfer models LSNV, HyperStyle and StyleRF. We followed multi-view consistency evaluation pipelines similar to LSNV, SNeRF, StyleRF and Ref-NeRF, and evaluated short-range and long-range warp error with masked MSE and LPIPS scores, via off-the-shelf optical flow estimator RAFT (Teed & Deng, 2020). Only pixels or features located in non-occluded mask areas are taken into account. For style similarity, we computed VGG feature Gram matrix style loss (Gatys et al., 2016) as a metric. Specifically, we rendered a short sequence of novel views around each scene and computed the similarity of adjacent

	Method	Object		Forward-face		Large Scene		Average	
		MSE	LPIPS	MSE	LPIPS	MSE	LPIPS	MSE	LPIPS
Short Range ↓	LSNV	0.0396	0.0999	0.0146	0.0701	0.0198	0.0818	0.0222	0.0805
	HyperStyle	0.0067	0.0320	0.0125	0.0778	0.0083	0.0482	0.0104	0.0628
	StyleRF	0.0086	0.0513	0.0095	0.0517	0.0134 ^c	0.0620 ^c	0.0102	0.0542
	ARF	0.0255	0.0508	0.0084	0.0515	0.0081	0.0356	0.0128	0.0460
	Ref-NPR ^b	0.0191	0.0580	0.0072	0.0594	0.0062	0.0353	0.0100	0.0530
	INS	0.0293	0.0343	0.0135	0.0534	0.0786 ^c	0.1837 ^c	0.0337	0.0812
Long Range ↓	SNeRF-G ^a	0.0230	0.0513	0.0072	0.0510	0.0060	0.0314	0.0109	0.0462
	SNeRF-A ^a	0.0116	0.0412	0.0061	0.0485	0.0059	0.0312	0.0074	0.0423
	LSNV	0.0469	0.0983	0.0285	0.0812	0.0387	0.0928	0.0399	0.0884
	HyperStyle	0.0072	0.0372	0.0641	0.1736	0.0092	0.0274	0.0403	0.1123
	StyleRF	0.0131	0.0513	0.0181	0.0681	0.0216 ^c	0.0573 ^c	0.0177	0.0612
	ARF	0.0483	0.0756	0.0214	0.0927	0.0185	0.0573	0.0276	0.0752
Style Loss (x1e5) ↓	Ref-NPR ^b	0.0373	0.0767	0.0178	0.0968	0.0127	0.0507	0.0214	0.0802
	INS	0.0536	0.0480	0.0401	0.0944	0.1127 ^c	0.2092 ^c	0.0616	0.1115
	SNeRF-G ^a	0.0517	0.0835	0.0515	0.1542	0.0224	0.0768	0.0443	0.1172
	SNeRF-A ^a	0.0331	0.0720	0.0584	0.1790	0.0220	0.0815	0.0430	0.1278
	LSNV	5.3345	12.2748			6.4795		9.0909	
	HyperStyle	6.3470	5.0541			5.6637		5.4130	
StyleRF	4.0249	4.4604			6.4243 ^c		4.8425		
Style Loss (x1e5) ↓	ARF	6.7117	4.8248			8.6629		6.2468	
	Ref-NPR ^b	6.3605	3.0653			5.4008		4.4730	
	INS	5.3055	3.7685			6.2505 ^c		4.7755	
	SNeRF-G ^a	5.6361	1.6660			3.5188		3.1217	
	SNeRF-A ^a	6.5625	2.9703			4.4199		4.2308	

^a SNeRF is reproduced by Plenoxels (fixed geometry), and Gatys *et al.* (SNeRF-G) or AdaIN (SNeRF-A).

^b Ref-NPR with the stylized reference view by AdaIN.

^c Trained without background.

Table 7: Evaluation results for short-range and long-range consistency, and style loss.

frames for short-range score and far-away frames (e.g., 10-frame interval) for long-range score. We used existing official implementations of methods, and edited reference views by AdaIN for Ref-NPR. We reproduced SNeRF based on Plenoxels (fixed geometry), and Gatys *et al.* (2016) (named SNeRF-G) or the pre-trained AdaIN model (named SNeRF-A) with 5 training iterations. 120 WikiArt style references are used for FID and KID, and 6 WikiArt images for warp error and style loss. All experiments were conducted on GeForce RTX 3090 GPUs with 24GB memory per GPU.

4.3.1 Evaluation Results

Table 7 reports the short-range and long-range consistency and style loss (Gram loss), Table 8 shows FID and KID metrics for style diversity of stylized images generated by pre-trained 3D arbitrary style transfer models. Fig. 11 displays some visual results among 3D arbitrary style and single style transfer methods.

Multi-view Consistency. Thanks to the implicit feature representation of scenes for novel view synthesis, all evaluated works can achieve short-range consistency. It indicates the implicit features offer a slight ability for close-view interpolation with

Method	FID↓	KID↓
LSNV	247.29	0.044
HyperStyle	289.29	0.076
StyleRF	267.112	0.043

Table 8: Evaluation results of 3D arbitrary style transfer in terms of FID, KID.

appearance consistency. As for long-range consistency, discarding view-dependent effects and 2D-to-3D feature lifting help with 3D consistency. Some works prefer to preserve view-dependent effects with viewing direction input (e.g., HyperStyle, INS), while some prefer to discard view-dependent effects for multi-view consistency (e.g., ARF, Ref-NeRF, StyleRF). Since supervision under multiple independent stylized views is not inherently consistent, the performance on long-range multi-view consistency metrics would be worse (e.g., Warp Error for INS and SNeRF). StyleRF learns 3D consistent latent features by feature lifting while Ref-NPR maps deterministic 2D to 3D features. They both discard view-dependent effects, therefore they can achieve stable either short-range or long-range multi-view consistency. It is noted that HyperStyle (2022) tends to generate blurry novel views, which leads to good multi-view consistency scores.

Performance in Different Scene Scales. Based on different reconstruction approaches, 3D stylization performance may vary among scene scales. For example, LSNV (2021) and HyperStyle (2022) are more robust on unbounded scene stylization, while grid-based approaches tend to be unstable or unsuccessful for large unbounded scenes, such as INS (2022) and StyleRF (2023).

Performance in Style Coherency. By assessing style loss between stylized views and target style references (see style loss in Table 7), in general, single style optimization approaches (ARF, Ref-NeRF, SNeRF) obtain closer style features to the given target style reference than arbitrary style transfer models (LSNV, HyperStyle, StyleRF). From visual results in Fig. 11, single style optimization methods ARF and SNeRF successfully learned correct brushstrokes and subtle motifs from reference paintings, while arbitrary style transfer models StyleRF and LSNV tend to generate harsher patterns with thicker brushstrokes.

Challenge in Text-guided 3D Artistic Stylization. In our additional experiments of stylizing

scenes with text prompts for artistic styles, we found that text-guided optimization methods such as Instruct-NeRF2NeRF (Haque et al., 2023) cannot handle abstract artistic style description, which leads to dramatic geometry destruction. For example, “Vincent van Gogh” stylization using the text prompt does not work because Instruct-Pix2Pix (Brooks et al., 2023) on multi-view images gets too much geometric inconsistency with artistic abstract patterns, which degrades the NeRF optimization. To achieve abstract style transfer for 3D scenes, additional datasets for fine-tuning feature extractors may be necessary such as TSNeRF (Y. Wang et al., 2023).

5 Applications

The burgeoning technologies for generating and manipulating 3D assets are unleashing the power of creativity and revolutionizing the way that we perceive and interact with visual content. 3D neural stylization sheds light on a new paradigm of providing infinite aesthetic possibilities from classic paintings to futuristic concepts, enhanced immersive experiences for virtual and augmented reality environments, seamless integration for cross-industry applications including advertising and marketing, fashion and product design, film and game development, architecture and environment visualization, and interactive education and learning, etc. Some examples are visualized in Fig. 12. In this section, we present some representative and promising applications of 3D neural stylization.

5.1 3D Asset Design

3D asset design and modeling involve constructing shapes, textures, materials, etc. Harnessing advanced neural stylization techniques, automatic 3D design becomes more flexible in a controllable way with text prompts, images or 3D references.

Single Object Design. In the creation of consumer products, the stylization of a single object can enhance its market appeal. Neural stylization enables fast illustration of ideas for a more effective discussion among designers, developers and customers, especially in the prototyping phase. Text-guided mesh stylization provides a flexible way to design 3D assets. For example, after the launch of Text2Mesh (Michel et al., 2022), digital R&D designers and artists employed this tool for

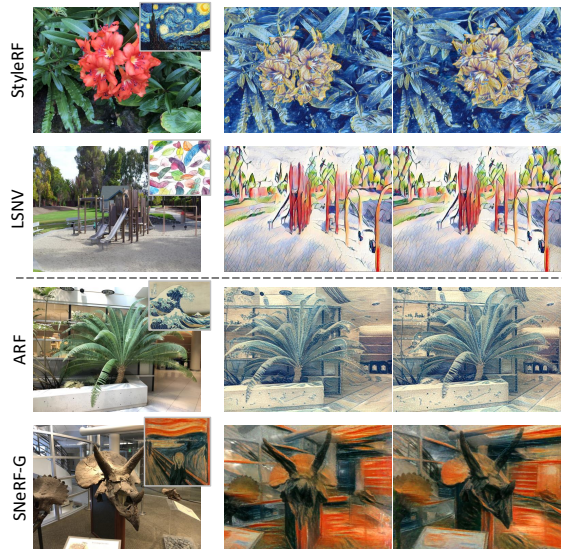


Fig. 11: Neural field stylization results. Zoom in for details.

3D gaming asset designs (Orghidan et al., 2022) and artwork creation (Guljajeva & Canet, 2022). Advanced techniques in automatic 3D shape mixing and morphing (Gao et al., 2023; Hui et al., 2022) are also promising for speedy 3D asset design and production.

Room Decoration. Current digital room/house decoration tools support adding pre-made assets to a virtual scene and adjusting their places, or using the device’s camera to map the room and place provided furniture (Global, 2024; Houzz, 2024; Planner5D, 2024; L. Yu et al., 2011). However, the asset library provides limited types and styles of 3D models, and the overall style of the whole space is neglected. Recent works that leverage 3D neural stylization techniques explore more possibilities in room decoration. DreamSpace (B. Yang et al., 2024) allows users to personalize the appearance of real-world scene reconstructions with text prompts, and delivers immersive VR experiences on HMD devices. SceneTex (D. Chen et al., 2024) generates high-quality textures for 3D indoor scenes from the given text prompts, which provide a consistent stylization for the whole space. Instead of entire room stylization, Text2Scene (Hwang et al., 2023) focuses on the stylization of individual object meshes in an indoor scene.



Fig. 12: Applications of 3D neural stylization. Images adapted from D. Chen et al. (2024); Han et al. (2024); Kanyuk et al. (2023); Y. Li, Lin, et al. (2023); Orghidan et al. (2022); Volinga (2023); T. Wu et al. (2023); K. Zhang et al. (2022).

5.2 3D Avatar Stylization

Avatar stylization is a long-standing and popular research area, that enables interesting applications such as cartoonization for 2D or 3D-aware portraits (Jang et al., 2021; G. Song et al., 2021; S. Yang et al., 2022; J. Zhang et al., 2023). With neural stylization techniques and novel 3D representations such as NeRF, there appear stylization solutions for 3D avatars (Han et al., 2024; Pérez et al., 2024; H. Zhang et al., 2024).

For example, the general NeRF stylization framework SNeRF (Nguyen-Phuoc et al., 2022) supports style transfer for dynamic NeRF avatars. 3DFaceHybrid (Feng & Singhal, 2024) achieves arbitrary style transfer for a NeRF-based face by lifting 2D pre-trained face style transfer knowledge (S. Yang et al., 2022) to the 3D face mesh. StyleAvatar (Pérez et al., 2024) enables either image- or text-guided stylization for animatable avatars from a phone scan (C. Cao et al., 2022) with CLIP supervision. TECA (H. Zhang et al., 2024) generates a detailed 3D avatar composition based on a given text description. The avatar includes a mesh-based face and body, and NeRF-based hair, clothing, and other accessories. HeadSculpt (Han et al., 2024) generates and edits a 3D-consistent head avatar with text prompts via diffusion priors (Brooks et al., 2023), achieving editions such as realistic or artistic head generation, expression editing, cartoonization, etc.

5.3 Non-photorealistic Rendering

Compared to traditional non-photorealistic rendering techniques (A. Gooch et al., 1998; B. Gooch & Gooch, 2001) with low-level control of simple

strokes and textures, neural stylization techniques realize general stylization for arbitrary style targets, offering high-level controllability with reference and semantics and higher speed for stylized assets production. 3D artistic stylization works have shown the potential of efficient NPR for a scene (Chiang et al., 2022; Fan et al., 2022; Haque et al., 2023; H. Huang et al., 2021; Y. Huang et al., 2022; K. Liu et al., 2023; Nguyen-Phuoc et al., 2022; C. Wang et al., 2023; K. Zhang et al., 2022; Y. Zhang, He, et al., 2023).

5.4 Physically Based Rendering

Physical properties in 3D scenes enable photorealistic rendering and editing.

Texture Stylization. TANGO (Lei et al., 2022) tends to optimize texture material parameters by CLIP supervision. It trains MLPs given the point and its normal to generate SVBRDF parameters and normal offset, which enables photorealistic rendering. Its follow-up work 3DStyle-Diffusion (H. Yang et al., 2023) further incorporates depth-guided ControlNet (L. Zhang et al., 2023) for score distillation, enabling high-quality fine-grained texture stylization.

3D Generation and Editing. HyperDreamer (T. Wu et al., 2023) achieves single-image-to-3D generation with physical decomposition including semantics, albedo, specular, roughness, and normal. It supports diverse downstream tasks such as relighting, text-guided and part-aware editing. Decorate3D (Y. Guo et al., 2023) converts NeRF scene to mesh for geometry and material decomposition. The decoupled geometry and UV texture representations support controllable texture editing and generation with text instructions.

Simulation. ClimateNeRF (Y. Li, Lin, et al., 2023) fuses weather physical simulation with NeRF rendering to create NeRF scenes with realistic weather effects such as smog, snow, and floods. PhysGaussian (T. Xie et al., 2024) integrates physics-based dynamics simulation, specifically the Material Point Method (MPM) simulation, to deform a 3DGS scene. By merging realistic rendering and physical simulation, these approaches have the potential to enhance the realism of virtual games and films.

5.5 Industrial Production

3D neural stylization provides automatic stylization techniques for 3D assets including mesh, point cloud, volumetric simulation, and novel views. Stylized assets can be seamlessly integrated into traditional computer graphics rendering pipelines and software, such as meshes with new stylized texture, re-colored point clouds, and stylized volumetric simulation. Implicit reconstructed scenes, such as NeRF, can be exported as textured mesh or rendered by game engine plugins such as Luma AI’s Unreal Engine NeRF plug-ins (Luma, 2023). Automated 3D environment synthesis holds great promise for film **virtual production** applications. For instance, combining environmental NeRF with light stages (Manzaneque, 2023) enables cost-effective scene shooting using Volinga suite (Volinga, 2023). Non-photorealistic stylized 3D assets and scenes are particularly beneficial for **animation production**, as demonstrated by the film Elemental (Hoffman et al., 2023; Kanyuk et al., 2023). Moreover, these techniques find possible applications in VR and video game development (Menapace et al., 2022), enabling rapid stylization and editing of 3D scenes (Fang et al., 2023; K. Liu et al., 2023).

6 Open Challenges and Future Works

From this survey, we identify under-explored problems and notable challenges in 3D neural stylization that are worth investigating in future work, which we discuss below.

Generalization

Large-scale Scene Stylization. Most 3D neural stylization works focus on objects or object-centric

scenes (Hertz et al., 2022; Michel et al., 2022), room-scale scenes (Höllein et al., 2022; Pang et al., 2023), and outdoor inward-facing scenes (Chiang et al., 2022; H. Huang et al., 2021). Though G. Kim et al. (2024) extended novel view stylization to city scenes, it does not output stylized 3D assets. StyleCity (2024) stylizes urban texture and sky but relies on heavy mesh representation. 3D assets and scenes can scale to as large as multi-room indoor scene (H. Huang et al., 2022; Straub et al., 2019), architectural scenes (Martin-Brualla et al., 2021; Q. Wang et al., 2021), multi-block outdoor scenes (Tancik et al., 2022; Turki et al., 2023), and even city-scale scenes (Y. Li, Jiang, et al., 2023; Xiangli et al., 2022; Xu et al., 2023). These complex scenarios with intricate semantics are challenging for semantic alignment and computation efficiency.

4D Scene Stylization. Limited literature exists on 4D scene stylization, with only a few notable works such as SNeRF (2022) and S-DyRF (2024) presenting to stylize dynamic portraits and small scenes. Stylizing time-varying scenes with dynamic geometry and appearance changes (K. Park et al., 2021; L. Song et al., 2023; Z. Yang et al., 2024), or integrating time-related special effects (Logacheva et al., 2020; Shih et al., 2013), poses significant challenges in maintaining temporospatial consistency in this domain.

Generalizable Text-guided Stylization. Text-guided 3D scene stylization and editing are still in the early stages. Data-driven generalizable text-guided 3D scene stylization or editing *without re-training* is seldom explored yet (Fang et al., 2023), which demands more attention. It is worth investigation and exploration since current advanced large-language models such as BLIP (J. Li et al., 2023), GPT (Brown et al., 2020) enable infinite image-text pair data generation for data-driven model training.

Controllability

3D Reference-guided Stylization. Various modalities have been explored to be style references, especially images and text prompts. 3D to 3D geometric and appearance style transfer with 3D shape or 3D scene guidance is still underexplored (Yin et al., 2021). While 3D features can provide 3D-aligned holistic references for stylization, 3D feature extraction suffers from limited 3D datasets in a few categories. With the rapid

development of 2D-to-3D lifting techniques, there is potential to leverage large-scale pre-trained 2D models, such as 2D diffusion models (Rombach et al., 2022; L. Zhang et al., 2023), as priors for context-aware scene stylization with 3D references. In addition, we expect more and more 3D pre-trained feature extractors and generative models with data in the wild to boost the 3D context-aligned style transfer.

Multi-modal Controls. Currently, most research works focus on sole-reference guidance for stylization, while multi-modal reference can provide high accuracy and controllability on precise manipulation and design (Bao et al., 2023; Pang et al., 2023; Zhuang et al., 2024). Therefore, it is worthwhile to explore the possibilities of joint supervision incorporating visual (Simonyan & Zisserman, 2015), textual (Radford et al., 2021), semantic (Caron et al., 2021), and geometric features for 3D stylization.

Efficiency

Real-time Arbitrary Style Transfer of 3D Scenes. Modern photo or video filters support real-time processing (Jamriška et al., 2019; Ruder et al., 2016). For instance, Ioannou and Maddock (2023) proposed a simplified style transfer architecture embedded into Unity rendering pipeline, enabling real-time depth-aware 2D style transfer. However, real-time stylizing a 3D scene given arbitrary styles remains challenging for some 3D representations due to the slow optimization process (T. Cao et al., 2023; Michel et al., 2022; Richardson et al., 2023; H. Yang et al., 2023) and slow rendering in neural fields (Chiang et al., 2022; K. Zhang et al., 2022). Even though there are some novel view stylization works (J. Chen et al., 2024; X. Li et al., 2019; K. Liu et al., 2023) that achieve arbitrary style transfer for speedy novel view synthesis, they fail to obtain stylized 3D scenes instantly. It is worth exploring to improve stylization speed by leveraging feed-forward networks (Aurand et al., 2022), 3D generative models (X. Cao et al., 2020), and advanced 3D representations such as 3DGS (K. Liu et al., 2024; D. Zhang et al., 2024).

3D Consistency

Comprehensive View Planning for Complex Scenes. Existing works have primarily focused on planning training views for object or room scenes

for 3D stylization (D. Chen et al., 2023; Hwang et al., 2023; Michel et al., 2022; Richardson et al., 2023), overlooking the crucial aspects of semantic- and instance-level view planning. Hence, it is a compelling research opportunity to investigate effective strategies for planning views in scenes characterized by intricate semantics such as cityscapes, and multi-room scenarios.

3D-Holistic Style Feature of Scenes. The majority of works reviewed are supervised by large-data 2D pixel-level features extracted from multi-views (B. Kim et al., 2019; Michel et al., 2022; K. Zhang et al., 2022), since large-data 3D pre-trained models are still rare and expensive. Even though some works try to lift 2D content features to 3D before 3D stylization (H. Huang et al., 2021; Y. Huang et al., 2022; K. Liu et al., 2023), they still use view-dependent style features for final 3D stylization supervision. It is also impractical to lift 2D features to 3D at every iteration. Some works supervise stylization with a 3D-aware style feature by averaging features of several views for a small object (Ma et al., 2023; Michel et al., 2022), which is not implementable for more views with limited memory. Per-view or multi-view supervision may not be sufficient to represent the whole 3D scene style feature, and worse may dilute the current single-view style from other views with conflicting gradients (Gao et al., 2023). More research and investigation are needed for efficient 3D-aware and even 3D-holistic style features for 3D stylization.

Evaluation

Standardized Evaluation on Other Stylization Problems. We provided only a mini-benchmark for artistic neural field stylization (Sec. 4.3), while other 3D stylization tasks are still developing evaluation criteria except for user study. We believe there should be some variations from the evaluation of our mini-benchmark, for other 3D stylization problems, while concerns should be similar to criteria in Sec. 4.2.

7 Conclusion

The report has explored the advancements in neural stylization techniques for diverse 3D data including mesh, volume, neural fields, point cloud and implicit shapes. Through this comprehensive survey of 3D neural stylization techniques and corresponding applications, we highlighted the

importance of neural stylization in accelerating the creative process, enabling fine-grained control over stylization, and enhancing artistic expression in various domains such as movie making, virtual production, and video game development. Furthermore, we have introduced a taxonomy for neural stylization, providing a framework for categorizing new works in the neural stylization field. Our analysis and discussion of advanced techniques underscored the ongoing research efforts aimed at addressing limitations and pushing the boundaries of neural stylization in the 3D digital domain. In addition, we proposed a mini-benchmark of 3D artistic stylization, with which we aim to offer inspiration and a standard of evaluation for other 3D stylization works. Finally, we introduced practical applications and discussed open challenges and future works of 3D neural stylization.

Availability of data and materials

The experimental data for the mini-benchmark of 3D artistic stylization are available within the paper (Table 6). The evaluation codes are available via the open repository: https://github.com/chenyingshu/advances.3d_neural_stylization.

References

- Aigerman, N., Gupta, K., Kim, V.G., Chaudhuri, S., Saito, J., Groueix, T. (2022). Neural jacobian fields: Learning intrinsic mappings of arbitrary meshes. *ACM Transactions on Graphics (TOG)*, 41(4), 1–17, <https://doi.org/10.1145/3528223.3530141>
- Artineering (2018). *MNPR*. Retrieved from <https://artineering.io/software/maya-npr>
- Aurand, J., Ortiz, R., Nauer, S., Azevedo, V.C. (2022). Efficient neural style transfer for volumetric simulations. *ACM Transactions on Graphics (TOG)*, 41(6), 1–10, <https://doi.org/10.1145/3550454.3555517>
- Avrahami, O., Lischinski, D., Fried, O. (2022). Blended diffusion for text-driven editing of natural images. *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition* (pp. 18208–18218).
- Baatz, H., Granskog, J., Papas, M., Rousselle, F., Novák, J. (2022). Nerf-tex: Neural reflectance field textures. *Computer graphics forum* (Vol. 41, pp. 287–301).
- Bao, C., Zhang, Y., Yang, B., Fan, T., Yang, Z., Bao, H., ... Cui, Z. (2023). Sine: Semantic-driven image-based nerf editing with prior-guided editing field. *The IEEE/CVF Computer Vision and Pattern Recognition Conference (CVPR)*.
- Barron, J., Mildenhall, B., Verbin, D., Srinivasan, P.P., Hedman, P. (2022). Mip-nerf 360: Unbounded anti-aliased neural radiance fields. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 5470–5479).
- Bar-Tal, O., Yariv, L., Lipman, Y., Dekel, T. (2023). Multidiffusion: Fusing diffusion paths for controlled image generation. *Proceedings of the 40th International Conference on Machine Learning*.
- Batzolis, G., Stanczuk, J., Schönlieb, C.-B., Etmann, C. (2021). Conditional image generation with score-based diffusion models. *arXiv preprint*, 1–19, <https://doi.org/10.48550/arXiv.2111.13606>
- Bhat, S., Alhashim, I., Wonka, P. (2021). Adabins: Depth estimation using adaptive bins. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 4009–4018).
- Brooks, T., Holynski, A., Efros, A.A. (2023). Instructpix2pix: Learning to follow image editing instructions. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 18392–18402).
- Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J.D., Dhariwal, P., ... others (2020). Language models are few-shot learners. *Advances in neural information processing systems* (Vol. 33, pp. 1877–1901).
- Cao, C., Simon, T., Kim, J.K., Schwartz, G., Zollhoefer, M., Saito, S.-S., ... others (2022).

- Authentic volumetric avatars from a phone scan. *ACM Transactions on Graphics (TOG)*, 41(4), 1–19, <https://doi.org/10.1145/3528223.3530143>
- Cao, T., Kreis, K., Fidler, S., Sharp, N., Yin, K. (2023). Texfusion: Synthesizing 3d textures with text-guided image diffusion models. *Proceedings of the IEEE/CVF International Conference on Computer Vision* (pp. 4169–4181).
- Cao, X., & Nagao, K. (2019). Point cloud colorization based on densely annotated 3d shape dataset. *Multimedia modeling: 25th international conference, mmm 2019, thessaloniki, greece, january 8–11, 2019, proceedings, part i 25* (pp. 436–446).
- Cao, X., Wang, W., Nagao, K., Nakamura, R. (2020). Psnnet: A style transfer network for point cloud stylization on geometry and color. *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision* (pp. 3337–3345).
- Caron, M., Touvron, H., Misra, I., Jégou, H., Mairal, J., Bojanowski, P., Joulin, A. (2021). Emerging properties in self-supervised vision transformers. *Proceedings of the International Conference on Computer Vision (ICCV)*.
- CGTrader (2023). *Cgtrader*. Retrieved from <https://www.cgtrader.com/>
- Chan, E., Lin, C.Z., Chan, M.A., Nagano, K., Pan, B., De Mello, S., ... others (2022). Efficient geometry-aware 3d generative adversarial networks. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 16123–16133).
- Chang, A., Funkhouser, T., Guibas, L., Hanrahan, P., Huang, Q., Li, Z., ... Yu, F. (2015). *ShapeNet: An Information-Rich 3D Model Repository* (Tech. Rep. No. arXiv:1512.03012 [cs.GR]). Stanford University - Princeton University - Toyota Technological Institute at Chicago.
- Chang, H., Wang, Z., Chuang, Y.-Y. (2020). Domain-specific mappings for generative adversarial style transfer. *European conference on computer vision* (pp. 573–589).
- Chen, A., Xu, Z., Geiger, A., Yu, J., Su, H. (2022). Tensorf: Tensorial radiance fields. *European conference on computer vision* (pp. 333–350).
- Chen, D., Li, H., Lee, H.-Y., Tulyakov, S., Nießner, M. (2024). Scenetex: High-quality texture synthesis for indoor scenes via diffusion priors. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.
- Chen, D., Siddiqui, Y., Lee, H.-Y., Tulyakov, S., Nießner, M. (2023). Text2tex: Text-driven texture synthesis via diffusion models. *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*.
- Chen, G., & Wang, W. (2024). A survey on 3d gaussian splatting. *arXiv preprint*, 1–15, <https://doi.org/10.48550/arXiv.2401.03890>
- Chen, J., Xing, W., Sun, J., Chu, T., Huang, Y., Ji, B., ... Wang, Z. (2024). Pnesm: Arbitrary 3d scene stylization via prompt-based neural style mapping. *Aaai*.
- Chen, R., Chen, Y., Jiao, N., Jia, K. (2023, October). Fantasia3d: Disentangling geometry and appearance for high-quality text-to-3d content creation. *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*.
- Chen, T., Kornblith, S., Norouzi, M., Hinton, G. (2020). A simple framework for contrastive learning of visual representations. *International conference on machine learning* (pp. 1597–1607).
- Chen, Y., Chen, Z., Zhang, C., Wang, F., Yang, X., Wang, Y., ... Lin, G. (2024). Gaussianeditor: Swift and controllable 3d editing with gaussian splatting. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.

- Chen, Y., Huang, H., Vu, T.-A., Shum, K.C., Yeung, S.-K. (2024). Stylecity: Large-scale 3d urban scenes stylization with vision-and-text reference via progressive optimization. *arXiv preprint arXiv:2404.10681*, 1–18,
- Chen, Y., Vu, T.-A., Shum, K.-C., Yeung, S.-K., Hua, B.-S. (2022). Time-of-day neural style transfer for architectural photographs. *2022 IEEE International Conference on Computational Photography (ICCP)* (pp. 1–12).
- Chen, Y., Yuan, Q., Li, Z., Liu, Y., Wang, W., Xie, C., ... Yu, Q. (2022). Upst-nerf: Universal photorealistic style transfer of neural radiance fields for 3d scene. *arxiv*.
- Chen, Z., Funkhouser, T., Hedman, P., Tagliasacchi, A. (2023). Mobilenerf: Exploiting the polygon rasterization pipeline for efficient neural field rendering on mobile architectures. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 16569–16578).
- Chen, Z., & Zhang, H. (2019). Learning implicit fields for generative shape modeling. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 5939–5948).
- Chiang, P., Tsai, M.-S., Tseng, H.-Y., Lai, W.-S., Chiu, W.-C. (2022). Stylizing 3d scene via implicit representation and hypernetwork. *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision* (pp. 1475–1484).
- Croitoru, F., Hondru, V., Ionescu, R.T., Shah, M. (2023). Diffusion models in vision: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, ,
- Deitke, M., Liu, R., Wallingford, M., Ngo, H., Michel, O., Kusupati, A., ... Farhadi, A. (2023). Objaverse-XL: A universe of 10m+ 3d objects. *Thirty-seventh conference on neural information processing systems datasets and benchmarks track*. Retrieved from <https://openreview.net/forum?id=Sq3CLKJeiz>
- Deitke, M., Schwenk, D., Salvador, J., Weihs, L., Michel, O., VanderBilt, E., ... Farhadi, A. (2023). Objaverse: A universe of annotated 3d objects. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 13142–13153).
- Deng, Y., Tang, F., Dong, W., Ma, C., Pan, X., Wang, L., Xu, C. (2022). Stytr2: Image style transfer with transformers. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 11326–11336).
- Deng, Y., Yang, J., Tong, X. (2021). Deformed implicit field: Modeling 3d shapes with learned dense correspondence. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 10286–10296).
- Dong, J., & Wang, Y.-X. (2023). Vica-nerf: View-consistency-aware 3d editing of neural radiance fields. *Thirty-seventh conference on neural information processing systems*.
- Dumoulin, V., Shlens, J., Kudlur, M. (2017). A learned representation for artistic style. *International conference on learning representations*.
- Efros, A.A., & Freeman, W.T. (2001). Image quilting for texture synthesis and transfer. *Proceedings of the 28th annual conference on computer graphics and interactive techniques* (pp. 341–346).
- Fan, Z., Jiang, Y., Wang, P., Gong, X., Xu, D., Wang, Z. (2022). Unified implicit neural stylization. *European conference on computer vision* (pp. 636–654).
- Fang, S., Wang, Y., Yang, Y., Tsai, Y.-H., Ding, W., Zhou, S., Yang, M.-H. (2023). Editing 3d scenes via text prompts without retraining. *arXiv e-prints*, arXiv-2309, <https://doi.org/10.48550/arXiv.2309.04917>
- Feng, J., & Singhal, P. (2024). 3d face style transfer with a hybrid solution of nerf and mesh

- rasterization. *Proceedings of the ieee/cvf winter conference on applications of computer vision* (pp. 3504–3513).
- Fridovich-Keil S. and YU A., Tancik, M., Chen, Q., Recht, B., Kanazawa, A. (2022). Plenoxels: Radiance fields without neural networks. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition*.
- Fridovich-Keil, S., Meanti, G., Warburg, F.R., Recht, B., Kanazawa, A. (2023). K-planes: Explicit radiance fields in space, time, and appearance. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 12479–12488).
- Fuji Tsang, C., Shugrina, M., Laffleche, J.F., Takikawa, T., Wang, J., Loop, C., ... Lebedev, R. (2022). *Kaolin: A pytorch library for accelerating 3d deep learning research*. <https://github.com/NVIDIAGameWorks/kaolin>.
- Gal, R., Patashnik, O., Maron, H., Bermano, A.H., Chechik, G., Cohen-Or, D. (2022). Stylegan-nada: Clip-guided domain adaptation of image generators. *ACM Transactions on Graphics (TOG)*, 41(4), 1–13, <https://doi.org/10.1145/3528223.3530164>
- Gao, W., Aigerman, N., Groueix, T., Kim, V., Hanocka, R. (2023). Textdeformer: Geometry manipulation using text guidance. *Acm siggraph 2023 conference proceedings* (pp. 1–11).
- Gatys, L., Ecker, A., Bethge, M. (2016). Image style transfer using convolutional neural networks. *Proceedings of the ieee conference on computer vision and pattern recognition* (pp. 2414–2423).
- Global, I. (2024). *Ikea place*. Retrieved from <https://www.ikea.com/>
- Gooch, A., Gooch, B., Shirley, P., Cohen, E. (1998). A non-photorealistic lighting model for automatic technical illustration. *Proceedings of the 25th annual conference on computer graphics and interactive techniques* (pp. 447–452).
- Gooch, B., & Gooch, A. (2001). *Non-photorealistic rendering*. AK Peters/CRC Press.
- Goodfellow, I., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., ... Bengio, Y. (2014). Generative adversarial nets. *Advances in neural information processing systems* (Vol. 27).
- Gu, J., Liu, L., Wang, P., Theobalt, C. (2022). Stylenerf: A style-based 3d aware generator for high-resolution image synthesis. *International conference on learning representations*. Retrieved from <https://openreview.net/forum?id=iUuzzTMUw9K>
- Guljajeva, V., & Canet, M. (2022). *Psychedelic forms*. Retrieved from <https://var-mar.info/psychedelic-forms/>
- Guo, J., Li, M., Zong, Z., Liu, Y., He, J., Guo, Y., Yan, L.-Q. (2021). Volumetric appearance stylization with stylizing kernel prediction network. *ACM Transactions on Graphics (TOG)*, 40(4), 162–1, <https://doi.org/10.1145/3450626.3459799>
- Guo, Y., Zuo, X., Dai, P., Lu, J., Wu, X., Cheng, L., ... Wu, X. (2023). Decorate3d: Text-driven high-quality texture generation for mesh decoration in the wild. *Thirty-seventh conference on neural information processing systems*.
- Ha, D., Dai, A., Le, Q.V. (2016). Hypernetworks. *arXiv preprint*, 1–29, <https://doi.org/10.48550/arXiv.1609.09106>
- Haeberli, P. (1990). Paint by numbers: Abstract image representations. *Proceedings of the 17th annual conference on computer graphics and interactive techniques* (pp. 207–214).
- Han, X., Cao, Y., Han, K., Zhu, X., Deng, J., Song, Y.-Z., ... Wong, K.-Y.K. (2024). Headsculpt: Crafting 3d head avatars with text. *Advances in neural information processing*

- systems* (Vol. 36).
- Haque, A., Tancik, M., Efros, A., Holynski, A., Kanazawa, A. (2023). Instruct-nerf2nerf: Editing 3d scenes with instructions. *Proceedings of the ieee/cvf international conference on computer vision*.
- Hedman, P., Srinivasan, P.P., Mildenhall, B., Barron, J.T., Debevec, P. (2021). Baking neural radiance fields for real-time view synthesis. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 5875–5884).
- Hertz, A., Aberman, K., Cohen-Or, D. (2023). Delta denoising score. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 2328–2337).
- Hertz, A., Mokady, R., Tenenbaum, J., Aberman, K., Pritch, Y., Cohen-Or, D. (2023). Prompt-to-prompt image editing with cross attention control. *International conference on learning representations*.
- Hertz, A., Perel, O., Giryas, R., Sorkine-Hornung, O., Cohen-Or, D. (2022). Spaghetti: Editing implicit shapes through part aware generation. *ACM Transactions on Graphics (TOG)*, 41(4), 1–20, <https://doi.org/10.1145/3528223.3530084>
- Hertzmann, A. (1998). Painterly rendering with curved brush strokes of multiple sizes. *Proceedings of the 25th annual conference on computer graphics and interactive techniques* (pp. 453–460).
- Hertzmann, A., Jacobs, C.E., Oliver, N., Curless, B., Salesin, D.H. (2001). Image analogies. *Proceedings of the 28th annual conference on computer graphics and interactive techniques* (pp. 327–340).
- Heusel, M., Ramsauer, H., Unterthiner, T., Nessler, B., Hochreiter, S. (2017). Gans trained by a two time-scale update rule converge to a local nash equilibrium. *Advances in neural information processing systems* (Vol. 30, pp. 6626–6637).
- Hoffman, J., Hu, T., Kanyuk, P., Marshall, S., Nguyen, G., Schroers, H., Witting, P. (2023). Creating elemental characters: From sparks to fire. *Acm siggraph 2023 talks* (pp. 1–2).
- Höllein, L., Johnson, J., Nießner, M. (2022). Stylemesh: Style transfer for indoor 3d scene reconstructions. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 6198–6208).
- Houzz (2024). *Houzz*. Retrieved from <https://www.houzz.com/>
- Hu, E., Shen, Y., Wallis, P., Allen-Zhu, Z., Li, Y., Wang, S., ... Chen, W. (2022). LoRA: Low-rank adaptation of large language models. *International conference on learning representations*. Retrieved from <https://openreview.net/forum?id=nZeVKeeFYf9>
- Hu, J., Hui, K.-H., Liu, Z., Li, R., Fu, C.-W. (2024). Neural wavelet-domain diffusion for 3d shape generation, inversion, and manipulation. *ACM Trans. Graph.*, , <https://doi.org/10.1145/3635304>
- Huang, H., Chen, Y., Zhang, T., Yeung, S.-K. (2022). Real-time omnidirectional roaming in large scale indoor scenes. *SIGGRAPH Asia 2022 Technical Communications*, 1–5, <https://doi.org/10.1145/3550340.3564222>
- Huang, H., Tseng, H.-Y., Saini, S., Singh, M., Yang, M.-H. (2021). Learning to stylize novel views. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 13869–13878).
- Huang, X., & Belongie, S. (2017). Arbitrary style transfer in real-time with adaptive instance normalization. *Proceedings of the ieee international conference on computer vision* (pp. 1501–1510).
- Huang, X., Liu, M.-Y., Belongie, S., Kautz, J. (2018). Multimodal unsupervised image-to-image translation. *Proceedings of the european conference on computer vision (eccv)*

- (pp. 172–189).
- Huang, Y., He, Y., Yuan, Y.-J., Lai, Y.-K., Gao, L. (2022). StylizedNeRF: consistent 3d scene stylization as stylized nerf via 2d-3d mutual learning. *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition* (pp. 18342–18352).
- Hui, K., Li, R., Hu, J., Fu, C.-W. (2022, December). Neural wavelet-domain diffusion for 3d shape generation. *Siggraph asia 2022 conference papers*.
- Hwang, I., Kim, H., Kim, Y.M. (2023). Text2scene: Text-driven indoor scene stylization with part-aware details. *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition* (pp. 1890–1899).
- Ibrahimli, N., Kooij, J.F.P., Nan, L. (2024). Muviecast: Multi-view consistent artistic style transfer. *3dv*.
- Ioannou, E., & Maddock, S. (2023). Neural style transfer for computer games. *Bmvc workshop proceedings*.
- Isola, P., Zhu, J.-Y., Zhou, T., Efros, A.A. (2017). Image-to-image translation with conditional adversarial networks. *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 1125–1134).
- Jamriška, O., Sochorová, Š., Texler, O., Lukáč, M., Fišer, J., Lu, J., ... Šykora, D. (2019). Stylizing video by example. *ACM Transactions on Graphics (TOG)*, 38(4), 1–11, <https://doi.org/10.1145/3306346.3323006>
- Jang, W., Ju, G., Jung, Y., Yang, J., Tong, X., Lee, S. (2021). Stylecarigan: caricature generation via stylegan feature map modulation. *ACM Transactions on Graphics (TOG)*, 40(4), 1–16, <https://doi.org/10.1145/3450626.3459860>
- Jensen, R., Dahl, A., Vogiatzis, G., Tola, E., Aanaes, H. (2014). Large scale multi-view stereopsis evaluation. *2014 IEEE conference on computer vision and pattern recognition* (pp. 406–413).
- Jiang, W., Trulls, E., Hosang, J., Tagliasacchi, A., Yi, K.M. (2021). Cotr: Correspondence transformer for matching across images. *Proceedings of the IEEE/CVF international conference on computer vision* (pp. 6207–6217).
- Jing, Y., Yang, Y., Feng, Z., Ye, J., Yu, Y., Song, M. (2019). Neural style transfer: A review. *IEEE transactions on visualization and computer graphics*, 26(11), 3365–3385, <https://doi.org/10.1109/TVCG.2019.2921336>
- Johnson, J., Alahi, A., Fei-Fei, L. (2016). Perceptual losses for real-time style transfer and super-resolution. *European conference on computer vision* (pp. 694–711).
- Joshi, B., Stewart, K., Shapiro, D. (2017). Bringing impressionism to life with neural style transfer in come swim. *Proceedings of the ACM SIGGRAPH Digital Production Symposium* (pp. 1–5).
- Kanyuk, P., Azevedo, V., Ortiz, R., Tang, J. (2023). Singed silhouettes and feed forward flames: Volumetric neural style transfer for expressive fire simulation. *ACM SIGGRAPH 2023 Talks* (pp. 1–2).
- Kato, H., Ushiku, Y., Harada, T. (2018). Neural 3d mesh renderer. *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 3907–3916).
- Kerbl, B., Kopanas, G., Leimkühler, T., Drettakis, G. (2023). 3d gaussian splatting for real-time radiance field rendering. *ACM Transactions on Graphics (TOG)*, 42(4), 1–14, <https://doi.org/10.1145/3592433>
- Kim, B., Azevedo, V.C., Gross, M., Solenthaler, B. (2019, nov). Transport-based neural style transfer for smoke simulations. *ACM Transactions on Graphics (TOG)*, 38(6), , <https://doi.org/10.1145/3355089.3356560>

- Kim, B., Azevedo, V.C., Gross, M., Solenthaler, B. (2020). Lagrangian neural style transfer for fluids. *ACM Transactions on Graphics (TOG)*, 39(4), 52–1, <https://doi.org/10.1145/3386569.3392473>
- Kim, G., Youwang, K., Oh, T.-H. (2024). Fprf: Feed-forward photorealistic style transfer of large-scale 3d neural radiance fields. *Proceedings of the aai conference on artificial intelligence*.
- Kim, J., Hua, B.-S., Nguyen, T., Yeung, S.-K. (2023). Pointinverter: Point cloud reconstruction and editing via a generative model with shape priors. *Proceedings of the ieee/cvf winter conference on applications of computer vision* (pp. 592–601).
- Kirillov, A., Mintun, E., Ravi, N., Mao, H., Rolland, C., Gustafson, L., ... Girshick, R. (2023, October). Segment anything. *Proceedings of the ieee/cvf international conference on computer vision (iccv)* (p. 4015-4026).
- Knapitsch, A., Park, J., Zhou, Q.-Y., Koltun, V. (2017). Tanks and temples: Benchmarking large-scale scene reconstruction. *ACM Transactions on Graphics*, 36(4), , <https://doi.org/10.1145/3072959.3073599>
- Knodt, J., & Gao, X. (2023). Consistent mesh diffusion. *arXiv preprint*, 1–17, <https://doi.org/10.48550/arXiv.2312.00971>
- Koo, J., Huang, I., Achlioptas, P., Guibas, L.J., Sung, M. (2022). Partglot: Learning shape part segmentation from language reference games. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 16505–16514).
- Koo, J., Park, C., Sung, M. (2024). Posterior distillation sampling. *Cvpr*.
- Koo, J., Yoo, S., Nguyen, M.H., Sung, M. (2023). Salad: Part-level latent diffusion for 3d shape generation and manipulation. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 14441–14451).
- Kwon, G., & Ye, J.C. (2022). Clipstyler: Image style transfer with a single text condition. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 18062–18071).
- Lai, W., Huang, J.-B., Wang, O., Shechtman, E., Yumer, E., Yang, M.-H. (2018). Learning blind video temporal consistency. *Proceedings of the european conference on computer vision (eccv)* (pp. 170–185).
- Laine, S., Hellsten, J., Karras, T., Seol, Y., Lehtinen, J., Aila, T. (2020). Modular primitives for high-performance differentiable rendering. *ACM Transactions on Graphics*, 39(6), , <https://doi.org/10.1145/3414685.3417861>
- Lee, H., Tseng, H.-Y., Huang, J.-B., Singh, M., Yang, M.-H. (2018). Diverse image-to-image translation via disentangled representations. *Proceedings of the european conference on computer vision (eccv)* (pp. 35–51).
- Lei, J., Zhang, Y., Jia, K., et al. (2022). Tango: Text-driven photorealistic and robust 3d stylization via lighting decomposition. *Advances in neural information processing systems* (Vol. 35, pp. 30923–30936).
- Li, C., & Wand, M. (2016). Combining markov random fields and convolutional neural networks for image synthesis. *Proceedings of the ieee conference on computer vision and pattern recognition* (pp. 2479–2486).
- Li, J., Li, D., Savarese, S., Hoi, S. (2023). Blip-2: bootstrapping language-image pre-training with frozen image encoders and large language models. *Proceedings of the 40th international conference on machine learning*.
- Li, R., Li, X., Hui, K.-H., Fu, C.-W. (2021). Sp-gan: Sphere-guided 3d shape generation and manipulation. *ACM Transactions on Graphics (TOG)*, 40(4), 1–12, <https://doi.org/10.1145/3450626.3459766>

- Li, W., Chen, R., Chen, X., Tan, P. (2024). Sweetdreamer: Aligning geometric priors in 2d diffusion for consistent text-to-3d. *The twelfth international conference on learning representations*. Retrieved from <https://openreview.net/forum?id=extpNXo6hB>
- Li, X., Cao, Z., Wu, Y., Wang, K., Xian, K., Wang, Z., Lin, G. (2024). S-dyrf: Reference-based stylized radiance fields for dynamic scenes. *Cvpr*.
- Li, X., Liu, S., Kautz, J., Yang, M.-H. (2019). Learning linear transformations for fast image and video style transfer. *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition* (pp. 3809–3817).
- Li, Y., Jiang, L., Xu, L., Xiangli, Y., Wang, Z., Lin, D., Dai, B. (2023). Matrixcity: A large-scale city dataset for city-scale neural rendering and beyond. *Proceedings of the IEEE/CVF international conference on computer vision* (pp. 3205–3215).
- Li, Y., Lin, Z.-H., Forsyth, D., Huang, J.-B., Wang, S. (2023). Climatenerf: Extreme weather synthesis in neural radiance field. *Proceedings of the IEEE/CVF international conference on computer vision* (pp. 3227–3238).
- Liao, P., Li, X., Liu, X., Keutzer, K. (2022). The artbench dataset: Benchmarking generative models with artworks. *arXiv preprint*, 1–26, <https://doi.org/10.48550/arXiv.2206.11404>
- Lin, C., Gao, J., Tang, L., Takikawa, T., Zeng, X., Huang, X., ... Lin, T.-Y. (2023). Magic3d: High-resolution text-to-3d content creation. *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition* (pp. 300–309).
- Lin, T., Maire, M., Belongie, b., Hays, J., Perona, P., Ramanan, D., ... Zitnick, C.L. (2014). Microsoft coco: Common objects in context. *European conference on computer vision* (pp. 740–755).
- Lindholm, E., Kilgard, M.J., Moreton, H. (2001). A user-programmable vertex engine. *Proceedings of the 28th annual conference on computer graphics and interactive techniques* (pp. 149–158).
- Liu, H., Tao, M., Jacobson, A. (2018). Paparazzi: surface editing by way of multi-view image processing. *ACM Transactions on Graphics (TOG)*, 37(6), 221–1, <https://doi.org/10.1145/3272127.3275047>
- Liu, K., Zhan, F., Chen, Y., Zhang, J., Yu, Y., Saddik, A.E., ... Xing, E. (2023). Stylerf: Zero-shot 3d style transfer of neural radiance fields. *Proc. IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*.
- Liu, K., Zhan, F., Xu, M., Theobalt, C., Shao, L., Lu, S. (2024). Stylegaussian: Instant 3d style transfer with gaussian splatting. *arXiv preprint arXiv:2403.07807*.
- Liu, M., Breuel, T., Kautz, J. (2017). Unsupervised image-to-image translation networks. *Advances in neural information processing systems* (pp. 700–708).
- Liu, R., Wu, R., Van Hoorick, B., Tokmakov, P., Zakharov, S., Vondrick, C. (2023). Zero-1-to-3: Zero-shot one image to 3d object. *Proceedings of the IEEE/CVF international conference on computer vision* (pp. 9298–9309).
- Liu, S., Lin, T., He, D., Li, F., Wang, M., Li, X., ... Ding, E. (2021). Adaattn: Revisit attention mechanism in arbitrary neural style transfer. *Proceedings of the IEEE/CVF international conference on computer vision* (pp. 6649–6658).
- Liu, Y., Fan, B., Meng, G., Lu, J., Xiang, S., Pan, C. (2019). Densepoint: Learning densely contextual representation for efficient point cloud processing. *Proceedings of the IEEE/CVF international conference on computer vision* (pp. 5239–5248).
- Liu, Z., Tang, H., Lin, Y., Han, S. (2019). Point-voxel cnn for efficient 3d deep learning. *Advances in neural information processing*

systems (Vol. 32).

- Logacheva, E., Suvorov, R., Khomenko, O., Mashikhin, A., Lempitsky, V. (2020). Deep-landscape: Adversarial modeling of landscape videos. *Computer vision—eccv 2020: 16th european conference, glasgow, uk, august 23–28, 2020, proceedings, part xxiii 16* (pp. 256–272).
- Long, X., Guo, Y.-C., Lin, C., Liu, Y., Dou, Z., Liu, L., ... others (2024). Wonder3d: Single image to 3d using cross-domain diffusion. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition*.
- Lorensen, W., & Cline, H.E. (1987). Marching cubes: A high resolution 3d surface construction algorithm. *Acm siggraph computer graphics*. Retrieved from <https://doi.org/10.1145/37401.37422>
- Luan, F., Paris, S., Shechtman, E., Bala, K. (2017). Deep photo style transfer. *Proceedings of the ieee conference on computer vision and pattern recognition* (pp. 4990–4998).
- Lüddecke, T., & Ecker, A. (2022). Image segmentation using text and image prompts. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 7086–7096).
- Luma (2023). *Luma ai*. Retrieved from <https://lumalabs.ai/>
- Ma, Y., Zhang, X., Sun, X., Ji, J., Wang, H., Jiang, G., ... Ji, R. (2023). X-mesh: Towards fast and accurate text-driven 3d stylization via dynamic textual guidance. *roceedings of the ieee/cvf international conference on computer vision (iccv)*.
- Manzaneque, F.R. (2023, Apr). *Revolutionizing virtual production: How neural radiance fields will supercharge production pipelines: Neural radiance fields*. Retrieved from <https://neurallradiancefields.io/revolutionizing-virtual-production-how-neural-radiance-fields-will-supercharge-production-pipelines/>
- Martin-Brualla, R., Radwan, N., Sajjadi, M.S., Barron, J.T., Dosovitskiy, A., Duckworth, D. (2021). Nerf in the wild: Neural radiance fields for unconstrained photo collections. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 7210–7219).
- Masci, J., Boscaini, D., Bronstein, M., Vandergheynst, P. (2015). Geodesic convolutional neural networks on riemannian manifolds. *Proceedings of the ieee international conference on computer vision workshops* (pp. 37–45).
- McGuire, M., Ekanayake, C., St-Amour, J.-F., Halén, H., Thibault, A., Martel, B. (2010). Stylized rendering in games. *Acm siggraph courses*. Retrieved from <https://stylized.realtimerendering.com/>
- Menapace, W., Lathuilière, S., Siarohin, A., Theobalt, C., Tulyakov, S., Golyanik, V., Ricci, E. (2022). Playable environments: Video manipulation in space and time. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 3584–3593).
- Mescheder, L., Oechsle, M., Niemeyer, M., Nowozin, S., Geiger, A. (2019). Occupancy networks: Learning 3d reconstruction in function space. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 4460–4470).
- Meshy (2024). *Meshy: Create stunning 3d models with ai*. Retrieved from <https://www.meshy.ai/>
- Michel, O., Bar-On, R., Liu, R., Benaim, S., Hanocka, R. (2022). Text2mesh: Text-driven neural stylization for meshes. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 13492–13502).
- Midjourney (2023). *Midjourney*. Retrieved from <https://www.midjourney.com/>
- Mildenhall, B., Srinivasan, P.P., Ortiz-Cayon, R., Kalantari, N.K., Ramamoorthi, R., Ng, R., Kar, A. (2019). Local light field fusion:

- Practical view synthesis with prescriptive sampling guidelines. *ACM Transactions on Graphics (TOG)*, 38(4), 1–14, <https://doi.org/10.1145/3306346.3322980>
- Mildenhall, B., Srinivasan, P.P., Tancik, M., Barron, J.T., Ramamoorthi, R., Ng, R. (2020). Nerf: Representing scenes as neural radiance fields for view synthesis. *European conference on computer vision* (pp. 405–421).
- Müller, T., Evans, A., Schied, C., Keller, A. (2022). Instant neural graphics primitives with a multiresolution hash encoding. *ACM Transactions on Graphics (ToG)*, 41(4), 1–15, <https://doi.org/10.1145/3528223.3530127>
- Navarro, M., & Rice, J. (2021). Stylizing volumes with neural networks. *Acm siggraph 2021 talks* (pp. 1–2).
- Nguyen-Phuoc, T., Liu, F., Xiao, L. (2022). Snerf: stylized neural implicit representations for 3d scenes. *ACM Transactions on Graphics (TOG) - Proceedings of ACM SIGGRAPH 2022*, , <https://doi.org/10.1145/3528223.3530107>
- Nguyen-Phuoc, T., Richardt, C., Mai, L., Yang, Y., Mitra, N. (2020). Blockgan: Learning 3d object-aware scene representations from unlabelled images. *Advances in neural information processing systems*, 33, 6767–6778,
- Nichol, A., Jun, H., Dhariwal, P., Mishkin, P., Chen, M. (2022). Point-e: A system for generating 3d point clouds from complex prompts. *arXiv preprint*, 1–14, <https://doi.org/10.48550/arXiv.2212.08751>
- Niemeyer, M., & Geiger, A. (2021). Giraffe: Representing scenes as compositional generative neural feature fields. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 11453–11464).
- Oechsle, M., Mescheder, L., Niemeyer, M., Strauss, T., Geiger, A. (2019). Texture fields: Learning texture representations in function space. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 4531–4540).
- OpenAI (2023). *Dall-e 3*. Retrieved from <https://openai.com/dall-e-3>
- OpenAI (2024). *Sora: Creating video from text*. Retrieved from <https://openai.com/sora>
- Orghidan, R., Bedenk, T., Wegner, K. (2022). *An r&D project on ai for in 3d asset creation for games*. Endava. Retrieved from <https://www.endava.com/en/blog/Engineering/2022/An-R-D-Project-on-AI-in-3D-Asset-Creation-for-Games>
- Painter by numbers. (2016). *Kaggle*, , Retrieved from <https://www.kaggle.com/c/painter-by-numbers>
- Pang, H., Hua, B.-S., Yeung, S.-K. (2023). Locally stylized neural radiance fields. *roceedings of the ieee/cvf international conference on computer vision (iccv)*.
- Park, J., Florence, P., Straub, J., Newcombe, R., Lovegrove, S. (2019). Deepsdf: Learning continuous signed distance functions for shape representation. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 165–174).
- Park, J., Kwon, G., Ye, J.C. (2024). Ed-nerf: Efficient text-guided editing of 3d scene using latent space nerf. *International conference on learning representations*.
- Park, K., Sinha, U., Barron, J.T., Bouaziz, S., Goldman, D.B., Seitz, S.M., Martin-Brualla, R. (2021). Nerfies: Deformable neural radiance fields. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 5865–5874).
- Patashnik, O., Wu, Z., Shechtman, E., Cohen-Or, D., Lischinski, D. (2021). Styleclip: Text-driven manipulation of stylegan imagery.

- Proceedings of the ieee/cvf international conference on computer vision* (pp. 2085–2094).
- Peng, S., Niemeyer, M., Mescheder, L., Pollefeys, M., Geiger, A. (2020). Convolutional occupancy networks. *Computer vision–eccv 2020: 16th european conference, glasgow, uk, august 23–28, 2020, proceedings, part iii 16* (pp. 523–540).
- Pérez, J., Nguyen-Phuoc, T., Cao, C., Sanakoyeu, A., Simon, T., Arbeláez, P., ... Pumarola, A. (2024). Styleavatar: Stylizing animatable head avatars. *Proceedings of the ieee/cvf winter conference on applications of computer vision* (pp. 8678–8687).
- Pfister, H., Zwicker, M., Van Baar, J., Gross, M. (2000). Surfels: Surface elements as rendering primitives. *Proceedings of the 27th annual conference on computer graphics and interactive techniques* (pp. 335–342).
- Planner5D (2024). *Planner5d*. Retrieved from <https://planner5d.com/>
- Po, R., Yifan, W., Golyanik, V., Aberman, K., Barron, J.T., Bermano, A.H., ... Wetzstein, G. (2023). State of the art on diffusion models for visual computing. *arXiv e-prints*, 1–32, <https://doi.org/10.48550/arXiv.2310.07204>
- Poole, B., Jain, A., Barron, J.T., Mildenhall, B. (2023). Dreamfusion: Text-to-3d using 2d diffusion. *The eleventh international conference on learning representations*.
- Qi, C., Su, H., Mo, K., Guibas, L.J. (2017). Pointnet: Deep learning on point sets for 3d classification and segmentation. *Proceedings of the ieee conference on computer vision and pattern recognition* (pp. 652–660).
- Qian, G., Mai, J., Hamdi, A., Ren, J., Siarohin, A., Li, B., ... Ghanem, B. (2024). Magic123: One image to high-quality 3d object generation using both 2d and 3d diffusion priors. *The twelfth international conference on learning representations*. Retrieved from <https://openreview.net/forum?id=0jHkUDyEO9>
- Radford, A., Kim, J.W., Hallacy, C., Ramesh, A., Goh, G., Agarwal, S., ... others (2021). Learning transferable visual models from natural language supervision. *International conference on machine learning* (pp. 8748–8763).
- Ravi, N., Reizenstein, J., Novotny, D., Gordon, T., Lo, W.-Y., Johnson, J., Gkioxari, G. (2020). Accelerating 3d deep learning with pytorch3d. *arXiv e-prints*, 1–18, <https://doi.org/10.48550/arXiv.2007.08501>
- Renderpeople (2023). *Renderpeople*. Retrieved from <https://renderpeople.com/>
- Richardson, E., Metzger, G., Alaluf, Y., Giryas, R., Cohen-Or, D. (2023). Texture: Text-guided texturing of 3d shapes. *Acm siggraph 2023 conference proceedings*. New York, NY, USA: Association for Computing Machinery.
- Riegler, G., & Koltun, V. (2020). Free view synthesis. *European conference on computer vision* (pp. 623–640).
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., Ommer, B. (2022). High-resolution image synthesis with latent diffusion models. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 10684–10695).
- Ruder, M., Dosovitskiy, A., Brox, T. (2016). Artistic style transfer for videos. *Pattern recognition: 38th german conference, gcpr 2016, hannover, germany, september 12-15, 2016, proceedings 38* (pp. 26–36).
- Ruiz, N., Li, Y., Jampani, V., Pritch, Y., Rubinstein, M., Aberman, K. (2023). Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 22500–22510).
- Runway (2023). *Runway*. Retrieved from <https://runwayml.com/>

- Saharia, C., Chan, W., Chang, H., Lee, C., Ho, J., Salimans, T., ... Norouzi, M. (2022). Palette: Image-to-image diffusion models. *Acm siggraph 2022 conference proceedings* (pp. 1–10).
- Saharia, C., Chan, W., Saxena, S., Li, L., Whang, J., Denton, E.L., ... others (2022). Photo-realistic text-to-image diffusion models with deep language understanding. *Advances in neural information processing systems* (Vol. 35, pp. 36479–36494).
- Salimans, T., Goodfellow, I., Zaremba, W., Cheung, V., Radford, A., Chen, X. (2016). Improved techniques for training gans. *Advances in neural information processing systems* (Vol. 29, pp. 2234–2242).
- Sasaki, H., Willcocks, C.G., Breckon, T.P. (2021). Unit-ddpm: Unpaired image translation with denoising diffusion probabilistic models. *arXiv preprint*, 1–10, <https://doi.org/10.48550/arXiv.2104.05358>
- Schwarz, K., Liao, Y., Niemeyer, M., Geiger, A. (2020). Graf: Generative radiance fields for 3d-aware image synthesis. *Advances in neural information processing systems* (Vol. 33, pp. 20154–20166).
- Sella, E., Fiebelman, G., Hedman, P., Averbuch-Elor, H. (2023). Vox-e: Text-guided voxel editing of 3d objects. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 430–440).
- Shih, Y., Paris, S., Durand, F., Freeman, W.T. (2013). Data-driven hallucination of different times of day from a single outdoor photo. *ACM Transactions on Graphics (TOG)*, 32(6), 1–11,
- Shum, K.C., Kim, J., Hua, B.-S., Nguyen, D.T., Yeung, S.-K. (2024). Language-driven object fusion into neural radiance fields with pose-conditioned dataset updates. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition*.
- Sidi, O., Van Kaick, O., Kleiman, Y., Zhang, H., Cohen-Or, D. (2011). Unsupervised co-segmentation of a set of shapes via descriptor-space spectral clustering. *Proceedings of the 2011 siggraph asia conference* (pp. 1–10).
- Simonyan, K., & Zisserman, A. (2015). Very deep convolutional networks for large-scale image recognition. *International conference on learning representations*.
- Singh, A., Jaiswal, V., Joshi, G., Sanjeeve, A., Gite, S., Kotecha, K. (2021). Neural style transfer: A critical review. *IEEE Access*, ,
- Song, G., Luo, L., Liu, J., Ma, W.-C., Lai, C., Zheng, C., Cham, T.-J. (2021). Agilegan: stylizing portraits by inversion-consistent transfer learning. *ACM Transactions on Graphics (TOG)*, 40(4), 1–13, <https://doi.org/10.1145/3450626.3459771>
- Song, H., Choi, S., Do, H., Lee, C., Kim, T. (2023). Blending-nerf: Text-driven localized editing in neural radiance fields. *Proceedings of the ieee/cvf international conference on computer vision*.
- Song, L., Chen, A., Li, Z., Chen, Z., Chen, L., Yuan, J., ... Geiger, A. (2023). Nerf-player: A streamable dynamic scene representation with decomposed neural radiance fields. *IEEE Transactions on Visualization and Computer Graphics*, 29(5), 2732–2742,
- Sorkine, O., & Alexa, M. (2007). As-rigid-as-possible surface modeling. *Symposium on geometry processing* (Vol. 4, pp. 109–116).
- Spline (2023). *Splineai*. Retrieved from <https://spline.design/ai-style-transfer>
- Srinivasan, P., Deng, B., Zhang, X., Tancik, M., Mildenhall, B., Barron, J.T. (2021). Nerv: Neural reflectance and visibility fields for relighting and view synthesis. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 7495–7504).

- Straub, J., Whelan, T., Ma, L., Chen, Y., Wijmans, E., Green, S., ... others (2019). The replica dataset: A digital replica of indoor spaces. *arXiv preprint arXiv:1906.05797*, 1–10, <https://doi.org/10.48550/arXiv.1906.05797>
- Su, X., Song, J., Meng, C., Ermon, S. (2023). Dual diffusion implicit bridges for image-to-image translation. *The eleventh international conference on learning representations*.
- Sumner, R., Schmid, J., Pauly, M. (2007). Embedded deformation for shape manipulation. *Acm siggraph 2007 papers* (pp. 80–es).
- Sun, C., Sun, M., Chen, H.-T. (2022). Direct voxel grid optimization: Super-fast convergence for radiance fields reconstruction. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 5459–5469).
- Sun, J., Zhang, B., Shao, R., Wang, L., Liu, W., Xie, Z., Liu, Y. (2024). Dreamcraft3d: Hierarchical 3d generation with bootstrapped diffusion prior. *International conference on learning representations*.
- Szegedy, C., Vanhoucke, V., Ioffe, S., Shlens, J., Wojna, Z. (2016). Rethinking the inception architecture for computer vision. *Proceedings of the ieee conference on computer vision and pattern recognition* (pp. 2818–2826).
- Tancik, M., Casser, V., Yan, X., Pradhan, S., Mildenhall, B., Srinivasan, P.P., ... Kretschmar, H. (2022). Block-nerf: Scalable large scene neural view synthesis. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 8248–8258).
- Tancik, M., Weber, E., Ng, E., Li, R., Yi, B., Wang, T., ... others (2023). Nerfstudio: A modular framework for neural radiance field development. *Acm siggraph 2023 conference proceedings* (pp. 1–12).
- Taniguchi, D. (2019). Neural ar: immersive augmented reality with real-time neural style transfer. *Acm siggraph 2019 virtual, augmented, and mixed reality* (pp. 1–1).
- Teed, Z., & Deng, J. (2020). Raft: Recurrent all-pairs field transforms for optical flow. *Computer vision–eccv 2020: 16th european conference, glasgow, uk, august 23–28, 2020, proceedings, part ii 16* (pp. 402–419).
- Tewari, A., Fried, O., Thies, J., Sitzmann, V., Lombardi, S., Sunkavalli, K., ... others (2020). State of the art on neural rendering. *Computer graphics forum* (Vol. 39, pp. 701–727).
- Tewari, A., Thies, J., Mildenhall, B., Srinivasan, P., Tretschk, E., Yifan, W., ... others (2022). Advances in neural rendering. *Computer graphics forum* (pp. 703–735).
- Thies, J., Zollhöfer, M., Nießner, M. (2019). Deferred neural rendering: Image synthesis using neural textures. *Acm Transactions on Graphics (TOG)*, 38(4), 1–12, <https://doi.org/10.1145/3306346.3323035>
- Tseng, K., Huang, J.-Y., Chen, Y.-S., Chen, C.-S., Hung, Y.-P. (2022, July). Pseudo-3d scene modeling for virtual reality using stylized novel view synthesis. *Acm siggraph 2022 posters*.
- Tumanyan, N., Bar-Tal, O., Bagon, S., Dekel, T. (2022). Splicing vit features for semantic appearance transfer. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 10748–10757).
- TurboSquid (2023). *Turbosquid*. Retrieved from <https://www.turbosquid.com/>
- Turki, H., Zhang, J.Y., Ferroni, F., Ramanan, D. (2023). Suds: Scalable urban dynamic scenes. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 12375–12385).
- Volinga (2023). *Volinga*. Retrieved from <https://volinga.ai/>
- Wang, C., Chai, M., He, M., Chen, D., Liao, J. (2022). Clip-nerf: Text-and-image driven

- manipulation of neural radiance fields. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 3835–3844).
- Wang, C., Jiang, R., Chai, M., He, M., Chen, D., Liao, J. (2023). Nerf-art: Text-driven neural radiance fields stylization. *IEEE Transactions on Visualization and Computer Graphics*, ,
- Wang, Q., Wang, Z., Genova, K., Srinivasan, P.P., Zhou, H., Barron, J.T., ... Funkhouser, T. (2021). Ibrnet: Learning multi-view image-based rendering. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 4690–4699).
- Wang, Y., Cheng, J.-S., Feng, Q., Tao, W.-Y., Lai, Y.-K., Li, K. (2023). Tsnerf: Text-driven stylized neural radiance fields via semantic contrastive learning. *Computers & Graphics*, 116, 102–114, <https://doi.org/10.1016/j.cag.2023.08.009>
- Wang, Z., Lu, C., Wang, Y., Bao, F., Li, C., Su, H., Zhu, J. (2023). Prolificdreamer: High-fidelity and diverse text-to-3d generation with variational score distillation. *Advances in neural information processing systems*.
- Wen, L., Gao, C., Zou, C. (2023). Cap-vstnet: Content affinity preserved versatile style transfer. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 18300–18309).
- Wu, T., Li, Z., Yang, S., Zhang, P., Pan, X., Wang, J., ... Liu, Z. (2023). Hyperdreamer: Hyper-realistic 3d content generation and editing from a single image. *Siggraph asia 2023 conference papers* (pp. 1–10).
- Wu, Z., Song, S., Khosla, A., Yu, F., Zhang, L., Tang, X., Xiao, J. (2015). 3d shapenets: A deep representation for volumetric shapes. *Proceedings of the ieee conference on computer vision and pattern recognition* (pp. 1912–1920).
- Wu, Z., Zhu, Z., Du, J., Bai, X. (2022). Ccpl: contrastive coherence preserving loss for versatile style transfer. *European conference on computer vision* (pp. 189–206).
- Xiangli, Y., Xu, L., Pan, X., Zhao, N., Rao, A., Theobalt, C., ... Lin, D. (2022). Bungeenerf: Progressive neural radiance field for extreme multi-scale scene rendering. *European conference on computer vision* (pp. 106–122).
- Xie, T., Zong, Z., Qiu, Y., Li, X., Feng, Y., Yang, Y., Jiang, C. (2024). Physgaussian: Physics-integrated 3d gaussians for generative dynamics. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition*.
- Xie, Y., Takikawa, T., Saito, S., Litany, O., Yan, S., Khan, N., ... Sridhar, S. (2022). Neural fields in visual computing and beyond. *Computer graphics forum* (pp. 641–676).
- Xu, L., Xiangli, Y., Peng, S., Pan, X., Zhao, N., Theobalt, C., ... Lin, D. (2023). Grid-guided neural radiance fields for large urban scenes. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 8296–8306).
- Yang, B., Dong, W., Ma, L., Hu, W., Liu, X., Cui, Z., Ma, Y. (2024). Dreamspace: Dreaming your room space with text-driven panoramic texture propagation. *Ieee vr*.
- Yang, H., Chen, Y., Pan, Y., Yao, T., Chen, Z., Mei, T. (2023). 3dstyle-diffusion: Pursuing fine-grained text-driven 3d stylization with 2d diffusion models. *Proceedings of the 31st acm international conference on multimedia* (pp. 6860–6868).
- Yang, L., Zhang, Z., Song, Y., Hong, S., Xu, R., Zhao, Y., ... Yang, M.-H. (2023). Diffusion models: A comprehensive survey of methods and applications. *ACM Computing Surveys*, , <https://doi.org/10.1145/3626235>
- Yang, S., Jiang, L., Liu, Z., Loy, C.C. (2022). Pastiche master: Exemplar-based high-resolution

- portrait style transfer. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition* (pp. 7693–7702).
- Yang, Z., Yang, H., Pan, Z., Zhu, X., Zhang, L. (2024). Real-time photorealistic dynamic scene representation and rendering with 4d gaussian splatting. *International conference on learning representations (iclr)*.
- Yariv, L., Gu, J., Kasten, Y., Lipman, Y. (2021). Volume rendering of neural implicit surfaces. *Advances in neural information processing systems* (Vol. 34, pp. 4805–4815).
- Yeh, Y., Huang, J.-B., Kim, C., Xiao, L., Nguyen-Phuoc, T., Khan, N., ... others (2024). Texturedreamer: Image-guided texture synthesis through geometry-aware diffusion. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition*.
- Yi, L., Kim, V.G., Ceylan, D., Shen, I.-C., Yan, M., Su, H., ... Guibas, L. (2016). A scalable active framework for region annotation in 3d shape collections. *ACM Transactions on Graphics (ToG)*, 35(6), 1–12, <https://doi.org/10.1145/2980179.2980238>
- Yin, K., Gao, J., Shugrina, M., Khamis, S., Fidler, S. (2021). 3dstylenet: Creating 3d shapes with geometric and texture style variations. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 12456–12465).
- Yoo, J., Uh, Y., Chun, S., Kang, B., Ha, J.-W. (2019). Photorealistic style transfer via wavelet transforms. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 9036–9045).
- Youwang, K., Oh, T.-H., Pons-Moll, G. (2024). Paint-it: Text-to-texture synthesis via deep convolutional texture map optimization and physically-based rendering. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition*.
- Yu, L., Yeung, S.K., Tang, C.K., Terzopoulos, D., Chan, T.F., Osher, S.J. (2011). Make it home: automatic optimization of furniture arrangement. *ACM Transactions on Graphics (TOG)-Proceedings of ACM SIGGRAPH 2011, v. 30,(4), July 2011, article no. 86, 30(4), ,*
- Yu, X., Dai, P., Li, W., Ma, L., Liu, Z., Qi, X. (2023). Texture generation on 3d meshes with point-uv diffusion. *Proceedings of the ieee/cvf international conference on computer vision* (pp. 4206–4216).
- Zeng, X., Chen, X., Qi, Z., Liu, W., Zhao, Z., Wang, Z., ... Yu, G. (2024). Paint3d: Paint anything 3d with lighting-less texture diffusion models. *Proceedings of the ieee/cvf conference on computer vision and pattern recognition*.
- Zhan, F., Yu, Y., Wu, R., Zhang, J., Lu, S., Liu, L., ... Xing, E. (2023). Multimodal image synthesis and editing: The generative ai era. *Ieee transactions on pattern analysis and machine intelligence*. IEEE.
- Zhang, D., Chen, Z., Yuan, Y.-J., Zhang, F.-L., He, Z., Shan, S., Gao, L. (2024). Stylizedgs: Controllable stylization for 3d gaussian splatting. *arXiv preprint arXiv:2404.05220*, 1–11,
- Zhang, H., Feng, Y., Kulits, P., Wen, Y., Thies, J., Black, M.J. (2024). Text-guided generation and editing of compositional 3d avatars. *3dv*.
- Zhang, J., Lan, Y., Yang, S., Hong, F., Wang, Q., Yeo, C.K., ... Loy, C.C. (2023). Deformtoon3d: Deformable 3d toonification from neural radiance fields. *Iccv*.
- Zhang, K., Kolkin, N., Bi, S., Luan, F., Xu, Z., Shechtman, E., Snavely, N. (2022). Arf: Artistic radiance fields. *European conference on computer vision* (pp. 717–733).
- Zhang, K., Riegler, G., Snavely, N., Koltun, V. (2020). Nerf++: Analyzing and improving neural radiance fields. *arXiv preprint*, 1–9, <https://doi.org/10.48550/arXiv.2010.07492>

- Zhang, L., Rao, A., Agrawala, M. (2023). Adding conditional control to text-to-image diffusion models. *Proceedings of the IEEE/CVF International Conference on Computer Vision* (pp. 3836–3847).
- Zhang, R., Isola, P., Efros, A.A., Shechtman, E., Wang, O. (2018). The unreasonable effectiveness of deep features as a perceptual metric. *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition* (pp. 586–595).
- Zhang, Y., He, Z., Xing, J., Yao, X., Jia, J. (2023). Ref-npr: Reference-based non-photorealistic radiance fields for controllable scene stylization. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 4242–4251).
- Zhang, Y., Huang, N., Tang, F., Huang, H., Ma, C., Dong, W., Xu, C. (2023). Inversion-based style transfer with diffusion models. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 10146–10156).
- Zhang, Z., Liu, Y., Han, C., Pan, Y., Guo, T., Yao, T. (2023). Transforming radiance field with Lipschitz network for photorealistic 3D scene stylization. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 20712–20721).
- Zhao, H., Jiang, L., Jia, J., Torr, P.H., Koltun, V. (2021). Point transformer. *Proceedings of the IEEE/CVF International Conference on Computer Vision* (pp. 16259–16268).
- Zhou, L., Du, Y., Wu, J. (2021). 3D shape generation and completion through point-voxel diffusion. *Proceedings of the IEEE/CVF International Conference on Computer Vision* (pp. 5826–5835).
- Zhou, Q., & Jacobson, A. (2016). Thing10k: A dataset of 10,000 3D-printing models. *arXiv preprint*, 1–8, <https://doi.org/10.48550/arXiv.1605.04797>
- Zhu, J., Park, T., Isola, P., Efros, A.A. (2017). Unpaired image-to-image translation using cycle-consistent adversarial networks. *Proceedings of the IEEE International Conference on Computer Vision* (pp. 2223–2232).
- Zhuang, J., Kang, D., Cao, Y.-P., Li, G., Lin, L., Shan, Y. (2024). Tip-editor: An accurate 3D editor following both text-prompts and image-prompts. *ACM Transactions on Graphics*, 1–11,
- Zhuang, J., Wang, C., Liu, L., Lin, L., Li, G. (2023). Dreameditor: Text-driven 3D scene editing with neural fields. *Acm siggraph asia 2023 conference proceedings*.