# Can We Trust the Unlabeled Target Data? Towards Backdoor Attack and Defense on Model Adaptation

Lijun Sheng<sup>12</sup> Jian Liang<sup>23</sup> Ran He<sup>23</sup> Zilei Wang<sup>1</sup> Tieniu Tan<sup>24</sup>

#### **Abstract**

Model adaptation tackles the distribution shift problem with a pre-trained model instead of raw data, becoming a popular paradigm due to its great privacy protection. Existing methods always assume adapting to a clean target domain, overlooking the security risks of unlabeled samples. In this paper, we explore the potential backdoor attacks on model adaptation launched by well-designed poisoning target data. Concretely, we provide two backdoor triggers with two poisoning strategies for different prior knowledge owned by attackers. These attacks achieve a high success rate and keep the normal performance on clean samples in the test stage. To defend against backdoor embedding, we propose a plug-and-play method named MIXADAPT, combining it with existing adaptation algorithms. Experiments across commonly used benchmarks and adaptation methods demonstrate the effectiveness of MIXADAPT. We hope this work will shed light on the safety of learning with unlabeled data.

#### 1. Introduction

Over recent years, deep neural networks (Krizhevsky et al., 2012; He et al., 2016; Dosovitskiy et al., 2021) have gained substantial research interest and demonstrated remarkable capabilities across various tasks. However, distribution shift (Saenko et al., 2010) between the training set and deployment environment inevitably arises, leading to a significant drop in performance. To solve this issue, researchers propose domain adaptation (Ben-David et al., 2010; Ganin et al., 2016; Long et al., 2018) to improve the performance on unlabeled target domains by utilizing labeled source data. As privacy awareness grows, source providers restrict user's access to raw data. Instead, model adaptation (Liang et al.,

Preprint. Copyright 2024 by the author(s).




Figure 1. An overview of the backdoor attack on model adaptation. With well-poisoned unlabeled data from malicious providers, target users suffer from the risk of backdoor injection.

2020), a novel paradigm only accessing pre-trained source models, has gained popularity (Liang et al., 2020; Yang et al., 2021; Li et al., 2020; Ding et al., 2022; Liang et al., 2021b). Since its proposal, model adaptation has been extensively investigated across various visual tasks, including semantic segmentation (Fleuret et al., 2021; Liu et al., 2021), object detection (Li et al., 2021a; Huang et al., 2021).

Security problems in model adaptation are always ignored, only two recent works (Sheng et al., 2023; Ahmed et al., 2023) reveal its vulnerability to the backdoor (Gu et al., 2017; Chen et al., 2017) embedded in the source model. A distillation framework (Sheng et al., 2023) and a model compression scheme (Ahmed et al., 2023) are proposed to eliminate threats from suspicious source providers, respectively. In this paper, we raise a similar question: Can we trust the unlabeled target data? Different from the source model, injecting backdoors through unlabeled data faces several significant challenges. On the one hand, the adaptation paradigm trains from a pre-trained clean model initialization instead of from scratch like classic backdoor attacks. Also, unsupervised tuning hinders learning the mapping of the trigger to the target class. Nevertheless, we find that well-poisoned unlabeled datasets still achieve successful

<sup>&</sup>lt;sup>1</sup>University of Science and Technology of China <sup>2</sup>CRIPAC & MAIS, Institute of Automation, Chinese Academy of Sciences <sup>3</sup>University of Chinese Academy of Sciences <sup>4</sup>Nanjing University. Correspondence to: Jian Liang liangjian92@gmail.com>.

backdoor attacks on adaptation algorithms, as illustrated in Fig. 1.

We decompose backdoor unsupervised embedding into two parts: trigger design and poisoning strategy. First, we introduce a non-optimization-based trigger and an optimizationbased trigger. The Hello Kitty trigger utilized in Blended (Chen et al., 2017) is adopted as the non-optimization-based trigger. The optimization-based one is an adversarial perturbation (Poursaeed et al., 2018) calculated with a surrogate model. As for the poisoning sample selection strategy, we provide two solutions for different prior knowledge owned by attackers. In cases where the attackers have ground truth labels, samples belonging to the target class are directly selected. When the attackers merely rely on predictions from the source model (e.g., through API), they select samples with a high probability assigned to the target class. Experimental results have shown that the collaboration of designed triggers and poisoning strategies achieves successful backdoor attacks.

To defend model adaptation against the backdoor threat, we propose a plug-and-play method called MIXADAPT. MIXADAPT eliminates the mapping between the backdoor trigger and the target class by mixing semantically irrelevant areas among target samples. First, we assign the mixup weight for each pixel by calculating class activation mapping (CAM) (Selvaraju et al., 2017) with the source model. Then, processed samples are directly sent to the adaptation algorithm for unsupervised tuning. Since no requirements for optimization process and loss functions, MIXADAPT can seamlessly integrate with existing adaptation algorithms. In the experiment section, we demonstrate the effectiveness of MIXADAPT on two popular model adaptation methods (i.e., SHOT (Liang et al., 2020), and NRC (Yang et al., 2021)) across three frequently used datasets (i.e., Office (Saenko et al., 2010), OfficeHome (Venkateswara et al., 2017), and DomainNet (Peng et al., 2019)). Our contributions are summarized as follows:

- We investigate backdoor attacks on model adaptation through poisoning unlabeled data. To the best of our knowledge, this is the first attempt at unsupervised backdoor attacks during adaptation tasks.
- We provide two poisoning strategies coupled with two backdoor triggers capable of successfully embedding backdoors into existing adaptation algorithms.
- We propose MIXADAPT, a flexible plug-and-play defense method against backdoor attacks while maintaining task performance on clean data.
- Extensive experiments involving two model adaptation methods across three benchmarks demonstrate the effectiveness of MIXADAPT.

#### 2. Related Work

#### 2.1. Model Adaptation

Model adaptation (Liang et al., 2020; Yang et al., 2021; Ding et al., 2022; Liang et al., 2021b; Li et al., 2020), aims to transfer knowledge from a pre-trained source model to an unlabeled target domain, which is also called source-free domain adaptation or test-time domain adaptation (Liang et al., 2023). SHOT (Liang et al., 2020) first exploits this paradigm and employs information maximization loss and self-supervised pseudo-labeling (Lee et al., 2013) to achieve source hypothesis transfer. NRC (Yang et al., 2021) captures target feature structure and promotes label consistency among high-affinity neighbor samples. Some methods (Li et al., 2020; Liang et al., 2021b; Zhang et al., 2022; Tian et al., 2021; Qiu et al., 2021) attempt to estimate the source domain or select source-similar samples to benefit knowledge transfer. Existing works also discuss many variants of model adaptation, such as black-box adaptation (Liang et al., 2022; Zhang et al., 2023), open-partial (Liang et al., 2021a) and multi-source (Dong et al., 2021; Liang et al., 2021b) scenarios.

With widespread attention on the security topic, a series of works (Agarwal et al., 2022; Li et al., 2021b; Sheng et al., 2023; Ahmed et al., 2023) have studied the security of model adaptation. A robust adaptation method (Agarwal et al., 2022) is proposed to improve the adversarial robustness of model adaptation. AdaptGuard (Sheng et al., 2023) investigates the vulnerability to image-agnostic attacks launched by the source side and introduces a model processing defense framework. SSDA (Ahmed et al., 2023) proposes a model compression scheme to defend against source backdoor attacks. However, this paper focuses on the backdoor attack on model adaptation through unlabeled poisoning target data, which has not been studied so far.

#### 2.2. Backdoor Attack and Defense

Backdoor attack (Gu et al., 2017; Chen et al., 2017; Li et al., 2021c; Nguyen & Tran, 2021; Wu et al., 2022; Li et al., 2022) is an emerging security topic to plant a backdoor in deep neural networks while maintaining clean performance. Many well-designed backdoor triggers are proposed to achieve backdoor injection. BadNets (Gu et al., 2017) utilize a pattern of bright pixels to attack digit classifiers and street sign detectors. Blended (Chen et al., 2017) achieves a strong invisible backdoor attack by mixing samples with a cartoon image. ISSBA (Li et al., 2021c) proposes a sample-specific trigger generated through an encoder-decoder network. In addition to solutions based solely on data preparation, other attack methods (Nguyen & Tran, 2021; 2020; Doan et al., 2021) control the training process to stably implant backdoors.

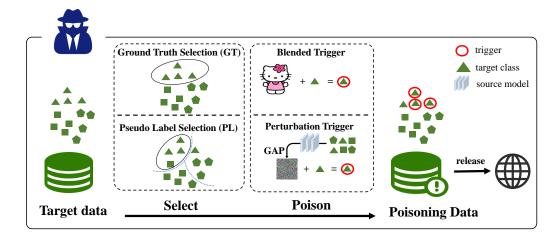


Figure 2. The attack framework of backdoor embedding on model adaptation. The attacker builds the poisoning set according to candidate selection strategies. Two types of triggers (i.e., Blended and Perturbation) are utilized to poison the samples. The attacker releases the unlabeled dataset to downstream adaptation users and will achieve a backdoor attack.

Recently, backdoor attacks have been studied in diverse scenarios besides supervised learning. Some works (Saha et al., 2022; Li et al., 2023) explore the backdoor attacks for victims who deploy self-supervised methods on unlabeled datasets. A repeat dot matrix trigger (Shejwalkar et al., 2023) is designed to attack semi-supervised learning methods by poisoning unlabeled data. Backdoor injection (Chou et al., 2023a;b) also works on diffusion models (Dhariwal & Nichol, 2021), which have shown amazing generation capabilities. However, the above victim learners training models with poisoned datasets from random initialization which is easier than a pre-trained model. This paper tries to embed the backdoor on model adaptation via poisoning unlabeled data, evaluating the danger of backdoor attacks from a new perspective.

As attack methods continue to improve, various backdoor defense methods (Liu et al., 2018; Wang et al., 2019; Wu & Wang, 2021; Li et al., 2021d; Guan et al., 2022) are proposed alternately. Fine-Pruning (Liu et al., 2018) finds that a combination of pruning and fine-tuning can effectively weaken backdoors. NAD (Li et al., 2021d) optimizes the backdoored model using a distillation loss with a fine-tuned teacher model. ANP (Wu & Wang, 2021) identifies and prunes backdoor neurons that are more sensitive to adversarial neuron perturbation. However, those defense methods are only deployed on in-distribution data and always require a set of labeled clean samples, which are impractical in model adaptation framework.

#### 3. Backdoor Attack on Model Adaptation

In this section, we focus on the backdoor attack on model adaptation through unsupervised poisoning. First, in Section 3.1, we review model adaptation and introduce the challenge and knowledge of launching backdoor attack on

it. Subsequently, We decompose backdoor embedding into backdoor trigger design (Section 3.2) and data poisoning strategy (Section 3.3), providing a detailed discussion.

#### 3.1. Preliminary Knowledge

**Model adaptation** (Liang et al., 2020), also known as source-free domain adaptation, aims to adapt a pre-trained source model  $f_s$  to a related target domain. Two domains share the same label space but follow different distributions with a domain gap. Model adaptation methods employ unsupervised learning techniques with the source model  $f_s$  and unlabeled data  $\mathcal{D}_t = \{x_t^t\}_{t=1}^{N_t}$  to obtain a model  $f_t$  with better performance on the target domain.

Challenges of backdoor attacks on model adaptation. Different from conventional backdoor embedding methods, backdoor attacks on model adaptation encounter several additional challenges. (i) Pre-trained model initialization: Model adaptation fine-tunes pre-trained source models instead of training from random initialization in previous backdoor victims (i.e., cross-entropy loss). Source models with basic classification capabilities tend to ignore task-irrelevant perturbations. Also, it is hard to add new features to categories that have been trained to converge. The small parameter space explored by unsupervised fine-tuning algorithms also makes backdoor injection more difficult. (ii) Unsupervised poisoning: Previous attackers always achieve backdoor embedding on supervised learning by poisoning the labeled dataset. Specifically, they add the trigger on some samples and modify their labels with the target class. Victim learners using a poisoned dataset will capture the mapping from the trigger to the target class. However, model adaptation algorithms use no labels during training. Attackers are restricted to poison unlabeled data which is unable to establish a connection between the trigger and the

target class explicitly.

The attacker's knowledge. In the scenario of backdoor attacks on model adaptation, attackers are allowed to control all target data, and in extremely challenging cases, can control the data supply of the target class. Additionally, attackers can access the ground truth or the source model prediction of their data during the poisoning stage. Taking practical scenarios into account, they are not allowed to access the source model parameters. Last but not least, attackers have no knowledge about and lack control over the downstream adaptation learners.

#### 3.2. Backdoor Triggers

To make adaptation algorithms capture the mapping from the trigger to the target class, we utilize the triggers with both semantic information and the same size as the input images. Triggers with semantic information will be extracted by the pre-trained source model with a higher probability. As for the modification area, local triggers may be weakened or even eliminated by data augmentation strategies while global modification will be retained more. Given the aforementioned requirements, we introduce two types of triggers in the following and illustrate them in the "Poison" Stage part in Fig. 2.

- ⊳ A non-optimization-based (Blended) trigger. Blended (Chen et al., 2017) is a strong backdoor attack technique that blends the samples with a Hello Kitty image. Blended trigger satisfies the requirements and no additional knowledge is required, making it a suitable choice as our non-optimization-based trigger.
- ightharpoonup An optimization-based (perturbation) trigger. In addition to the hand-crafted trigger, we introduce an optimization-based method for trigger generation. Initially, we query the black-box source model  $f_s$  to acquire pseudolabels for the target data and construct a pseudo dataset  $\hat{\mathcal{D}}_t = \{x_i^t, \hat{y}_i\}_{i=1}^{N_t}$ . Next, a surrogate model is trained on the pseudo dataset  $\hat{\mathcal{D}}_t$  using a cross-entropy loss function. With the surrogate model and the target data, we compute the universal adversarial perturbations (Poursaeed et al., 2018) for the target class which leads to the misclassification of the majority of samples. The perturbation has misleading semantics and is the same size as input samples which makes it a great optimization-based trigger. It is worth noting that the perturbation will not achieve such a high attack success rate on the source model due to the impact of data augmentation.

#### 3.3. Data Poisoning

Previous backdoor attack methods employ data poison with a random sampling strategy. Due to the unsupervised nature of adaptation algorithms, attackers are unable to establish a connection between the trigger and the target class explicitly explicitly. Hence, a well-designed poison set selection strategy becomes critical for the success of backdoor embedding. Attackers are allowed to access either ground truth or source model predictions for the poisoning data selection. We provide a selection strategy for each condition below, and the illustration is presented in the "Select" part in Fig. 2.

- ightharpoonup Ground-truth-based selection strategy (GT). When attackers hold the ground truth labels  $\{y_i^t\}_{i=1}^{N_t}$  of all samples, samples belonging to the target class  $y_t$  are simply selected to construct a poisoning set  $\mathcal{D}_t^{poison} = \{x_i^t\}_{i=1}^P$ . To avoid interference for backdoor embedding, samples in other classes remain unchanged.
- ightharpoonup Pseudo-label-based selection strategy (PL). With access to source model predictions, attackers first calculate pseudo-labels for all target data. Then, a base poisoning set  $\mathcal{D}_t^{pl} = \{x_i^t\}_{i=1}^P$  consists of samples belonging to the target class  $y_t$ . In order to strengthen the poisoning set, attackers continue to select samples outside of  $\mathcal{D}_t^{pl}$  but with a high prediction probability for the target class  $y_t$ , creating a supplementary set  $\mathcal{D}_t^{supp} = \{x_i^t\}_{i=1}^{P/2}$ . The final poisoning set  $\mathcal{D}_t^{poison}$  is the union of the above two sets:  $\mathcal{D}_t^{poison} = \mathcal{D}_t^{pl} \cup \mathcal{D}_t^{supp}$ .

# 4. MIXADAPT: A Secure Adaptation Method for Defending Against Backdoor Attacks

From the previous section, we learn an incredible fact: malicious target data providers can achieve a backdoor embedding on model adaptation algorithms through unsupervised poisoning. To mitigate such a risk, we introduce a straightforward defense method named MIXADAPT. MIXADAPT is designed to defend against potential backdoor attacks while preserving the adaptation performance in the target domain.

The main idea inside MIXADAPT is to introduce confusion into the relationship between the poisoning trigger and the target class. A direct approach involves detecting samples containing backdoor triggers and assigning low weights. Nevertheless, the distribution shift faced by adaptation algorithms and the unlabeled nature of the target data, makes it impractical to accurately detect poisoning samples. Instead of detecting and removing triggers, we solve the problem in the opposite direction by introducing triggers to all target samples.

Here, we provide a detailed outline of the procedures involved in MIXADAPT and present them in Algorithm. 1. Firstly, the pseudo-labels  $\{\hat{y}_t\}_{i=1}^N$  for all target samples are obtained from the source pre-trained model  $f^s$  as follows:

$$\hat{y}_i^t = \arg\max_k f^s(x_i^t)_k. \tag{1}$$

For higher quality pseudo-labels, we also employ the pseudo-label refinement process introduced in (Liang et al.,

Algorithm 1 MIXADAPT defends against backdoor attacks in model adaptation.

- 1: Input: Potentially poisoned unlabeled target dataset  $\mathcal{D}_t = \{x_i^t\}_{i=1}^{N_t}$ , a clean source model  $f_s$ , batch size B, Maximum training iteration T, weight factor  $\omega$ .
- 2: **Output**: A secure target model  $f_t$ .
- 3: Obtain pseudo label  $\{\hat{y}_t\}_{i=1}^N$  of all samples via Eq. 1. 4: Calculate soft mask  $\{m_i\}_{i=1}^N$  of all samples via Eq. 2.
- 5: Init target model with the source  $f_t = f_s$ .
- 6: **for** iter = 1 **to** T **do**
- Sample a batch of target data  $\{x_i^t\}_{i=1}^B$ . 7:
- Query masks  $\{m_i\}_{i=1}^B$ . 8:
- Obtain model inputs  $\{\bar{x}_i^t\}$  via Eq. 3. 9:
- Optimize  $f_t$  using  $\{\bar{x}_i^t\}$  by model adaptation algo-10: rithms (e.g., SHOT (Liang et al., 2020), NRC (Yang et al., 2021)).
- 11: **end for**
- 12: **return** A secure target model  $f_t$ .

2020). With pseudo-labels, we leverage the knowledge of the source model to extract the background areas of the samples. The soft masks  $\{m_i\}_{i=1}^N$  for background areas are computed using the Grad-CAM algorithm (Selvaraju et al., 2017) with the source model  $f^s$  as,

$$m_i = 1 - \mathbf{GradCAM} (f^s, x_i^t, y_i^t). \tag{2}$$

Finally, we filter the background areas using the masks  $\{m_i\}_{i=1}^N$  and exchange background areas among target samples as follows:

$$\bar{x}_i^t = (1 - \omega \cdot m_i) \otimes x_i^t +$$
Shuffle  $((\omega \cdot m_j) \otimes x_j^t),$  (3)

where  $\omega$  represents the background weight in the exchange operation. Combining with existing model adaptation algorithms (e.g., SHOT (Liang et al., 2020), and NRC (Yang et al., 2021)), MIXADAPT train a secure target model  $f^t$ by replacing the target data  $x_i^t$  with its generated version  $\bar{x}_i^t$ during optimization.

**Discussion.** MIXADAPT is a resource-efficient defense method, given its optimization-free modifications at the input level. Additionally, we calculate the soft masks once at the beginning and utilize them consistently throughout the whole adaptation process. Besides effective defense against backdoor attacks, MIXADAPT maintains the adaptation performance on the clean data. With no requirement for training strategies or types of loss functions, our proposed MIXADAPT can be combined with all existing model adaptation methods.

#### 5. Experiment

#### **5.1.** Setup

**Datasets.** We evaluate our framework on three commonly used model adaptation benchmarks from image classification tasks. Office (Saenko et al., 2010) is a classic model adaptation dataset containing 31 categories across three domains (i.e., Amazon (A), DSLR (D), and Webcam (W)). Since the small number of samples in DSLR domain makes it difficult to poison a certain category, we remove two tasks whose target domain is Amazon and only use the remaining four (i.e.,  $A \rightarrow W$ ,  $D \rightarrow A$ ,  $D \rightarrow W$ ,  $W \rightarrow A$ ). OfficeHome (Venkateswara et al., 2017) is a popular dataset whose images are collected from the office and home environment. It consists of 65 categories across four domains (i.e., Art (A), Clipart (C), Product (P), and Real World (R)). **DomainNet** (Peng et al., 2019) is a large-size challenging benchmark with imbalanced classes and extremely difficult tasks. Following previous work (Tan et al., 2020; Li et al., 2021b), we consider a subset version, miniDomainNet for convenience and efficiency. miniDomainNet contains four domains (i.e., Clipart (C), Painting (P), Real (R), and Sketch (S)) and 40 categories. For both OfficeHome and DomainNet datasets, we use all 12 tasks of each to evaluate our framework.

**Evaluation metrics.** In our experiments, we divide 80% of the target domain samples as the unlabeled training set for adaptation and the remaining 20% as the test set for metric calculation. In order to avoid loss of generality, we uniformly select class 0 as the target class for backdoor attack and defense. We adopt accuracy on the clean samples (ACC) and attack success rate on the poison samples (ASR), two commonly used metrics in backdoor attack tasks to evaluate the effectiveness of our attack and defense method. A stealthy attack should achieve high ASR while maintaining accuracy on clean samples to keep the backdoor from being detected. Likewise, a better defense method should have both low ASR and high accuracy.

**Implementation details.** Unlike the supervised algorithms with cross-entropy loss in conventional backdoor attacks, we choose two popular model adaptation methods, SHOT (Liang et al., 2020) and NRC (Yang et al., 2021), as victim algorithms. We use their official codes and hyperparameters with ResNet-50 (He et al., 2016). For each adaptation algorithm, we report the results from four attack methods (two types of trigger with two poison selection strategies). For the non-optimization-based trigger, we set the blended weight as 0.2. The optimization-based trigger is calculated by GAP (Poursaeed et al., 2018) and the maximum  $L_{inf}$ norm value is 10/255. All experiments use the PyTorch framework and run on RTX3090 GPUs.

**Hyperparameters.** Our defense method is plug-and-play for existing model adaptation algorithms, so the only hy-

Table 1. ACC (%) and ASR (%) of MIXADAPT against backdoor attacks on **Office** (Saenko et al., 2010) dataset for model adaptation (ResNet-50). GT refers to ground truth selection strategy and PL refers to pseudo label selection strategy.

			SHO	Γ (Liang	g et al.,	2020)			NRC (Yang et al., 2021)											
Task	A-	→W	D-	→A	D-	→W	W-	→A	A-	→W	D-	→A	D-	→W	W-	→A				
Task	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR				
Source Only	76.7	-	62.0	-	95.0	-	63.2	-	76.7	-	62.0	-	95.0	-	63.2	-				
No Poisoning	91.2	-	76.9	-	97.5	-	76.9	-	93.7	-	77.1	-	98.1	-	77.1	-				
Poisoning (GT)	90.6	43.9	76.4	50.8	97.5	62.6	76.0	39.8	92.5	35.5	78.2	56.4	99.4	58.1	76.9	52.5				
+ MIXADAPT	91.8	15.5	76.0	7.4	97.5	26.5	75.0	8.3	90.6	20.7	72.7	25.6	98.7	34.2	73.2	16.8				
Poisoning (PL)	90.6	78.1	76.9	72.4	97.5	82.6	76.4	70.5	91.8	22.6	78.0	64.8	98.7	44.5	76.6	62.6				
+ MIXADAPT	91.2	43.9	75.1	28.7	97.5	53.6	74.4	15.8	89.9	16.1	72.8	29.8	98.7	20.0	72.5	18.2				
				Bler	nded tr	igger ↑	` I	Perturb	ation tr	rigger	1									
Poisoning (GT)	91.2	27.7	75.3	47.9	98.1	36.1	76.6	41.4	92.5	31.6	77.6	46.4	98.7	36.1	76.0	38.1				
+ MIXADAPT	91.2	17.4	75.3	12.9	96.9	21.3	74.3	11.1	90.6	21.9	74.3	20.1	98.1	25.2	72.1	16.8				
Poisoning (PL)	91.8	49.7	75.7	79.4	98.1	49.7	74.8	62.6	93.1	27.1	77.3	58.9	98.7	39.4	75.8	55.6				
+ MIXADAPT	91.2	32.3	74.1	33.3	97.5	32.3	74.6	20.6	89.3	17.4	74.3	26.3	98.1	16.1	71.4	20.8				

Table 2. ACC (%) and ASR (%) of MIXADAPT against backdoor attacks on **OfficeHome** (Venkateswara et al., 2017) dataset for model adaptation (ResNet-50).

	SHOT (Liang et al., 2020)													NRC (Yang et al., 2021)											
Task	1	→C ASR	A-ACC			→R ASR	R- ACC		R- ACC		l	→P ASR		→C ASR	A-ACC		A-ACC		R- ACC		R- ACC		R- ACC	→P ASR	
Source Only No Poisoning	43.6 55.8	-	63.8 78.6	-	72.9 80.4	-	63.5 71.8	-	45.6 57.5	-	78.0 81.9	-	43.6 56.0	-	63.8 76.7	-	72.9 79.8	-	63.5 69.7	-	45.6 55.4	-	78.0 82.5	-	
Poisoning (GT) + MIXADAPT	53.6	3.2	78.1 77.9	34.2 10.6	81.4	18.7	72.4	16.7	56.7 54.8	27.2 5.0	83.7	27.4 6.9	55.9	36.1 20.2		34.6 15.1	79.7 78.8	16.1	68.9	15.6		34.7 21.4		11.6	
Poisoning (PL) + MIXADAPT	55.1	34.5 5.7	77.9	35.9 13.4	81.5	28.4 6.8	72.0		54.3	31.6		41.3 11.4	51.7	23.7	76.8 76.4	34.0 16.5	79.3 78.8	14.2 4.9	68.9 65.8	18.2 6.1	55.6 54.0	38.3 19.4	82.6 81.1	31.7	
							В	lende	d trigg	ger †↑	P	erturk	oation	trigge	r↓↓										
Poisoning (GT) + MIXADAPT Poisoning (PL)	54.3 54.1 54.9	37.7 1.4 44.7	78.6 78.5 78.6	35.7 1.6 28.2	79.8 80.6 79.8	2.1 0.5 4.8	72.0 70.1 71.6	2.8 1.3 2.1	54.5 54.4 53.8	30.4 1.0 41.7	82.8 82.1 82.1	30.7 9.5 31.7	56.2 52.5 56.4	40.7 13.1 42.8	77.3 77.7 77.1	25.9 4.1 22.5	79.7 77.7 79.5	2.6 1.3 2.7	70.3 67.0 69.9	5.1 1.5 5.1	56.0 53.8 55.9	40.6 14.1 45.0	83.1 80.4 83.0	22.7 9.7 25.9	
+ MIXADAPT	53.6	1.6	78.5	4.5	80.5	0.5	70.5	1.3	54.6	0.5	82.4	7.3	52.7		78.4	4.4	77.5	1.3	67.0	1.5	53.8	13.8	80.4	10.3	

perparameter is confusion weight  $\omega$ . In OfficeHome and DomainNet benchmarks, we adopt  $\omega=0.3$ . Office is a relatively simple dataset and easy to attack, we use a larger value of 0.4 for  $\omega$ . Other training details are consistent with the official settings of the adaptation algorithms.

#### 5.2. Results

We evaluate different backdoor attack strategies for two model adaptation on three benchmarks and our defense method against the above attacks. The results are shown in Table 1, 2, 3. Due to space limitations, for OfficeHome and DomainNet, we only report 6 tasks from the first and last source domains and leave the remaining results in the **supplementary material**. We also evaluate our defense method under other three existing backdoor attacks to prove the versatility of our method and results are provided in Table 4. Note that We will use PL as the abbreviation for pseudo label selection strategy and GT for ground truth selection strategy.

Analysis about non-optimization-based backdoor at-For non-optimization-based backdoor attacks (Blended trigger), we conduct experiments across a variety of benchmarks and two poison selection strategies and find that it achieves backdoor embedding on those tasks. As shown in Table 1, on Office dataset, Blended trigger achieves an average ASR of 49.3% by GT strategy and 75.9% by PL selection strategy on SHOT. It is worth noting that PL selection strategy is better than GT on most tasks, the reason is that PL will select more samples which backdoor embedding may benefit from. During adaptation, these samples have a tendency to be classified into target classes, so the trigger also has a chance to be written into the parameters. However, due to the existence of the distribution shift, samples selected by GT may not have the same effect. For a 65-category benchmark OfficeHome in Table 2, Blended trigger also achieves ASR of 27.4% and 29.0% on NRC algorithm with two selection strategies. Besides, Blended trigger also has good concealment on every task. Take DomainNet dataset in Table 3 as an example, compared with

Table 3. ACC (%) and ASR (%) of MIXADAPT against backdoor attacks on **DomainNet** (Peng et al., 2019) dataset for model adaptation (ResNet-50).

	<b>SHOT</b> (Liang et al., 2020)												NRC (Yang et al., 2021)											
Task		→P ASR	C- ACC		_	→S ASR	S- ACC		S- ACC		-	→R ASR	C- ACC		C- ACC		C- ACC		_	→C ASR	S- ACC	→P ASR	_	→R ASR
Source Only No Poisoning	57.1 76.7	-	75.7 89.6	-	59.5 74.5	-	60.3	-	64.9 78.0	-	75.9 87.5	-	57.1 77.4	-	75.7 90.2	-	59.5 74.7	-	60.3	-	64.9 78.8	-	75.9 90.8	-
Poisoning (GT) + MIXADAPT Poisoning (PL) + MIXADAPT	76.3 75.9 76.7 76.2	10.8 16.6	89.6 88.2 89.8 88.0	17.7 6.3 22.7 8.6	72.8 71.4 71.5 73.1	49.8 31.9 59.0 30.8	77.6 76.5 77.1 75.6	10.1 2.2 20.6 3.4	77.5 77.7 76.9 77.0	18.9 8.7 33.3 24.0	86.9 87.1 86.8 86.9	16.8 4.9 41.9 18.8	77.7 78.0 77.7 78.4	22.8	90.3 89.8 90.3 89.7	19.3 8.9 23.3 8.7	73.8 73.5 74.6 73.5	47.7 33.1 44.1 27.0	80.7 79.5 80.4 80.0	11.3 1.9 18.5 2.8	78.9 79.2 78.9 79.4	21.2 12.7 36.6 21.7	89.8   89.2   89.8   89.4	8.2 23.7
							В	lende	d trigg	ger ††	P	erturk	ation	trigge	r Џ									
Poisoning (GT) + MIXADAPT Poisoning (PL) + MIXADAPT	76.6 76.3 76.7 75.8	6.7 1.8 3.2 0.7	89.6 88.3 89.6 88.4	16.6 4.3 28.6 8.0	72.7 72.8 73.1 73.3	51.0 41.3 48.9 38.9	77.6 76.6 78.2 76.6	11.7 3.2 28.6 5.5	77.2 76.9 76.8 77.2	8.6 3.9 22.7 15.0	86.6 87.1 86.6 86.9	23.5 5.0 45.6 26.0	78.2 78.1 78.3 78.0	6.7 3.8 4.2 2.6	90.3 89.7 90.2 89.6	17.1 8.1 20.2 8.2	73.8 74.3 74.4 74.4	40.2 30.7 34.7 28.7	80.3 80.7 80.6 80.8	15.5 4.8 26.7 6.4	79.2 79.6 79.2 79.2	8.4 5.7 12.5 6.5	90.9 90.4 91.0 89.4	20.7 8.5 39.4 8.8

using the clean target training set, the poisoning set only brought 0.8% and 0.2% decrease in accuracy on SHOT and NRC, respectively.

Analysis about optimization-based backdoor attacks.

For optimization-based backdoor attacks (perturbation trigger), we provide experimental results in the lower part of the tables. As shown in Table 1, on Office dataset, the perturbation trigger achieves an average ASR of 60.3% on SHOT and 45.3% on NRC with PL selection strategy. And on DomainNet dataset in Table 3, the average ASR of perturbation with PL strategy arrives at 30.0% for SHOT and 23.6% for NRC. Under the perturbation trigger's attack, PL selection strategy has a stronger backdoor injection capability than GT, which is consistent with the phenomenon in Blended trigger. Also, the perturbation trigger does not affect the model's classification ability. It reduces the target clean accuracy of SHOT on DomainNet from 80.0% before poisoning to 79.2% after poisoning. The degradation of the remaining results is less than this gap. This ensures that our attack methods will be difficult to detect by the victim while successfully embedding the backdoor.

Analysis about MIXADAPT against backdoor attack. To defend against the backdoor attacks for the model adaptation, we further evaluate our proposed defense method on the above benchmarks and the results are shown in Table 1, 2, 3. It is easy to find that MIXADAPT effectively reduces ASR scores while maintaining the original classification ability. Take OfficeHome dataset on SHOT in Table 2 as an example, MIXADAPT reduces ASR scores of PL selection strategy from 29.7% to 9.9% on Blended trigger and 23.4% to 3.6% on perturbation trigger. At the same time, the clean accuracy of the target domain drops by 1.6% and 1.2% respectively, which is within an acceptable range. Results on DomainNet and Office also demonstrate the effectiveness of MIXADAPT. In addition, we record the ASR score and clean accuracy after every epoch of perturbation trigger

Table 4. ACC (%) and ASR (%) of MIXADAPT against other backdoor attacks on model adaptation (ResNet-50).

Task	Dataset	Method	ACC	ASR
$A \rightarrow R$	OfficeHome	SIG (Barni et al., 2019) +MIXADAPT		27.6 14.0
$D \rightarrow A$	Office	BadNets (Gu et al., 2017) +MIXADAPT	76.4 76.0	
$R \rightarrow P$	OfficeHome	Blended* (Chen et al., 2017) +MIXADAPT	82.4 82.3	25.1 3.3

attack and MIXADAPT in  $A \rightarrow P$  task and present results in Fig. 3. In (a) and (b), regarding target accuracy, SHOT initially reaches a high value and then stabilizes, and NRC increases and gradually converges. It is shown that our method does not affect the convergence trend and clean accuracy of the base algorithm. We provide the ASR curve in (c) and (d). During training with the dataset including poisoning samples, ASR score of SHOT and NRC gradually increases since they accept the trigger as the feature of the target class. However, with the help of MIXADAPT, the samples retain their semantic information and exchange the background with others, keeping ASR score in a relatively low range.

MIXADAPT defends against other backdoor attacks. To prove the versatility of MIXADAPT, we evaluate it on a variety of existing backdoor attacks including SIG (Barni et al., 2019), BadNets (Gu et al., 2017), and Blended\* (Chen et al., 2017). SIG adds a horizontal sinusoidal signal on the selected samples and BadNets replaces their four corners with a fixed noise. We use Blended\* to indicate Blended attack using Jerry Mouse instead of Hello Kitty. Since it is difficult to launch unsupervised backdoor attacks on model adaptation, existing attack methods are ineffective on most tasks. We select one task with great performance for each attack with PL selection strategy on SHOT and then deploy MIXADAPT to defend against them, the results are shown

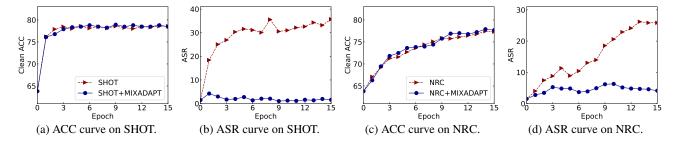


Figure 3. ACC and ASR curve of backdoor attack (perturbation trigger) and MIXADAPT on A→P from **OfficeHome**.




Figure 4. Sensitivity analysis about hyperparameter  $\omega$  under backdoor attack (perturbation trigger) on A $\rightarrow$ P from **OfficeHome**.

Table 5. Ablation studies on three datasets (Office, OfficeHome, and DomainNet).

	Off	îce	Office	Home	DomainNet				
	ACC	ASR	ACC	ASR	ACC	ASR			
NRC +MixUp +MIXADAPT	86.2	45.3	69.7	22.3	80.9	23.6			
+MixUp	80.1	31.0	61.7	11.3	78.3	9.4			
+MIXADAPT	83.3	20.2	66.8	8.3	80.1	10.3			

in Table 4. It is clearly shown that MIXADAPT can effectively defend against three backdoors while maintaining clean accuracy. For example, for BadNest in D $\rightarrow$ A task, MIXADAPT reduces ASR score from 35.2% to 2.8% while only causing the clean accuracy to drop by 0.4%.

Analysis about the sensitivity of hyperparameters. We investigate the sensitivity of hyperparameters in the proposed MIXADAPT. The only hyperparameter in our method is the weight factor  $\omega$ . We evaluate MIXADAPT whose  $\omega$ is in the range of [0.2, 0.25, 0.3, 0.35, 0.4] on  $A \rightarrow P$  from OfficeHome under attack with perturbation trigger and PL selection strategy, and results are shown in Fig. 4. It is obvious that the clean accuracy is relatively stable around 78.4% under different weight factors. Besides, as the weight factor increases, ASR score will continue to decrease until a low value around 2.5%. Note that if we choose a bigger weight factor, although we will obtain a more secure model, it will also affect the clean accuracy. Similar to adversarial training, there is a trade-off between accuracy and security. Users can choose the weight factor in deployment according to their preferences for the tasks.

**Ablation study.** We study the performance of MixUp and MIXADAPT on all benchmarks and the results are provided in Table 5. MixUp without background masks calculated by Grad-CAM can also reduce ASR score when facing a backdoor attack. However, due to containing semanticrelated content, MixUp will bring obstacles to unsupervised model adaptation and cause clean accuracy to decrease a lot. It is shown in the table that when deploying MixUp on NRC, clean accuracy drops by 6.1% and 8.0% on Office and OfficeHome respectively. MIXADAPT with background masks achieves a low ASR while maintaining the classification performance. Take OfficeHome dataset as an example, MIXADAPT reduces ASR score from 22.3% to 8.3% and only causes a clean accuracy drop of 2.9%. This indicates that our proposed MIXADAPT effectively defends against backdoor attacks while also protecting the classification performance of the target model.

### 6. Conclusion

In this paper, we discuss whether users can trust unlabeled data during model adaptation. Our study focuses on backdoor attacks during model adaptation and introduces an attack framework to prove that a malicious data provider can achieve backdoor embedding through unsupervised poisoning. The attack framework encompasses two types of triggers and two data poisoning strategies for different conditions. Furthermore, to reduce the risks of potential backdoor attacks, we propose MIXADAPT, a plug-and-play defense method to protect adaptation algorithms. MIXADAPT eliminates the association between triggers and target class by exchanging background areas among target samples. Extensive experiments conducted on commonly used adaptation benchmarks validate the efficacy of MIXADAPT in effectively defending against backdoor attacks.

It is worth noting that while our framework achieves successful attacks, injecting backdoors on model adaptation through unsupervised poisoning remains challenging. The proposal of more effective triggers and poisoning strategies for specific types of model adaptation methods (e.g., self-training, consistency training) remains an open question, and we leave this aspect for future work.

#### References

- Agarwal, P., Paudel, D. P., Zaech, J.-N., and Van Gool, L. Unsupervised robust domain adaptation without source data. In *Proc. WACV*, pp. 2009–2018, 2022. 2
- Ahmed, S., Al Arafat, A., Rizve, M. N., Hossain, R., Guo, Z., and Rakin, A. S. Ssda: Secure source-free domain adaptation. In *Proc. ICCV*, pp. 19180–19190, 2023. 1, 2
- Barni, M., Kallas, K., and Tondi, B. A new backdoor attack in cnns by training set corruption without label poisoning. In *Proc. ICIP*, pp. 101–105, 2019. 7
- Ben-David, S., Blitzer, J., Crammer, K., Kulesza, A., Pereira, F., and Vaughan, J. W. A theory of learning from different domains. *Machine Learning*, 79(1):151–175, 2010. 1
- Chen, X., Liu, C., Li, B., Lu, K., and Song, D. Targeted backdoor attacks on deep learning systems using data poisoning. *arXiv preprint arXiv:1712.05526*, 2017. 1, 2, 4, 7
- Chou, S.-Y., Chen, P.-Y., and Ho, T.-Y. How to backdoor diffusion models? In *Proc. CVPR*, pp. 4015–4024, 2023a. 3
- Chou, S.-Y., Chen, P.-Y., and Ho, T.-Y. Villandiffusion: A unified backdoor attack framework for diffusion models. *arXiv preprint arXiv:2306.06874*, 2023b. 3
- Dhariwal, P. and Nichol, A. Diffusion models beat gans on image synthesis. In *Proc. NeurIPS*, volume 34, pp. 8780–8794, 2021. 3
- Ding, Y., Sheng, L., Liang, J., Zheng, A., and He, R. Proxymix: Proxy-based mixup training with label refinery for source-free domain adaptation. *arXiv* preprint *arXiv*:2205.14566, 2022. 1, 2
- Doan, K., Lao, Y., Zhao, W., and Li, P. Lira: Learnable, imperceptible and robust backdoor attacks. In *Proc. ICCV*, pp. 11966–11976, 2021. 2
- Dong, J., Fang, Z., Liu, A., Sun, G., and Liu, T. Confident anchor-induced multi-source free domain adaptation. In *Proc. NeurIPS*, volume 34, pp. 2848–2860, 2021. 2
- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn,
  D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M.,
  Heigold, G., Gelly, S., et al. An image is worth 16x16 words: Transformers for image recognition at scale. In *Proc. ICLR*, 2021. 1
- Fleuret, F. et al. Uncertainty reduction for model adaptation in semantic segmentation. In *Proc. CVPR*, pp. 9613–9623, 2021. 1

- Ganin, Y., Ustinova, E., Ajakan, H., Germain, P., Larochelle,
  H., Laviolette, F., Marchand, M., and Lempitsky, V.
  Domain-adversarial training of neural networks. *Machine Learning*, 17(1):2096–2030, 2016.
- Gu, T., Dolan-Gavitt, B., and Garg, S. Badnets: Identifying vulnerabilities in the machine learning model supply chain. *arXiv preprint arXiv:1708.06733*, 2017. 1, 2, 7
- Guan, J., Tu, Z., He, R., and Tao, D. Few-shot backdoor defense using shapley estimation. In *Proc. CVPR*, pp. 13358–13367, 2022. 3
- He, K., Zhang, X., Ren, S., and Sun, J. Deep residual learning for image recognition. In *Proc. CVPR*, pp. 770–778, 2016. 1, 5
- Huang, J., Guan, D., Xiao, A., and Lu, S. Model adaptation: Historical contrastive learning for unsupervised domain adaptation without source data. In *Proc. NeurIPS*, volume 34, pp. 3635–3649, 2021. 1
- Krizhevsky, A., Sutskever, I., and Hinton, G. E. Imagenet classification with deep convolutional neural networks. In *Proc. NeurIPS*, 2012. 1
- Lee, D.-H. et al. Pseudo-label: The simple and efficient semi-supervised learning method for deep neural networks. In *Proc. ICML*, 2013. 2
- Li, C., Pang, R., Xi, Z., Du, T., Ji, S., Yao, Y., and Wang, T. An embarrassingly simple backdoor attack on self-supervised learning. In *Proc. ICCV*, pp. 4367–4378, 2023.
- Li, R., Jiao, Q., Cao, W., Wong, H.-S., and Wu, S. Model adaptation: Unsupervised domain adaptation without source data. In *Proc. CVPR*, pp. 9641–9650, 2020. 1, 2
- Li, X., Chen, W., Xie, D., Yang, S., Yuan, P., Pu, S., and Zhuang, Y. A free lunch for unsupervised domain adaptive object detection without source data. In *Proc. AAAI*, pp. 8474–8481, 2021a. 1
- Li, X., Li, J., Zhu, L., Wang, G., and Huang, Z. Imbalanced source-free domain adaptation. In *Proc. ACM MM*, pp. 3330–3339, 2021b. 2, 5
- Li, Y., Li, Y., Wu, B., Li, L., He, R., and Lyu, S. Invisible backdoor attack with sample-specific triggers. In *Proc. ICCV*, pp. 16463–16472, 2021c. 2
- Li, Y., Lyu, X., Koren, N., Lyu, L., Li, B., and Ma, X. Neural attention distillation: Erasing backdoor triggers from deep neural networks. In *Proc. ICLR*, 2021d. 3
- Li, Y., Jiang, Y., Li, Z., and Xia, S.-T. Backdoor learning: A survey. *IEEE Transactions on Neural Networks and Learning Systems*, 2022. 2

- Liang, J., Hu, D., and Feng, J. Do we really need to access the source data? source hypothesis transfer for unsupervised domain adaptation. In *Proc. ICML*, pp. 6028–6039, 2020. 1, 2, 3, 4, 5, 6, 7, 11
- Liang, J., Hu, D., Feng, J., and He, R. Umad: Universal model adaptation under domain and category shift. *arXiv* preprint arXiv:2112.08553, 2021a. 2
- Liang, J., Hu, D., Wang, Y., He, R., and Feng, J. Source data-absent unsupervised domain adaptation through hypothesis transfer and labeling transfer. *IEEE Trans on Pattern Analysis and Machine Intelligence*, 44(11):8602–8617, 2021b. 1, 2
- Liang, J., Hu, D., Feng, J., and He, R. Dine: Domain adaptation from single and multiple black-box predictors. In *Proc. CVPR*, pp. 8003–8013, 2022. 2
- Liang, J., He, R., and Tan, T. A comprehensive survey on test-time adaptation under distribution shifts. *arXiv* preprint arXiv:2303.15361, 2023. 2
- Liu, K., Dolan-Gavitt, B., and Garg, S. Fine-pruning: Defending against backdooring attacks on deep neural networks. In *International symposium on research in attacks*, intrusions, and defenses, pp. 273–294. Springer, 2018. 3
- Liu, Y., Zhang, W., and Wang, J. Source-free domain adaptation for semantic segmentation. In *Proc. CVPR*, pp. 1215–1224, 2021. 1
- Long, M., Cao, Z., Wang, J., and Jordan, M. I. Conditional adversarial domain adaptation. In *Proc. NeurIPS*, 2018.
- Nguyen, A. and Tran, A. Wanet–imperceptible warping-based backdoor attack. In *Proc. ICLR*, 2021. 2
- Nguyen, T. A. and Tran, A. Input-aware dynamic backdoor attack. In *Proc. NeurIPS*, volume 33, pp. 3454–3464, 2020. 2
- Peng, X., Bai, Q., Xia, X., Huang, Z., Saenko, K., and Wang, B. Moment matching for multi-source domain adaptation. In *Proc. ICCV*, pp. 1406–1415, 2019. 2, 5, 7, 11
- Poursaeed, O., Katsman, I., Gao, B., and Belongie, S. Generative adversarial perturbations. In *Proc. CVPR*, 2018. 2, 4, 5
- Qiu, Z., Zhang, Y., Lin, H., Niu, S., Liu, Y., Du, Q., and Tan, M. Source-free domain adaptation via avatar prototype generation and adaptation. In *Proc. IJCAI*, 2021. 2
- Saenko, K., Kulis, B., Fritz, M., and Darrell, T. Adapting visual category models to new domains. In *Proc. ECCV*, pp. 213–226, 2010. 1, 2, 5, 6

- Saha, A., Tejankar, A., Koohpayegani, S. A., and Pirsiavash, H. Backdoor attacks on self-supervised learning. In *Proc. CVPR*, pp. 13337–13346, 2022. 3
- Selvaraju, R. R., Cogswell, M., Das, A., Vedantam, R., Parikh, D., and Batra, D. Grad-cam: Visual explanations from deep networks via gradient-based localization. In *Proc. ICCV*, pp. 618–626, 2017. 2, 5
- Shejwalkar, V., Lyu, L., and Houmansadr, A. The perils of learning from unlabeled data: Backdoor attacks on semi-supervised learning. In *Proc. ICCV*, pp. 4730–4740, 2023. 3
- Sheng, L., Liang, J., He, R., Wang, Z., and Tan, T. Adapt-guard: Defending against universal attacks for model adaptation. In *Proc. ICCV*, 2023. 1, 2
- Tan, S., Peng, X., and Saenko, K. Class-imbalanced domain adaptation: an empirical odyssey. In *Proc. ECCV Workshops*, pp. 585–602. Springer, 2020. 5
- Tian, J., Zhang, J., Li, W., and Xu, D. Vdm-da: Virtual domain modeling for source data-free domain adaptation. *IEEE Transactions on Circuits and Systems for Video Technology*, 32(6):3749–3760, 2021. 2
- Venkateswara, H., Eusebio, J., Chakraborty, S., and Panchanathan, S. Deep hashing network for unsupervised domain adaptation. In *Proc. CVPR*, pp. 5018–5027, 2017. 2, 5, 6, 11
- Wang, B., Yao, Y., Shan, S., Li, H., Viswanath, B., Zheng, H., and Zhao, B. Y. Neural cleanse: Identifying and mitigating backdoor attacks in neural networks. In *Proc. S&P*, pp. 707–723. IEEE, 2019. 3
- Wu, B., Chen, H., Zhang, M., Zhu, Z., Wei, S., Yuan, D., and Shen, C. Backdoorbench: A comprehensive benchmark of backdoor learning. In *Proc. NeurIPS*, volume 35, pp. 10546–10559, 2022. 2
- Wu, D. and Wang, Y. Adversarial neuron pruning purifies backdoored deep models. In *Proc. NeurIPS*, volume 34, pp. 16913–16925, 2021. 3
- Yang, S., van de Weijer, J., Herranz, L., Jui, S., et al. Exploiting the intrinsic neighborhood structure for source-free domain adaptation. In *Proc. NeurIPS*, pp. 29393–29405, 2021. 1, 2, 5, 6, 7, 11
- Zhang, J., Huang, J., Jiang, X., and Lu, S. Black-box unsupervised domain adaptation with bi-directional atkinson-shiffrin memory. In *Proc. ICCV*, pp. 11771–11782, 2023.
- Zhang, Z., Chen, W., Cheng, H., Li, Z., Li, S., Lin, L., and Li, G. Divide and contrast: Source-free domain adaptation via adaptive contrastive learning. In *Proc. NeurIPS*, volume 35, pp. 5137–5149, 2022. 2

## A. Additional Experiments.

We present additional experimental results that are not included in the main text. Table 6 includes the results for 'C' and 'P' from the OfficeHome dataset. Additionally, Table 7 contains the results for 'P' and 'R' from the DomainNet dataset.

*Table 6.* ACC (%) and ASR (%) of MIXADAPT against backdoor attacks on **OfficeHome** (Venkateswara et al., 2017) dataset for model adaptation (ResNet-50).

	SHOT (Liang et al., 2020)													NRC (Yang et al., 2021)											
Task		→A ASR	C- ACC		C- ACC		P- ACC		P- ACC		P- ACC		C- ACC		C- ACC		C- ACC		1	→A ASR		→C ASR	P- ACC		
Source Only No Poisoning	48.9 64.3	-	62.9 77.0	-	65.7 77.8	-	52.2 64.7	-	38.6 51.6	- -	73.1 82.1	-	48.9 61.2		62.9 79.8		65.7 77.6		52.2 62.5		38.6 52.6		73.1 80.8		
Poisoning (GT)	65.0	16.5	78.9	37.6	79.3	12.4	63.9	22.4	51.9	34.2	83.1	16.1	62.1	15.2	79.0	42.1	76.9	14.4	61.9	23.3	52.1	46.4	80.8	21.2	
+ MIXADAPT	61.4	5.1	76.8	10.1	76.5	3.3	65.2	12.3	49.3	4.5	81.1	2.9	57.7	6.1	77.0	18.0	75.0	3.4	57.5	15.2	47.5	29.1	80.0	7.4	
Poisoning (PL)	65.0	26.4	78.9	15.1	79.1	10.8	64.3	27.3	52.1	45.9	82.8	37.4	61.9	15.6	79.1	17.7	76.6	5.7	62.1	27.5	52.0	54.6	80.8	41.2	
+ MIXADAPT	61.7	13.7	77.1	4.5	76.8	1.1	65.2	22.2	49.0	14.1	80.8	11.7	58.4	5.5	76.8	9.4	74.4	3.2	57.5	16.7	47.7	34.8	80.0	11.2	
							В	lende	d trigg	er ↑↑	P	erturk	ation	trigge	r ↓↓										
Poisoning (GT)	64.7	0.4	77.1	20.6	78.3	7.3	66.8	14.8	53.4	42.9	83.5	17.5	62.1	1.9	79.1	17.2	77.7	1.4	61.7	19.2	52.5	51.7	82.0	18.4	
+ MIXADAPT	60.8	0.2	77.1	1.7	77.3	0.2	64.3	6.8	49.7	1.3	80.9	2.0	58.8	0.6	76.3	6.2	73.7	0.1	58.1	11.6	47.5	18.8	78.5	8.4	
Poisoning (PL)	65.2	2.3	76.7	11.2	77.7	1.8	66.2	20.1	52.9	59.2	83.1	33.5	61.9	2.1	79.1	10.9	77.5	1.2	61.9	21.1	52.5	61.4	81.9	27.5	
+ MIXADAPT	61.0	0.6	76.7	1.3	77.0	0.1	63.7	17.6	48.6	2.7	80.8	5.5	57.9	0.6	76.6	5.0	73.6	0.1	58.6	13.1	47.7	21.7	78.0	11.6	

Table 7. ACC (%) and ASR (%) of MIXADAPT against backdoor attacks on **DomainNet** (Peng et al., 2019) dataset for model adaptation (ResNet-50).

	SHOT (Liang et al., 2020)														NRC (Yang et al., 2021)												
Task	l	→C		→R	P-		R-		R-		l	→S	P-		P-		P-			→C		→P	R-				
	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR	ACC	ASR			
Source Only	61.3		84.8		64.8		69.1		75.8		57.8		61.3		84.8		64.8		69.1		75.8		57.8				
No Poisoning	76.1		89.9		75.2		82.2		80.3		72.6		79.1		91.1		74.5		81.0		78.5		75.1				
Poisoning (GT)	75.1	2.6	90.1	16.2	74.4	22.4	80.9	6.3	79.4	13.5	70.8	8.3	78.2	2.4	91.1	13.3	73.3	15.4	80.6	8.7	78.5	16.9	74.2	19.2			
+ MIXADAPT	73.2	0.9	88.5	4.7	73.1	11.6	78.8	0.9	78.5	6.7	71.0	1.7	75.5	0.5	90.5	6.4	74.0	7.3	77.8	1.6	79.2	8.1	74.0	18.7			
Poisoning (PL)	75.1	14.0	90.1	41.5	73.5	29.8	80.7	3.5	79.5	27.7	71.6	2.1	79.0	7.4	91.1	27.0	73.5	3.9	80.7	4.8	78.2	26.8	75.1	13.8			
+ MIXADAPT	73.9	1.5	88.5	14.2	74.0	15.4	78.6	0.6	79.1	8.4	71.4	1.9	75.1	1.2	90.6	14.1	73.4	3.6	78.3	1.1	79.1	14.8	74.2	7.3			
							В	Blende	d trigg	ger ↑↑	P	erturk	ation	trigge	r↓												
Poisoning (GT)	76.3	13.1	90.1	15.9	73.4	40.3	80.8	15.9	80.2	14.2	68.8	52.1	78.0	12.0	90.9	11.5	73.8	35.3	80.5	16.2	78.4	16.7	72.2	53.2			
+ MIXADAPT	74.1	3.0	88.4	4.8	72.4	30.4	78.0	0.8	80.0	3.8	70.8	29.6	75.5	4.9	90.2	5.7	73.6	24.0	78.0	5.4	79.1	6.0	73.1	35.4			
Poisoning (PL)	75.7	27.0	89.7	43.2	73.7	50.2	80.7	9.0	80.2	19.0	69.0	34.1	79.1	16.2	91.2	23.7	73.6	42.3	80.7	10.7	78.4	21.8	74.0	31.1			
+ MIXADAPT	73.9	6.3	88.7	20.2	73.2	44.6	78.2	0.4	79.7	9.2	71.0	13.0	75.8	5.5	90.3	11.2	73.5	20.7	77.7	3.9	78.5	5.7	73.4	15.4			