Evaluating the Performance of ChatGPT for Spam Email Detection

Shijing Si, Yuwei Wu¹ School of Economics and Finance Shanghai International Studies University, Shanghai, China LE TANG² Library, Shanghai International Studies University, Shanghai, China Yugui Zhang School of Economics and Finance Shanghai International Studies University, Shanghai, China JEDREK WOSIK Department of Medicine Duke University, North Carolina, USA

Abstract: Email continues to be a pivotal and extensively utilized communication medium within professional and commercial domains. Nonetheless, the prevalence of spam emails poses a significant challenge for users, disrupting their daily routines and diminishing productivity. Consequently, accurately identifying and filtering spam based on content has become crucial for cybersecurity. Recent advancements in natural language processing, particularly with large language models like ChatGPT, have shown remarkable performance in tasks such as question answering and text generation. However, its potential in spam identification remains underexplored. To fill in the gap, this study attempts to evaluate ChatGPT's capabilities for spam identification in both English and Chinese email datasets. We employ ChatGPT for spam email detection using in-context learning, which requires a prompt instruction and a few demonstrations. We also investigate how the number of demonstrations in the prompt affects the performance of ChatGPT. For comparison, we also implement five popular benchmark methods, including naive Bayes, support vector machines (SVM), logistic regression (LR), feedforward dense neural networks (DNN), and BERT classifiers. Through extensive experiments, the performance of ChatGPT is significantly worse than deep supervised learning methods in the large English dataset, while it presents superior performance on the low-resourced Chinese dataset.

Keywords: ChatGPT, Large Language Models, Spam email detection, Cybersecurity, In-context Learning Mathematics Subject Classification: 03B65, 68T50, 91F20

1 Introduction

Used as a swift and cost-efficient communication tool, email underpins global connectivity and is fundamental in various professional and personal activities, such as international electronic commerce [Hudak et al., 2017]. As of 2020, the international email user base was approximately 4.037 billion. Due to its very nature of accessibility, email inevitably compromises on privacy [Ackerman et al., 1999], hence, exploited by corporations, organizations, and criminals alike for marketing and fraudulent purposes.

Spam content predominantly encompasses deceptive information or advertisements [Jáñez-Martino et al., 2023], and occasionally includes harmful elements such as computer viruses, explicit material, or adverse information. The rampant spread of spam not only poses a nuisance to individuals but also instigates a squandering of network resources, in addition to eliciting a myriad of security threats [Ahmed et al., 2022]. As such, the development of an efficacious model capable of accurately identifying and consequently filtering spam is of paramount importance [Samarthrao and Rohokale, 2022].

Numerous methods have been established in the realm of spam detection and classification [Karim et al., 2019, Akinyelu, 2021]. Conventional approaches encompass techniques such as character matching, the naive Bayes algorithm [Kumar, 2020], support vector machines (SVM) [Sharma and Kaur, 2016] and ensemble learning [Bhardwaj and Sharma, 2023]. In the wake of deep learning advancements, a variety of deep models, including Convolutional Neural Networks (CNN), Recurrent Neural Networks (RNN), and BERT,

¹Co-first authors: Shijing Si and Yuwei Wu.

²Corresponding author: Le Tang, 1067061406@qq.com.

have been employed in spam recognition [Seth and Biswas, 2017, Fazzolari et al., 2021, Manasa et al., 2024]. For instance, Doshi et al. [2023] proposed a comprehensive dual-layer architecture for phishing and spam email detection. Zavrak and Yilmaz [2023] developed a hierarchical attention hybrid deep learning method for spam email detection.

Recently large language models (LLMs) such as ChatGPT have shown impressive performance in many natural language processing tasks Radford et al. [2019], including question answering, text generation, etc. In-context learning Garg et al. [2022], Wei et al. [2022], central to these large models, refers to their prediction capabilities given a specific context; these models analyze and generate words or sentences based on the instruction (i.e., prompt), which aids their ability to coherently operate in tasks such as conversation, text completion, translation, and summarization. However, while ChatGPT has been used in various tasks of text processing, little research has been done on spam detection. To fill in the gap, we aim to explore how well ChatGPT performs at spam detection via in-context learning. We design experiments to systematically evaluate the performance of ChatGPT in both English and Chinese email datasets.

Our contributions can be summarized as follows:

- We compile a low-resourced Chinese spam email datasets, which can be used in the community.
- We evaluate the performance of ChatGPT on spam email detection via in-context learning. From our experiments, the performance of ChatGPT is worse than deep supervised models in spam detection, but it has shown benefits in the low-resourced setting (Chinese dataset).
- We also investigate how the number of instances affects the performance of in-context learning.

The remainder of the paper is organized as follows. Section 2 covers the related works of this research. Section 3 presents the experimental setup in detail. Section 4 exhibits the experimental results and analyses. Section 5 is the conclusion.

2 Related Works

2.1 Spam Classification

Based on the types of data used, existing spam classification algorithms can be broadly categorized into two groups: The first category involves recognition based on mail features. This approach involves extracting features from mail titles and employing supervised classifiers like the SVM model for classification [Khamis et al., 2020]. Some studies have also considered the cumulative relative frequency of each spam feature to enhance the performance of supervised classifiers [Fazzolari et al., 2021]. The feature-based spam recognition dataset is multidimensional, making it suitable for multiple classification models. Consequently, researchers have compared the performance of different machine learning models [Awad and ELseuofi, 2011], such as SVM, deep neural networks (DNN), and k-nearest neighbor (KNN) [Yeruva et al., 2022], in spam recognition tasks.

The second category focuses on email content identification. For instance, the relaxed online SVM model can be utilized to effectively filter and classify mail content [Sculley and Wachman, 2007], naive Bayes classifiers have also demonstrated effectiveness in email classification [Ma et al., 2020]. In recent years, deep learning algorithms have been increasingly employed in spam recognition. CNNs [Seth and Biswas, 2017], for example, have proven to be effective in identifying spam. The transfer learning of BERT models has also been employed for spam classification, yielding high accuracy [Fazzolari et al., 2021]. Long Short-Term Memory (LSTM) models have shown better performance on short messages (SMS) datasets compared to machine learning classification algorithms like random forest and SVM [Raj et al., 2018].

2.2 GPT and Its Applications

GPT [Radford et al., 2018] is one of the landmark models proposed on the basis of Transformer proposed by Vaswani in 2017 [Vaswani et al., 2017], another representative model is the BERT model proposed by [Devlin et al., 2018]. On this basis, GPT2 [Radford et al., 2019] and GPT3 [Brown et al., 2020] have been proposed and widely used. Excellent performance was achieved tasks such as text generation, question and answer, translation, summary, and dialogue.

ChatGPT [Ouyang et al., 2022] is an upgraded version of OpenAI in 2022 based on the GPT-3.5 model, which is optimized for conversation tasks, adding input and output of conversation history, and control of conversation policies. ChatGPT excels at conversational tasks and can have natural and fluid conversations with humans.

Spam recognition is a text classification task. ChatGPT generally performs well on text classification tasks, and researchers have demonstrated that the model performs well on some text classification tasks [Liu et al., 2023a]. GPT can be used to assist classification decision, by using chatgpt to extract structured

and refined knowledge from knowledge graph as the characteristics of classification tasks. [Shi et al., 2023]. It can also be used directly for text classification with appropriate Prompt design, such as for agricultural [Zhao et al., 2023], business news Lopez-Lira and Tang [2023] and even medical dialogues [Wang et al., 2023].

A few research have explored the application of ChatGPT in text binary classification [Wang et al., 2023], which can provide some reference for spam recognition. In recent studies, ChatGPT was able to identify opinions, sentiment, and emotions contained in the text and categorize emotions. In addition, GPT also performed well in sentiment analysis of disease-related papers [Susnjak, 2023] and Twitter texts [Sharma et al., 2023], indicating that ChatGPT is capable of a wide range of sentiment analysis tasks for texts in different fields.

Due to some uncertainty in the answers of large language models, [Borji, 2023], when using chatgpt for text classification tasks, it is necessary to carefully design hints and related strategies to make the answers as stable and effective as possible. If necessary, a small number of samples can be added to guide the model [Reiss, 2023], such as One-shot Prompting [Korini and Bizer, 2023], Few-shot Prompting [Zhao et al., 2021], and Chain-of-Thought (CoT) Prompting design [Liu et al., 2023b].

3 Spam Detection as an Optimization Problem

In this section, we formulate the spam email detection as a binary classification. Suppose the training dataset $\{(\mathbf{x}_1, y_1), (\mathbf{x}_2, y_2), \dots, (\mathbf{x}_n, y_n)\}$ consists of *n* training examples, each of which has an email (\mathbf{x}_i) and label $y_i \in \{0, 1\}$. For a text encoder (feature extractor) $f_{\theta}(\mathbf{x})$, it extracts hidden representations from the input email \mathbf{x} and it can be term frequency–inverse document frequency, BERT encoder [Devlin et al., 2018], feedforward neural networks [Manasa et al., 2024], and so on. The probability of the *i*-th email being spam is

$$P(Y = 1 | \mathbf{x}_i) = \sigma(\mathbf{w}^T f_\theta(\mathbf{x}_i) + b) = \frac{\exp\left(\mathbf{w}^T f_\theta(\mathbf{x}_i) + b\right)}{1 + \exp\left(\mathbf{w}^T f_\theta(\mathbf{x}_i) + b\right)},$$
(3.1)

so we attempt to optimize the cross-entropy loss during the training stage:

$$(\theta^*, \mathbf{w}^*, b^*) = \arg\min_{\theta, \mathbf{w}, b} \sum_{i=1}^n (y_i \log \sigma(\mathbf{w}^T f_{\theta}(\mathbf{x}_i) + b) + (1 - y_i)(1 - \sigma(\mathbf{w}^T f_{\theta}(\mathbf{x}_i) + b))),$$
(3.2)

where $\hat{\theta}, \hat{\mathbf{w}}, \hat{b}$ are the estimates of θ, \mathbf{w} and b, respectively.

For the large language models (LLMs) like ChatGPT that has more than 100 Billion parameters, we do not need to tune the parameters, but to prompt them directly. The performance of a LLM depends on the design of prompts. We can tune the prompt on the validation dataset S_v ,

$$\mathbf{p}^* = \arg\min_{\mathbf{p}} \sum_{i \in S_v} I(\text{LLM}([\mathbf{p}, \mathbf{x}_i]) \neq y_i), \tag{3.3}$$

where $I(\cdot)$ is the indicator function, and it equals to 1 if the output of LLM is not y_i , otherwise it equals to 0. The optimization can be over the instruction of prompt or the training examples in the prompt.

4 Experimental Setup

In this section, we will describe the details in the study to evaluate ChatGPT's capabilities spam detection tasks. This section covers the following main components: datasets, Prompt design, implementation of baseline models, and evaluation metrics.

At present, there is no strict definition of spam. Usually, email spamming refers to the act of distributing unsolicited messages, optionally sent in bulk, using email; whereas emails of the opposite nature are known as ham, or useful emails.

In this paper, spam detection is defined as a binary classification problem: for an email text T, if it is considered spam, the model outputs "spam", and if it is not, it outputs "ham".

4.1 Datasets

We used two baseline datasets: The open-sourced email spam detection dataset in English and a self-built low-resourced Chinese dataset.

• Email Spam Detection Dataset (ESD): It is a dataset contains 5572 rows, each row for each email. Each line is composed of two columns: v1 contains the label (ham or spam) and v2 contains the raw text. This dataset is open-sourced in Kaggle ³.

 $^{^{3}} https://www.kaggle.com/datasets/shantanudhakadd/email-spam-detection-dataset-classification and the state of the st$

• Chinese Spam Dataset (CSD): This data set is constructed by the authors, which are mainly collected from personal email messages and some spam messages are collected on the Internet. We label the corpus manually and cross-validate the labels to ensure the quality of the data.

Table 1: Detail of Datasets							
Data	Size	Spam	Ham				
ESD	5572	747	4825				
CSD	58	44	14				

The general information of the dataset is shown in Table 1. This table displays the size of two datasets, and the number of spam and ham emails in these datasets.

4.2 In-context Learning

In-context learning was popularized in the original GPT-3 paper [Brown et al., 2020] as a way to use language models to learn tasks given only a few examples in the instruction. During in-context learning, we give the language model a prompt that consists of a list of input-output pairs that demonstrate a task. At the end of the prompt, we append a test input and allow the language model to make a prediction just by conditioning on the prompt and predicting the next tokens.

To utilize ChatGPT via in-context learning, it is necessary to design an instruction, the so-called prompt.

4.2.1 Specification of Prompt

The prompt for spam mail detection is designed as follows:

Forget all your previous instructions, pretend you are a junk mail detection expert who try to identify whether a mail is spam mail. Answer "**spam**" if it is spam, "**ham**" if not. Now you can identify whether the mail is spam:

Mail: [title]. [mail content]

In this prompt, [mail content] represents the title text of the mail, and [title] represents the title of the mail if have. We expect Chatgpt just give us a result like spam or ham, where spam represents spam mail and ham represents non-spam.

4.2.2 Zero-shot Prompt

The output of ChatGPT is sometimes inconsistent, so we enhance the classification efficiency of the model by adjusting the design of prompt [Cao et al., 2023]. On top of the observation from real-world questions, we propose an enhanced prompt template:

Forget all your previous instructions, pretend you are a junk mail detection expert who tries to identify whether a mail is spam mail. Answer "spam" if it is spam, "ham" if not. And if you think it is too private or difficult to judge, you can exclude the impossible one and choose the other. Now you can identify whether the mail is spam: Mail. Incid contents

Mail: [mail content]

We made this adjustment because ChatGPT sometimes had difficulty identifying email categories and gave responses like "neutral" or "ambiguous" under the zero-shot settings. Therefore, in order to achieve better binary classification, we utilize this prompt for the zero-shot experiments.

4.3 Baselines

We compared ChatGPT with popular mainstream spam detection models.

• Naive Bayes: It is a classification algorithm based on Bayes' theorem and feature independence assumption [Ma et al., 2020]. It assumes that input features are independent of each other and uses prior probabilities of classes and conditional probabilities of features to calculate posterior probabilities for classification. Naive Bayes classifier is simple, computationally efficient, and widely used in text classification and spam filtering tasks. This method takes the TF-IDF features of texts as input.

- Logistic Regression (LR): It is a commonly used classification algorithm for solving binary classification problems. It builds a linear model and applies a logistic function (such as the sigmoid function) to perform classification predictions. Logistic regression can output the probability of a sample belonging to a certain class and make decisions based on a specified threshold. Its advantages include computational efficiency, simplicity, and interpretability. This method takes the TF-IDF features of texts as input.
- Support Vector Machine (SVM) [Khamis et al., 2020]: It is a popular classification algorithm that constructs an optimal hyperplane to separate different classes of samples. SVM maps data to a high-dimensional space and seeks a maximum-margin hyperplane to maximize the separation between classes. SVM performs well in handling high-dimensional data and non-linear classification problems, and different kernel functions can be used for different types of data. This method takes the TF-IDF features of texts as input.
- Dense Neural Networks (DNN): This method takes the word embeddings as input and use dense layers to extract hidden features and outputs the probability of being spam. We chose the Keras deep learning framework to implement the DNN model.
- **BERT:** It is a pre-trained language model based on the Transformer architecture. It is trained on large-scale unlabeled text to learn rich language representations. The BERT model can be used for text classification tasks by passing the input text representation to subsequent classification layers for prediction. The BERT model exhibits high performance in natural language processing tasks, particularly in handling contextual relevance and semantic understanding. This model takes the pre-trained embeddings as input.

4.4 Metrics

For classification models, the commonly used evaluation metrics are precision, recall, accuracy and F1 score [Pérez-Díaz et al., 2012]. Following the literature, notations TP, TN, FP, FN represent the number of true positive, true negative, false positive and false negative, respectively. The accuracy (Acc) refers to the proportion of correct predictions among the total number of predictions. It is calculated as follows:

$$Acc = \frac{TP + TN}{TN + TP + FN + FP}$$

In the context of classification models, the recall (R) metric denotes the proportion of actual positive cases that are accurately identified by the model, which is defined as follows:

$$R = \frac{TP}{FN + TP}$$

Conversely, the precision (P) metric represents the proportion of examples predicted as positive that are indeed truly positive, which is defined as follows,

$$P = \frac{TP}{TP + FP}.$$

Notably, the precision rate and recall rate often exhibit a trade-off phenomenon, where improvements in one metric may come at the expense of the other. This reciprocal relationship is particularly pronounced in large-scale datasets, necessitating a comprehensive consideration of both metrics. To strike a balance between these competing indices, the F1-score is commonly employed as a summary measure of model performance, which is defined as follows:

$$F1 = \frac{2 \times P \times R}{P + R}$$

Because the spam detection dataset is usually imbalanced, so we use macro-level precision, recall, F1 score to evaluate the performance of models. Additionally, accuracy is also an important metric.

4.5 Specific Settings

The experiment utilized the GPT3.5 API from OpenAI to conduct experiments. We provide a prompt as input, excluding any historical dialogue or context, and instructing the model to disregard any previous context in the prompt [Lopez-Lira and Tang, 2023]. We removed all line breaks and kept the message length under 100 words, in case the whole length was too long (GPT has a limit of 2000 tokens total). We specifically required the ChatGPT to output "ham" or "spam", without any explanation.

For the ESD dataset, the train-test split ratio is 80-20, i.e., 80% of data is used for training models and 20% for testing. However, due to the small-size of CSD, the train-test split ratio is 50-50, i.e., half of data is used for training models, and the rest for testing.

5 Results and Analysis

5.1 Main Findings

This section exhibits the results from experiments and presents some analysis.

Table 2: A comparison of different methods for spam mail detection using macro-level precision (Prec.), recall (Rec.), F1 score and accuracy (Acc.). The best and second-best results for each dataset and metrics are highlighted in bold and underlined, respectively.

	ESD			CSD				
	Prec.	Rec.	Acc.	F1	Prec.	Rec.	Acc.	F1
Naive Bayes	0.98	0.85	0.96	0.90	0.37	0.50	0.74	0.42
SVM	0.97	0.90	0.97	0.93	0.63	0.55	0.74	0.56
LR	0.97	0.94	0.98	0.96	0.37	0.52	0.75	0.43
DNN	<u>0.98</u>	0.94	0.98	0.96	0.39	0.52	0.76	0.44
BERT	0.99	0.98	0.99	0.98	0.59	0.54	0.76	0.56
ChatGPT(0-shot)	0.73	0.86	0.83	0.76	0.76	0.81	0.84	0.78
ChatGPT(1-shot)	0.76	0.87	0.85	0.79	<u>0.87</u>	0.74	0.88	0.78
ChatGPT(5-shot)	0.77	0.88	0.86	0.80	0.88	0.75	0.89	0.79

Table 2 shows the performance of different models on both the English ESD and Chinese CSD datasets, in terms of macro-level precision, recall, F1 score and accuracy. From this table, BERT performs the best on the English ESD dataset, achieving the highest values on all four metrics, followed by DNN and LR. This result is pretty straightforward, as BERT is pre-trained and has the largest size of tunable parameters. In terms of macro F1 score, supervised learning methods (From naive Bayes to BERT) outperforms ChatGPT significantly, more than 10%. Based on the ESD dataset, the spam detection ability of ChatGPT is significantly weaker than supervised learning models, especially BERT. Fig. 1 illustrates the same information. This figure shows the performance of six methods on ESD in terms of four metrics (macro-level precision, recall, F1 score and accuracy). The ChatGPT with five-shot instances in the prompt is almost always below other lines.

However, on the low-resourced Chinese CSD dataset, the story is quite different. The total sample size is 58, and 29 training examples and 29 testing examples. Due to the low-resourced training data, supervised learning methods perform poorly, BERT achieving a F1 score (0.56) and accuracy (0.76). The low-resourced situation does not affect the in-context learning of ChatGPT, and ChatGPT with five-shot instances performs the best on all four metrics. Figure 2 exhibits the same point, as ChatGPT lies above other models.

By comparing the performance of ChatGPT on ESD and CSD datasets, we find that it performs consistently on both the English and Chinese datasets, ranging from 0.84 to 0.89 for accuracy and from 0.76 to 0.80 for F1 score.

5.2 Effect of Instance Number in the Prompt

The performance of in-context learning depends on the number of instances/demostrations in the prompt. We designed the prompt template of few-shot as follows:

Forget all your previous instructions, pretend you are a junk mail detection expert who tries to identify whether a mail is spam mail. Answer **"spam"** if it is spam, **"ham"** if not. And if you think it is too private or difficult to judge, you can exclude the impossible one and choose the other.

Here is a few examples for you:

• 'Please don't text me anymore. I have nothing else to say.' is "ham";

 \bullet 'The New Jersey Devils and the Detroit Red Wings play Ice Hockey. Correct or Incorrect? End? Reply END SPTV' is "spam" .

Now you can identify whether the mail is spam:

Mail: [mail title]. [mail content]

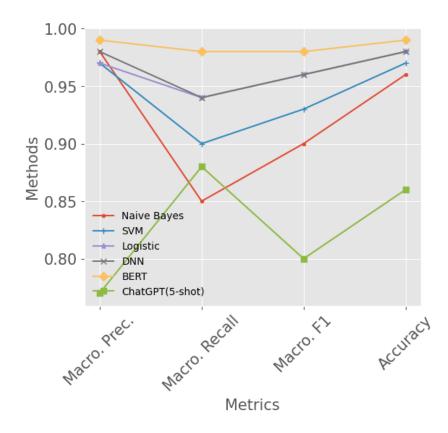


Figure 1: Comparison of performance of different methods on the English ESD dataset. The four evaluation metrics are macro-level precision, recall, F1 score and accuracy.

Fig. 3 and Fig. 4 present the effect of instance number on the performance of ChatGPT. From these two figures, generally the performance of ChatGPT becomes better in terms of all four metrics, as we increase the number of instance examples in the prompt.

~	20110 11110	, ,	and 1 as	11110 101	Paono	
	Words	Length	Quant.	Number	Url	Pub info
	26	157	\checkmark	\checkmark		
	29	154		\checkmark		
	26	155		\checkmark	\checkmark	
	19	149			\checkmark	
	24	155		\checkmark	\checkmark	
	16	92				\checkmark
	22	159	\checkmark	\checkmark		
	15	78				\checkmark

Table 3: Examples of spam texts that incorrectly identified as ham. In the header, "Quant." stands for "quantitative information", and "Pub info" for public information.

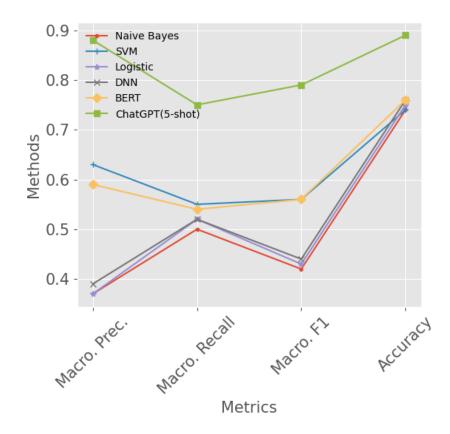


Figure 2: Comparison of performance of different methods on the low-resourced Chinese CSD dataset. The four evaluation metrics are macro-level precision, recall, F1 score and accuracy.

5.3 Error Analysis

In order to further elucidate the characteristics of misclassified emails, we conducted an in-depth examination of the textual data. Specifically, we undertook a comparative analysis of the text length and content of the misclassified emails. The results of this analysis are presented in Table 3, which displays the details of eight spam emails that were incorrectly classified as ham. Notably, the text length of these misclassified emails tends to fall within the range of 150-160 words. However, no discernible pattern emerges in terms of word number distribution. A qualitative analysis of the text content reveals that six of the misclassified emails, which were shorter in length, contain references to public information, such as "Divorce Barbie" and "The New Jersey Devils", and employ a conversational tone reminiscent of small talk between acquaintances. As a result, these emails were mistakenly classified as ham.

5.4 Limitations

In this section, we will briefly summarize some of the limitations of the paper.

• Evaluation Constraints: Due to cost constraints, we only tested some of our baseline models on the mail classification task against zero-shot chat-gpt, and in fact, there may be other more representative machine learning and deep learning techniques that may provide additional perspectives for model evaluation. In addition, the GPT model in this paper uses the API of GPT-3.5, and with the development of large language models, large language models such as GPT-4 will also be put into formal use, so there are certain limitations in the performance evaluation of GPT in this paper.

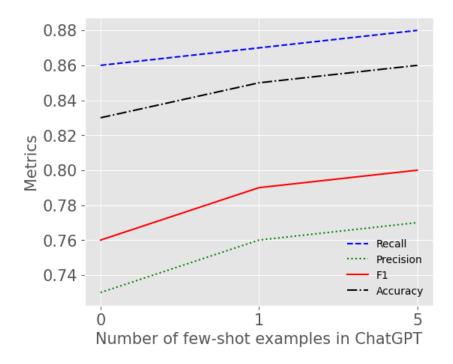


Figure 3: The performance of ChatGPT versus number of instances in prompts on the English ESD dataset

- Dataset Limitations: In this paper, the self-constructed Chinese data set is selected as one of the main datasets, which is small in scale and needs to be expanded in the future. In addition, when studying the performance of different languages in the task of spam recognition, this paper only compares Chinese and English, which is representative to a certain extent, but there are still language limitations.
- Input Length Limitation: Because the GPT API has a limit on the length of tokens, and considering the uncertainty of the GPT's answers, this paper limits the input Prompt to 150 words (Email 100 words or less), so that the model can run normally. Therefore, the research of this paper mainly focuses on short texts with less than 100 words, and the research on long texts is still underexplored.

6 Conclusion

This paper explores the capabilities of ChatGPT in spam detection tasks and compares its performance with various baseline models such as SVM, LR, naive Bayes, and BERT. We evaluated the model on two datasets: the Email Spam Detection Dataset (ESD) and a low-resourced Chinese spam dataset.

Our experimental results demonstrate that ChatGPT performs well in spam classification tasks, although its overall performance is significantly inferior to supervised models on the English ESD dataset. However, the spam detection ability of ChatGPT is pretty stable across different languages as its performance on the low-resourced Chinese CSD is similar to ESD. Another important observation is that ChatGPT has benefits on low-resourced datasets.

Acknowledgments

The authors thank the reviewers for the valuable comments that helped to improve the paper. This work was supported by "the Fundamental Research Funds for the Central Universities" under Grant 2022114012, and the High-End Foreign Expert Recruitment Program of the Ministry of Science and Technology of the People's

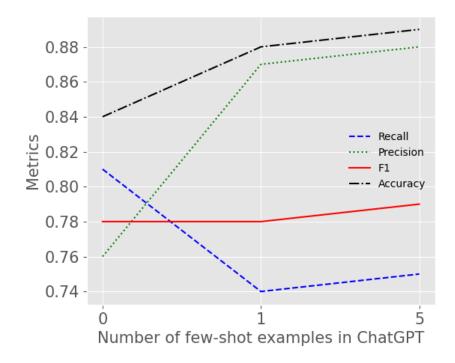


Figure 4: The performance of ChatGPT versus number of instances in prompts on the Chinese CSD dataset

Republic of China, the construction of cutting-edge courses and academic research plans of International Finance and Big Data Management, under Grant G2023138001.

References

- M. S. Ackerman, L. F. Cranor, and J. Reagle. Privacy in e-commerce: examining user scenarios and privacy preferences. In Proceedings of the 1st ACM Conference on Electronic Commerce, pages 1–8, 1999.
- N. Ahmed, R. Amin, H. Aldabbas, D. Koundal, B. Alouffi, and T. Shah. Machine learning techniques for spam detection in email and iot platforms: Analysis and research challenges. *Secur. Commun. Networks*, 2022:1862888:1–1862888:19, 2022. doi: 10.1155/2022/1862888. URL https://doi.org/10.1155/2022/ 1862888.
- A. A. Akinyelu. Advances in spam detection for email spam, web spam, social network spam, and review spam: Ml-based and nature-inspired-based techniques. J. Comput. Secur., 29(5):473-529, 2021. doi: 10.3233/JCS-210022. URL https://doi.org/10.3233/JCS-210022.
- W. Awad and S. ELseuofi. Machine learning methods for e-mail classification. International Journal of Computer Applications, 16(1):39–45, 2011.
- U. Bhardwaj and P. Sharma. Email spam detection using bagging and boosting of machine learning classifiers. Int. J. Adv. Intell. Paradigms, 24(1/2):229–253, 2023. doi: 10.1504/IJAIP.2023.10052961. URL https://doi.org/10.1504/IJAIP.2023.10052961.
- A. Borji. A categorical archive of chatgpt failures, 2023.
- T. Brown, B. Mann, N. Ryder, M. Subbiah, J. D. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell, et al. Language models are few-shot learners. *Advances in neural information processing* systems, 33:1877–1901, 2020.

- J. Cao, M. Li, M. Wen, and S. chi Cheung. A study on prompt design, advantages and limitations of chatgpt for deep learning program repair, 2023.
- J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. arXiv preprint arXiv:1810.04805, 2018.
- J. Doshi, K. Parmar, R. Sanghavi, and N. Shekokar. A comprehensive dual-layer architecture for phishing and spam email detection. *Comput. Secur.*, 133:103378, 2023. doi: 10.1016/J.COSE.2023.103378. URL https://doi.org/10.1016/j.cose.2023.103378.
- M. Fazzolari, F. Buccafurri, G. Lax, and M. Petrocchi. Experience: improving opinion spam detection by cumulative relative frequency distribution. *Journal of Data and Information Quality (JDIQ)*, 13(1):1–16, 2021.
- S. Garg, D. Tsipras, P. Liang, and G. Valiant. What can transformers learn in-context? A case study of simple function classes. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, editors, Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022, 2022.
- M. Hudak, E. Kianičková, and R. Madleňák. The importance of e-mail marketing in e-commerce. Procedia engineering, 192:342–347, 2017.
- F. Jáñez-Martino, R. Alaíz-Rodríguez, V. González-Castro, E. Fidalgo, and E. Alegre. A review of spam email detection: analysis of spammer strategies and the dataset shift problem. Artif. Intell. Rev., 56(2):1145–1173, 2023. doi: 10.1007/S10462-022-10195-4. URL https://doi.org/10.1007/ s10462-022-10195-4.
- A. Karim, S. Azam, B. Shanmugam, K. Kannoorpatti, and M. Alazab. A comprehensive survey for intelligent spam email detection. *IEEE Access*, 7:168261–168295, 2019. doi: 10.1109/ACCESS.2019.2954791. URL https://doi.org/10.1109/ACCESS.2019.2954791.
- S. A. Khamis, C. F. M. Foozy, M. F. A. Aziz, and N. Rahim. Header based email spam detection framework using support vector machine (svm) technique. In R. Ghazali, N. M. Nawi, M. M. Deris, and J. H. Abawajy, editors, *Recent Advances on Soft Computing and Data Mining*, pages 57–65, Cham, 2020. Springer International Publishing.
- K. Korini and C. Bizer. Column type annotation using chatgpt, 2023.
- P. Kumar. Predictive analytics for spam email classification using machine learning techniques. International Journal of Computer Applications in Technology, 64(3):282–296, 2020.
- Y. Liu, T. Han, S. Ma, J. Zhang, Y. Yang, J. Tian, H. He, A. Li, M. He, Z. Liu, Z. Wu, D. Zhu, X. Li, N. Qiang, D. Shen, T. Liu, and B. Ge. Summary of chatgpt/gpt-4 research and perspective towards the future of large language models, 2023a.
- Y. Liu, D. Iter, Y. Xu, S. Wang, R. Xu, and C. Zhu. Gpteval: Nlg evaluation using gpt-4 with better human alignment. arXiv preprint arXiv:2303.16634, 2023b.
- A. Lopez-Lira and Y. Tang. Can chatgpt forecast stock price movements? return predictability and large language models. arXiv preprint arXiv:2304.07619, 2023.
- T. M. Ma, K. Yamamori, and A. Thida. A comparative approach to naïve bayes classifier and support vector machine for email spam classification. In 2020 IEEE 9th Global Conference on Consumer Electronics (GCCE), pages 324–326. IEEE, 2020.
- P. Manasa, A. Malik, and I. Batra. Detection of twitter spam using glove vocabulary features, bidirectional LSTM and convolution neural network. SN Comput. Sci., 5(1):206, 2024. doi: 10.1007/ S42979-023-02518-1. URL https://doi.org/10.1007/s42979-023-02518-1.
- L. Ouyang, J. Wu, X. Jiang, D. Almeida, C. Wainwright, P. Mishkin, C. Zhang, S. Agarwal, K. Slama, A. Ray, et al. Training language models to follow instructions with human feedback. Advances in Neural Information Processing Systems, 35:27730–27744, 2022.

- N. Pérez-Díaz, D. Ruano-Ordas, J. R. Mendez, J. F. Galvez, and F. Fdez-Riverola. Rough sets for spam filtering: Selecting appropriate decision rules for boundary e-mail classification. *Applied Soft Computing*, 12(11):3671–3682, 2012.
- A. Radford, K. Narasimhan, T. Salimans, I. Sutskever, et al. Improving language understanding by generative pre-training. 2018.
- A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, I. Sutskever, et al. Language models are unsupervised multitask learners. OpenAI blog, 1(8):9, 2019.
- H. Raj, Y. Weihong, S. K. Banbhrani, and S. P. Dino. Lstm based short message service (sms) modeling for spam classification. In *Proceedings of the 2018 International Conference on Machine Learning Technologies*, pages 76–80, 2018.
- M. V. Reiss. Testing the reliability of chatgpt for text annotation and classification: A cautionary remark, 2023.
- K. V. Samarthrao and V. M. Rohokale. Enhancement of email spam detection using improved deep learning algorithms for cyber security. J. Comput. Secur., 30(2):231–264, 2022. doi: 10.3233/JCS-200111. URL https://doi.org/10.3233/JCS-200111.
- D. Sculley and G. M. Wachman. Relaxed online syms for spam filtering. In Proceedings of the 30th annual international ACM SIGIR conference on Research and development in information retrieval, pages 415– 422, 2007.
- S. Seth and S. Biswas. Multimodal spam classification using deep learning techniques. In 2017 13th International Conference on Signal-Image Technology & Internet-Based Systems (SITIS), pages 346–349. IEEE, 2017.
- R. Sharma and G. Kaur. E-mail spam detection using svm and rbf. International Journal of Modern Education and Computer Science, 8(4):57, 2016.
- S. Sharma, R. Aggarwal, and M. Kumar. Mining twitter for insights into chatgpt sentiment: A machine learning approach. In 2023 International Conference on Distributed Computing and Electrical Circuits and Electronics (ICDCECE), pages 1–6. IEEE, 2023.
- Y. Shi, H. Ma, W. Zhong, G. Mai, X. Li, T. Liu, and J. Huang. Chatgraph: Interpretable text classification by converting chatgpt knowledge to graphs, 2023.
- T. Susnjak. Applying bert and chatgpt for sentiment analysis of lyme disease in scientific literature, 2023.
- A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin. Attention is all you need. Advances in neural information processing systems, 30, 2017.
- Z. Wang, Q. Xie, Z. Ding, Y. Feng, and R. Xia. Is chatgpt a good sentiment analyzer? a preliminary study, 2023.
- J. Wei, X. Wang, D. Schuurmans, M. Bosma, B. Ichter, F. Xia, E. H. Chi, Q. V. Le, and D. Zhou. Chainof-thought prompting elicits reasoning in large language models. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, editors, Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022, 2022.
- A. R. Yeruva, D. Kamboj, P. Shankar, U. S. Aswal, A. K. Rao, and C. Somu. E-mail spam detection using machine learning-knn. In 2022 5th International Conference on Contemporary Computing and Informatics (IC3I), pages 1024–1028. IEEE, 2022.
- S. Zavrak and S. Yilmaz. Email spam detection using hierarchical attention hybrid deep learning method. Expert Syst. Appl., 233:120977, 2023. doi: 10.1016/J.ESWA.2023.120977. URL https://doi.org/10. 1016/j.eswa.2023.120977.
- B. Zhao, W. Jin, J. D. Ser, and G. Yang. Chatagri: Exploring potentials of chatgpt on cross-linguistic agricultural text classification, 2023.
- Z. Zhao, E. Wallace, S. Feng, D. Klein, and S. Singh. Calibrate before use: Improving few-shot performance of language models. In International Conference on Machine Learning, pages 12697–12706. PMLR, 2021.