

Key-Point-Driven Data Synthesis with its Enhancement on Mathematical Reasoning

Yiming Huang,^{*} Xiao Liu,[†] Yeyun Gong, Zhibin Gou, Yelong Shen,
Nan Duan, Weizhu Chen

Microsoft

{v-yimhuang, xiaoliu2, yegong, v-zhibingou, yeshe}@microsoft.com

{nanduan, wzchen}@microsoft.com

Abstract

Large language models (LLMs) have shown great potential in complex reasoning tasks, yet their performance is often hampered by the scarcity of high-quality and reasoning-focused training datasets. Addressing this challenge, we propose Key-Point-Driven Data Synthesis (KPDDS), a novel data synthesis framework that synthesizes question-answer pairs by leveraging key points and exemplar practices from authentic data sources. KPDDS ensures the generation of novel questions with rigorous quality control and substantial scalability. As a result, we present KPMath, an extensive synthetic dataset tailored for mathematical reasoning, comprising over 800K question-answer pairs. Utilizing KPMath and augmenting it with additional reasoning-intensive corpora, we create the comprehensive KPMath-Plus dataset. The Qwen1.5-72B model, fine-tuned on KPMath-Plus, achieves 87.0% PASS@1 accuracy on GSM8K and 58.3% on MATH, surpassing competitors in the 7B to 70B range and best commercial models like GPT-4 across multiple math reasoning datasets.

1 Introduction

The recent advent of large language models (LLMs) such as GPT-4 (OpenAI, 2023), Gemini (Team et al., 2023), and Mistral (AI, 2024) has sparked significant interest due to their advanced capabilities in diverse domains (Bubeck et al. (2023)). Despite this, their reasoning prowess, particularly in challenging domains like advanced mathematics (Lewkowycz et al., 2022), competitive programming (Huang et al., 2023), and integrated vision-language planning (Cen et al., 2024), remains under scrutiny. In current mathematical reasoning corpora, such as OpenWebMath (Paster et al., 2023b) and MathPile (Wang et al., 2023b), the vast internet-sourced data often suffers from poor quality and relevance to the subject matter. Conversely, manually annotated high-quality datasets like the MATH dataset (Hendrycks et al., 2021b) are scarce and sometimes lack detailed reasoning steps.

Prior efforts to boost the mathematical reasoning capabilities of LLMs using synthetic data have primarily adopted two strategies. The first strategy focuses on augmenting existing datasets. It involves question rephrasing (Yu et al., 2023b) or generating similar questions (Yu et al., 2023b; Luo et al., 2023a; Liu & Yao, 2024). However, the primary issue is that the generated questions are not only textually or conceptually similar but also uncontrollable in their variations. The second strategy seeks to broaden the training dataset by generating new questions from established knowledge concepts. Knowledge bases are either compiled from online educational resources, such as Khan Academy’s math courses (Huang et al., 2024), or synthesized from scratch using models like GPT-4 (Li et al., 2024). However, these methods depend on constructed knowledge that might not align with the existing dataset’s distributions and are difficult to comprehend without examples to illustrate the concepts.

^{*}This work was done during the internship of Yiming Huang at Microsoft.

[†]Corresponding author.

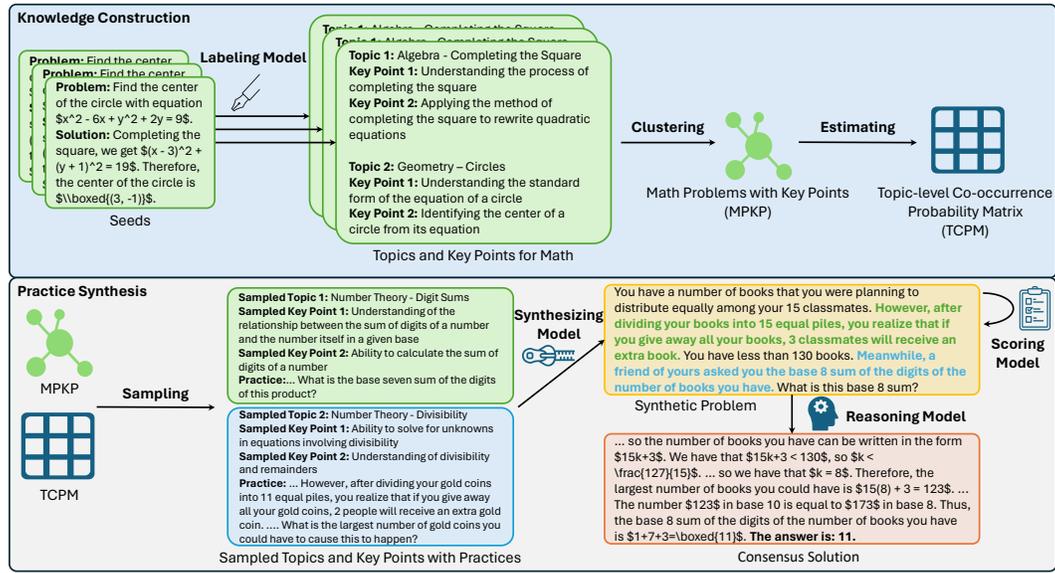


Figure 1: Overview of the Key-Point-Driven Data Synthesis (KPDDS) pipeline, from knowledge extraction to practice synthesis.

Considering these disadvantages of the two strategies, we introduce a novel data synthesis paradigm termed **Key-Point-Driven Data Synthesis (KPDDS)**, which capitalizes on the strengths of both data synthesis strategies. As depicted in Figure 1, it delves into datasets for knowledge mining, using relevant key points and associated problems to inform the generation of new problems. (1) For knowledge construction, we begin by extracting topics and key points from seed problems using a labeling model, followed by a clustering algorithm to ensure deduplication and alignment. Therefore, we get the Math Practices with Key Points (MPKP) dataset and construct the Topic-level Co-occurrence Probability Matrix (TCPM) to understand the frequency and distribution of topic pairs within the dataset. (2) For practice synthesis, we sample multiple topics and key points from MPKP using the TCPM as a guide. These key points, along with corresponding example practices, serve as input for the synthesizing model to generate new questions. A scoring model then assesses the quality of these questions, allowing only those with high scores to proceed. Then, a reasoning model generates a range of answer options, which are later consolidated into consensus solutions through a voting mechanism.

Utilizing the training sets of the MATH (Hendrycks et al., 2021b) and GSM8K (Cobbe et al., 2021b) datasets as foundational data, we developed a novel dataset named **KPMath**. Our training corpus was further enriched by integrating a series of mathematical reasoning datasets, leading to the creation of a comprehensive training dataset, **KPMath-Plus**. By fine-tuning the Qwen1.5-72 model (Bai et al., 2023) on KPMath-Plus, we achieved zero-shot PASS@1 accuracies of 87.0% on the GSM8K test set and 58.3% on the MATH test set, culminating in a promising average of 81.5% across six math reasoning datasets. This performance exceeds that of all competitors within the 7B to 70B model size range and best commercial models like GPT-4. In the Hungarian Exam Score test, the KPMath-Plus-Mistral-7B model also outperforms the majority of models, indicating its competitive performance.

2 Related Work

2.1 Math Reasoning with LLMs

Recently, solving math problems is treated as an important aspect of evaluating LLM’s reasoning ability. However, the LLMs trained for general purposes like GPT-4 (Bubeck et al., 2023), Llama2 (Touvron et al., 2023), Mistral (Jiang et al., 2023), InternLM2 (Team, 2023),

Qwen (Bai et al., 2023), Gemini (Team et al., 2023) and DeepSeek (Bi et al., 2024) have shown limited capabilities in math reasoning. To enhance the math reasoning ability of LLMs, researchers have turned their attention to research directions like prompting methods (Chia et al., 2023; Zheng et al., 2023; Chen et al., 2023; Zhang et al., 2023b), data construction for pretraining (Taylor et al., 2022; Lewkowycz et al., 2022; Paster et al., 2023a; Azerbayev et al., 2022; 2023) and instruction tuning (Yue et al., 2024; Yu et al., 2023b; Luo et al., 2023a; Gou et al., 2024b; An et al., 2023; Liu & Yao, 2024; Huang et al., 2024; Li et al., 2024), interacting with external tools (Mishra et al., 2022; Gao et al., 2022; Gou et al., 2024a;b; Yue et al., 2024; Zhou et al., 2023; Zhang et al., 2024), and reinforcement learning with rewards (Ma et al., 2023; Yu et al., 2023a; Wang et al., 2023a; Luong et al., 2024) for either outcomes or steps. This work is in line with math reasoning data construction for instruction tuning.

2.2 Data Synthesis for Math Reasoning

In the realm of math reasoning, data synthesis is usually applied for instruction tuning, with each data sample encompassing a question text and its corresponding answer text. To advance this field, research efforts focus on three critical aspects: enhancing the quality of answers, generating novel questions, and implementing quality control measures.

For answer quality, some works focus on chain-of-thought (CoT) (Wei et al., 2022; Yu et al., 2023b) style answers, while others like Yue et al. (2024) and Gou et al. (2024b) investigate program-based answers. Yue et al. (2024) synthesize program-of-thought (PoT) (Chen et al., 2022) style answers using GPT-4. Gou et al. (2024b) further explore interleaved answers with program-based tool use. In this work, we focus on the synthesis of CoT-style answers.

For question novelty, research diverges into two approaches: starting from existing problems, Shao et al. (2023) explore answer-first data synthesis and Yu et al. (2023b) utilize backward reasoning, while Luo et al. (2023a), An et al. (2023), and Liu & Yao (2024) focus on evolution instruction and iterative composition using reasoning steps. Alternatively, some work begins with knowledge-based techniques, where Huang et al. (2024) extracts concepts from Khan Academy and Li et al. (2024) uses GPT-4 to create a concepts taxonomy. The former is limited by poor scalability with existing data, and the latter often yields a synthetic data distribution that significantly deviates from real data. In our work, we create questions by extracting key points from real data and then synthesizing new problems based on these key points with authentic and reliable exercises.

For synthetic data quality, Huang et al. (2024) prompt GPT-4 to convert CoT-style answers into verifiable Lean-3 code, while Trinh et al. (2024)’s AlphaGeometry ensures Euclidean geometry theorem accuracy using symbolic deduction. In contrast, We assess synthetic question and answer quality through GPT-4 scored evaluations and consensus scoring via repeated sampling.

2.3 Data Synthesis for Other Applications

The aim of synthetic data is to offer a convincing and fuller depiction of the actual data source, maintaining key statistical characteristics such as the distribution patterns of continuous variables, categorical ratios, and the latent relationships among different variables. Except for math reasoning, there are also works on data synthesis for other applications like code (Luo et al., 2023b; Gunasekar et al., 2023; Wei et al., 2023), table reasoning (Lei et al., 2023), medical application (Zhang et al., 2023a; Tang et al., 2023), visual reasoning (Du et al., 2023), and general purposes (Wang et al., 2022; Xu et al., 2023; Li et al., 2024).

3 Method

3.1 Overview

In the comprehensive framework illustrated in Figure 1, our methodology is systematically delineated into two primary phases: Knowledge Construction and Practice Generation, each consisting of two components. We will introduce these four components separately:

Knowledge Extraction, Topic-level Co-occurrence Probability Matrix (TCPM) Construction, Question Generation with Quality Assessment, and Answer Generation with Consensus Assessment. The specific prompts utilized for each component are detailed in Appendix A.

3.2 Knowledge Extraction

We employ GPT-4 as the labeling model to extract knowledge pertinent to problem-solving from seed problems, as illustrated in Figure 1. The questions and solutions of seeds are input into GPT-4, which then extracts information at two levels of knowledge. Key excerpts from the prompt for knowledge extraction are showcased in Figure 2, and the complete details are shown in Figure 8. The first level of knowledge is the topics, which correspond to the subject and its subcategories that are pertinent to the problem, such as "Geometry - Circles". The secondary level is key points (KPs), which comprise the theorems or methods essential for the resolution process, like "Determining the center of a circle from its equation".

The process of knowledge extraction results in an uncontrolled, extensive number of topics, many of which exhibit semantic overlap. Examples of such redundancy include "Arithmetic - Percentages" and "Arithmetic - Percentage". Furthermore, there are instances where a topic occurs only once, accompanied by very few KPs. Therefore, we further process the extracted knowledge data. Specifically, we use OpenAI's text-embedding-ada-002 to embed all KPs, and the topics are represented by the average value of the embeddings of their included KPs. Then, we calculate the cosine similarity of the topic embeddings for deduplication and clustering, obtaining several representative topics, which are displayed in Tables 3 and 4. Finally, we construct the Math Practices with Key Points (MPKP) dataset.

3.3 TCPM Construction

Mathematical problems typically involve multiple topics and KPs, and the combination of topics within these problems follows a discernible pattern. For example, semantically highly similar topics do not appear repeatedly in the same problem, whereas arbitrarily meshing unrelated topics tends to result in nonsensical questions. In light of this structured complexity, we compute the Topic-level Co-occurrence Probability Matrix (TCPM) from the topics present in mathematical questions within the MPKP dataset. Our methodology is systematically outlined in Algorithm 1. This algorithm quantifies the co-occurrence and self-interaction of topics within a dataset by constructing a matrix that logs the frequency of topic pairs and the instances where the number of KPs for individual topics exceeds five, followed by a logarithmic normalization. An increased co-occurrence probability between topic clusters indicates a likelihood of their concurrent appearance in the examined problems. Figures 10 and 11 presents a heatmap visualization of the co-occurrence probability matrix.

Algorithm 1 TCPM Calculation

Require: MPKP *dataset*
 1: $N \leftarrow$ number of topics in *data*
 2: Initialize *TCPM* with zeros of shape $N \times N$
 3: **for** each d in *data* **do**
 4: **for** each topic i in d **do**
 5: **for** each topic j in d **do**
 6: **if** $i \neq j$ **then**
 7: $TCPM[i][j] + = 1$
 8: **end if**
 9: **end for**
 10: **if** Number of KPs in topic $i > 5$ **then**
 11: $TCPM[i][i] + = 1$
 12: **end if**
 13: **end for**
 14: **end for**
 15: $TCPM \leftarrow \log_{10}(TCPM + 1)$
 16: **return** *TCPM*

As a mathematics education specialist, please analyze the topics and key points of the provided question and its answer. This analysis should serve as a guide for teachers to craft analogous problems and as focal learning objectives for students when approaching the problem. Be sure to avoid repetition of Key Points for clarity and conciseness. Specific requirements are as follows:

1. Identify and categorize the main mathematical topics involved in the problem. If knowledge from non-mathematical fields is used, it is classified into Others - xxx, such as Others - Problem Context.
2. For each topic, enumerate the essential Key Points relevant to the problem.

...

Figure 2: Key excerpts of the prompt for knowledge extraction.

3.4 Question Generation with Quality Assessment

By extracting knowledge and constructing the TCPM from the seed problems, we pave the way for generating new problems that are similar yet varied in nature, building upon their foundational elements. Leveraging the TCPM, we perform probabilistic sampling of topics, with the probability calculation method as follows:

$$V_n = \begin{cases} \sum_j \text{TCPM}_{ij}, & \text{if } n = 1, \\ \text{TCPM}_{T_i}, & \text{if } n = 2, \\ \text{TCPM}_{T_{n-1}} \circ \text{TCPM}_{T_{n-2}}, & \text{if } n > 2, \end{cases}$$

where V_n represents the vector used for probabilistic topic sampling, i and j are index variables, T_i denotes the i -th topic, and TCPM_{T_n} denotes the n -th row vector in TCPM. \circ denotes the Hadamard product (element-wise multiplication).

We proceed to sample two to three topics, and for each topic, we randomly select a problem along with the associated KPs for that topic. This process yields a foundational KPs-Practice information set as the basis for our problem generation. Employing GPT-4, we use this set to generate new problems, with the prompt presented in Figure 3.

Following the generation of problems, we conduct a quantitative evaluation to determine the quality of each problem by GPT-4, prompt shown in Figure 9. This assessment is based on two criteria: the presence of the provided KPs and the absence of logical or factual errors. Each problem is assigned a quality score on a continuous scale from 0 to 1. Figure 4 shows the score distribution of our synthetic questions. In assembling quality-assured questions, a threshold of 0.85 is instituted to screen the newly generated problems, save about 51% high-quality question. Figure 12 displays an example of a high-quality and a poor-quality problem originating from identical initial inputs.

You are a math teacher. Now, you need to help your students to learn the following math knowledge. There are some key points and example problems:
.....
Using these key points and example problems as a guideline, please construct a new, original math problem that requires an understanding and application of all the {len of selected kps} knowledge points.
.....
Write your new math problem, using <Q> and </Q> to indicate the question.

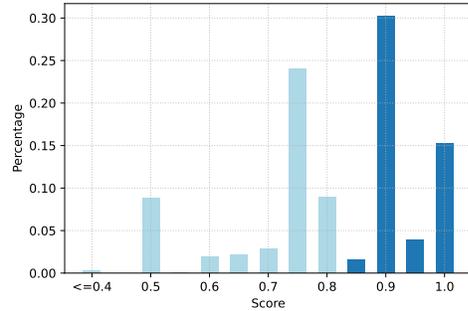


Figure 3: Prompt for Question Generation

Figure 4: Score Distribution of Synthetic Questions

3.5 Solution Generation with Consensus Assessment

Prior work in the domain did not emphasize the quality control measures or relied solely on answers generated by models like GPT-4. By integrating a voting protocol, our methodology is designed to minimize the effects of noisy data and enhance the reliability of the answer-generation process. To ensure the correctness of generated answers, we employ a few-shot strategy where the reference problem is utilized as a demonstration input. To procure a diverse array of CoT rationales, we employ nucleus sampling, thereby invoking multiple prompts. Subsequently, a voting mechanism, derived from an enhanced version of the script from Gou et al. (2024b), is employed to aggregate the solutions. This mechanism leverages packages such as sympy¹ to ensure that equivalent answers, albeit in different forms (e.g., fractions and decimals), are recognized as equal.

¹<https://www.sympy.org>

As illustrated in Figure 13, some samples in our dataset include multiple sub-questions. We have excluded data with more than three sub-questions to maintain analytical clarity. For the multipart questions in our study, we extract the answers to sub-questions and apply a distinct voting mechanism for each. For each sub-question, we utilized GPT-4 with a temperature of 0.75 and a top-p of 0.95, resampling to obtain 10 potential responses, which then contribute to the formation of the Consensus Score Vector (CSV). Let x be a question with n sub-questions. Then $CSV(x)$ is defined as

$$CSV(x) = [c_1, c_2, \dots, c_n]$$

where each c_i is the consensus score for the i -th sub-question and is calculated based on the voting results from the potential responses. Each c_i is in the range $[0, 1]$.

4 Experiment

4.1 Training Dataset Construction

KPMATH-M (252K) This segment is based on the MATH (Hendrycks et al., 2021a) dataset’s training set, which consists of 7,500 samples from high school math competitions, encompassing seven subjects and five difficulty levels. Utilizing the KPDDS approach on the seed problems, we generate a collection of 500K question-answer pairs. Considering that voting may produce multiple answers to the same question, such as in extreme cases where one question has ten answers, this type of data may not be conducive to model learning. Therefore, by rewriting each original question and its answers (not necessarily correct), we can obtain non-repetitive question-answer pairs. After a thorough examination of the consensus voting strategies optimization, detailed in Section §4.7, we refined our dataset to include the most representative 253K data points.

KPMATH-G (613K) Drawing from the GSM8K (Cobbe et al., 2021b) training set, which offers 7,473 samples of grade school math problems characterized by their 2 to 8 step solutions, we established the KPMATH-G component. We simplified our approach due to the dataset’s emphasis on basic math operations. Instead of generating solutions through consensus assessment, we generated three potential solutions containing mathematical expressions for each question and then meticulously verified the accuracy of each expression. We removed any data with incorrect expressions and transformed the remaining correct solutions into detailed, expression-free explanations. This process contributed an additional 613K data points to our dataset.

MixMath (711K) To ensure diversity and quality, we curated a comprehensive collection from various high-quality open-source mathematical reasoning datasets. The collection encompasses the complete datasets of MetaMath (Yu et al., 2023b), MMIQC (Liu & Yao, 2024), and Open-Platypus (Lee et al., 2023), in addition to the training sets of GSM8K (Cobbe et al., 2021b), MATH (Hendrycks et al., 2021a), and TAL-SCQ5K-EN (math eval, 2023), as well as the CoT subset of MathInstruct (Yue et al., 2024). As there was significant overlap among these datasets, we applied min-hash techniques to minimize redundancy. We also omitted entries with excessively long numbers or those with empty answers. This careful curation resulted in a robust dataset of 711K data points.

It is noteworthy that these procedural steps of deduplication and filtering out excessively long numbers were also applied to KPMATH-M and KPMATH-G datasets. Through these comprehensive measures, the final KPMATH-Plus dataset aggregates the three individual components into a substantial collection, culminating in a total of 1,576K data points that embody the richness and variety of mathematical problem-solving challenges.

4.2 Implementation Details

In our supervised fine-tuning (SFT) experiments, we employed chat message templates to transform question-answer pairs into the format: “User: {question}\nEnclose the final answer using \boxed{\}. \n\nAssistant: {answer}”. We utilized the LLaMa-Factory repository

Table 1: Results on six mathematical reasoning tasks. The results of our model are bolded. ZS: Zero-shot inference without demonstrations. Vanilla models are tested with CoT.

Model	Base	Size	ZS	GSM8k	MATH	SVAMP	TabMWP	ASDiv	MAWPS	AVG
Proprietary Models										
GPT-4 (0613)	-	-	✗	92.0	42.5	93.1	67.1	91.3	97.6	80.6
ChatGPT	-	-	✗	80.8	35.5	83.0	69.1	87.3	94.6	75.1
Claude-2	-	-	✗	85.2	32.5	-	-	-	-	-
PaLM-2	-	540B	✗	80.7	34.3	-	-	-	-	-
Open-Source Models										
Llama-2	-	7B	✗	13.3	4.1	38.0	31.1	50.7	60.9	33.0
Llama-2 SFT	-	7B	✓	41.3	7.2	31.9	27.8	47.4	60.0	35.9
Platypus-2	Llama-2	7B	✗	14.4	5.4	36.7	26.5	47.9	58.4	31.6
MAmmoTH	Llama-2	7B	✓	45.9	7.3	48.7	28.9	62.3	74.8	44.7
WizardMath	Llama-2	7B	✓	54.9	10.7	57.3	38.1	59.1	73.7	49.0
MetaMath	Llama-2	7B	✓	66.6	20.7	68.8	43.8	72.5	86.9	59.9
Mistral	-	7B	✗	42.9	12.9	65.1	55.6	68.4	86.8	55.3
MAmmoTH	Mistral	7B	✓	52.7	14.5	54.1	49.1	64.9	77.5	52.1
MMIQc	Mistral	7B	✓	74.8	36.0	73.1	62.5	81.9	90.5	69.8
MetaMath	Mistral	7B	✗	77.8	29.0	78.6	64.7	81.1	93.4	70.8
KPMath-Plus	Mistral	7B	✓	82.1	46.8	76.4	66.4	86.7	94.2	75.4 (+20.1)
DeepSeekMath	-	7B	✓	63.3	32.3	73.2	68.6	82.9	92.4	68.8
KPMath-Plus	DSMath	7B	✓	83.9	48.8	81.5	78.7	88.9	94.8	79.4 (+10.6)
Llama-2	-	13B	✗	24.3	6.3	43.1	39.5	56.3	70.4	36.2
Llama-2 SFT	-	13B	✓	51.1	9.2	46.3	35.8	58.6	75.0	42.6
Platypus-2	Llama-2	13B	✗	23.7	7.1	50.7	45.3	55.1	69.6	38.0
MAmmoTH	Llama-2	13B	✓	49.6	9.9	49.6	40.5	60.0	73.4	47.2
WizardMath	Llama-2	13B	✓	63.9	14.0	64.3	46.7	65.8	79.7	51.8
MetaMath	Llama-2	13B	✓	71.0	23.2	71.9	52.8	75.7	87.0	63.6
KPMath-Plus	Llama-2	13B	✓	81.6	41.0	76.7	63.9	83.2	92.3	73.1 (+36.9)
Llemma	-	34B	✗	55.4	24.4	68.0	57.2	75.9	90.5	61.9
MMIQc	Llemma	34B	✓	79.2	38.7	80.4	70.1	85.0	94.0	74.6
KPMath-Plus	Llemma	34B	✓	82.4	48.6	81.2	71.9	87.5	94.5	77.7 (+15.8)
Llama-2	-	70B	✗	57.8	14.4	73.6	57.5	76.0	92.4	58.2
Llama-2 SFT	-	70B	✓	69.3	14.9	64.0	53.0	71.3	84.8	56.6
Platypus-2	Llama-2	70B	✗	45.9	15.0	74.3	47.3	72.7	91.1	53.0
WizardMath	Llama-2	70B	✓	81.6	22.7	80.0	49.8	76.2	86.2	63.8
MetaMath	Llama-2	70B	✓	82.0	27.2	85.8	63.4	84.0	95.4	73.0
MAmmoTH	Llama-2	70B	✓	65.1	14.6	60.1	38.2	70.2	80.3	54.8
KPMath-Plus	Llama-2	70B	✓	87.4	48.6	81.2	75.1	89.0	95.4	79.4 (+21.2)
Qwen1.5	-	72B	✗	77.6	38.2	82.5	52.0	85.1	95.9	71.9
KPMath-Plus	Qwen1.5	72B	✓	87.0	58.3	82.1	76.7	89.2	95.5	81.5 (+9.6)

(Zheng et al., 2024) to fine-tune the models for 3 epochs across all experiments. We adopted a linear learning rate schedule with a 3% warm-up ratio. The maximum learning rate is $1e-5$, except for DeepSeekMath, which is $5e-5$. We trained all models with BFloat16 numerical format, *DeepSpeed ZeRO Stage3* (Rajbhandari et al., 2021) and *Flash-Attention 2* (Dao, 2023). For evaluation, we adopted the same template in SFT to prompt all questions. We employed greedy decoding with a maximum sequence length of 2,048 tokens.

4.3 Evaluation and Metrics

We evaluate our fine-tuned models on GSM8k (Cobbe et al., 2021a) and MATH (Hendrycks et al., 2021b), along with 4 out-of-distribution datasets, namely SVAMP (Patel et al., 2021), ASDIV (Miao et al., 2021), TabMWP (Lu et al., 2022), MAWPS (Koncel-Kedziorski et al., 2016). We utilize an enhanced version of the script from Gou et al. (2024b) to extract answers, parse expressions, and compare the equivalency of the answers. We report the zero-shot PASS@1 accuracies of predicted answers.

The Hungarian Exam was first introduced by Grok-1 (xAI, 2023), designed to evaluate the out-of-domain capabilities of mathematical models. We follow the evaluation method proposed by Paster (2023), which divides this exam into 33 challenging problems suitable for model processing, and these answers require manual verification by humans.

4.4 Baselines

We present results from a range of state-of-the-art (SoTA) proprietary LLMs, including OpenAI’s GPT-4 (OpenAI, 2023), ChatGPT (gpt-3.5-turbo), Google’s PaLM-2(Anil et al., 2023), and Anthropic’s Claude-2(Anthropic, 2023). Regarding open-source models, we consider base models such as LLaMA-2(Touvron et al., 2023), DeepSeekMath(Shao et al., 2024), Mistral(Jiang et al., 2023), Llemma (Azerbayev et al., 2023), and Qwen1.5(Bai et al., 2023). Supervised Fine-Tuning (SFT) employs CoT rationales from the original GSM8k and MATH dataset (15k samples) for fine-tuning. We also showcase the performance of advanced models using SFT or RLHF on various mathematical reasoning datasets, including MAMmoTH (Yue et al., 2024), WizardMath (Luo et al., 2023a), Platypus-2 (Lee et al., 2023), MetaMath (Yu et al., 2023b) and MMIQC (Liu & Yao, 2024).

4.5 Main Results

Table 1 presents the results on six widely-used mathematical benchmarks, highlighting several key observations: KPMath-Plus significantly enhances the performance of multiple base models, with average accuracy improvements ranging from 10.6% to 36.9%. The KPMath-Plus-Qwen1.5-72B model achieves zero-shot PASS@1 accuracies of 87.0% on GSM8K and 58.3% on MATH, and also reaches promising performance on other math reasoning datasets, outperforming competitors in the 7B to 70B range.

Figure 5 displays the Hungarian Exam Score versus GSM8K Performance of various models, with comparative data sourced from Paster (2023). KPMath-Plus-Mistral-7B is notably behind only to GPT-4 (OpenAI, 2023) and Grok-1 (xAI, 2023). Additionally, compared to other fine-tuned models, it exhibits a well-balanced performance between the two test sets, suggesting that our model does not overfit the seed data.

Our comprehensive analysis across multiple widely recognized math reasoning datasets confirms the superiority of KPMath-Plus in achieving the highest performance. Remarkably, KPMath-Plus maintains exceptional competitiveness even when compared to numerous 70B models, despite being based on a 7B architecture.

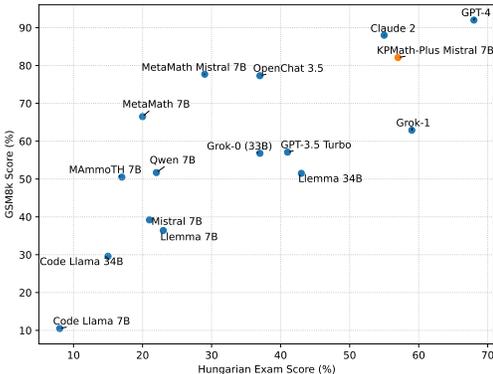


Figure 5: Hungarian Exam Score vs GSM8K Performance of Various Models.

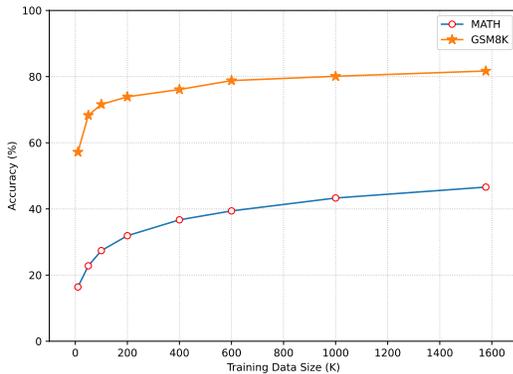


Figure 6: Performance of KPMath-Plus-Mistral-7B across various training data size.

4.6 Ablation Study on Training Data Components and Size

We conducted an ablation study with the KPMath-Plus data components on the Mistral-7B model, training over 3 epochs. Results in Table 2 indicate that integrating KPMath-G, derived from the GSM8K dataset, enhances performance on GSM8K by 5% compared to training solely on MathMix. Improvements extend to SVAMP, ASDiv, and MAWPS, while a slight performance decline in MATH and TabMWP is observed, potentially due to their higher complexity. Moreover, combining KPMath-M, based on the MATH dataset, with MixMath consistently increases scores by over 1% across all datasets. Merging KPMath-G

and KPMath-M significantly boosts overall performance, with gains of 6.4% on GSM8K and 3.5% on MATH, averaging a 4.1% improvement, illustrating the comprehensive benefits of our synthesized data within KPMath-Plus for mathematical reasoning.

We also investigated the impact of training data size on the KPMath-Plus-Mistral-7B model’s performance. As demonstrated in Figure 6, model performance exhibits a logarithmic increase with the expansion of training data. The model achieves impressive results with small data size and maintains a steady growth trend. This study underlines the exceptional quality of our data and establishes a clear linkage between training data size and model performance, particularly in tackling complex tasks. In our future work, we aim to further explore larger and higher-quality datasets to continue improving model performance.

Table 2: Performance comparison of different data components (%).

Data	GSM8K	MATH	SVAMP	TabMWP	ASDiv	MAWPS	AVG
MixMath	75.7	43.3	73.6	63.1	82.9	89.1	71.3
MixMath + KPMath-G	80.7	43.0	76.7	60.0	85.1	93.9	73.1
MixMath + KPMath-M	77.0	45.9	74.0	65.0	84.6	92.0	73.1
KPMath-Plus	82.1 (+6.4)	46.8 (+3.5)	76.4 (+2.8)	66.4 (+3.3)	86.7 (+3.8)	94.2 (+5.1)	75.4 (+4.1)

4.7 Investigation on the Consensus Voting Strategy

We conducted a comparative analysis to identify the optimal consensus voting strategies for KPMath-M, experimenting with three distinct strategies on the Mistral-7B model. The first strategy, non-voting, involved retaining all answers, regardless of their differences. The second strategy, semi-voting, for questions with only one sub-question, preserved only the most popular answer to ensure complete consensus in the retained response. For questions with multiple sub-questions, consensus needed to be reached on at least one of the answers. The third strategy was full-voting, requiring consensus on every sub-question. Additionally, we conducted CSV threshold experiments on the latter two strategies.

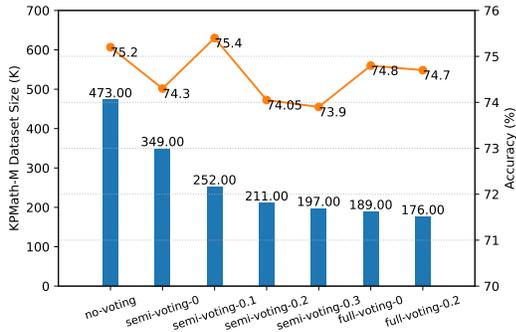


Figure 7: Training Results with Different Voting Strategies (average performance on six mathematical dataset).

We integrated KPMath-M with different strategies into KPMath-G and MixMath, and after fine-tuning on Mistral-7B, we obtained results as demonstrated in Figure 7. The semi-voting with a CSV threshold of 0.1 proved to be the best setting, with the data volume reduced by 46.7% compared to non-voting, yet without any degradation in performance. Therefore, we retained KPMath-M under this setting as our final dataset. This experiment also validated the effectiveness of our consensus voting strategy in filtering data for quality.

5 Conclusion

In this paper, we propose a new data synthesis paradigm that is focused on the generation of large-scale, high-quality, symbolically-driven training datasets. Leveraging this paradigm, we have developed an extensive synthetic dataset tailored for mathematical reasoning. By utilizing this data set, our fine-tuned model achieved excellent performance in multiple data sets including MATH and GSM8K, and the performance exceeded all 7B to 70B competitors. Our research underscores the efficacy of integrating key points in data synthesis and applying stringent quality control protocols to both questions and answers.

References

- Mistral AI. Au large: Mistral large is our flagship model, with top-tier reasoning capacities, February 2024. URL <https://mistral.ai/news/mistral-large/>.
- Shengnan An, Zexiong Ma, Zeqi Lin, Nanning Zheng, Jian-Guang Lou, and Weizhu Chen. Learning from mistakes makes llm better reasoner. *arXiv preprint arXiv:2310.20689*, 2023.
- Rohan Anil, Andrew M Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos, Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, et al. Palm 2 technical report. *arXiv preprint arXiv:2305.10403*, 2023.
- Anthropic. Model card and evaluations for claude models. 2023.
- Zhangir Azerbayev, Edward Ayers, and Bartosz Piotrowski. <https://huggingface.co/datasets/hoskinson-center/proof-pile>, 2022. URL <https://huggingface.co/datasets/hoskinson-center/proof-pile>.
- Zhangir Azerbayev, Hailey Schoelkopf, Keiran Paster, Marco Dos Santos, Stephen McAleer, Albert Q Jiang, Jia Deng, Stella Biderman, and Sean Welleck. Llemma: An open language model for mathematics. *arXiv preprint arXiv:2310.10631*, 2023.
- Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, et al. Qwen technical report. *arXiv preprint arXiv:2309.16609*, 2023.
- Xiao Bi, Deli Chen, Guanting Chen, Shanhuang Chen, Damai Dai, Chengqi Deng, Honghui Ding, Kai Dong, Qiu Shi Du, Zhe Fu, et al. Deepseek llm: Scaling open-source language models with longtermism. *arXiv preprint arXiv:2401.02954*, 2024.
- Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, et al. Sparks of artificial general intelligence: Early experiments with gpt-4. *arXiv preprint arXiv:2303.12712*, 2023.
- Jun Cen, Chenfei Wu, Xiao Liu, Shengming Yin, Yixuan Pei, Jinglong Yang, Qifeng Chen, Nan Duan, and Jianguo Zhang. Using left and right brains together: Towards vision and language planning. *arXiv preprint arXiv:2402.10534*, 2024.
- Jiaao Chen, Xiaoman Pan, Dian Yu, Kaiqiang Song, Xiaoyang Wang, Dong Yu, and Jianshu Chen. Skills-in-context prompting: Unlocking compositionality in large language models. *arXiv preprint arXiv:2308.00304*, 2023.
- Wenhu Chen, Xueguang Ma, Xinyi Wang, and William W Cohen. Program of thoughts prompting: Disentangling computation from reasoning for numerical reasoning tasks. *arXiv preprint arXiv:2211.12588*, 2022.
- Yew Ken Chia, Guizhen Chen, Luu Anh Tuan, Soujanya Poria, and Lidong Bing. Contrastive chain-of-thought prompting. *arXiv preprint arXiv:2311.09277*, 2023.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021a.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021b.
- Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning. *arXiv preprint arXiv:2307.08691*, 2023.
- Yifan Du, Hangyu Guo, Kun Zhou, Wayne Xin Zhao, Jinpeng Wang, Chuyuan Wang, Mingchen Cai, Ruihua Song, and Ji-Rong Wen. What makes for good visual instructions? synthesizing complex visual reasoning instructions for visual instruction tuning. *arXiv preprint arXiv:2311.01487*, 2023.

- Luyu Gao, Aman Madaan, Shuyan Zhou, Uri Alon, Pengfei Liu, Yiming Yang, Jamie Callan, and Graham Neubig. Pal: Program-aided language models. *arXiv preprint arXiv:2211.10435*, 2022.
- Zhibin Gou, Zhihong Shao, Yeyun Gong, yelong shen, Yujiu Yang, Nan Duan, and Weizhu Chen. CRITIC: Large language models can self-correct with tool-interactive critiquing. In *The Twelfth International Conference on Learning Representations*, 2024a. URL <https://openreview.net/forum?id=Sx038qxjek>.
- Zhibin Gou, Zhihong Shao, Yeyun Gong, yelong shen, Yujiu Yang, Minlie Huang, Nan Duan, and Weizhu Chen. ToRA: A tool-integrated reasoning agent for mathematical problem solving. In *The Twelfth International Conference on Learning Representations*, 2024b. URL <https://openreview.net/forum?id=Ep0TtjVoap>.
- Suriya Gunasekar, Yi Zhang, Jyoti Aneja, Caio César Teodoro Mendes, Allie Del Giorno, Sivakanth Gopi, Mojan Javaheripi, Piero Kauffmann, Gustavo de Rosa, Olli Saarikivi, et al. Textbooks are all you need. *arXiv preprint arXiv:2306.11644*, 2023.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv preprint arXiv:2103.03874*, 2021a.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *NeurIPS*, 2021b.
- Yiming Huang, Zhenghao Lin, Xiao Liu, Yeyun Gong, Shuai Lu, Fangyu Lei, Yaobo Liang, Yelong Shen, Chen Lin, Nan Duan, et al. Competition-level problems are effective llm evaluators. *arXiv preprint arXiv:2312.02143*, 2023.
- Yinya Huang, Xiaohan Lin, Zhengying Liu, Qingxing Cao, Huajian Xin, Haiming Wang, Zhenguo Li, Linqi Song, and Xiaodan Liang. Mustard: Mastering uniform synthesis of theorem and proof data. *arXiv preprint arXiv:2402.08957*, 2024.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.
- Rik Koncel-Kedziorski, Subhro Roy, Aida Amini, Nate Kushman, and Hannaneh Hajishirzi. Mawps: A math word problem repository. In *Proceedings of the 2016 conference of the north american chapter of the association for computational linguistics: human language technologies*, pp. 1152–1157, 2016.
- Ariel N. Lee, Cole J. Hunter, and Nataniel Ruiz. Platypus: Quick, cheap, and powerful refinement of llms. *arXiv preprint arxiv:2308.07317*, 2023.
- Fangyu Lei, Qian Liu, Yiming Huang, Shizhu He, Jun Zhao, and Kang Liu. S3eval: A synthetic, scalable, systematic evaluation suite for large language models. *arXiv preprint arXiv:2310.15147*, 2023.
- Aitor Lewkowycz, Anders Johan Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Venkatesh Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, Yuhuai Wu, Behnam Neyshabur, Guy Gur-Ari, and Vedant Misra. Solving quantitative reasoning problems with language models. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022.
- Haoran Li, Qingxiu Dong, Zhengyang Tang, Chaojun Wang, Xingxing Zhang, Haoyang Huang, Shaohan Huang, Xiaolong Huang, Zeqiang Huang, Dongdong Zhang, et al. Synthetic data (almost) from scratch: Generalized instruction tuning for language models. *arXiv preprint arXiv:2402.13064*, 2024.
- Haoxiong Liu and Andrew Chi-Chih Yao. Augmenting math word problems via iterative question composing. *arXiv preprint arXiv:2401.09003*, 2024.

- Pan Lu, Liang Qiu, Kai-Wei Chang, Ying Nian Wu, Song-Chun Zhu, Tanmay Rajpurohit, Peter Clark, and Ashwin Kalyan. Dynamic prompt learning via policy gradient for semi-structured mathematical reasoning. *arXiv preprint arXiv:2209.14610*, 2022.
- Haipeng Luo, Qingfeng Sun, Can Xu, Pu Zhao, Jianguang Lou, Chongyang Tao, Xiubo Geng, Qingwei Lin, Shifeng Chen, and Dongmei Zhang. Wizardmath: Empowering mathematical reasoning for large language models via reinforced evol-instruct. *arXiv preprint arXiv:2308.09583*, 2023a.
- Ziyang Luo, Can Xu, Pu Zhao, Qingfeng Sun, Xiubo Geng, Wenxiang Hu, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. Wizardcoder: Empowering code large language models with evol-instruct. *CoRR*, abs/2306.08568, 2023b. doi: 10.48550/ARXIV.2306.08568. URL <https://doi.org/10.48550/arXiv.2306.08568>.
- Trung Quoc Luong, Xinbo Zhang, Zhanming Jie, Peng Sun, Xiaoran Jin, and Hang Li. Reft: Reasoning with reinforced fine-tuning. *arXiv preprint arXiv:2401.08967*, 2024.
- Qianli Ma, Haotian Zhou, Tingkai Liu, Jianbo Yuan, Pengfei Liu, Yang You, and Hongxia Yang. Let’s reward step by step: Step-level reward model as the navigators for reasoning. *arXiv preprint arXiv:2310.10080*, 2023.
- math eval. Tal-scq5k. <https://github.com/math-eval/TAL-SCQ5K>, 2023.
- Shen-Yun Miao, Chao-Chun Liang, and Keh-Yih Su. A diverse corpus for evaluating and developing english math word problem solvers. *arXiv preprint arXiv:2106.15772*, 2021.
- Swaroop Mishra, Matthew Finlayson, Pan Lu, Leonard Tang, Sean Welleck, Chitta Baral, Tanmay Rajpurohit, Oyvind Tafjord, Ashish Sabharwal, Peter Clark, and Ashwin Kalyan. Lila: A unified benchmark for mathematical reasoning. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2022.
- OpenAI. Gpt-4 technical report, 2023.
- Keiran Paster. Testing language models on a held-out high school national finals exam. https://huggingface.co/datasets/keirp/hungarian_national_hs_finals_exam, 2023.
- Keiran Paster, Openwebmath: An open dataset of high-quality mathematical web text. *arXiv preprint, forthcoming*, 2023a.
- Keiran Paster, Marco Dos Santos, Zhangir Azerbayev, and Jimmy Ba. Openwebmath: An open dataset of high-quality mathematical web text. *arXiv preprint arXiv:2310.06786*, 2023b.
- Arkil Patel, Satwik Bhattamishra, and Navin Goyal. Are nlp models really able to solve simple math word problems? *arXiv preprint arXiv:2103.07191*, 2021.
- Samyam Rajbhandari, Olatunji Ruwase, Jeff Rasley, Shaden Smith, and Yuxiong He. Zero-infinity: Breaking the gpu memory wall for extreme scale deep learning. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, pp. 1–14, 2021.
- Zhihong Shao, Yeyun Gong, Yelong Shen, Minlie Huang, Nan Duan, and Weizhu Chen. Synthetic prompting: Generating chain-of-thought demonstrations for large language models. *arXiv preprint arXiv:2302.00618*, 2023.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Mingchuan Zhang, YK Li, Y Wu, and Daya Guo. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Ruixiang Tang, Xiaotian Han, Xiaoqian Jiang, and Xia Hu. Does synthetic data generation of llms help clinical text mining? *arXiv preprint arXiv:2303.04360*, 2023.

- Ross Taylor, Marcin Kardas, Guillem Cucurull, Thomas Scialom, Anthony Hartshorn, Elvis Saravia, Andrew Poulton, Viktor Kerkez, and Robert Stojnic. Galactica: A large language model for science, 2022.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- InternLM Team. Internlm: A multilingual language model with progressively enhanced capabilities. <https://github.com/InternLM/InternLM>, 2023.
- Hugo Touvron, Louis Martin, Kevin R. Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruti Bhosale, Daniel M. Bikel, Lukas Blecher, Cristian Cantón Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony S. Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel M. Kloumann, A. V. Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, R. Subramanian, Xia Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zhengxu Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models. *ArXiv*, abs/2307.09288, 2023.
- Trieu H Trinh, Yuhuai Wu, Quoc V Le, He He, and Thang Luong. Solving olympiad geometry without human demonstrations. *Nature*, 625(7995):476–482, 2024.
- Peiyi Wang, Lei Li, Zhihong Shao, RX Xu, Damai Dai, Yifei Li, Deli Chen, Y Wu, and Zhifang Sui. Math-shepherd: A label-free step-by-step verifier for llms in mathematical reasoning. *arXiv preprint arXiv:2312.08935*, 2023a.
- Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A Smith, Daniel Khashabi, and Hannaneh Hajishirzi. Self-instruct: Aligning language model with self generated instructions. *arXiv preprint arXiv:2212.10560*, 2022.
- Zengzhi Wang, Rui Xia, and Pengfei Liu. Generative ai for math: Part i–mathpile: A billion-token-scale pretraining corpus for math. *arXiv preprint arXiv:2312.17120*, 2023b.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in Neural Information Processing Systems*, 35:24824–24837, 2022.
- Yuxiang Wei, Zhe Wang, Jiawei Liu, Yifeng Ding, and Lingming Zhang. Magicoder: Source code is all you need. *arXiv preprint arXiv:2312.02120*, 2023.
- xAI. Grok-1, 2023. URL <https://x.ai/>.
- Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, and Daxin Jiang. Wizardlm: Empowering large language models to follow complex instructions. *arXiv preprint arXiv:2304.12244*, 2023.
- Fei Yu, Anningzhe Gao, and Benyou Wang. Outcome-supervised verifiers for planning in mathematical reasoning. *arXiv preprint arXiv:2311.09724*, 2023a.
- Longhui Yu, Weisen Jiang, Han Shi, Jincheng Yu, Zhengying Liu, Yu Zhang, James T. Kwok, Zhenguo Li, Adrian Weller, and Weiyang Liu. Metamath: Bootstrap your own mathematical questions for large language models. *arXiv preprint arXiv:2309.12284*, 2023b.
- Xiang Yue, Xingwei Qu, Ge Zhang, Yao Fu, Wenhao Huang, Huan Sun, Yu Su, and Wenhua Chen. MAMmoTH: Building math generalist models through hybrid instruction tuning. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=yLC1Gs770I>.

- Beichen Zhang, Kun Zhou, Xilin Wei, Xin Zhao, Jing Sha, Shijin Wang, and Ji-Rong Wen. Evaluating and improving tool-augmented computation-intensive math reasoning. *Advances in Neural Information Processing Systems*, 36, 2024.
- Xinlu Zhang, Chenxin Tian, Xianjun Yang, Lichang Chen, Zekun Li, and Linda Ruth Petzold. Alpacare: Instruction-tuned large language models for medical application. *arXiv preprint arXiv:2310.14558*, 2023a.
- Yifan Zhang, Jingqin Yang, Yang Yuan, and Andrew Chi-Chih Yao. Cumulative reasoning with large language models. *arXiv preprint arXiv:2308.04371*, 2023b.
- Chuanyang Zheng, Zhengying Liu, Enze Xie, Zhenguo Li, and Yu Li. Progressive-hint prompting improves reasoning in large language models. *arXiv preprint arXiv:2304.09797*, 2023.
- Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyang Luo, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models. *arXiv preprint arXiv:2403.13372*, 2024. URL <http://arxiv.org/abs/2403.13372>.
- Aojun Zhou, Ke Wang, Zimu Lu, Weikang Shi, Sichun Luo, Zipeng Qin, Shaoqing Lu, Anya Jia, Linqi Song, Mingjie Zhan, et al. Solving challenging math word problems using gpt-4 code interpreter with code-based self-verification. *arXiv preprint arXiv:2308.07921*, 2023.

A Prompts

Prompt for Knowledge Extraction

As a mathematics education specialist, please analyze the topics and key points of the provided question and its answer. These analysis should serve as a guide for teachers to craft analogous problems and as focal learning objectives for students when approaching the problem. Be sure to avoid repetition of Key Points for clarity and conciseness. Specific requirements are as follows:

1. Identify and categorize the main mathematical topics involved in the problem. If knowledge from non-mathematical fields is used, it is classified into Others - xxx, such as Others - Problem Context.
2. For each topic, enumerate the essential Key Points relevant to the problem.

Question: Compute $\cos 330^\circ$. Answer: We know that $330^\circ = 360^\circ - 30^\circ$. Since $\cos(360^\circ - \theta) = \cos \theta$ for all angles θ , we have $\cos 330^\circ = \cos 30^\circ$. Since $\cos 30^\circ = \frac{\sqrt{3}}{2}$,

we can conclude that $\cos 330^\circ = \frac{\sqrt{3}}{2}$.

Analysis: `<AN><1>Trigonometry - Cosine Function</1><k>Understanding co-terminal angles in trigonometry</k><k>Trigonometric identities, specifically the cosine of an angle related to a reference angle</k><k>Knowledge of exact values of cosine for common angles (30°, 45°, 60°, etc.)</k><k>Subtraction of angles and use of angle identities</k></AN>`

Question: Cara is sitting at a circular table with her five friends as shown below. How many different possible pairs of people could Cara be sitting between?

`<asy>draw(circle((0,0),1)); label("-",1.5dir(0)); label("-",1.5dir(60)); label("Cara",1.5dir(120)); label("-",1.5dir(180)); label("-",1.5dir(240)); label("-",1.5dir(300)); </asy>`

Answer: The number of pairs of neighbors for Cara actually has nothing to do with the shape of the table she is sitting at. That is, all that matters is that she has 5 friends and two of them will be her neighbors. There are $\binom{5}{2} = \boxed{10}$ pairs of friends that she can thus sit between.

Analysis: `<AN><1>Combinatorics - Counting Problems</1><k>Understanding of combinations and the use of the combination formula</k><k>Interpreting combinatorial problems in context</k><k>Application of $\binom{n}{k}$ to find the number of ways to choose k items from n distinct items</k></AN><AN><1>Others - Problem Context</1><k>Translation of real-world scenarios into combinatorial problems</k><k>Recognition that the physical arrangement (e.g., circular table) does not affect the combinatorial count</k></AN>`

Question: {question of seed problem}

Answer: {answer of seed problem}

Analysis:

Figure 8: Prompts for knowledge extraction.

Prompt for Question Generation
 You are a math teacher. Now, you need to help your students to learn the following math key points. There are some key points and example problems:

 Using these key points and example problems as a guideline, please construct a new, original math problem that requires an understanding and application of all the {len of selected kps} key points.

 Write your new math problem, using <Q>and </Q>to indicate the question.

Prompt for Question Evaluation
 Given these math key points and example problems:

 I have formulated a new math problem as follows:

 Could you please evaluate whether the new math problem incorporates all the provided key points? And please determine whether there are factual or logical errors in the problem. Provide a score as a floating-point number between 0 and 1, where 1 means all key points are fully integrated into the problem and there are no factual or logical errors, and 0 indicates none are integrated or there are many factual or logical errors. The closer the score is to 1, the more comprehensive the problem is in terms of covering the given concepts and theorems, and the fewer factual or logical errors there are. Evaluation Score:

Prompts for Question Answering

- You have extensive experience with math competitions and you need to write a detailed tutorial for beginners.
- You are an experienced math teacher and you need to help beginners learn these math problems.
- There are some challenging math problems, take deep breath and solve them.
- Look at the following math problems and help me to solve them.
- You are a ai assistant know a lot of math problems. Tell me how to solve the following math problems.

Prompt for Question Rephrasing
 Below is an original mathematics problem with its corresponding solution. Your task is to creatively reframe this problem into 10 different scenarios. The scenarios should incorporate the same numerical values but be set in a wide array of environments, involving various characters or objects. Ensure that each scenario stands out by using a variety of sentence structures, settings, and applications, ranging from the everyday to the fantastical. The rephrased problems should each be unique in their presentation while still clearly corresponding to the original problem's solution.
 Original Problem: <Q>..... </Q>
 Original Solution: <A>.....
 Now, create the 10 rephrased questions based on this information. Using <Q>and </Q>to indicate the question. Question1:

Figure 9: Some prompts used in this work.

B Mathematic Topic Details

Table 3: Topics in MATH.

1	Calculus - Functions and their Properties	2	Calculus - Optimization	3	Calculus - Limits
4	Algebra - Solving Equations	5	Algebra - Polynomials	6	Algebra - Inequalities
7	Algebra - Functions	8	Algebra - Simplifying Expressions	9	Algebra - Linear Equations
10	Algebra - Quadratic Equations	11	Algebra - Square Roots	12	Algebra - Radicals
13	Algebra - Sequences and Series	14	Algebra - Linear Functions	15	Algebra - Complex Numbers
16	Algebra - Function Operations	17	Algebra - Exponents	18	Algebra - Rational Functions
19	Algebra - Function Transformations	20	Algebra - Proportions	21	Algebra - Proportional Relationships
22	Algebra - Logarithms	23	Algebra - Substitution	24	Algebra - Exponential Growth
25	Algebra - Summation	26	Algebra - Absolute Value	27	Algebra - Variables and Expressions
28	Algebra - Ratios and Proportions	29	Algebra - Geometric Series	30	Algebra - Interval Notation
31	Algebra - Polynomial Expansion	32	Algebra - Real Numbers	33	Others - Problem Context
34	Others - Graph Interpretation	35	Others - Problem Solving	36	Arithmetic - Order of Operations
37	Arithmetic - Time Calculations	38	Arithmetic - Division	39	Arithmetic - Basic Operations
40	Arithmetic - Fractions	41	Arithmetic - Multiplication	42	Arithmetic - Percentages
43	Arithmetic - Addition	44	Arithmetic - Averages	45	Arithmetic - Rate Problems
46	Arithmetic - Unit Conversion	47	Arithmetic - Rounding Numbers	48	Number Theory - Fractions and Decimals
49	Number Theory - Integer Properties	50	Number Theory - Powers and Roots	51	Number Theory - Floor Function
52	Number Theory - Floor and Ceiling Functions	53	Number Theory - Perfect Squares	54	Number Theory - Divisibility
55	Number Theory - Factors and Multiples	56	Number Theory - Prime Numbers	57	Number Theory - Multiples
58	Number Theory - Odd and Even Numbers	59	Number Theory - Digit Sums	60	Number Theory - Modulo Arithmetic
61	Number Theory - Properties of Integers	62	Number Theory - Units Digit	63	Number Theory - Greatest Common Divisor (GCD)
64	Number Theory - Perfect Squares and Cubes	65	Number Theory - Counting Digits	66	Number Theory - Modular Arithmetic
67	Number Theory - Division and Remainders	68	Number Theory - Powers and Exponents	69	Geometry - Circles
70	Geometry - Coordinate Geometry	71	Geometry - Distance Formula	72	Geometry - Polygons
73	Geometry - Midpoint Formula	74	Geometry - Reflections	75	Geometry - Area Calculation
76	Geometry - Lines and Angles	77	Geometry - Perimeter	78	Geometry - Parabolas
79	Geometry - Area of a Circle	80	Geometry - Rectangles	81	Geometry - Triangles
82	Geometry - Transformations	83	Geometry - Squares	84	Geometry - 3D Shapes
85	Geometry - Angles	86	Geometry - Volume of Solids	87	Geometry - Pyramids
88	Geometry - Similar Triangles	89	Geometry - Cones	90	Geometry - Parallelograms
91	Geometry - Conic Sections	92	Geometry - Ellipse	93	Geometry - Coordinate Systems
94	Geometry - Planes in Three Dimensions	95	Financial Mathematics - Compound Interest	96	Sequences and Series - Infinite Series
97	Complex Numbers - Absolute Value	98	Combinatorics - Counting Problems	99	Combinatorics - Factorials
100	Combinatorics - Binomial Coefficients	101	Combinatorics - Pascal's Triangle	102	Measurement - Unit Conversion
103	Statistics - Mean	104	Statistics - Mean and Median	105	Probability - Basic Concepts
106	Probability - Expected Value	107	Probability - Geometric Probability	108	Data Interpretation - Bar Graphs
109	Trigonometry - Tangent Function	110	Trigonometry - Sine and Cosine Functions	111	Trigonometry - Polar Coordinates
112	Set Theory - Overlapping Sets	113	Number Systems - Base Conversion	114	Number Systems - Binary Numbers
115	Linear Algebra - Matrices	116	Linear Algebra - Vectors	117	Linear Algebra - Determinants
118	Linear Algebra - Vectors and Parametric Equations	119	Vector Algebra - Dot Product		

Table 4: Topics in GSM.

1	Arithmetic - Basic Operations	2	Others - Problem Context	3	Arithmetic - Multiplication and Division
4	Arithmetic - Multiplication and Addition	5	Algebra - Word Problems	6	Word Problems - Problem Solving
7	Arithmetic - Division	8	Arithmetic - Addition and Subtraction	9	Arithmetic - Percentages
10	Arithmetic - Fractions	11	Proportional Reasoning	12	Arithmetic - Time Calculations
13	Arithmetic - Averages	14	Geometry - Volume Calculation	15	Measurement - Length
16	Arithmetic - Sequences and Series	17	Geometry - Rectangles	18	Arithmetic - Comparison
19	Set Theory - Overlapping Sets	20	Arithmetic - Rate Problems	21	Arithmetic - Unit Conversion
22	Arithmetic - Money	23	Geometry - Triangles	24	Problem Solving - Multi-step Problems
25	Probability	26	Geometry - Area Calculation	27	Arithmetic - Age Problems
28	Geometry - Perimeter	29	Measurement - Volume	30	Word Problems - Distance Problems
31	Measurement - Weight	32	Arithmetic - Subtraction and Multiplication	33	Algebra - Exponential Growth
34	Fractions - Addition and Subtraction				

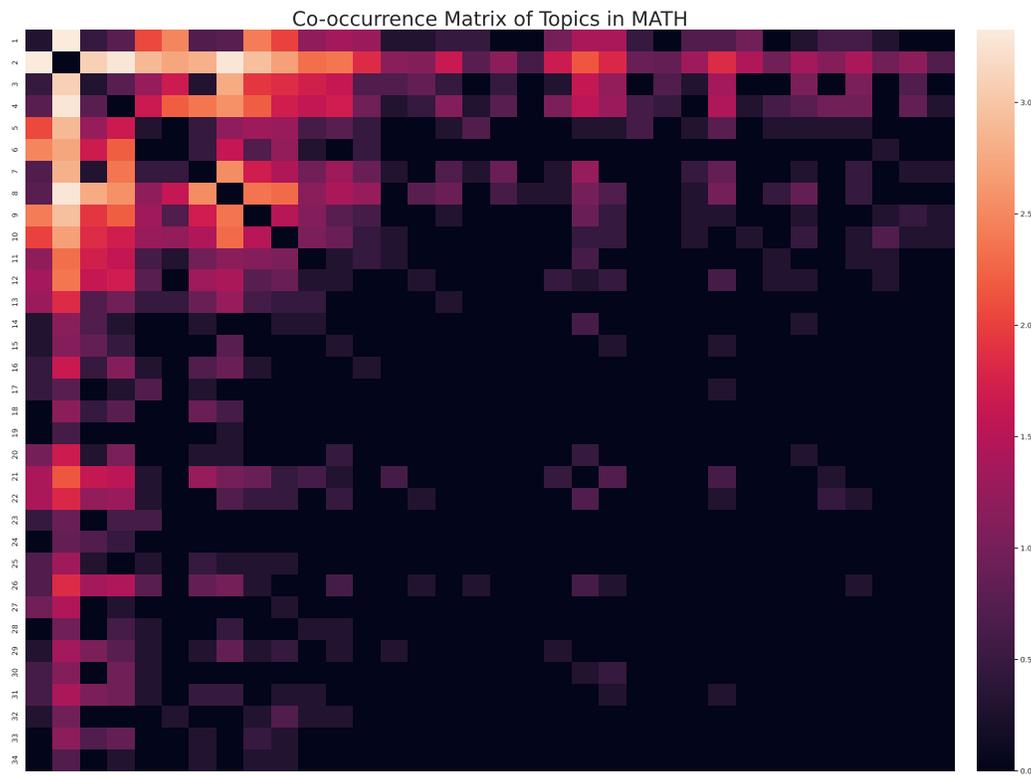


Figure 10: Visualized heat map of co-occurrence probability matrix.

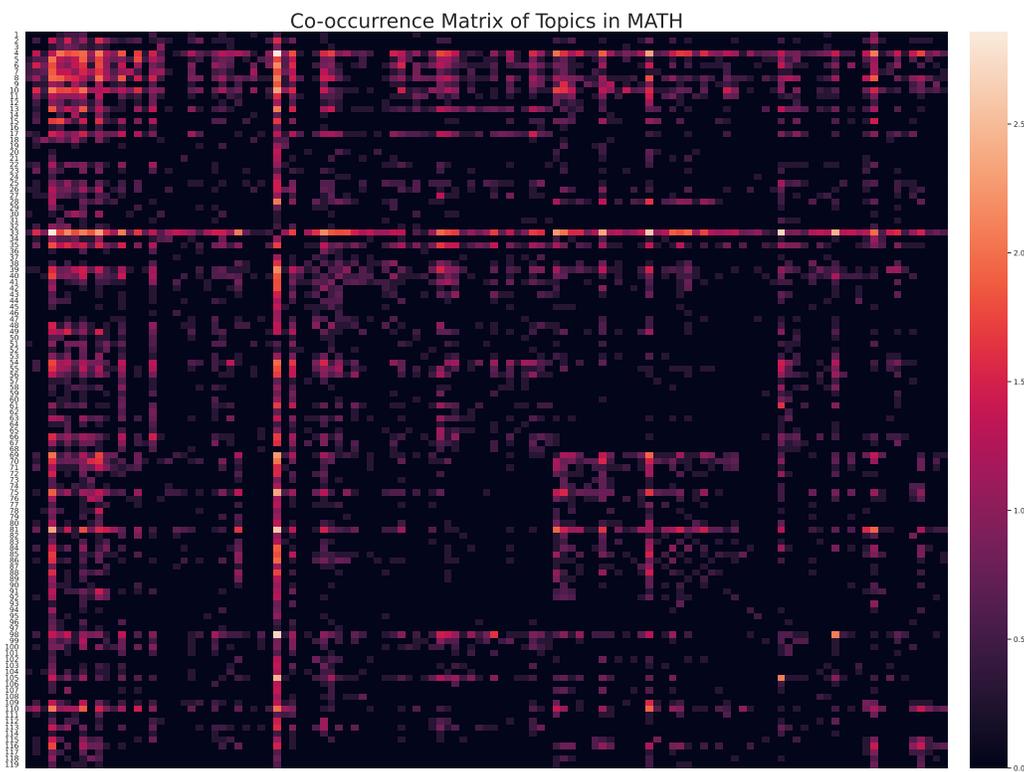


Figure 11: Visualized heat map of co-occurrence probability matrix.

C QA Examples

Synthetic Question Bad Case ✗

You are a treasure hunter and have found a chest full of gold coins in an ancient ruin. The chest contains less than 1000 gold coins. You decided to distribute the coins equally among your 13 fellow treasure hunters. However, after dividing your gold coins into 13 equal piles, you realize that if you give away all your gold coins, 3 people will receive an extra gold coin. You also found an ancient riddle in the chest stating that the sum of the digits of the number of gold coins is a base 13 number that leaves the same remainder upon division by 10 as the number itself. What is the largest number of gold coins you could have to cause this to happen?

Synthetic Question Good Case ✓

You have a number of books that you were planning to distribute equally among your 15 classmates. However, after dividing your books into 15 equal piles, you realize that if you give away all your books, 3 classmates will receive an extra book. You have less than 130 books. Meanwhile, a friend of yours asked you the base 8 sum of the digits of the number of books you have. What is this base 8 sum?

Figure 12: Examples of high-quality and poor-quality problems generated from the same initial inputs.

Question: Tommy ran four blocks south and then 9 blocks east for his morning run. If each block is one-fourth of a mile, how many miles did he run? After his run, he relaxed by watching the sunrise. He noticed that the sun rose at 6:00 AM and by 6:40 AM, it had risen 30 degrees in the sky. If the sun continues to rise at this rate, what will be the angle of the sun above the horizon at 7:20 AM?

Solution: Tommy ran $4 + 9 = 13$ blocks. This is $13 \left(\frac{1}{4}\right) = \boxed{3.25}$ miles.

For the second part of the question, we need to determine the rate at which the sun is rising. We know that in 40 minutes (from 6:00 AM to 6:40 AM), the sun rose 30 degrees. So, the rate of rise is $\frac{30 \text{ degrees}}{40 \text{ minutes}} = \frac{3}{4}$ degrees per minute. From 6:40 AM to 7:20 AM is another 40 minutes. So in this time, the sun will rise an additional $40 \text{ minutes} \times \frac{3}{4} \text{ degrees/minute} = 30$ degrees. Therefore, at 7:20 AM, the sun will be 30 degrees (from 6:00 AM to 6:40 AM) + 30 degrees (from 6:40 AM to 7:20 AM) = $\boxed{60}$ degrees above the horizon. The answer is: 3.25; 60

Figure 13: A complex problem comprising multiple sub-questions in KPMath.

D Data Contamination Test

To mitigate the risk of data contamination in our evaluation benchmark, we adhere to the methodology presented by Azerbayev et al. (2023) for cross-examining n -gram overlaps between our synthetic dataset and the test sets of Math and GSM8K. A hit is recorded if any n -gram in the test sequence appears within any training set. Given the shorter length of questions, we implement a 20-gram check for questions and a 30-gram check for solutions. For GSM8K, our analysis identifies no hits. For Math, our analysis identifies 102 hits for KPMath questions and 108 hits for KPMath solutions, fewer than the 181 and 144 hits found in the MATH training set’s problems and solutions, respectively. Notably, KPMath accounts for 9 unique problem hits, and 16 solution hits absent in the MATH train set, with details provided in Appendix D. Moreover, we conducted a manual review of all hits. We determined that they were instances of repeated problem contexts or intermediate reasoning steps rather than exact duplicates of questions or solutions. This examination indicates a very low risk of data contamination for KPMath.

Listing 1: Caces of Question 20-gram Hits

Question of Math Test 257:
 A square is drawn such that one of its sides coincides with the line $y = 7$, and so that the endpoints of this side lie on the parabola $y = 2x^2 + 8x + 4$. What is the area of the square?
 Overlap:
 A square is drawn such that one of its sides coincides with the line $y = 7$, and so that the endpoints of this side lie on the parabola $y =$
 >>>>>>>

Question of Math Test 2314:
 Let $x, y,$ and z be nonnegative real numbers such that $x + y + z = 3$. Find the maximum value of $[(xy + z)(xz + y)].$
 Overlap:
 $x, y,$ and z be nonnegative real numbers such that $x + y + z = 3$. Find the maximum value of
 >>>>>>>

Question of Math Test 2253:
 For some real numbers a and b , the equation $[8x^3 + 4ax^2 + 2bx + a = 0]$ has three distinct positive roots. If the sum of the base-2 logarithms of the roots is 5, what is the value of a ?
 Overlap:
 three distinct positive roots. If the sum of the base-2 logarithms of the roots is 5, what is the value of
 >>>>>>>

Question of Math Test 4974:
 Find the matrix \mathbf{M} that swaps the rows of a matrix. In other words, $[\mathbf{M} \begin{pmatrix} a & b \\ c & d \end{pmatrix} = \begin{pmatrix} c & d \\ a & b \end{pmatrix}]$. If no such matrix \mathbf{M} exists, then enter the zero matrix.
 Overlap:
 $\begin{pmatrix} a & b \\ c & d \end{pmatrix} = \begin{pmatrix} c & d \\ a & b \end{pmatrix}$. If no such matrix
 >>>>>>>

Question of Math Test 2416:
 Let $a, b, c,$ and d be positive real numbers such that $a + b + c + d = 10$. Find the maximum value of $ab^2 c^3 d^4$.
 Overlap:
 Let $a, b, c,$ and d be positive real numbers such that $a + b + c + d =$
 >>>>>>>

Question of Math Test 1042:
 Suppose the function $f(x)$ is defined explicitly by the table $\begin{array}{c|c|c|c|c} x & 0 & 1 & 2 & 3 & 4 \\ \hline f(x) & 0 & 0 & 1 & 3 & 6 \end{array}$

end{array}\$\$\$ This function is defined only for the values of x listed in the table. Suppose $g(x)$ is defined as $f(x)-x$ for all numbers x in the domain of f . How many distinct numbers are in the range of $g(x)$?

Overlap:

```
$$$\begin{array}{c || c | c | c | c | c} x & 0 & 1 & 2 & 3 & 4 \\ \hline & & & & & \end{array}
```

Question of Math Test 1972:

In the diagram, the two triangles shown have parallel bases. What is the ratio of the area of the smaller triangle to the area of the larger triangle? Express your answer as a common fraction. [asy] path p = (0,0)--dir(-60)--dir(-120)--(0,0); draw(p); draw(scale(3)*p); label("4 cm",dir(-60)--dir(-120),S); label("10 cm",3*dir(-60)--3dir(-120),S); [/asy]

Overlap:

What is the ratio of the area of the smaller triangle to the area of the larger triangle? Express your answer as a common fraction. [asy]

>>>>>>>

Question of Math Test 1917:

Points $A(0,0)$, $B(9,6)$ and $C(6,12)$ are vertices of triangle ABC . Point D is on segment AB such that $2(AD) = DB$, point E is on segment BC such that $2(BE) = EC$ and point F is on segment CA such that $2(CF) = FA$. What is the ratio of the area of triangle DEF to the area of triangle ABC ? Express your answer as a common fraction.

Overlap:

= FA . What is the ratio of the area of triangle DEF to the area of triangle ABC ? Express your answer as a common fraction.

>>>>>>>

Question of Math Test 3166:

The greatest common divisor of two integers is $(x+3)$ and their least common multiple is $x(x+3)$, where x is a positive integer. If one of the integers is 40, what is the smallest possible value of the other one?

Overlap:

integers is $(x+3)$ and their least common multiple is $x(x+3)$, where x is a positive integer. If one of the integers is 40, what is the smallest possible value of

>>>>>>>

Listing 2: Caces of Solution 30-gram Hits

Solution of Math Test 3232:

Let us look at the powers of 5 : $\begin{array}{l} 5^1 \equiv 5 \pmod{7} \\ 5^2 \equiv 4 \pmod{7} \\ 5^3 \equiv 6 \pmod{7} \\ 5^4 \equiv 2 \pmod{7} \\ 5^5 \equiv 3 \pmod{7} \\ 5^6 \equiv 1 \pmod{7} \end{array}$. Since $5^6 \equiv 1 \pmod{7}$, we see that $5^{30} \equiv (5^6)^5 \equiv 1 \pmod{7}$, hence our desired remainder is $\boxed{1}$.

Overlap:

$\begin{array}{l} 5^1 \equiv 5 \pmod{7} \\ 5^2 \equiv 4 \pmod{7} \\ 5^3 \equiv 6 \pmod{7} \\ 5^4 \equiv 2 \pmod{7} \\ 5^5 \equiv 3 \pmod{7} \\ 5^6 \equiv 1 \pmod{7} \end{array}$.

>>>>>>>

Solution of Math Test 1445:

We can just treat the knot as another bead. There are $5!$ ways to place the beads and the knot on the bracelet, but we must divide by 5 for rotational symmetry (5 rotations for each arrangement), and by 2 for reflectional symmetry (we can flip the bracelet to get the same arrangement). The answer is $\frac{5!}{5 \times 2} = \boxed{12}$.

Overlap:

on the bracelet, but we must divide by 5 for rotational symmetry (5 rotations for each arrangement), and by 2 for reflectional symmetry (we can flip the bracelet to get the same arrangement). The answer is $\frac{5!}{5 \times 2} =$

>>>>>>

Solution of Math Test 3528:

The primes between 1 and 100 are 2, 3, 5, 7, 11, 13, 17, 19, 23, 29, 31, 37, 41, 43, 47, 53, 59, 61, 67, 71, 73, 79, 83, 89, and 97. We compute their residues modulo 16: 2, 3, 5, 7, 11, 13, 1, 3, 7, 13, 15, 5, 9, 11, 15, 5, 11, 13, 3, 7, 9, 15, 3, 9, 1. We multiply all of these numbers modulo 16, taking advantage of the fact that $3 \cdot 5 \equiv -1 \pmod{16}$, $7 \cdot 9 \equiv -1 \pmod{16}$, $11 \cdot 13 \equiv -1 \pmod{16}$, and $15 \equiv -1 \pmod{16}$. We find that our answer is $\boxed{6}$.

Overlap:

between 1 and 100 are 2, 3, 5, 7, 11, 13, 17, 19, 23, 29, 31, 37, 41, 43, 47, 53, 59, 61, 67, 71, 73, 79, 83, 89, and 97.

>>>>>>

Solution of Math Test 458:

The sum of the first n odd integers is $1 + 3 + \dots + (2n - 1)$. The sum of an arithmetic series is equal to the average of the first and last term, multiplied by the number of terms, so this sum is $[1 + (2n - 1)]/2 \cdot n = n^2$. Then the sum of the odd integers between 0 and 100 is 50^2 , and the sum of the odd integers between 0 and 200 is 100^2 . Therefore, the ratio of the sum of the odd integers between 0 and 100 to the sum of the odd integers between 100 and 200 is $\frac{50^2}{100^2 - 50^2} = \frac{1}{4-1} = \boxed{\frac{1}{3}}$.

Overlap:

$+ \dots + (2n - 1)$. The sum of an arithmetic series is equal to the average of the first and last term, multiplied by the number of terms, so

>>>>>>

Solution of Math Test 3562:

Let's find the cycle of units digits of 7^n , starting with $n=1$: 7, 9, 3, 1, 7, 9, 3, 1, \dots. The cycle of units digits of 7^n is 4 digits long: 7, 9, 3, 1. Thus, to find the units digit of 7^n for any positive n , we must find the remainder, R , when n is divided by 4 ($R=1$ corresponds to the units digit 7, $R=2$ corresponds to the units digit 9, etc.) Since $53 \div 4 = 13R1$, the units digit of 7^{53} is $\boxed{7}$.

Overlap:

7, 9, 3, 1, 7, 9, 3, 1, \dots. The cycle of units digits of 7^n is 4 digits long: 7, 9, 3, 1. Thus, to find the units digit of 7^n for any positive n , we must find the remainder, R , when n is divided by 4 ($R=1$ corresponds to the units digit 7, $R=2$ corresponds to the units digit 9, etc.) Since

>>>>>>

Solution of Math Test 2349:

Note that $ab + bc + cd \leq ab + bc + cd + da = (a + c)(b + d)$. By AM-GM, $\frac{(a + c)(b + d)}{2} \leq \left(\frac{a + c}{2} + \frac{b + d}{2}\right)^2 = \frac{1}{4}$. Equality occurs when $a = 0$, $b = \frac{1}{2}$, $c = \frac{1}{2}$, and $d = 0$, so the maximum value of $ab + bc + cd$ is $\boxed{\frac{1}{4}}$.

Overlap:

that $ab + bc + cd \leq ab + bc + cd + da = (a + c)(b + d)$. By AM-GM, $\frac{(a + c)(b + d)}{2} \leq \left(\frac{a + c}{2} + \frac{b + d}{2}\right)^2 =$

>>>>>>

Solution of Math Test 333:

Let d be the common difference. Then the last term is $7 + (15-1)d = 7+14d$. The sum of an arithmetic series is equal to the average of the first and last term, multiplied by the number of terms, so the sum of the series is $\frac{7 + (7 + 14d)}{2} \cdot 15 = 15(7d + 7) = 105d + 105$. We are told that this sum equals -210 , so we have $105+105d = -210$, from which we find $d = \boxed{-3}$. Note: $\boxed{3}$ is also accepted as an answer.

Overlap:

The sum of an arithmetic series is equal to the average of the first and last term, multiplied by the number of terms, so the sum of the series is

>>>>>>

Solution of Math Test 3695:

The measure of each interior angle in a regular n -gon is $\frac{180(n-2)}{n}$ degrees. Therefore, the measure of angle $\angle BAD$ is $\frac{180(6-2)}{6}=120$ degrees and the measure of angle $\angle CAD$ is 108 degrees. Their difference, $\angle BAC$, measures $120-108=\boxed{12}$ degrees.

Overlap:

The measure of each interior angle in a regular n -gon is $\frac{180(n-2)}{n}$ degrees. Therefore, the measure of angle $\angle BAD$ is $\frac{180(6-2)}{6}=120$ degrees and the measure of angle $\angle CAD$ is

>>>>>>

Solution of Math Test 79:

The radius of the circular path of the horse closer to the center is $\frac{1}{4}$ of the radius of the path of the horse farther from the center. Since circumference is directly proportional to radius, the length of shorter path is $\frac{1}{4}$ of the length of the longer path. Therefore, 4 times as many revolutions must be made to go the same distance, which is $27 \times 4 = \boxed{108}$ revolutions.

Overlap:

radius of the circular path of the horse closer to the center is $\frac{1}{4}$ of the radius of the path of the horse farther from the center. Since circumference is directly proportional to radius, the length of

>>>>>>

Solution of Math Test 593:

Moving terms to the LHS, we have $x^2-6x+y^2+8y=24$. Completing the square on the quadratic in x , we add $(\frac{6}{2})^2=9$ to both sides. Completing the square on the quadratic in y , we add $(\frac{8}{2})^2=16$ to both sides. We are left with the equation $x^2-6x+9+y^2+8y+16=49 \rightarrow (x-3)^2+(y+4)^2=49$. Thus, our circle has center $(3,-4)$. The distance between this center and the point $(-3,-12)$ is $\sqrt{(-3-3)^2+(-12-(-4))^2}=\boxed{10}$.

Overlap:

Completing the square on the quadratic in x , we add $(\frac{6}{2})^2=9$ to both sides. Completing the square on the quadratic in y , we add $(\frac{8}{2})^2=16$ to both sides. We are left with the equation

>>>>>>

Solution of Math Test 4816:

By the product-to-sum identities, we have that $2\cos a \sin b = \sin(a+b) - \sin(a-b)$. Therefore, this reduces to a telescoping series:
$$\sum_{k=1}^n 2\cos(k^2a)\sin(ka) = \sum_{k=1}^n [\sin(k(k+1)a) - \sin((k-1)ka)] = -\sin(0) + \sin(2a) - \sin(2a) + \sin(6a) - \dots - \sin((n-1)na) + \sin(n(n+1)a) = -\sin(0) + \sin(n(n+1)a) = \sin(n(n+1)a)$$
 Thus, we need $\sin\left(\frac{n(n+1)\pi}{2008}\right)$ to be an integer; this integer can be only $\{-1, 0, 1\}$, which occurs when $2 \cdot \frac{n(n+1)}{2008}$ is an integer. Thus $1004 = 2^2 \cdot 251$ divides $n(n+1)$. Since 251 is prime, 251 must divide n or $n+1$. The smallest such n is 250, but 1004 does not divide $250 \cdot 251$. The next smallest such n is 251, and 1004 divides $251 \cdot 252$. Therefore, the smallest such integer n is $\boxed{251}$.

Overlap:

we have that $2\cos a \sin b = \sin(a+b) - \sin(a-b)$. Therefore, this reduces to a telescoping series:
$$\sum_{k=1}^n 2\cos(k^2a)\sin(ka) = \sum_{k=1}^n [\sin(k(k+1)a) - \sin((k-1)ka)] = -\sin(0) + \sin(2a) - \sin(2a) + \sin(6a) - \dots - \sin((n-1)na) + \sin(n(n+1)a) = -\sin(0) + \sin(n(n+1)a)$$

>>>>>>

Solution of Math Test 2959:

Let $x = \frac{a}{b}$, $y = \frac{b}{c}$, and $z = \frac{c}{a}$. Then $x + y + z = 7$ and $\frac{1}{x} + \frac{1}{y} + \frac{1}{z} = 9$. Also, $xyz = \frac{a}{b} \cdot \frac{b}{c} \cdot \frac{c}{a} = 1$, so $xy + xz + yz = 9$. We want to compute $x^3 + y^3 + z^3$. Recall the factorization $x^3 + y^3 + z^3 - 3xyz = (x+y+z)(x^2 + y^2 + z^2 - xy - xz - yz)$. Squaring the equation $x + y + z = 7$, we get $x^2 + y^2 + z^2 + 2(xy + xz + yz) = 49$. Then $x^2 + y^2 + z^2 - xy - xz - yz = 49 - 3(xy + xz + yz) = 49 - 3 \cdot 9 = 22$. Hence, $x^3 + y^3 + z^3 = 7 \cdot 22 + 3 = \boxed{157}$.

Overlap:

the factorization $\backslash[x^3 + y^3 + z^3 - 3xyz = (x + y + z)(x^2 + y^2 + z^2 - xy - xz - yz).\backslash$ Squaring the equation $\$x + y + z =$
 $\>>>>>>$

Solution of Math Test 1237:

We consider the subset $\backslash\{ 2, 3, 5, 7, 11 \}\backslash$ which consists only of the prime integers in the original set. Any subset consisting entirely of prime numbers must be a subset of this particular subset. And, there are $2^5 - 1 = \boxed{31}$ non-empty subsets of this 5-element set, which we can easily see by making the choice of including or not including each element.

Overlap:

numbers must be a subset of this particular subset. And, there are $2^5 - 1 = \boxed{31}$ non-empty subsets of this 5-element set, which we can easily see by making the choice of including or not including each element.
 $\>>>>>>$

Solution of Math Test 503:

The function is defined when the value inside the square root is positive, i.e. we must have $\$x^2 - 5x + 6 > 0\backslash$. Factoring, we get $\$(x-3)(x-2) > 0\backslash$. So either both factors in the left hand side are negative or they are both positive. They are both negative when $\$x < 2\backslash$. They are both positive when $\$x > 3\backslash$. So the domain of $\$f(x)\backslash$ is $\$x < 2 \text{ or } x > 3\backslash$, or $\$x \in \boxed{(-\infty, 2) \cup (3, \infty)}\backslash$ in interval notation.

Overlap:

So either both factors in the left hand side are negative or they are both positive. They are both negative when $\$x < 2\backslash$. They are both positive when $\$x > 3\backslash$. So the domain of
 $\>>>>>>$

Solution of Math Test 4954:

Let $\backslash\mathbf{v} = \begin{pmatrix} 3 \\ 6 \\ 15 \end{pmatrix}\backslash$ and $\backslash\mathbf{w} = \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}\backslash$. \backslash asy import three; size(180); currentprojection = perspective(6,3,2); triple I = (1,0,0), J = (0,1,0), K = (0,0,1), O = (0,0,0); triple V = (3,2,2), W = (4,1,3), P = dot(V,W)/abs(W)^2*W, R = 2*P - V; draw(V--R,dashed); draw(0.85*P--(0.85*P + 0.15*(V - P))--(P + 0.15*(V - P))); draw(O--V,Arrow3(6)); draw(P--W,Arrow3(6)); draw(O--P,Arrow3(6)); draw(O--R,Arrow3(6)); draw(O--3*I, Arrow3(6)); draw(O--3*J, Arrow3(6)); draw(O--3*K, Arrow3(6)); label("\\$x\\$", 3.2*I); label("\\$y\\$", 3.2*J); label("\\$z\\$", 3.2*K); label("\\$mathbf{v}\\$", V, NE); label("\\$mathbf{w}\\$", W, N); label("\\$mathbf{p}\\$", P, SW); label("\\$mathbf{r}\\$", R, SW); \backslash asy Let $\backslash\mathbf{p}\backslash$ be the projection of $\backslash\mathbf{v}\backslash$ onto $\backslash\mathbf{w}\backslash$, so $\backslash\mathbf{p} = \frac{\mathbf{v} \cdot \mathbf{w}}{\mathbf{w} \cdot \mathbf{w}} \mathbf{w} = \frac{\begin{pmatrix} 3 \\ 6 \\ 15 \end{pmatrix} \cdot \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}}{\begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix} \cdot \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}} \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix} = \frac{-18}{9} \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix} = \begin{pmatrix} -4 \\ -2 \\ 4 \end{pmatrix}\backslash$. Let $\backslash\mathbf{r}\backslash$ be the reflection of $\backslash\mathbf{v}\backslash$ across line $\backslash L\backslash$. Then $\backslash\mathbf{p}\backslash$ is the midpoint of $\backslash\mathbf{v}\backslash$ and $\backslash\mathbf{r}\backslash$, so $\backslash\mathbf{p} = \frac{\mathbf{v} + \mathbf{r}}{2}\backslash$. Then $\backslash\mathbf{r} = 2 \mathbf{p} - \mathbf{v} = 2 \begin{pmatrix} -4 \\ -2 \\ 4 \end{pmatrix} - \begin{pmatrix} 3 \\ 6 \\ 15 \end{pmatrix} = \begin{pmatrix} -11 \\ -10 \\ -7 \end{pmatrix}\backslash$. Hence, the resulting point is $\boxed{(-11, -10, -7)}\backslash$.

Overlap:

$\backslash\begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix} \cdot \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix}\backslash \cdot \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix} \cdot \begin{pmatrix} 2 \\ 1 \\ -2 \end{pmatrix} =$
 $\>>>>>>$

Solution of Math Test 701:

We see that $\$x^2 + 4x + 4 = (x + 2)^2\backslash$. If $\$x\backslash$ must be positive, we can see that this expression can take on the value of any perfect square that is greater than or equal to $\$(1+2)^2 = 9\backslash$. The possible values between 10 and 50 are thus 16, 25, 36, and 49, achieved when $\$x = 2, 3, 4, 5\backslash$ respectively. So, there are $\boxed{4}$ positive integers $\$x\backslash$ for which $\$x^2 + 4x + 4\backslash$ is between 10 and 50.

Overlap:

see that $x^2 + 4x + 4 = (x + 2)^2$. If x must be positive, we can see that this expression can take on the value of any perfect square that is greater than or equal to

>>>>>>>
