

A Survey on Error-Bounded Lossy Compression for Scientific Datasets

SHENG DI, Argonne National Laboratory, USA
 JINYANG LIU, University of California, Riverside, USA
 KAI ZHAO, Florida State University, USA
 XIN LIANG, University of Kentucky, USA
 ROBERT UNDERWOOD, Argonne National Laboratory, USA
 ZHAORUI ZHANG, The Hong Kong Polytechnic University, China
 MILAN SHAH, North Carolina State University, USA
 YAFAN HUANG, University of Iowa, USA
 JIAJUN HUANG, University of California, Riverside, USA
 XIAODONG YU, Stevens Institute of Technology, USA
 CONGRONG REN, The Ohio State University, USA
 HANQI GUO, The Ohio State University, USA
 GRANT WILKINS, University of Cambridge, UK
 DINGWEN TAO, Indiana University, USA
 JIANNAN TIAN, Indiana University, USA
 SIAN JIN, Temple University, USA
 ZIZHE JIAN, University of California, Riverside, USA
 DAOCE WANG, Indiana University, USA
 MD HASANUR RAHMAN, University of Iowa, USA
 BOYUAN ZHANG, Indiana University, USA
 JON C. CALHOUN, Clemson University, USA
 GUANPENG LI, University of Iowa, USA
 KAZUTOMO YOSHII, Argonne National Laboratory, USA
 KHALID AYED ALHARTHI, University of Bisha, Saudi Arabia
 FRANCK CAPPELLO, Argonne National Laboratory, USA

Authors' addresses: Sheng Di, sdi1@anl.gov, Argonne National Laboratory, 9700 Cass Ave., Lemont, Illinois, USA, 60439; Jinyang liu, jliu447@ucr.edu, University of California, Riverside, Riverside, California, USA, 27696; Kai Zhao, kai.zhao@fsu.edu, Florida State University, 600 W. College Ave., Tallahassee, USA, 32306; Xin Liang, xliang@uky.edu, University of Kentucky, 410 Administration Dr., Lexington, Kentucky, USA, 40506; Robert Underwood, runderwood@anl.gov, Argonne National Laboratory, 9700 Cass Ave., Lemont, Illinois, USA, 60439; Zhaorui Zhang, zhaorui.zhang@polyu.edu.hk, The Hong Kong Polytechnic University, 11 Yuk Choi Rd, Hong Kong, China; Milan Shah, mkshah5@ncsu.edu, North Carolina State University, 2610 Cates Ave., Raleigh, North Carolina, USA, 27695; Yafan Huang, yafan-huang@uiowa.edu, University of Iowa, 201 S. Clinton St., Iowa City, Iowa, USA, 52246; Jiajun Huang, jhuan380@ucr.edu, University of California, Riverside, 900 University Ave., Riverside, California, USA, 92521; Xiaodong Yu, xyu38@stevens.edu, Stevens Institute of Technology, 1 Castle Point Terrace, Hoboken, New Jersey, USA, 07030; Congrong Ren, ren.452@osu.edu, The Ohio State University, 2015 Neil Ave., Columbus, Ohio, USA, 43210; Hanqi Guo, guo.2154@osu.edu, The Ohio State University, 2015 Neil Ave., Columbus, Ohio, USA, 43210; Grant Wilkins, gfw27@cam.ac.uk, University of Cambridge, 15 JJ Thomson Ave., Cambridge, UK; Dingwen Tao, ditao@iu.edu, Indiana University, 107 S. Indiana Ave., Bloomington, Indiana, USA, 47405; Jiannan Tian, jti1@iu.edu, Indiana University, 107 S. Indiana Ave., Bloomington, Indiana, USA, 47405; Sian Jin, sian.jin@temple.edu, Temple University, 1801 N. Broad St., Philadelphia, Pennsylvania, USA, 19122; Zizhe Jian, zjian106@ucr.edu, University of California, Riverside, 900 University Ave., Riverside, California, USA, 92521; Daoce Wang, daocwang@iu.edu, Indiana University, 107 S. Indiana Ave., Bloomington, Indiana, USA, 47405; Md Hasanur Rahman, mdhasanur-rahman@uiowa.edu, University of Iowa, 201 S. Clinton St., Iowa City, Iowa, USA, 52246; Boyuan Zhang, bozhan@iu.edu, Indiana University, 107 S. Indiana Ave., Bloomington, Indiana, USA, 47405; Jon C. Calhoun, jonccal@clemson.edu, Clemson University, 433 Calhoun Dr, Clemson, South Carolina, USA, 29634; Guanpeng Li, guanpeng-li@uiowa.edu, University of Iowa, 201 S. Clinton

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and

Error-bounded lossy compression has been effective in significantly reducing the data storage/transfer burden while preserving the reconstructed data fidelity very well. Many error-bounded lossy compressors have been developed for a wide range of parallel and distributed use cases for years. These lossy compressors are designed with distinct compression models and design principles, such that each of them features particular pros and cons. In this paper we provide a comprehensive survey of emerging error-bounded lossy compression techniques for different use cases each involving big data to process. The key contribution is fourfold. (1) We summarize an insightful taxonomy of lossy compression into 6 classic compression models. (2) We provide a comprehensive survey of 10+ commonly used compression components/modules used in error-bounded lossy compressors. (3) We provide a comprehensive survey of 10+ state-of-the-art error-bounded lossy compressors as well as how they combine the various compression modules in their designs. (4) We provide a comprehensive survey of the lossy compression for 10+ modern scientific applications and use-cases. We believe this survey is useful to multiple communities including scientific applications, high-performance computing, lossy compression, and big data.

CCS Concepts: • **Information systems** → *Data compression*.

Additional Key Words and Phrases: Error-Bounded Lossy Compression, Scientific Applications

ACM Reference Format:

Sheng Di, Jinyang liu, Kai Zhao, Xin Liang, Robert Underwood, Zhaorui Zhang, Milan Shah, Yafan Huang, Jiajun Huang, Xiaodong Yu, Congrong Ren, Hanqi Guo, Grant Wilkins, Dingwen Tao, Jiannan Tian, Sian Jin, Zizhe Jian, Daoce Wang, Md Hasanur Rahman, Boyuan Zhang, Jon C. Calhoun, Guanpeng Li, Kazutomo Yoshii, Khalid Ayed Alharthi, and Franck Cappello. 2024. A Survey on Error-Bounded Lossy Compression for Scientific Datasets. 37, 4, Article 111 (December 2024), 36 pages. <https://doi.org/XXXXXXXX.XXXXXXX>

1 INTRODUCTION

Today's scientific exploration and discovery substantially depend on large-scale scientific simulations or advanced instruments, which can easily produce vast amounts of data. Such vast volumes of data need to be transferred at different levels of devices (such as memory, network, and disk I/O) during the simulations or data acquisition for post hoc analysis. Coherent imaging methods, for example, are one of the primary drivers for the upgrades to the light sources (LCLS-II [10], APS-U [55], NSLS-II, ALS-U), which will generate high-resolution detector images at a very high frequency, producing data streams of 250 GB/s [36] in some settings. These instrument data are expected to be transferred through an internal high-speed network and stored in a dedicated storage device for later analysis. Another typical example is that 16 petabytes of memory is required to store the full quantum state of a 50-qubit system [182].

Error-bounded lossy compression¹ has been effective in reducing the volumes of scientific datasets for different use cases. Basically, as indicated by our previous study [36], the common use cases that have been explored include significantly reducing storage footprint [196] and memory footprint

¹Data compression is also known as data reduction. In this paper we may use these two terms exchangeably.

St., Iowa City, Iowa, USA, 52246; Kazutomo Yoshii, kazutomo@mcs.anl.gov, Argonne National Laboratory, 9700 Cass Ave., Lemont, Illinois, USA, 50439; Khalid Ayed Alharthi, kharthi@ub.edu.sa, University of Bisha, Department Of Computer Science And Artificial Intelligence, College of Computing And Information Technology, University Of Bisha, Bisha 61922, P.O. Box 551, Saudi Arabia., Bisha, Saudi Arabia; Franck Cappello, cappello@mcs.anl.gov, Argonne National Laboratory, 9700 Cass Ave., Lemont, Illinois, USA, 60439.

the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM XXXX-XXXX/2024/12-ART111
<https://doi.org/XXXXXXXX.XXXXXXX>

[182], avoiding recomputation cost in scientific simulations [58], accelerating checkpoint/restart [165], accelerating the I/O performance [114], and reducing data stream intensity [172]. More emerging use cases will be discussed in Section 5.

Studies have showed that the reconstructed data of lossy compressors are acceptable to users for their post hoc analysis as long as the compression errors can be controlled to a certain extent. In the community, we call such lossy compressors that allows to control the data distortion to a certain low level *error-bounded lossy compressors*. Since error-bounded compression can potentially reach very high compression ratios (e.g., 10–1000 [113, 193] or even higher [27, 104, 122]), this technique is arguably a promising solution to resolve the big data issues in the above-mentioned use cases.

In this paper we present a comprehensive survey to provide a thorough understanding of the error-bounded lossy compression techniques, their pros and cons, and how to use error-bounded lossy compression in different parallel and distributed use cases. The following topics are considered.

- We summarize an insightful taxonomy of lossy compression into 6 compression models.
- We provide a comprehensive survey of 10+ commonly used compression components/modules (such as various predictors, bit truncation, quantization, wavelet transform, tucker decomposition, autoencoder) used in different lossy compressors.
- We choose 30+ state-of-the-art error-controlled lossy compressors (i.e., compression pipelines) and analyze 12 of them in terms of how various compression modules are used in their designs. The studied compressors include not only classic general-purpose error-bounded lossy compressors (such as SZ, ZFP) but also many other emerging tailored lossy compressors (such as SPERR, AESZ, FAZ, MDZ) optimized for specific use cases.
- We provide a comprehensive survey of many emerging parallel scientific applications and distributed use cases regarding the error-bounded lossy compression technique.

To the best of our knowledge, this is the most comprehensive summary of the lossy compression modules/techniques used by existing error-bounded lossy compressors (up to the year 2024), and the most comprehensive survey for the emerging state-of-the-art error-bounded lossy compressors.

The remainder of the paper is organized as follows. We propose a novel compression model taxonomy in Section 2, which summarizes the existing lossy compression methods into six categories. In Section 3 we survey multiple modular techniques commonly used in different lossy compressors. In Section 4 we discuss existing off-the-shelf lossy compressors for scientific datasets and how they are designed/developed based on the aforementioned lossy compression modules/techniques. In Section 5 we discuss a wide range of applications and the parallel and distributed use cases with regard to lossy compression techniques. We discuss related work in Section 6 and conclude the survey in Section 7 with a discussion of future work.

2 COMPRESSION MODEL TAXONOMY

Figure 1 illustrates the six state-of-the-art data compression models we summarized based on many existing error-bounded lossy compressors. Each of the models has its pros and cons with respect to the time/space complexity and reconstruction quality. In the figure, for example, the models on the left generally tend to have lower time complexity yet lower data reconstruction quality than do the models on the right.² In practice, each reduction model is a fundamental technique that can be combined with other models or techniques to generate a specific data compressor.

In what follows, we describe the six data compression models and their pros and cons.

²Note that the performance and quality rule demonstrated in Figure 1 holds in general cases. The real performance/quality also depends on the specific design and implementation.

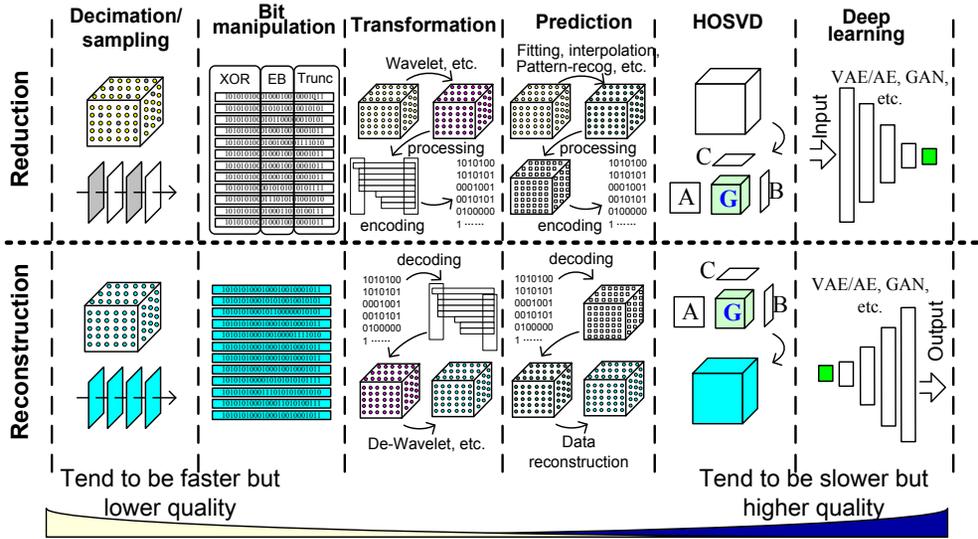


Fig. 1. Error-Controlled Lossy Compression Model Taxonomy

1. Decimation-/filtering-based compression: Decimation can be split into two categories: spatial decimation and temporal decimation. The former often adopts a sampling method during the data compression and then recovers the missing data by applying an interpolation over the sampled data during the data reconstruction. The latter samples the temporal snapshots every K time steps during the simulation or data acquisition and reconstructs the missing snapshots using an interpolation method. **Pros:** extremely high data compression performance. **Cons:** potentially very expensive data reconstruction since it needs to recover missing data points by numerical methods such as interpolation. Specific examples will be given in later sections.

2. Bit-manipulation-based compression: Bit manipulation is commonly used to remove the insignificant bits in the dataset, which may reduce the data size in turn. A typical example is Bit Grooming [187], which analyzes the number of significant bits with respect to the user-specified number of base-2 or base-10 digits and truncates data by removing insignificant parts. Another example is SZx [186], which pursues a very high compression speed by enforcing every step in the compression to be composed of fairly lightweight operations such as addition, subtraction, and bitwise operation. **Pros:** fairly fast data compression because of pure bitwise operations. **Cons:** relatively low data compression ratio because it does not take full advantage of the data characteristics or correlation information.

3. Transformation-based compression: Data transform (such as wavelet and cosine transform) has been widely used in the data compression community [102–104, 117] because it can effectively convert the original data domain to another domain (generally called the *coefficient* domain). The transformed domain is generally much easier to compress because the coefficient data are mostly close to zero and their values often exhibit regular spatial characteristics (e.g., large values are gathered in a core of the space). **Pros:** may lead to fairly high rate distortion (i.e., high ratio with high quality); high performance due to matrix multiplication (e.g., on GPU). **Cons:** not easy to control the error bound; relatively fixed transform methods.

4. Prediction-based compression: A prediction-based compression model [37, 50, 98, 113, 118, 164] generally involves four steps: pointwise data prediction, quantization, variable-length encoding, and dictionary encoding. Data prediction is the most critical step in the prediction-based compressors because higher prediction accuracy can significantly reduce the burden of the later steps. **Pros:** very high compression ratio with high quality; customizable prediction stage to fit different datasets adaptively; easy/effective control of errors. **Cons:** inferior performance (speed) because of variable-length and dictionary encoding; nontrivial to accelerate over GPUs.

5. HOSVD-based compression: Higher-order singular value decomposition (HOSVD) (e.g., Tucker decomposition) can effectively decompose the data (i.e., a tensor) to a set of matrices and a small core tensor, with well-preserved L2 normal error. By combining HOSVD and other techniques such as bit-plane, run-length, and/or arithmetic coding, the data size could be significantly reduced. **Pros:** extremely high compression ratio [27] since it leverages long-range correlation in the dataset across different dimensions (such as time dimension and different fields). **Cons:** very expensive because of its intrinsic iterative steps in error control [27].

6. Deep-learning-based compression: Deep learning techniques have been used to improve the data compression ratio. In particular, autoencoder (AE) [60] and variational autoencoder (VAE) [91] are two classic data reconstruction techniques. An autoencoder is a kind of artificial neural network for learning efficient data codings in an unsupervised manner. The original aim of an autoencoder is to learn a representation (encoding) for a set of data, typically for dimensionality reduction. Thus it can be leveraged to reduce data size. By comparison, VAE is a generative model (similar to a generative adversarial network [61]), in which a variational approach is used for latent representation learning, resulting in a specific estimator for the training algorithm. VAE has many variate versions [39, 71, 91, 93, 95, 170, 197], which are studied in our project. **Pros:** a fast-emerging technique with a promising opportunity to get a very high compression ratio. **Cons:** inferior data reconstruction quality; very expensive training; relatively expensive encoding and decoding.

3 MODULAR LOSSY COMPRESSION TECHNIQUES

In this section we describe the key lossy compression modules or techniques that are often used in many modern state-of-the-art error-bounded lossy compressors. Each technique listed here generally cannot be treated as a complete compressor but just a critical module or step in a compression pipeline (i.e., a compressor). That is, each technique needs to be combined with one or more other techniques to compose an error-bounded lossy compression pipeline, in order to obtain a high compression ratio with strictly controlled compression errors based on user-defined error bounds.

3.1 Pointwise Data Prediction (PDP)

Data prediction is a critical technique in the prediction-based error-bounded compression model, such as FPZIP and the SZ-series compressors including SZ1.4, SZ2, SZ3, and QoZ, as well as many domain-specific compressors (MDZ, CliZ, etc.). Generally in the whole compression pipeline, the data prediction step is the first or second step, followed by computing the difference between the predicted value and the original value, which would lead to a set of close-to-zero values. These close-to-zero values could be compressed more easily/effectively than the original data values.

Two critical constraints exist in the design of the data predictor to be used in an error-bounded lossy compression model such as SZ.

- **Reconstructed-Data-Driven Policy.** The prediction method cannot use the original raw data values directly in the course of data prediction, because the predicted values must be identical between the compression stage and decompression stage while the prediction method can see only the lossily reconstructed values during the decompression. Otherwise,

compression errors cannot be bounded because of the undesired inconsistent predicted values during the compression versus decompression.

- Recoverable Recursive-Scanning Policy (RRS policy).** The prediction method should be able to cover all the datapoints in terms of a specific scanning policy/order, since the data values would be reconstructed one by one in the course of decompression. Figure 2 demonstrates the RRS policy based on six eligible predictors. As shown in the figure, the scanning policy of all the prediction methods presented is executable to cover all data points throughout the whole dataset.

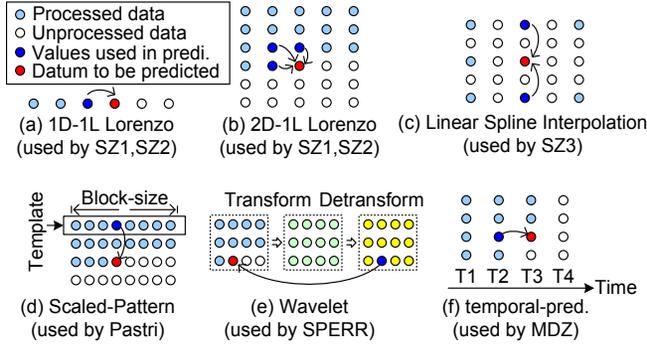


Fig. 2. RRS Policy with Six Prediction Methods

Table 1 summarizes many existing predictors used in different error-bounded lossy compressors. The most popular predictors used in generic-purpose compressors include Lorenzo predictor, linear regression, spline interpolation, and wavelet transform. In general, the prediction method applied on each data point in the whole dataset leverages a certain number of neighboring or adjacent data values in spatial or temporal dimension.

Table 1. Predictors Used in Different Lossy Compressors

Predictor	Compressor	Domain	# Values Used
Lorenzo-1D-1L	SZ1-3 [50, 164, 193], FPZIP [118]	Generic	1
Lorenzo-2D-1L	SZ1-3 [50, 164, 193], FPZIP [118]	Generic	3
Lorenzo-3D-1L	SZ1-3 [50, 164, 193], FPZIP [118]	Generic	7
Mean-value	SZ2 [113]	Generic	Many
Linear Regression	SZ2 [113]	Generic	216
Linear Interpolation	SZ3 [193], QoZ [121], FAZ [122]	Generic	2
Spline Interpolation	SZ3 [193], QoZ [121], FAZ [122]	Generic	4
Wavelet/Orthogonal Tran.	Hybrid [111], SPERR [104]	Generic	64
Scaled-Pattern	Pastri [58]	Quantum Che.	Many
Temporal Smoothness	MDZ [196]	MD	1
Multi-level	MDZ [196]	MD	Many
Mask-based	Cliz [84]	Climate	2 or 4

3.2 Quantization (QT)

Quantization is a popular technique widely used in today’s lossy compressors. Basically, quantization means a specific procedure/operation in which the data value range will be split into multiple consecutive intervals (i.e., quantization bins) each with a unique bin number, and each data value would be checked in which bin/interval it is located so that it can be represented by the corresponding quantization bin number. After the quantization step, each quantization bin would contain a certain number of data values, forming a histogram, which would often be encoded by a certain coding algorithm (such as Huffman encoding) to get a high compression ratio. The data to be quantized could be the original data values [97, 188] or the difference of the predicted value and original

data value [113, 164]. Various types of quantization methods are summarized in Table 2 and are detailed in the following text.

Table 2. Quantizations Used in Different Lossy Compressors

Method	Compressor	Domain	Approximation Feature
Linear-scale	SZ1/2/3,etc.	Generic	Fixed-error and uneven distribution
Log-scale	NUMARCK	Generic	More balanced histograms
Vector-quantization	MDZ	MD	Matching multilevel pattern
multi-interval	Cons-SZ	Generic	Adaptation to multi-intervals

- **Linear-scale quantization.** Linear-scale quantization is used mainly when an error bound needs to be respected during the compression. In this method, each quantization bin has the same length.
- **Log-scale quantization.** In log-scale quantization, the quantization bin size follows a log-scale (or exponential distribution). In general, smaller bins tend to cover denser intervals in the histogram, in order to get a balanced count distribution among all quantization bins. NUMARCK [40] is a typical example that studied log-scale quantization.
- **Vector quantization.** Similar to log-scale quantization, vector quantization adopts variable-length quantization bins, where the quantization bin size depends on a certain clustering (e.g., K-means) technique applied on the dataset. This can improve the data approximation accuracy when using the centroid to represent all the data values contained by the corresponding bins. Typical examples that use the vector quantization method include MDZ [196] and NUMARCK [40].
- **Multi-interval based quantization.** In this quantization method, the quantization bins may have different lengths, depending on the user's quantity of interest on various value intervals. Thus, the multi-interval-based quantization method allows users to set different error bounds (i.e., different lengths of quantization bins) to control data distortion at different value ranges more flexibly compared with the linear-scale quantization. We refer readers to [127, 129] for more details.

3.3 Orthogonal/Wavelet Transform (OWT/DWT)

Wavelet transform, specifically the hierarchical multidimensional discrete wavelet transform, is also a useful data transform method for scientific data compression. In many cases it can effectively decorrelate and sparsify the input data to coefficients with higher compressibilities. Example wavelet transforms leveraged in existing scientific lossy compressors are the CDF9/7 [44] wavelet in SPERR [104] and Sym13 [47] wavelet in FAZ [122]. In those compressors, the input data array is first preprocessed with wavelet transforms. Next, the transformed coefficient array is further encoded with certain encoding algorithms such as the SPECK [139] encoding algorithm for wavelet coefficients. The encoded bitstream usually exhibits a significantly reduced size compared with the original data. One core limitation of wavelet transform is that, for achieving a high compression ratio, the corresponding transform often has a relatively high computational cost and therefore apparently slows the compression process.

3.4 Pointwise Domain Transform (PDT)

Pointwise domain transform here refers to a (pre)processing step that performs an operation on each data point in order to meet a specific error bound requirement. A typical example of PDT is using logarithmic domain transform to implement the pointwise relative error bound [194]. Specifically, Liang et al. [112] proved that enforcing a pointwise relative error bound e_r on the original data d is equivalent to enforcing an absolute error bound $\log(1+e_r)$ on the logarithmic data $\log|d|$. Thus, compression with pointwise relative error bound can be implemented as traditional lossy

compression with absolute error bound after performing a logarithmic transform on the original data. This is a generic approach that can be applied to any compressor with an absolute error bound. However, it will introduce certain overhead due to the expensive logarithmic operations during compression and exponential operations during decompression.

3.5 Bit-Plane Coding (BPC)

Bit-plane coding is commonly used in many lossy compressors with different compression models. BPC can be applied either in the original data domain or in the transformed coefficient domain. The fundamental idea about BPC is that the scientific data are always stored in a specific bit-plane representation (e.g., IEEE 754 floating-point or integer), such that each bit in the presentation affects the data value with different levels. Taking 32-bit floating-point data as an example (as illustrated in Figure 3), the alteration of leading bits (high-end) will change the data value more significantly than the alteration of ending bits (low-end). The reason is that the leading part contains the sign, exponent, and significant mantissa bits. Thus, ignoring a certain number of insignificant bit planes for a group of data values is often used in different lossy compression algorithms. In general, the loss introduced into the data by the bit truncation method is determined by the data values: the larger the data value, the larger the compression error. We explain the reason by using a floating-point value as an example. For simplicity and without loss of generality, we give the analysis based on the floating-point value in decimal format instead of binary format actually used by the data representation on machines. For the two numbers 12.34 and 123.4, their representations are 1.234×10^1 and 1.234×10^2 . When a digit is removed (e.g., removing 4), the errors introduced into the two numbers would be 0.04 and 0.4, respectively, which depends on the original data values. Performing BPC after aligning the exponent of data to the same scale is a typical variation, which enforces an absolute error bound that is irrelevant to the data value.

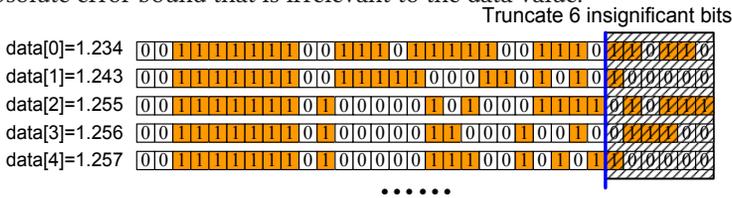


Fig. 3. Example of Bit Truncation to Remove 6 Insignificant Bits for 5 Consecutive Data Values

Table 3 summarizes 8 error-controlled lossy compressors that involve the BPC technique.

Table 3. Bit-Plane Coding Methods Used in Different Lossy Compressors

Compressor	Stage & Purpose	Error Control Mode
SZ1/2 [50, 113, 164]	Processing Outlier/Unpredictable Data	Absolute Error Bound
ZFP [117]	Processing/Encoding Transformed Coefficients	Absolute Error Bound & Precision Mode
FPZIP [118]	Processing Prediction-Mapped Integer Residuals	Precision Mode
SZx [186]	Processing Nonconstant Blocks	Absolute Error Bound
cuSZp [97]	Processing Nonzero Blocks after Quantization+Lorenzo	Absolute Error Bound
SPERR [104]	Processing Wavelet-Transformed Coefficients	Absolute Error Bound
DigitRounding [48]	Processing Raw Data	Absolute Error Bound
BigGrooming [187]	processing Raw Data	Absolute Error Bound

3.6 Tucker Decomposition and HOSVD (SVD)

Tucker decomposition, particularly HOSVD, is a robust technique extensively utilized for data reduction in high-dimensional datasets [27, 28, 160, 161]. This method extends the matrix singular value decomposition (SVD) to higher-order tensors. HOSVD decomposes a dataset into a core tensor and a series of matrices corresponding to each dimension, effectively leveraging the spatial

correlation within the dataset to capture its multidimensional structure. As a result of the HOSVD process, the transformed core tensor becomes sparser than the original dataset, enhancing its compressibility. This characteristic enables HOSVD-based compressors to achieve significant compression ratios with minimal information loss, particularly for datasets with relatively smooth variations. The primary limitation of HOSVD lies in its computational complexity, especially for large datasets, which can make the decomposition computationally expensive and time-consuming.

3.7 Decimation/Sampling (DS)

Decimation/sampling is commonly used by scientific applications to reduce the volumes of the simulation data to be stored on parallel file systems. In general, *decimation* means performing downsampling along the time dimension during the simulation: for example, saving the snapshot data to disks every K time steps instead of saving all snapshots during the simulation. Many scientific simulation packages, such as Hardware/Hybrid Accelerated Cosmology Code (HACC) [64], EXAALT molecular dynamics simulation [11], reverse time migration (RTM) [9, 31], and Flash-X [4], allow users to save the snapshot data selectively over time. In comparison with decimation, the *sampling* strategy generally means performing downsampling in space for each snapshot dataset, which can also significantly reduce the data volumes. Liang et al. [110] studied the pros and cons of different decimation/sampling-based compression strategies in both temporal and spatial dimension. Specifically, the authors pointed out that a decimation/sampling method can have extremely high speed in the compression stage, but it may suffer from substantial decompression cost and also low reconstructed data quality compared with traditional error-bounded lossy compressors such as SZ [113, 164]. Compressed sensing (CS) is another typical lossy compression method that leverages the sampling strategy. In general, CS is used where the compression is required to be very fast (e.g., in online compression) while decompression is not that important and can be performed offline. CS can be very fast because it just needs to sample the dataset with a certain randomness. To reconstruct the data, however, CS needs to solve an underdetermined linear system, which could be very expensive.

3.8 Filtering (FTR)

The filtering technique aims to remove insignificant values or ignore the insignificant changes of the data, which can then significantly reduce the data size. In general, the significance of the data is determined by the impact of the data being processed on the final reconstructed data quality. The filtering technique has been widely used in many existing error-bounded lossy compressors, such as (cu)SZx, cuSZp, and SPERR[] and the specific filtering methods often appear in different forms. In the following, we describe two forms of filtering commonly used in lossy compressors.

- **Data Folding.** Data folding aims to replace (“fold”) a set of data with one single value, provided that the variation of these data can be ignored. The error-bounded compressor SZx is a good example. SZx splits the whole dataset into many fixed-length consecutive 1D blocks. If all the data values in a block are close to each other such that the value interval range of the block is lower than or equal to twice the user-required error bound, then the mean of the min and max in this block can be used to replace all values in the block. Such blocks are called “constant blocks” in SZx. Similarly, cuSZp [97] also splits the whole dataset into many blocks, and each block performs uses quantization and Lorenzo prediction to decorrelate the data. Most of data values then tend to be very close to 0, and the blocks with all zeros would be just represented by a 1-byte mark. This is essentially a type of data folding.

- **Data Extraction.** Data extraction is also widely used to select the significant values or outliers from among many data points, most of which tend to be relatively small. A typical example is SZ2/SZ3, which treats the unpredictable data (data points with overlarge prediction errors compared with the predefined quantization range) as outliers and processes these outliers separately. Another example is SPERR [104]. SPERR adopts a SPECK algorithm, which outputs only the larger values according to a varied threshold on a set of partitioned wavelet-transformed coefficients level by level. Moreover, with the wavelet+SPECK algorithm, some data points still might remain whose reconstructed data do not meet the user-required error bound (they are called “outliers”). These outliers are processed separately by SPERR, which also forms a kind of data extraction method.

3.9 Lossless Encoding (LE)

Lossless encoding is a critical technique in error-bounded lossy compression that can help obtain a fairly high compression ratio in general because the intermediate data outputted by the previous steps tend to be very sparse. The lossless compression encoders/techniques used in the different lossy compression pipelines are summarized in Table 4 and described in detail thereafter.

Table 4. Survey of Lossless Encoders/Compressors Used in Lossy Compression Pipelines

Lossless Encoder	Corresponding Lossy Compressor	Key Feature	References
Huffman Encoding (HE)	SZ1.x, SZ2.x, SZ3.x, QOZ, FAZ	Entropy Encoding	[121, 122, 164, 193]
Arithmetic Encoding (AE)	TTHRESH	Entropy Encoding	[27]
Zlib/Zstd Encoding (ZE)	SZ1-3, QOZ, FAZ, MGARD Bit Grooming, Digit Rounding	Dictionary Encoding	[3, 121, 122, 164]
RunLength Encoding (RE)	cuSZ+, TTHRESH	Reduce Repeated Symbols	[27, 168]
Constant-block Encoding (CE)	SZx, FZ-GPU, cuSZp	Reduce Repeated Symbols	[77, 186, 188]
Fixed-length Encoding (FE)	cuSZp	Fast on GPU	[77]
Embedded Encoding (EE)	ZFP, TTHRESH	Generally Fast&Effective	[27, 117]
Predictor Encoding (PE)	SZ0.1	Simple	[50]

3.10 Deep Neural Network (DNN)

Since neural-network-based compression has been well developed and practicalized for natural images [72, 82, 134] and videos [33], several initial attempts have also been made to leverage neural networks for the lossy compression of scientific data. In neural-network-based scientific lossy compressors, the neural networks can serve as both data encoders [42, 57, 67, 78, 79, 120, 125, 130] and data predictors [65, 66, 76, 119] and can also be offline-pretrained by preacquired datasets [42, 57, 67, 78, 79, 119, 120, 125] or be online-trained by input data [65, 66, 76, 130]. For example, AE-SZ [120] encodes the input data with a pretrained convolutional Sliced-Wasserstein Autoencoder (SWAE), and SRNN-SZ applies a pretrained Hybrid Attention Transformer (HAT) as an interpolation-like data predictor. CoordNet [65] and KD-INR [66] are examples of leveraging predictive neural networks with data coordination information in scientific compression, in which the networks are online trained by the input data before the data prediction process. Neural network-based compressors with online-trained networks can achieve much better compression ratios and/or distortions than offline-trained networks but suffer from lower throughputs due to the requirement of training for each separate input. Neural-network-based compressors with offline-trained networks are free from per-input training but also need to address the challenge of collecting trustworthy training datasets. No matter which scheme is used, neural-network-based scientific lossy compressors still must overcome the limitation of low-speed neural networks, presenting a better balance of quality and performance to fit the practical usage in high-performance scientific computing systems.

4 GENERAL-PURPOSE ERROR-BOUNDED LOSSY COMPRESSORS

In Table 5 we summarize the compression pipelines used by 35 error-bounded lossy compressors. We describe 12 representative state-of-the-art lossy compressors in detail in the following text of this section.

Table 5. 36 Error-Bounded Compressors Each with Various Pipelines, Domains, Targeted Devices, and Datasets

Compressor	Year	Compression Pipeline	Domain	Device	Dataset	References
FPZIP	2006	PDP+BPC	Generic	CPU	Structured	[118]
ISABELA	2013	Sorting+DS+B spline	Generic	CPU	Structured	[98, 99]
ZFP	2014	PDT+OWT+BPC	Generic	CPU/GPU	Structured	[46, 117]
SZ0.1	2016	PDP+LE	Generic	CPU	Structured	[50]
Bitgrooming	2016	BPC+LE	Generic	CPU	Structured	[187]
SZ1.4	2017	PDP+QT+LE	Generic	CPU	Structured	[164]
SZ2	2018	PDP+QT+LE	Generic	CPU	Structured	[113]
Pastri-SZ	2018	PDP+QT+LE	Quantum Chemistry	CPU	Structured	[58]
MGARD	2018	PDP+QT+LE	Generic	CPU	(Un)structured	[13, 16]
Digitrounding	2019	BPC+LE	Generic	CPU	Structured	[3]
DCTZ	2019	OWT+QT+LE	Generic	CPU	Structured	[189]
GhostSZ	2019	PDP+QT+LE	Generic	FPGA	Structured	[184]
TTHRESH	2019	SVD+DS	Generic	CPU	Structured	[27]
ZFP-V	2019	PDT+OWT+BPC	Generic	FPGA	Structured	[159]
DeepSZ	2019	PDP+QT+LE	DNN model	CPU	Structured	[85]
SZauto	2020	PDP+QT+LE	Generic	CPU	Structured	[195]
cpSZ	2020	PDP+QT+LE	Critical Points in Vector Fields	CPU	(Un)structured	[109, 115]
waveSZ	2020	QT+PDP+LE	Generic	FPGA	Structured	[169]
cuSZ	2021	QT+PDP+HE+RE	Generic	GPU	Structured	[167, 168]
SZ 3	2021	PDP+QT+LE	Generic	CPU	Structured	[108, 193]
AESZ	2021	DNN+PDP+QT+LE	Generic	CPU	Structured	[120, 125]
GPU-MGARD	2021	PDP+QT+HE+RE	Generic	GPU	Structured	[38, 59]
DE-ZFP	2022	PDT+OWT+BPC	Generic	FPGA	Structured	[63]
QOZ	2022	PDP+QT+LE	Generic	CPU	Structured	[121]
MDZ	2022	PDP+QT+LE	Molecular Dynamics	CPU	Structured	[196]
SZx	2022	FTR+BPC	Generic	CPU/GPU	Structured	[186]
SPERR	2023	DWT+QT+LE	Generic	CPU	Structured	[104]
FAZ	2023	DWT+PDP+QT+LE	Generic	CPU	Structured	[122]
FP-GPU	2023	CE+QT+PDP+PE	Generic	GPU	Structured	[188]
cuSZp	2023	CE+QT+PDP+PE	Generic	CPU/GPU	Structured	[77, 97]
Roibin-SZ	2023	PDP+QT+LE	Light-source Data	CPU/GPU	Structured	[172]
AMR-SZ	2023	PDP+QT+LE	Generic	CPU	Unstructured	[176–179]
SRNN-SZ	2023	DNN+PDP+QT+LE	Generic	CPU	Structured	[119]
topoSZ	2023	PDP+QT+LE	Contour Tree in Scalar Fields	CPU	Structured	[185]
FedSZ	2023	PDP+QT+LE	Federated Learning	CPU	Structured	[181]
Cliz	2024	PDP+QT+LE	Climate Research	CPU	Structured	[84]

4.1 SZ

SZ [50, 51, 108, 164, 193] is a prediction-based error-bounded lossy compressor. In fact, it is not only a compression library/software but also a flexible composable framework allowing users to customize specific compression pipelines according to their datasets or use cases. SZ's compression

pipeline generally is composed of four stages: pointwise data prediction, quantization, variable-length encoding and lossless encoding. For different domain datasets and use cases, the SZ developers have developed many predictors, including Lorenzo, linear regression, and dynamic spline interpolation [193], using ZFP transform as a predictor [111], as listed in Section 3.1.

In addition to the data prediction stage, SZ developers explored the possibilities of improving compression capability by other stages, for example, different quantization methods such that the users can set various error bounds for multiple value ranges in one dataset [127–129]. SZ adopts Huffman+Zstd [50, 113, 164] to compress the quantization bins because this method projects the best trade-off between the compression ratio and compression speed [124]. For pointwise relative error bound compression in SZ [112], SZ performs a preprocessing step to transform the original data domain to the logarithm domain and then execute absolute error-bounded compression on top of it. However, the logarithm may significantly delay the overall compression/decompression performance, which was fixed by an efficient fusion of logarithm and quantization thereafter [201, 202]. Since SZ adopts a fixed number of quantization bins for each compression, some data points may be outliers (i.e., outside the quantization range). These outliers are called ‘unpredictable data’, which will be compressed in a separate way (e.g., using bit-wise truncation).

4.2 ZFP

ZFP [117] is a transform-based error-bounded lossy compressor, which supports two error control methods: fixed-accuracy (i.e., absolute error bound) and fixed precision. ZFP splits the whole dataset into many fixed-size blocks (e.g., $4 \times 4 \times 4$ for a 3D dataset) and then executes three steps in each block: (1) preprocessing (PDT): align the values in a block to a common exponent and convert the floating-point values to a fixed-point representation; (2) (near)orthogonal block transform (OWT): use orthogonal transform to decorrelate data; and (3) embedded coding (BPC): order and encode the transform coefficients by the embedded coding. To achieve the best trade-off between decorrelation efficiency and speed, developers of ZFP explored multiple transforms using a parametric description and identified a near-orthogonal one to use in practice. Their embedded encoding is a variation of BPC, where the coefficients are divided into separate groups based on their locations and then encoded in the granularity of a group. In general, ZFP features high compression and decompression performance on both CPUs and GPUs because of the performance optimization strategies in its implementation, such as lifted transform.

4.3 MGARD

MGARD [13–16, 59] is a multilevel data compressor based on finite element analysis and wavelet theories. It treats the data as a piecewise multilinear function defined on the input data grid and iteratively decomposes the data into coarse representations in a set of hierarchical grids. The decomposition procedure is as follows. Starting with the original data and input grid, MGARD will compute the piecewise linear interpolation using data from the lower-level grid and then subtract the interpolation values from current data to obtain multilevel coefficients. These coefficients are then projected to the lower-level grid to compute correction, which roughly approximates the loss of missing nodes using the lower-level grid. The correction then is added to data in the lower-level grid to form the lower-level representation. This process is repeated until the lowest level is reached. All the multilevel coefficients are then fed to a Huffman encoder and a lossless encoder for size reduction.

MGARD can be applied to uniform/nonuniform structured and unstructured grids [16] because of the general data decomposition theory. In addition to providing general error controls (such as absolute error and L^2 error) on raw data, MGARD features error controls on derived quantities such as bounded-linear analysis [15]. It also provides error control for more complex derived quantities

using a postprocessing method [29, 100]. The performance of MGARD is slightly slower than that of SZ and ZFP due to the higher computational complexity, but it provides portable GPU implementations across different vendors with high performance.

4.4 SPERR

SPERR [104] is a transform-based lossy compressor based on the CDF9/7 discrete wavelet transform [44] and SPECK encoding algorithm [139], and it has both a pointwise error-bounding mode and a global quality thresholding mode. The compression pipeline of SPERR includes four stages: (1) CDF9/7 wavelet transform; (2) SPECK lossy encoding of wavelet coefficients; (3) outlier encoding (only in error-bounding mode); and (4) zstd postprocessing of compressed data (optional). The decompression pipeline is an inverse of the compression pipeline with the decoding, detransform, and so on. The advantage of SPERR is that the hierarchical multidimension DWT in SPERR can effectively capture the relevance between data points, and it can often decorrelate the transformed coefficients to a great extent, which also brings a high compression ratio after the SPECK encoding. One limitation of SPERR is that the wavelet transform and the SPECK encoding processes have high computational costs, and hence its (sequential) execution speed is relatively low, typically around 30% of SZ3 [193].

4.5 TTHRESH

TTHRESH [27] is a lossy compressor that utilizes the Tucker decomposition, specifically higher-order singular value decomposition. Unlike other lossy HOSVD-based compressors [28, 160, 161], which implement coarse-granularity slicewise truncation on the tensor core and factor matrices post-HOSVD, TTHRESH employs bit-plane coding across the entire set of HOSVD transform coefficients. This approach is complemented by run-length encoding (RLE) and arithmetic coding (AC). Notably, TTHRESH is capable of achieving significantly higher compression ratios compared with other compressors, especially for larger error bounds (i.e., higher compression ratios). This superior performance is largely attributable to HOSVD's efficiency in capturing the global correlations within the dataset. However, TTHRESH exhibits much lower speed compared with other compressors due to the high computational complexity of HOSVD; for instance, it is $O(n^4)$ for a 3D dataset with dimensions of n^3 . Additionally, we note that TTHRESH does not offer pointwise error control; instead, it can control only the l^2 error (the sum of squared errors) because of the nature of HOSVD.

4.6 FPZIP

FPZIP [118] is an error-controlled lossy compressor developed based on the prediction-based compression model. It involves four steps: (1) It uses a Lorenzo predictor to predict the data value for each data point. (2) It computes the prediction residuals and maps these to integers. (3) After the mapping, a two-level compression scheme is applied on the residual integers. (4) It then applies a fast entropy coding (arithmetic coding) to improve the compression ratio. FPZIP does not support absolute error bound or decimal digit control, but it allows users to specify the number of bit planes (i.e., precision) to ignore, based on which the users can control the data distortion on demand. Specifically, when the precision is set to 32 for the single-precision floating-point dataset, all 32 bit-planes will be preserved, projecting essentially a lossless compression. The lower the precision value, the higher the data distortion and also the higher the compression ratio.

4.7 QoZ

QoZ (quality-oriented scientific compressor) [121] is a derivation and upgrade of the SZ3 error-bounded lossy compressor. It focuses on improving the decompression data quality, as its name

indicates, and it also supports compression autotuning according to user-specified quality metric targets. The technical outlines of QoZ are detailed as follows. First, addressing the decompression visualization quality issue of SZ3 caused by the inaccurate long-interval data prediction, QoZ merges losslessly stored anchor points into its data interpolator design to avoid long-interval data predictions. Second, to further improve the compression rate-distortion, QoZ introduces levelwise autotuning of interpolation configurations and error bounds by the user-specified quality metric target. Third, the most recent version of HPEZ (or QoZ 2.0) [123] brings several major updates to its data prediction design, including multidimensional interpolation, interpolation re-ordering, dimension autofolding, and blockwise interpolation tuning. Those flexible design modules make QoZ a highly adaptive scientific data compressor with different optimization levels exhibiting varying compression ratios and speeds. In experiments, with the compression speed of around 60% to 100% of SZ3, QoZ can achieve around 50% to 300% compression ratio improvement over SZ3 under the same quality metric (such as PSNR) value.

4.8 FAZ

In past research works, several systematical evaluations have shown that different scientific lossy compressor archetypes have diverse advantages and limitations. For example, wavelet-based SPERR features extremely high compression ratios over quite a few scientific datasets but may present unsatisfactory compression ratios on certain data inputs; Interpolation-based SZ3 and QoZ have stable and decent compression ratios over all scientific datasets but cannot achieve as high compression ratios as SPERR does on SPERR's well-performing datasets. To this end, FAZ [122] is proposed to offer scientific data users one versatile data compressor, freeing them from the work of compressor evaluation and selection. FAZ features a hybrid design of compression framework and compression pipeline. With an integrated pipeline autotuning module; it can adaptively leverage the best-fit compression techniques for each separate input and autodetermine their corresponding parameters. Attributed by this design, it achieves state-of-the-art compression ratio and distortion among all existing scientific error-bounded lossy compressors.

4.9 SZx

SZx [186] features a novel design that composes only lightweight operations, such as bitwise operations, additions, and subtractions, and can support strict control of the compression errors within user-specified error bounds. Specifically, SZx splits the whole dataset into the fixed-length blocks (each with 128 elements) and goes over each block to check whether all the elements in the block can be represented by a single value (i.e., the mean of min value and max value in the block). If yes, this block is called a "constant" block, and the block of data would be represented/compressed by using this single value (a kind of filtering). Otherwise, the block is called a "non-constant" block, and a bit-truncation method (i.e., PDP) is applied to compress these data. SZx is an ultrafast error-bounded lossy compressor that can achieve 2–7× faster throughput compared with the second-best existing error-bounded lossy compressor while still reaching a high compression ratio.

4.10 AE-SZ

AE-SZ [120] is one of the initial explorations into leveraging deep neural networks for error-bounded scientific lossy compression. Specifically, AE-SZ applies a convolutional sliced-Wasserstein autoencoder with generalized divisive normalization layers for the compression; and in AE-SZ the Lorenzo data predictor is also used as a supplement to the neural networks. In evaluations, AE-SZ outperforms several existing scientific lossy compressors with traditional techniques such as SZ2.1 [113], ZFP [117], and SZauto [195] in the settings of relatively large error bounds.

4.11 SRNN-SZ

To the best of our knowledge, SRNN-SZ [119] is the first work of applying both super-resolution neural networks and transformers to scientific error-bounded lossy compression. As a prediction-based data compressor, SRNN-SZ has a data prediction scheme that is nearly the same as interpolation-based SZ3 and QoZ; however, the super-resolution neural networks can perform as the alternative for the interpolation within a single level (especially the last ones). SRNN-SZ trains a customized hybrid attention transformer on assorted scientific datasets and fine-tunes it on each scientific domain before the application of the network. Evaluations [119] show that SRNN-SZ has achieved state-of-the-art compression rate-distortion on several low-compressibility scientific datasets.

4.12 Digit Rounding and Bit Grooming

Digit Rounding [3] and Bit Grooming [187] are two error-bounded lossy compressors, which both mainly adopt the bit-plane coding method. We describe these two compressors in detail as follows.

Digit Rounding allows users to specify a decimal digit (denoted as *nsd*) to preserve for the compression. For example, if a user sets the *nsd* to be 4 to compress the number 3.14159265, then four significant digits will be preserved: the lossily reconstructed number would be 3.1411328. Digit Rounding includes three key steps:

- Bit truncation: computing the required number of bits to preserve in the IEEE-754 floating-point representation according to the number of significant decimal digits specified by the user (i.e., *nsd*).
- Shuffle: applying a byte shuffle function on the bit-truncated dataset.
- Lossless compression: compressing the shuffled bytes with a lossless compressor such as Deflate (Gzip [49]) or Zstd [45].

The official release of Digit Rounding [3] has a dependency on HDF5 because it uses the deflate function offered by HDF5.

Bit Grooming is developed mainly based on the bit plane encoding. Similar to Digit Rounding, Bit Grooming also truncates the bit planes for the floating-point datasets by removing the insignificant digits, followed by a deflate lossless encoder such as zlib [200]. Bit Grooming was released together with NetCDF operators (NCOs) [8], so its installation depends on the NCOs package.

5 CUSTOMIZED COMPRESSORS FOR SPECIFIC APPLICATIONS OR USE CASES

In this section we carefully survey the error-bounded lossy compressors that were tailored for specific applications/use cases.

5.1 Compression for Molecular Dynamics Simulations

Molecular dynamics (MD) simulations have become one of the most important research methods in many science domains, including physics, biology, and materials science. In biophysics and structural biology, MD simulations are commonly employed to study the behavior of macromolecules, such as proteins and nucleic acids, aiding in the interpretation of biophysical experiment results and the modeling of molecular interactions. In materials science, MD simulations enable researchers to model and predict the structural, thermal, and mechanical characteristics of materials at the atomic level, to help them understand phenomena such as material deformation, fracture mechanics, and phase transitions, offering insights that are often unattainable through direct experimental observation.

The volume of data generated by MD simulations is growing exponentially, and it becomes a critical challenge for researchers to keep all of the data in their storage facilities. For instance, running MD simulations to model the SGLT membrane protein may take 2.4×10^8 steps (480 ns),

resulting in approximately 260 TB of raw trajectory data with only 90,000 particles [81]. On the other hand, a 20-trillion particle simulation [166] may produce petabytes of data with just 10 steps.

Lossy compression has been widely considered a promising solution to reduce the data volume of MD simulations. For example, GROMACS [70], which is one of the leading MD simulation packages, has had its lossy format XTC built-in for decades. However, designing lossy compressors for MD simulations also presents unique challenges. First, the dominant type of data that needs to be stored in MD simulations is the particle trajectory, which is made of multiple frames (snapshots) of particle coordinates in a 3D space. Other data, including the particle velocities, forces, and system topology, either are not required in many cases or take much less storage than the trajectory. Compared with the structured mesh (regular multidimensional grid) that many other scientific applications use, the trajectory format is different: it stores discrete coordinates whereas the mesh stores continuous values. As such, the trajectory format is not well studied in terms of compression—most of the leading lossy compressors, including SZ [193] and ZFP [117], focus on the continuous values from the structured mesh. Second, although the MD trajectory has a temporal dimension, it is not feasible to treat the data as time series and compress accordingly. One reason is that random access (access data from randomly selected frames) is usually required for postanalysis, such that the compression needs to be done in batches, each containing only a limited number of frames. Another reason is that the frames may be saved in irregular (random) intervals; therefore the data from MD simulations may not be as continuous as in regular time series.

Given these challenges, there is ongoing research into lossy compression methods tailored for MD simulations. The HRTC method [81] employs a strategy that represents trajectories as piecewise linear segments, coupled with quantization that is controlled for errors and a representation using variable-length integers. The PMC approach [52] leverages the information about atomic bonds within molecules to forecast the positions of atoms in each frame; however, this technique does not apply to simulations involving nonbonded interactions. Omeltchenko et al. [137] proposed a spatial compressor for MD datasets that includes three steps: (1) converting all floating-point values (both position and velocity) to integer numbers, (2) building a uniform oct-tree index according to the space-filling curve of the position fields, and (3) sorting the particles based on R-indices using a radix-similar sorting method in each block and encoding the difference in adjacent indices by variable-length encoding. Tao et al. [163] improved Omeltchenko et al.'s method by sorting the particles based on a partial-radix sorting algorithm while preserving the same compression ratios by using SZ to compress the reordered coordinates instead of directly using the R-index. Essential dynamics [133] is a powerful analysis tool for identifying the nature and relative importance of the essential deformation modes of a macromolecule from MD samplings. ED offers lossy compression by adopting principal component analysis (PCA) over the full trajectories of all particles. By comparison, Kumar et al. [96] combined PCA and discrete cosine transform (DCT) to compress the full trajectories of the total MD dataset. Such full-trajectory-based compression methods, however, may be impractical for many of today's large-scale MD simulations. Zhao et al. [196] proposed an SZ2-based compressor, MDZ, which is equipped with spatial-clustering-based prediction and two-level temporal prediction. MDZ achieves high compression ratios particularly on MD simulations focusing on crystalline materials or featuring a continuous temporal domain.

5.2 Compression for Quantum Chemistry Simulations

Quantum chemistry applications may produce extremely large amounts of data (such as petabytes of data [58]) during execution on parallel systems. General Atomic and Molecular Electronic Structure System (GAMESS) [12] is a typical example. In GAMESS, the Schrödinger differential equation needs to be solved to obtain the wavefunction that contains all the information about a chemical

system. The most expensive step in this procedure involves computation of two-electron repulsion integrals (ERIs), which takes about 87% time of Hartree–Fock computation time in GAMESS [58]. This step also projects a high storage requirement because it scales as $O(N^4)$ with the size of the chemical system. ERIs are required by each time step during the simulation, but they cannot always be kept in memory because of limited memory capacity, so they need to be recomputed from scratch at every iteration.

An error-bounded lossy compressor called Pattern Scaling for Two-electron Repulsion Integrals (PaSTri) was developed for GAMESS, to avoid such an expensive ERI recomputation cost. Specifically, PaSTri was developed based on the prediction-based compression model (similar to SZ). The key advantage of PaSTri is that it leverages the inherent scaled repeated pattern features in the ERI datasets to significantly improve the prediction accuracy, which thus can considerably improve the compression ratio in turn. According to [58], PaSTri exhibits much higher compression ratios than the general-purpose compressors SZ and ZFP with different error bound settings. For example, SZ and ZFP can get compression ratios of 7.24× and 5.92×, respectively, on the compression of double-precision floating-point ERIs data, respectively, when the error bound is set to 10^{-10} . In comparison, PaSTri can get the compression ratio up to 16.8×. Experiments also show that the performance of retrieving ERIs can be improved 200–300% with PaSTri over the traditional ERIs recomputation method, when the same integral data needs to be used for a total of 20 iterations during the simulation.

5.3 Compression for Quantum Circuit Simulations

Quantum circuit simulation is employed for a variety of quantum computing research tasks, including the development of new quantum algorithms, co-design of quantum computers, and verification of quantum supremacy claims [141]. With limited access to today’s noisy intermediate-scale quantum [141] devices as well as limited performance of these devices, quantum circuit simulation on classical computers can serve as a pragmatic tool for researchers exploring these tasks. Two important types of quantum circuit simulation are Schrödinger algorithm full state vector simulations [143][155] and tensor network contractions [131].

Full state vector simulations involve storing a quantum state vector in memory and evolving the state vector with gates over each time step. For these simulations, the space complexity scales exponentially with the number of qubits and polynomially with the circuit depth. As circuits for simulation grow in complexity, in terms of both number of qubits and depth of circuit, serious computational and memory limitations emerge. In order to precisely simulate the evolution of a complete n -qubit state vector, 2^n state vector amplitudes must be stored. Assuming complex, single-precision floating-point values are stored for each amplitude, the Frontier supercomputer, with 4.8 PB of memory [1], would be capped at a 49-qubit simulation. Today’s quantum devices are already exceeding this number of qubits, such as IBM’s Osprey with 433 qubits [2].

Tensor network contraction simulators represent a quantum circuit as a tensor network, where quantum gates or states are represented as a tensor [131]. Indices represent the index of a bitstring that a gate operates on. Contracting tensors requires multiplication of tensors and a summation. Tensor networks can require up to the same level of memory as full state vector simulations, depending on the circuit. Even with lower-memory footprint circuits, tensor networks can have tensors grow larger and larger as the contraction sequence advances, straining the memory resources of the system.

Compression is an attractive solution to this memory footprint problem. With sufficiently high throughput compression, large state vectors can be stored in memory and processed in chunks, eliminating the need to read and write from storage. As is the case with other scientific applications, if lossy compression is utilized to achieve high compression ratios and high throughput, the

impact on simulation results must be characterized and mitigated. For quantum circuit simulations, state vector fidelity and total energy of the circuit are two metrics integral for analysis; thus, loss introduced from compression must not greatly distort these values.

Wu et al. [182] designed a Schrödinger algorithm-based full state vector simulation pipeline that integrates compression. MPI is used to parallelize the matrix multiplication required to apply a gate to a state vector. Each rank stores a set of compressed blocks that together compose a component of the overall state vector. Blocks are decompressed two at a time to perform a partial state vector update, and the resulting state vector piece is compressed for later use. Wu et al. explored multiple compressors to compress the state vector data, including SZ2.1 (A), SZ2.1 with complex type support (B), XOR leading-zero reduction coupled with bit-plane truncation and `zstd` (C), and reshuffling of real and imaginary parts together before performing C (D). The results indicate that solutions C and D achieve the highest compression ratios (30–90 for error bounds in the range $[1E-5, 1E-1]$) across the four configurations as well as FPZIP and ZFP. These results are due to the spiky nature of state vectors: adjacent data points may not be good predictors of each other. When running a 61-qubit Grover’s search algorithm with this pipeline, the memory requirement drops from 32 exabytes to 768 terabytes using 4,096 nodes. In all, their compression integration can raise the number of qubits for a simulation by 2 to 16.

Shah et al. [151] targeted tensor network-based quantum circuit simulation and proposed a GPU-based compression framework for these types of simulators. Since the target is tensors that exhibit spiky behavior, the authors applied preprocessing and postprocessing steps to `cuSZ` and `cuSZx`, the GPU implementations of SZ and SZx. Additionally, the `cuSZx` kernel was modified to integrate the pre- and postprocessing such that the impact on throughput was limited. At a high level, the pre- and postprocessing sparsify the tensor, leveraging the fact that many tensor values are close to zero and have little impact on the contraction result. The sparsification process requires efficient computation and storage of metadata structures, such as a bitmap, in order to boost the compressors’ performance. Their designs can yield up to 10 times greater compression ratio compared with `cuSZ` alone. When prioritizing throughput, the modified `cuSZx` kernel compressor can achieve 3 to 4 times improvement in compression ratio with limited impact on throughput.

5.4 Compression for Climate Research

The simulations used by climate scientists produce enormous volumes of data. For example, the Coupled Model Intercomparison Project alone produced nearly 2.5 PB of data [43], and future studies will produce more data as the resolution of the modeling is increased. The data from these studies are often extensive and used as the baseline for studies of different aspects of climate science. Thus, both the quality and size of these datasets are of utmost importance.

Climate researchers have developed some of the most extensive work [22, 24, 26] to quantify the impacts of lossy compression on their specific domain quantities of interest. In a series of papers researchers proposed four critical assessments: the SSIM of the visualization (and later the data with `dSSIM` [25]), the p-value of the KS test, the Pearson correlation coefficient of determination, and the spatial relative error with corresponding thresholds to be established by asking a panel of domain experts if the data were distinguishable from the datasets [23]. While the results of the assessments are correlated, they are independent—that is, passing any one test does not guarantee that passing the others.

These thresholds were later refined by the community. Work by Underwood and Bessac [171] identified several weaknesses in the p-value of the KS test when used in this way, making the test too conservative in some cases and too liberal in others. Therefore, they proposed some alternative distance measures for the climate community to consider. Additionally, some papers have proposed less aggressive limits for the SSIM metric in particular [92].

The current recommendation from climate experts is to ensure that a metric known as Data SSIM, a variant of the SSIM (dSSIM) image quality metric between the uncompressed floating-point data and the decompressed floating point, of at least .99995 for “conservative” compression and .995 for “aggressive” compression of climate datasets [25]. The dSSIM as implemented in the LDCPY [140] package differs from the SSIM in that it (1) normalizes the values from 0 to 1, then quantizes them into 256 discrete values, (2) chooses the values $C_1 = 1e-8$ and $C_2 = 1e-8$ instead of their more traditional values, and (3) uses ASTROPY’s `preserve_nan` option when convolving with NaN values, in order to improve robustness to NaNs.

In the work by Underwood and Bessac [171], the `OptZConfig` package was used to find the largest compression ratio possible while meeting all of these quality requirements. This work found that compression ratios as high as 59.81 for the atmospheric datasets were possible using the most effective compressor (SZ3).

However, this work also highlighted many opportunities to further improve the customization of compressors for climate datasets [171]. For example, while climate datasets are often stored as 3D or 4D tensors, a correlation may or may not exist between the layers of data. Specialized compressors can detect when these layers are or are not correlated and use only the correlations that exist within the layers. Dimension permutation and fusion as such are implemented in `CliZ` [84]. Additionally, periodicity and geographic consistency can help increase prediction accuracy in prediction-based compressors. Some climate datasets, like those used in Land or ICE, have many small fields and would benefit from common dictionary encoding optimizations.

5.5 Compression for Cosmology Research

Modern cosmological simulations are used by researchers and scientists to investigate new fundamental astrophysics ideas, develop and evaluate new cosmological probes, assist in large-scale cosmological surveys, and investigate systematic uncertainties [56, 69]. Historically such studies have required large computation- and storage-intensive simulations that are run on leadership supercomputers. Today’s supercomputers have evolved to heterogeneity with accelerator-based architectures, in particular GPU-based high-performance computing systems such as the Summit system [158] at Oak Ridge National Laboratory. In order to adapt to this evolution, cosmological simulation codes such as `Nyx` [20] (an adaptive mesh cosmological simulation code) have been designed to take advantage of GPU-based HPC systems and can be efficiently scaled to simulate trillions of particles on millions of cores [20]. These simulations often run on a static number of ranks, usually for the same number of compute partitions; and periodically huge amounts dump raw simulation data to the storage for future post hoc analysis. With the increase in scale of such simulations, saving all the raw data generated to disk becomes impractical because of limited storage capacity and bottlenecks in the simulation due to the I/O bandwidth required to save the data to disk [36, 174, 175].

Research has shown that general-purpose data distortion metrics, such as *peak signal-to-noise ratio* (PSNR), *normalized root-mean-square error*, *mean relative error*, and *mean squared error*, on their own cannot satisfy the demand of quality for cosmological simulation post hoc analysis [62, 87]. Additionally, approaches utilizing lossy compression for scientific datasets usually apply the same compression configuration to the entire dataset [87, 162]. Yet not all partitions (regions) in the cosmological simulation have the same amount of information. Cosmologists are typically interested in the dense regions since these contain halos (clusters of particles) where galaxies are formed. Hence, the sparse regions could be compressed more aggressively than the dense ones, and such an action would not impact the analysis done by cosmologists.

To significantly improve the compression performance and control the compression error for cosmological data, Jin et al. [88] introduced an adaptive approach to select feasible error bounds

for different partitions, showing the possibility and efficiency of adaptively configuring lossy compression for each partition individually. Specifically, the authors built analytical models to estimate the overall loss of post-analysis results due to lossy compression and to estimate compression ratio, based on the property of each partition. Then, they used an efficient optimization method to determine the best-fit configuration of error bounds combination in order to maximize the compression ratio under acceptable post-analysis quality loss. The work introduces negligible overheads for feature extraction and error-bound optimization for each partition. Overall, this fine-grained adaptive configuration approach improves the compression ratio by up to 73% with the same post-analysis distortion with only 1% performance overhead.

More recently, Jin et al. [86, 89] proposed that the parallel write performance of cosmological data can be significantly improved by a parallel write solution that deeply integrates predictive lossy compression with the asynchronous I/O feature in HDF5. It uses a more advanced ratio-quality model to accurately predict the compression ratio of all partitions and estimate the offsets to allow overlapping between compression and I/O. Evaluation shows that, with up to 4,096 cores from Summit, this solution improves the write performance by up to $4.5\times$ and $2.9\times$ over the non-compression and lossy compression filter solutions, respectively, with only 1.5% storage overhead (compared with original data) on cosmological simulation.

5.6 Compression for Topology and Visualization

Topological data analysis and visualization are essential in abstracting, summarizing, and understanding scientific data in various applications, ranging from cosmology and combustion to Earth simulations and AI. Topological feature descriptors, or simply topological descriptors, provide robust capabilities for capturing, summarizing, and comparing features in scientific data. Most lossy compressors cannot preserve topological features, thus not guaranteeing topology preservation in decompressed data. Inconsistency of topology in decompressed data could lead to misinterpretation and even wrong discoveries. Below is a review of the preservation of topological features in two aspects: scalar field topology and vector field topology, both of which require customizations of existing lossy compressors.

Scalar field topological descriptors include persistence diagrams, merge trees, contour trees, Reeb graphs, and Morse and Morse–Smale complexes. Key constituents of these descriptors include critical points (maxima, minima, and saddles) and their relationships. Earlier in 2018, Soler et al. [156] developed a method to adaptively quantize data based on a given persistent simplification threshold ϵ . This method guarantees the preservation of critical point pairs with a persistence larger than ϵ yet does not enforce pointwise error control. More recently, Yan et al. [185] proposed TopoSZ, which builds on top of SZ1.4 with a customized quantization scheme to allow different lower/upper bounds per point based on the segmentation induced by contour trees. TopoSZ also iteratively tests whether there are false-positive/false-negative critical points in decompressed data until convergence.

Vector fields are a common output form in scientific simulations, such as fluid dynamics, climate and weather, and tokamak simulations. Topological features of vector fields, such as critical points, separatrices, and critical point trajectories, are crucial to structural understanding and thus must be preserved in vector field compression. Until recently, little research had been done on the preservation of vector field features. In 2020 and later, however, Liang et al. [109, 115] proposed cpSZ to preserve all critical points in a vector field without false-negatives, false-positives, and false-types. A false-negative means the critical point appeared in the original data but was missed in the decompressed data in the exact cell location; a false-positive means an artificial critical point is introduced in the decompressed data but does not exist in the original data; a false-type indicates that although the same critical point exists in both original and decompressed data, the type

of the critical point (e.g., source, sink, or saddle) is wrong in the decompressed data. Specifically, cpSZ derives an analytically sufficient error bound for each point such that no false cases exist in the decompressed data. This approach has been extended to preserve critical points extracted by simulation of simplicity (SoS) [53], a more robust critical point extraction algorithm than the numerical one. Since SoS relies on the signs of determinants to determine the existence of critical points in a cell, the extended version of cpSZ [183] establishes the theory for preserving signs of determinants in lossy compression and leverages it to preserve critical points in vector fields. To achieve high compression ratios, relaxation strategies on the derived error bound are explored in the sequential algorithm, and a ghost-aware parallelization strategy is proposed for execution on distributed-memory systems.

5.7 Compression for Seismic Imaging

Seismic imaging is a technique for determining the seismic properties of the Earth's subsurface [107]. The technique is extensively utilized in earthquake imaging and resource exploration, including hydrocarbon and geothermal, by energy companies such as Saudi Aramco [80]. Among all the existing seismic imaging methods, reverse time migration (RTM) is a cutting-edge one since it can effectively analyze complex seismic structures (e.g., complex velocity focusing and steep ($>70^\circ$) dips imaging), compared with traditional methods such as Kirchhoff and wave equation migration [54].

A notable limitation of RTM is the massive data it generates during its execution. In general, RTM is a full two-way wave equation and can be explained as follows. Once the input data and configurations, such as the velocity model, are prepared, RTM conducts a **forward propagation** using the seismic waves. This phase typically involves thousands of time steps, with each step producing a single snapshot. After this phase, RTM performs a **backward propagation** based on the reverse order of the generated snapshots, creating the final stacking image, which represents the overall seismic structure. In real-world use cases, a $10 \times 10 \times 8$ cubic kilometers geological structure may produce up to 2,800 TB of data within only a single time step [146]. Storing such big data into peripheral devices can degrade the runtime performance drastically, which motivates error-bounded lossy compression a promising solution to reduce the memory footprint [30, 80].

Huang et al. [80] proposed a hybrid lossy compression method called HyZ that combines block-wise regression (BR) and an ultra-fast prediction-based compressor SZx [186] to improve the performance of RTM overall execution. Evaluation on 3,600 snapshots of the Overthrust model shows HyZ achieves a compression ratio of 12.31x and compression/decompression speeds of 10.69 GB/s and 12.45 GB/s, respectively. Integration of HyZ into an industrial parallel RTM code improves overall performance by 6.29–6.60x over the execution without compression techniques, outperforming second-tier compressors like SZ and ZFP by up to 2.23x. HyZ also demonstrates higher fidelity than BR in preserving the visualization quality of single snapshots and the final stacking image.

Barbosa et al. [30] introduced an on-the-fly lossy and lossless wavefield compression strategy for RTM to reduce the computational cost and storage demand. They leveraged the ZFP and Nyquist sampling theorem to compress the source wavefield solution before storage and decompress it during the imaging condition calculation. Experimental results on 2D and 3D benchmarks show the seismic image quality is preserved with compression ratios up to 18.84x and 2.08x, respectively. Computational tests using 24 CPU cores and 4 GPUs indicate that the overhead of compression ranges from 122% to 381% of the baseline RTM runtime but allows reducing storage by up to 66.7%. The proposed integration of wavefield compression in RTM enables substantial reductions in I/O and storage needs with minimal impact on image accuracy.

5.8 Compression for X-ray Light Source Data

Light sources such as the Advanced Photon Source (APS) at Argonne National Laboratory and the Linac Coherent Light Source (LCLS) at SLAC National Accelerator Center produce enormous volumes of data. With the completion of the APS upgrade project and the LCLS 2 high energy projects these systems are expected to produce data at rates exceeding 1 TB/s for some experiments and beamlines. This deluge of data presents a monumental challenge to move the data within and between sites and store the data for archival purposes. In many cases, a compression ratio target of a 10× is desired for these online workflows [172].

So far, compression for light sources has been extensively studied in the fields of ptychography and serial crystallography. As with other disciplines, the quality of the decompressed data is of the utmost importance. However, a key challenge in assessing the quality is the automation of the analysis techniques used to study light source data—in many of these domains, the evaluation of datasets is still largely a time-consuming, manual process [172]. More work to automate these workflows would accelerate the development of compressors for these applications.

For ptychography, the current state of the art is expressed in [193]. These data present as 2D float-encoded integer data recorded over time for a third dimension.³ In this work, a pipeline is constructed in SZ3 that uses different prediction schemes based on the error bound. At higher error bounds, a multidimensional regression predictor is used. At lower error bounds, a specialized 1D Lorenzo predictor is used on a transposed version of the 3D input data that aligns all time steps of a particular pixel consequently in memory. The 1D Lorenzo prediction results in higher quality because spatially adjacent pixels may or may not actually be correlated, resulting in lower quality when using them for prediction. Together, this pipeline achieves higher rate-distortion results than any other variant of SZ, which was the prior state of the art of these data. While these results present high quality at each bit rate, they were evaluated by using only traditional rate-distortion curve measures, leaving room for evaluations using more domain-specific metrics.

For serial crystallography, two major approaches can be combined: non-hit rejection and ROIBIN-SZ [172]. Like ptychography, the data present as 2D float-encoded integer data over a time dimension. Unlike ptychography, however, the data are substantially noisier, and there are features called Bragg spots or peaks that are key to the analysis pipeline that need to be preserved more conservatively. Non-hit rejection is a technique that uses the number of peaks detected each frame to veto or reject capturing frames that contain few, if any, peaks. While non-hit rejection eliminates on average 50% (typically between 20% and 80%) of the data from an experiment, it alone is not enough to hit the compression ratio targets for these workflows. In order to achieve higher compression ratios, a method called ROBIN-SZ was developed. ROBIN-SZ uses the peak information used to perform non-hit rejection to losslessly preserve rectangular regions around the Bragg peaks, while using aggressive 2×2 binning followed by SZ3 compression on the background. Preserving the background is critical because the peak-finding process is not infallible. There can be false-negative peaks in the dataset that need to be preserved to some extent in order for the analysis process to complete.

5.9 Compression for Data Transfer over WAN

Recently, error-bounded lossy compression techniques have also been used to improve the data transfer performance over the wide area network (WAN). Ocelet [126]—a lossy-compression-based data transfer accelerator developed for the Globus platform—is a typical example. The Ocelet

³The detectors used in beamlines often produce unsigned 14- or 16-byte integer data; but after gain correction, pedestal correction, and calibration the data take the form of single-precision floating-point data. An open research question is whether compression can be effectively perform on raw data without these steps.

framework is composed of 8 components/modules: user interface, FuncX service [5], Globus service [6], parallel executor, MPI call module, error-bounded lossy compression module, data loader/writer, and lossy compression quality estimation module. The lossy compression quality estimation module is used to find a suitable error bound and compressor to conduct the compression. The data loader is used to load the data of multiple formats such as NetCDF [145], HDF5 [7], and binary. The parallel executor is used to launch the compression/decompression work in a parallel job. Globus manages the data transfer. FuncX service deals with remote orchestration. The user interface offers a graphical interface that helps users submit the tasks easily.

In addition to aggregating all 8 modules together to form the Ocelet framework, some other optimization strategies have been designed to improve the data transfer performance to address I/O contention, compute-node waiting, and transfer slowdown for many small files. One issue is that the compression task may exceed the capacity available on data transfer nodes or login nodes and thus require powerful compute nodes to compress the data via a batch scheduler, while such requests may not be scheduled immediately. To address this issue, Ocelet has a sentinel program to monitor and schedule the transfer/compression task dynamically. As the data transfer request is submitted, a certain amount of data will be transferred immediately without waiting for the scheduled compute resources. Whenever the compute resources are allocated by the scheduler, the remaining data that have not been transferred yet will be compressed and transferred, a process that can accelerate the overall transfer performance in turn. According to the Globus data transfer experiments across different sites over the WAN, the data transfer performance can be greatly improved by applying the adaptive parallel compression: more than 90% of the transfer time can be reduced by this method.

5.10 Compression for Boosting Communication in HPC Clusters

Researchers have been actively investigating the application of lossy compression to boost the performance of communication in high-performance clusters, focusing on two primary categories: point-to-point and collective communication. Collective communication operations encompass a variety of types, which fall into two distinct subcategories, collective data movement and collective computation, based on their respective communication patterns.

In point-to-point communication, Zhou et al. [198] utilized 1D fixed-rate ZFP compression [46] to enhance MPI communications within GPU clusters. This method predominantly enhances point-to-point communication effectiveness but falls short in collective communication scenarios. Moreover, its fixed-rate design, which favors compressed data size over accuracy, fails to assure bounded error, a crucial aspect in lossy compression.

On the collective communication front, Huang et al. [75] developed a high-performance framework to improve performance across all MPI collectives. This CPU-based method is a significant advancement in compression-enabled MPI collective communication, demonstrating 1.8–2.7× performance improvement over traditional MPI collectives and various baselines. They also provided both theoretical analysis and experimental results to prove the limited impact of error-bounded lossy compression on the final accuracy of collective communications. However, this approach does not efficiently tackle GPU utilization, synchronization, and device-host data transfer issues, leading to suboptimal results in GPU clusters.

Addressing collective communication on GPU clusters, Zhou et al. [199] enhanced MPI_Alltoall performance on GPUs through 1D fixed-rate ZFP. Their method, however, depends on a CPU-centric staging algorithm tailored for a singular collective operation, thus limiting its applicability and performance. The fixed-rate compression further compounds these limitations, affecting both performance and compression quality. In response, Huang et al. [73, 74] presented a GPU-centric framework designed to optimize both collective computation and data movement, while efficiently

controlling data distortion. This innovative approach harnesses the full computational capabilities of GPUs, significantly reducing the compression cost, synchronization, and device-host data transfers. The resulting performance improvements are notable, surpassing NCCL and Cray MPI by up to 4.5× and 28.7×, respectively.

5.11 Compression for Distributed Machine Learning & Federated Learning Systems

Recent years have witnessed the rapid evolution of deep learning models for getting high model accuracy, especially in the realm of large-scale models. Typical examples include large language foundation models (e.g., Palm and GPT-4 [21, 138]), large-scale models in computer vision (e.g., VGGs, ResNets [68, 154]), and life science (e.g., AlphaFolds [90]). Large-scale models have achieved significant breakthroughs and demonstrated remarkable success in learning and generative tasks in multiple domains by applying a large number of model parameters and a huge training dataset [34]. Along with these rapid advancements and their success, however, come computational, training data collection, and privacy challenges in training these models. Distributed systems, including the public/private cloud and HPC platforms, provide strong support for training large-scale models based on large-volume training datasets to accelerate the training procedure. Therefore, distributed machine learning systems have become a hot topic in recent years. Typically, there are two distributed training schemes: data parallel [101, 105, 150, 190, 191] and model parallel [153].

Communication across different computing nodes during the training has been identified as the main bottleneck for distributed machine learning systems. The gradients, model parameters, and even activation data are transmitted across different computing nodes during the training. With the increase in model size, these data increase dramatically and bring high communication overhead. To improve the training performance, we need to compress them for communication reduction.

Three main kinds of communication reduction approaches exist: ❶ reducing communication rounds, ❷ communication and computing overlapping, and ❸ gradients and parameter compression. The gradient compression approaches mainly consist of *gradient sparsification*, *gradient quantization*, *low rank*, and *error-bounded lossy compression*.

Gradient Sparsification The core idea here is transmitting only the gradients, which play a significant role in the model update. A gradient near zero indicates that the associated parameter has potentially been converged, and such gradients have little contribution to model updating [192] and can be dropped out to reduce the communication overhead; such approaches include Top-K sparsification [17, 116, 144, 147]. **Gradient Quantization** These approaches use the low-precision data to represent the original data (e.g., defined by float32 data type), which maps the discretized continuous value to different integers in a range. The one-bit SGD [149] and signSGD [32] open an opportunity for gradient quantization. The recent most popular gradient quantization works, TerGrad [180] and QSGD [19], use the stochastic unbiased estimation value of the gradient to reduce the gradient error for the gradient quantization. **Low Rank** Some recent research works argue that the final model learned has a “low stable rank” for the modern overparameterized DNN models [106, 132, 173], which can explain the impressive generalization properties of the trained DNN models. This opens an opportunity for gradient compression using the low-rank approaches, in which the large gradient matrix is decomposed as several small matrices before transferring and then reconstructed after receiving.

Error-Bounded Lossy Compressors An emerging area of research is using error-bounded lossy compressors such as SZ and ZFP to reduce the size of model updates for distributed systems. Early approaches such as DeepSZ [85] focused on providing a framework for compression and storage of general DNN model architectures. Their results showed that through compressing the weights of the model, they could achieve high compression ratios in those areas, leading to

reported $\approx 50\times$ compression on the weights. Other studies, such as the FedSZ framework [181], demonstrate how SZ-based compression can be efficiently integrated into federated learning (FL) workflows. By compressing local model updates before transmission, FedSZ effectively reduces the bandwidth requirements and latency in FL systems, particularly in edge computing scenarios. This approach enhances communication efficiency and opens new avenues for maintaining model quality under stringent bandwidth constraints. A significant advantage of using error-bounded lossy compression is that it can retain more information than the above methods. While compressors introduce noise, they do not erase information like sparsification or quantization at certain error boundaries. Developing error-bounded lossy compression strategies to target communication reduction for distributed learning systems is an open area of research. More work is needed to address this and to understand the nuances of controlled compression algorithms and how they affect model accuracy and performance.

6 RELATED WORK

In this section we discuss the work related to the survey of lossy compression.

Compression survey across domains and data types.

- Jayasankar et al. [83] contributed a comprehensive survey to summarize the data compression techniques in terms of different coding schemes (such as entropy coding and dictionary coding) and across various data types (such as text compression, image compression, audio compression, and video compression). The survey also involved various use cases, including compression for wireless sensor networks, medical imaging, database compression, HEP data compression, and wind turbine data compression. However, the survey was written based on a high-level view of the data compression techniques, so that it has limited information about lossy compression for scientific datasets. For example, it does not mention the state-of-the-art error-bounded lossy compressors SZ [50, 164] and ZFP [117] at all. Moreover, it was published in 2018, so it misses many critical lossy compression techniques such as MGARD [13], SPEER [104], and SZ3 [193] developed after its publication.
- Son et al. [157] provided a survey about data compression for scientific domains that were generally produced by HPC applications. This survey involves both lossless compression techniques (such as FPC [35], ISOBAR [148], and PRIMACY [152]) and four lossy compressors (such as ISABELA [98] and fpzip [118]). Similar to Jayasankar et al.'s survey, however, this survey misses many key error-bounded lossy compression methods such as SZ [50, 164], ZFP [117], MGARD [13], SPERR [104], and TTHRESH [27], which were published after its publication.

Compression Survey for Specific Domains or Use Cases

We also collected the survey papers about compression for specific domains, use cases, or data.

- Climate data: Mummadisetty et al. [135] discussed the lossless compression methods used for climate datasets. This survey shows that lossless compressors can only get compression ratios of up to 5.81 on climate data compression. Kunkel et al. [94] wrote another survey about data compression for climate data, which mainly covered lossless compression techniques and mentioned only a few lossy compressors such as ISABELA [98] and ZFP [117]. It also provided a modeling for the impact of compression on performance and cost with regard to memory, I/O, and networks.
- Seismic data: Hilal et al. [136] wrote a survey about different seismic data compression methods. This survey covers multiple compression techniques, such as transformation, prediction,

quantization, run length, and sampling. It can be deemed an initial attempt to provide an up-to-date overview of the research work carried out in this all-important field of seismic data processing.

- Medical data: Al-Salamee et al. [18] provided a survey regarding the compression of medical image data for both lossy compression approaches (such as Fractals, wavelet, region of interest, and non-region of interest) and lossless approaches (such as adaptive block size, least square). Rate-distortion is considered in this survey as the main metric to investigate and evaluate the compression quality and performance.
- Point cloud data: Quach et al. [142] provided a comprehensive survey about deep-learning-based point cloud compression methods. Specifically, they covered various categories of geometry and attribute compression and discussed the importance of level of detail decomposition for compression, the limitation of separating geometry and attribute compression, and the importance of rendering in the context of compression. They also discussed how point cloud compression relates to mesh compression and identified their intersection.
- Time series data: Chiarot et al. [41] provided a comprehensive survey about the principal time series compression techniques, proposing a taxonomy to classify them considering their overall approach and their characteristics. The authors also discussed the performance of the selected algorithms by comparing the experimental results that were provided in the original articles.

Compared with all these surveys, our paper has four unique features/contributions, which are summarized in next section.

7 CONCLUSION AND FUTURE WORK

In this paper we provide a comprehensive survey to discuss error-bounded lossy compressors for scientific datasets in multiple facets. Our survey features the following key contributions:

- We propose a lossy compression model taxonomy with 6 different compression models, from high-speed (low-quality) compression to low-speed (high-quality) compression.
- This is the first survey paper comprehensively discussing the modular techniques commonly used in error-controlled lossy compressors.
- This is the most comprehensive survey including 30+ state-of-the-art error-controlled lossy compressors developed from 2006 through early 2024.
- This survey also comprehensively discusses optimized compressors customized for specific applications or use cases.

In the future, we will continue to survey modern error-bounded lossy compression techniques for diverse accelerators (such as FPGA, GPU, and CPU Vector) with various applications/use-cases.

ACKNOWLEDGMENTS

This research was supported by the U.S. Department of Energy, Office of Science, Advanced Scientific Computing Research (ASCR), under contract DE-AC02-06CH11357, and supported by the National Science Foundation under Grant OAC-2003709, OAC-2104023, OAC-2311875, OAC-2330367, OAC-2311756, and OAC-2313122. The authors extend their appreciation to the Deanship of Scientific Research at University of Bisha, Saudi Arabia for funding this research work through the Promising Program under Grant Number (UB- Promising -40 - 1445).

REFERENCES

- [1] [n. d.]. https://docs.olcf.ornl.gov/systems/frontier_user_guide.html#frontier-compute-nodes
- [2] [n. d.]. <https://newsroom.ibm.com/2022-11-09-IBM-Unveils-400-Qubit-Plus-Quantum-Processor-and-Next-Generation-IBM-Qu>
- [3] [n. d.]. Digit Rounding Code. https://github.com/CNES/Digit_Rounding. Online.

- [4] [n. d.]. Flash-X: A Multiphysics Scientific Software System. <https://flash-x.org/>.
- [5] [n. d.]. FuncX. <https://funcx.org/>.
- [6] [n. d.]. Globus. <https://www.globus.org/>.
- [7] [n. d.]. HDF5. <http://www.hdfgroup.org/HDF5>
- [8] [n. d.]. NetCDF Operator Site. <https://nco.sourceforge.net/>.
- [9] [n. d.]. Reverse Time Migration (RTM) Technology. <http://www.seismiccity.com/RTM.html>.
- [10] . 2017. Linac Coherent Light Source (LCLS-II). <https://lcls.slac.stanford.edu/>. Online.
- [11] . 2020. EXAALT: Molecular Dynamics at the Exascale. <https://www.exascaleproject.org/wp-content/uploads/2019/10/EXAALT.pdf>. Online.
- [12] 2020. GAMESS: Enabling GAMESS for exascale computing in chemistry and materials. <https://www.exascaleproject.org/wp-content/uploads/2019/10/GAMESS.pdf>. Online.
- [13] Mark Ainsworth, Ozan Tugluk, Ben Whitney, and Scott Klasky. 2018. Multilevel techniques for compression and reduction of scientific data—the univariate case. *Computing and Visualization in Science* 19, 5 (2018), 65–76.
- [14] Mark Ainsworth, Ozan Tugluk, Ben Whitney, and Scott Klasky. 2019. Multilevel techniques for compression and reduction of scientific data—the multivariate case. *SIAM Journal on Scientific Computing* 41, 2 (2019), A1278–A1303.
- [15] Mark Ainsworth, Ozan Tugluk, Ben Whitney, and Scott Klasky. 2019. Multilevel techniques for compression and reduction of scientific data—quantitative control of accuracy in derived quantities. *SIAM Journal on Scientific Computing* 41, 4 (2019), A2146–A2171.
- [16] Mark Ainsworth, Ozan Tugluk, Ben Whitney, and Scott Klasky. 2020. Multilevel techniques for compression and reduction of scientific data—The unstructured case. *SIAM Journal on Scientific Computing* 42, 2 (2020), A1402–A1427.
- [17] Alham Fikri Aji and Kenneth Heafield. 2017. Sparse communication for distributed gradient descent. *arXiv preprint arXiv:1704.05021* (2017).
- [18] Baidaa A. Al-Salamee and Dhiyah Al-Shammary. 2021. Survey Analysis for Medical Image Compression Techniques. In *Communication and Intelligent Systems*, Harish Sharma, Mukesh Kumar Gupta, G. S. Tomar, and Wang Lipo (Eds.). Springer Singapore, Singapore, 241–264.
- [19] Dan Alistarh, Demjan Grubic, Jerry Li, Ryota Tomioka, and Milan Vojnovic. 2017. QSGD: Communication-efficient SGD via gradient quantization and encoding. *Advances in Neural Information Processing Systems* 30 (2017).
- [20] Ann S Almgren, John B Bell, Mike J Lijewski, Zarija Lukić, and Ethan Van Andel. 2013. Nyx: A massively parallel amr code for computational cosmology. *The Astrophysical Journal* 765, 1 (2013), 39.
- [21] Rohan Anil, Andrew M. Dai, Orhan Firat, and et al. 2023. PaLM 2 Technical Report. [arXiv:2305.10403](https://arxiv.org/abs/2305.10403) [cs.CL]
- [22] Allison H. Baker and et al. 2016. Evaluating Lossy Data Compression on Climate Simulation Data within a Large Ensemble. *Geoscientific Model Development* 9, 12 (December 2016), 4381–4403. <https://doi.org/10.5194/gmd-9-4381-2016>
- [23] A. H. Baker, D. M. Hammerling, and T. L. Turton. 2019. Evaluating Image Quality Measures to Assess the Impact of Lossy Data Compression Applied to Climate Simulation Data. *Computer Graphics Forum* 38, 3 (december 2019), 517–528.
- [24] Allison H. Baker, Alexander Pinard, and Dorit M. Hammerling. 2022. DSSIM: A Structural Similarity Index for Floating-Point Data. *arXiv:2202.02616 [cs, stat]* (February 2022). [arXiv:2202.02616](https://arxiv.org/abs/2202.02616) [cs, stat]
- [25] Allison H. Baker, Alexander Pinard, and Dorit M. Hammerling. 2022. DSSIM: a structural similarity index for floating-point data.
- [26] Allison H. Baker, Haiying Xu, Dorit M. Hammerling, Shaomeng Li, and John P. Clyne. 2017. Toward a Multi-method Approach: Lossy Data Compression for Climate Simulation Data. In *High Performance Computing*. Springer International Publishing, 30–42.
- [27] Rafael Ballester-Ripoll, Peter Lindstrom, and Renato Pajarola. 2019. TTHRESH: Tensor compression for multidimensional visual data. *IEEE Transactions on Visualization and Computer Graphics* 26, 9 (2019), 2891–2903.
- [28] Rafael Ballester-Ripoll, Susanne K Suter, and Renato Pajarola. 2015. Analysis of tensor approximation for compression-domain volume visualization. *Computers & Graphics* 47 (2015), 34–47.
- [29] Tania Banerjee, Jong Choi, Jaemoon Lee, Qian Gong, Ruonan Wang, Scott Klasky, Anand Rangarajan, and Sanjay Ranka. 2022. An Algorithmic and Software Pipeline for Very Large Scale Scientific Data Compression with Error Guarantees. In *2022 IEEE 29th International Conference on High Performance Computing, Data, and Analytics (HiPC)*. IEEE, 226–235.
- [30] Carlos HS Barbosa and Alvaro LGA Coutinho. 2023. Reverse Time Migration with Lossy and Lossless Wavefield Compression. In *2023 IEEE 35th International Symposium on Computer Architecture and High Performance Computing (SBAC-PAD)*. IEEE, 192–201.
- [31] Allon Bartana, Dan Kosloff, Brandon Warnell, Chris Connor, Jeff Codd, David Kessler, Paulius Micikevicius, Ty Mckercher, Peng Wang, and Paul Holzhauser. 2015. GPU implementation of minimal dispersion recursive operators for reverse time migration. *SEG Technical Program Expanded Abstracts* 34 (2015), 4116–4120.

<https://doi.org/10.1190/segam2015-5754164.1> Publisher Copyright: © 2015 SEG.; null ; Conference date: 18-10-2011 Through 23-10-2011.

- [32] Jeremy Bernstein, Yu-Xiang Wang, Kamyar Azizzadenesheli, and Animashree Anandkumar. 2018. signSGD: Compressed optimisation for non-convex problems. In *International Conference on Machine Learning*. PMLR, 560–569.
- [33] Ranjeet Vasant Bidwe, Sashikala Mishra, Shruti Patil, Kailash Shaw, Deepali Rahul Vora, Ketan Kotecha, and Bhushan Zope. 2022. Deep learning approaches for video compression: a bibliometric analysis. *Big Data and Cognitive Computing* 6, 2 (2022), 44.
- [34] Rishi Bommasani, Drew A. Hudson, Ehsan Adeli, and et al. 2022. On the Opportunities and Risks of Foundation Models. arXiv:2108.07258 [cs.LG]
- [35] M. Burtcher and P. Ratanaworabhan. 2009. FPC: A High-Speed Compressor for Double-Precision Floating-Point Data. *IEEE Trans. Comput.* 58, 1 (Jan 2009), 18–31.
- [36] Franck Cappello, Sheng Di, Sihuan Li, Xin Liang, Ali Murat Gok, Dingwen Tao, Chun Hong Yoon, Xin-Chuan Wu, Yuri Alexeev, and Frederic T Chong. 2019. Use cases of lossy compression for floating-point data in scientific data sets. *The International Journal of High Performance Computing Applications* 33, 6 (2019), 1201–1220.
- [37] S. Chandak, K. Tatwawadi, C. Wen, L. Wang, J. Aparicio Ojea, and T. Weissman. 2020. LfZip: Lossy Compression of Multivariate Floating-Point Time Series Data via Improved Prediction. In *2020 Data Compression Conference (DCC)*. 342–351. <https://doi.org/10.1109/DCC47342.2020.00042>
- [38] Jieyang Chen, Lipeng Wan, Xin Liang, Ben Whitney, Qing Liu, David Pugmire, Nicholas Thompson, Jong Youl Choi, Matthew Wolf, Todd Munson, et al. 2021. Accelerating multigrid-based hierarchical scientific data refactoring on GPUs. In *2021 IEEE International Parallel and Distributed Processing Symposium (IPDPS)*. IEEE, 859–868.
- [39] Pengfei Chen, Guangyong Chen, and Shengyu Zhang. 2018. Log Hyperbolic Cosine Loss Improves Variational Auto-Encoder. <https://openreview.net/forum?id=rkglvsC9Ym>. Online.
- [40] Zhengzhang Chen, Seung Woo Son, William Hendrix, Ankit Agrawal, Wei-Keng Liao, and Alok Choudhary. 2014. NUMARCK: Machine Learning Algorithm for Resiliency and Checkpointing. In *SC '14: Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*. 733–744.
- [41] Giacomo Chiarot and Claudio Silvestri. 2023. Time Series Compression Survey. *ACM Comput. Surv.* 55, 10, Article 198 (feb 2023), 32 pages. <https://doi.org/10.1145/3560814>
- [42] Jong Choi, Qian Gong, David Pugmire, Scott Klasky, Michael Churchill, Seung-Hoe Ku, CS Chang, Jaemoon Lee, Anand Rangarajan, and Sanjay Ranka. [n. d.]. Neural Data Compression for Physics Plasma Simulation. ([n. d.]).
- [43] Luca Cinquini and et al. 2014. The Earth System Grid Federation: An Open Infrastructure for Access to Distributed Geospatial Data. *Future Generation Computer Systems* 36 (July 2014), 400–417.
- [44] A. Cohen, Ingrid Daubechies, and J.-C. Feauveau. 1992. Biorthogonal bases of compactly supported wavelets. *Communications on Pure and Applied Mathematics* 45, 5 (1992), 485–560. <https://doi.org/10.1002/cpa.3160450502> arXiv:<https://onlinelibrary.wiley.com/doi/pdf/10.1002/cpa.3160450502>
- [45] Yann Collet. 2015. Zstandard – Real-time data compression algorithm. <http://facebook.github.io/zstd/> (2015).
- [46] cuZFP. 2020. https://github.com/LLNL/zfp/tree/develop/src/cuda_zfp. Online.
- [47] Ingrid Daubechies. 1988. Orthonormal bases of compactly supported wavelets. *Communications on Pure and Applied Mathematics* 41, 7 (1988), 909–996. <https://doi.org/10.1002/cpa.3160410705> arXiv:<https://onlinelibrary.wiley.com/doi/pdf/10.1002/cpa.3160410705>
- [48] Xavier Delaunay, Aurélie Courtois, and Flavien Gouillon. 2019. Evaluation of lossless and lossy algorithms for the compression of scientific datasets in netCDF-4 or HDF5 files. *Geoscientific Model Development* 12, 9 (2019), 4099–4113.
- [49] L Peter Deutsch. 1996. GZIP file format specification version 4.3.
- [50] Sheng Di and Franck Cappello. 2016. Fast error-bounded lossy HPC data compression with SZ. In *IEEE International Parallel and Distributed Processing Symposium*. 730–739.
- [51] Sheng Di and Franck Cappello. 2018. Optimization of Error-Bounded Lossy Compression for Hard-to-Compress HPC Data. *IEEE Transactions on Parallel and Distributed Systems* 29, 1 (2018), 129–143.
- [52] Jan Dvořák, Martin Maňák, and Libor Váša. 2020. Predictive compression of molecular dynamics trajectories. *Journal of Molecular Graphics and Modelling* 96 (2020), 107531.
- [53] Herbert Edelsbrunner and Ernst Peter Mücke. 1990. Simulation of simplicity: a technique to cope with degenerate cases in geometric algorithms. *ACM Transactions on Graphics (tog)* 9, 1 (1990), 66–104.
- [54] Paul Farmer, Zheng-Zheng Joe Zhou, and David Jones. 2009. SS: The Future of Seismic Imaging; Reverse Time Migration and Full Wavefield Inversion-Reverse Time Migration Imaging and Model Estimation. In *Offshore Technology Conference*. OTC, OTC–19879.
- [55] Thomas E. Fornek. 2017. Advanced Photon Source Upgrade Project preliminary design report.
- [56] Brian Friesen, Ann Almgren, Zarija Lukić, Gunther Weber, Dmitriy Morozov, Vincent Beckner, and Marcus Day. 2016. In situ and in-transit analysis of cosmological simulations. *Computational Astrophysics and Cosmology* 3, 1

- (2016), 1–18.
- [57] Andrew Glaws, Ryan King, and Michael Sprague. 2020. Deep learning for in situ data compression of large turbulent flow simulations. *Physical Review Fluids* 5, 11 (2020), 114602.
- [58] A. M. Gok, S. Di, Y. Alexeev, D. Tao, V. Mironov, X. Liang, and F. Cappello. 2018. PaSTRI: Error-Bounded Lossy Compression for Two-Electron Integrals in Quantum Chemistry. In *2018 IEEE International Conference on Cluster Computing (CLUSTER)*. 1–11. <https://doi.org/10.1109/CLUSTER.2018.00013>
- [59] Qian Gong, Jieyang Chen, Ben Whitney, Xin Liang, Viktor Reshniak, Tania Banerjee, Jaemoon Lee, Anand Rangarajan, Lipeng Wan, Nicolas Vidal, et al. 2023. MGARD: A multigrid framework for high-performance, error-controlled data compression and refactoring. *SoftwareX* 24 (2023), 101590.
- [60] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. 2016. *Deep Learning*. MIT Press. <http://www.deeplearningbook.org>.
- [61] Ian J. Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. 2014. Generative Adversarial Nets. In *Proceedings of the 27th International Conference on Neural Information Processing Systems - Volume 2 (Montreal, Canada) (NIPS'14)*. MIT Press, Cambridge, MA, USA, 2672–2680.
- [62] Pascal Grosset, Christopher Bower, Jesus Pulido, Arvind Mohan, Ayan Biswas, John Patchett, Terece Turton, David Rogers, Daniel Livescu, and James Ahrens. 2020. Foresight: analysis that matters for data reduction. In *2020 SC20: International Conference for High Performance Computing, Networking, Storage and Analysis (SC)*. IEEE Computer Society, 1171–1185.
- [63] Mahmoud Habboush, Aiman H. El-Maleh, Muhammad E.S. Elrabaa, and Saleh AlSaleh. 2022. DE-ZFP: An FPGA implementation of a modified ZFP compression/decompression algorithm. *Microprocessors and Microsystems* 90 (2022), 104453. <https://doi.org/10.1016/j.micpro.2022.104453>
- [64] Salman Habib, Vitali Morozov, Nicholas Frontiere, Hal Finkel, Adrian Pope, and Katrin Heitmann. 2013. HACC: Extreme scaling and performance across diverse architectures. In *Proceedings of the International Conference on High Performance Computing, Networking, Storage and Analysis*. 1–10.
- [65] Jun Han and Chaoli Wang. 2022. Coordnet: Data generation and visualization generation for time-varying volumes via a coordinate-based neural network. *IEEE Transactions on Visualization and Computer Graphics* (2022).
- [66] Jun Han, Hao Zheng, and Chongke Bi. 2023. KD-INR: Time-Varying Volumetric Data Compression via Knowledge Distillation-based Implicit Neural Representation. *IEEE Transactions on Visualization and Computer Graphics* (2023).
- [67] Lucas Hayne, John Clyne, and Shaomeng Li. 2021. Using Neural Networks for Two Dimensional Scientific Data Compression. In *2021 IEEE International Conference on Big Data (Big Data)*. IEEE, 2956–2965.
- [68] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. 2016. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*. 770–778.
- [69] Katrin Heitmann, Thomas D Uram, Hal Finkel, Nicholas Frontiere, Salman Habib, Adrian Pope, Esteban Rangel, Joseph Hollowed, Danila Korytov, Patricia Larsen, Benjamin S. Allen, Kyle Chard, and Ian Foster. 2019. HACC Cosmological Simulations: First Data Release. *arXiv preprint arXiv:1904.11966* (2019).
- [70] Berk Hess, Carsten Kutzner, David van der Spoel, and Erik Lindahl. 2008. GROMACS 4: Algorithms for Highly Efficient, Load-Balanced, and Scalable Molecular Simulation. *Journal of Chemical Theory and Computation* 4, 3 (2008), 435–447.
- [71] I. Higgins, Loïc Matthey, A. Pal, C. Burgess, Xavier Glorot, M. Botvinick, S. Mohamed, and Alexander Lerchner. 2017. *beta*-VAE: Learning Basic Visual Concepts with a Constrained Variational Framework. In *ICLR*.
- [72] Yueyu Hu, Wenhan Yang, Zhan Ma, and Jiaying Liu. 2021. Learning end-to-end lossy image compression: A benchmark. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 44, 8 (2021), 4194–4211.
- [73] Jiajun Huang, Sheng Di, Xiaodong Yu, Yujia Zhai, Jinyang Liu, Yafan Huang, Ken Raffanetti, Hui Zhou, Kai Zhao, Zizhong Chen, Franck Cappello, Yanfei Guo, and Rajeev Thakur. 2023. gZCCL: Compression-Accelerated Collective Communication Framework for GPU Clusters. *arXiv:2308.05199 [cs.DC]*
- [74] Jiajun Huang, Sheng Di, Xiaodong Yu, Yujia Zhai, Jinyang Liu, Yafan Huang, Ken Raffanetti, Hui Zhou, Kai Zhao, Zizhong Chen, Franck Cappello, Yanfei Guo, and Rajeev Thakur. 2024. POSTER: Optimizing Collective Communications with Error-bounded Lossy Compression for GPU Clusters. In *Proceedings of the 29th ACM SIGPLAN Annual Symposium on Principles and Practice of Parallel Programming (Edinburgh, United Kingdom) (PPoPP '24)*. Association for Computing Machinery, New York, NY, USA, 454–456.
- [75] Jiajun Huang, Sheng Di, Xiaodong Yu, Yujia Zhai, Zhaorui Zhang, Jinyang Liu, Xiaoyi Lu, Ken Raffanetti, Hui Zhou, Kai Zhao, Zizhong Chen, Franck Cappello, Yanfei Guo, and Rajeev Thakur. 2023. An Optimized Error-controlled MPI Collective Framework Integrated with Lossy Compression. *arXiv:2304.03890 [cs.DC]*
- [76] Langwen Huang and Torsten Hoefler. 2022. Compressing multidimensional weather and climate data into neural networks. *arXiv preprint arXiv:2210.12538* (2022).

- [77] Yafan Huang, Sheng Di, Xiaodong Yu, Guanpeng Li, and Franck Cappello. 2023. cuSZp: An Ultra-fast GPU Error-bounded Lossy Compression Framework with Optimized End-to-End Performance. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*. 1–13.
- [78] Yi Huang, Yihui Ren, Shinjae Yoo, and Jin Huang. 2021. Efficient data compression for 3D sparse TPC via bicephalous convolutional autoencoder. In *2021 20th IEEE International Conference on Machine Learning and Applications (ICMLA)*. IEEE, 1094–1099.
- [79] Yi Huang, Yihui Ren, Shinjae Yoo, and Jin Huang. 2023. Fast 2D Bicephalous Convolutional Autoencoder for Compressing 3D Time Projection Chamber Data. In *Proceedings of the SC'23 Workshops of The International Conference on High Performance Computing, Network, Storage, and Analysis*. 298–305.
- [80] Yafan Huang, Kai Zhao, Sheng Di, Guanpeng Li, Maxim Dmitriev, Thierry-Laurent D Tonellot, and Franck Cappello. 2023. Towards Improving Reverse Time Migration Performance by High-speed Lossy Compression. In *2023 IEEE/ACM 23rd International Symposium on Cluster, Cloud and Internet Computing (CCGrid)*. IEEE, 651–661.
- [81] Jan Huwald, Stephan Richter, Bashar Ibrahim, and Peter Ditttrich. 2016. Compressing molecular dynamics trajectories: Breaking the one-bit-per-sample barrier. *Journal of Computational Chemistry* 37, 20 (2016), 1897–1906.
- [82] Sonain Jamil, Md Jalil Piran, MuhibUr Rahman, and Oh-Jin Kwon. 2023. Learning-driven lossy image compression: A comprehensive survey. *Engineering Applications of Artificial Intelligence* 123 (2023), 106361.
- [83] Uthayakumar Jayasankar, Vengattaraman Thirumal, and Dhavachelvan Ponnuramgam. 2021. A survey on data compression techniques: From the perspective of data quality, coding schemes, data type and applications. *Journal of King Saud University – Computer and Information Sciences* 33, 2 (2021), 119–140.
- [84] Zizhe Jian, Sheng Di, Jinyang Liu, Kai Zhao, Xin Liang, Haiying Xu, Robert Underwood, Shixun Wu, Zizhong Chen, and Franck Cappello. 2024. CliZ: Optimizing Lossy Compression for Climate Datasets with Adaptive Fine-tuned Data Prediction. In *2024 IEEE International Parallel and Distributed Processing Symposium (IPDPS)*. IEEE.
- [85] Sian Jin, Sheng Di, Xin Liang, Jiannan Tian, Dingwen Tao, and Franck Cappello. 2019. DeepSZ: A Novel Framework to Compress Deep Neural Networks by Using Error-Bounded Lossy Compression. In *Proceedings of the 28th International Symposium on High-Performance Parallel and Distributed Computing (Phoenix, AZ, USA) (HPDC '19)*. ACM, New York, NY, USA, 159–170.
- [86] Sian Jin, Sheng Di, Frédéric Vivien, Daoce Wang, Yves Robert, Dingwen Tao, and Franck Cappello. 2024. Concealing compression-accelerated I/O for HPC applications through in situ task scheduling. In *EuroSys 2024*.
- [87] Sian Jin, Pascal Grosset, Christopher M Biwer, Jesus Pulido, Jiannan Tian, Dingwen Tao, and James Ahrens. 2020. Understanding GPU-Based Lossy Compression for Extreme-Scale Cosmological Simulations. *arXiv preprint arXiv:2004.00224* (2020).
- [88] Sian Jin, Jesus Pulido, Pascal Grosset, Jiannan Tian, Dingwen Tao, and James Ahrens. 2021. Adaptive configuration of in situ lossy compression for cosmology simulations via fine-grained rate-quality modeling. In *Proceedings of the 30th International Symposium on High-Performance Parallel and Distributed Computing*. 45–56.
- [89] Sian Jin, Dingwen Tao, Houjun Tang, Sheng Di, Suren Byna, Zariya Lukic, and Franck Cappello. 2022. Accelerating parallel write via deeply integrating predictive lossy compression with HDF5. In *SC22: International Conference for High Performance Computing, Networking, Storage and Analysis*. IEEE, 1–15.
- [90] John Jumper and et al. 2021. Highly accurate protein structure prediction with AlphaFold. *Nature* 596, 7873 (2021), 583–589. <https://doi.org/10.1038/s41586-021-03819-2>
- [91] Diederik P Kingma and Max Welling. 2013. Auto-encoding variational Bayes. *arXiv preprint arXiv:1312.6114* (2013).
- [92] Milan Klöwer, Miha Razinger, Juan J. Dominguez, Peter D. Düben, and Tim N. Palmer. 2021. Compressing Atmospheric Data into Its Real Information Content. *Nature Computational Science* 1, 11 (Nov. 2021), 713–724. <https://doi.org/10.1038/s43588-021-00156-2>
- [93] Soheil Kolouri, Phillip E Pope, Charles E Martin, and Gustavo K Rohde. 2018. Sliced Wasserstein auto-encoders. In *International Conference on Learning Representations*.
- [94] Michael Kuhn, Julian Kunkel, and Thomas Ludwig. 2016. Data Compression for Climate Data. *Supercomputing Frontiers and Innovations* 3, 1 (Jun. 2016), 75–94. <https://superfri.org/index.php/superfri/article/view/101>
- [95] Abhishek Kumar, Prasanna Sattigeri, and Avinash Balakrishnan. 2017. Variational inference of disentangled latent concepts from unlabeled observations. *arXiv preprint arXiv:1711.00848* (2017).
- [96] Anand Kumar, Xingquan Zhu, Yi-Cheng Tu, and Sagar Pandit. 2013. Compression in Molecular Simulation Datasets. In *Intelligence Science and Big Data Engineering*. Berlin, Heidelberg, 22–29.
- [97] Argonne National Laboratory. 2023. cuSZp– a lossy error-bounded compression library for compression of floating-point data in NVIDIA GPU. <https://github.com/szcompressor/cuSZp>.
- [98] Sriram Lakshminarasimhan, Neil Shah, Stephane Ethier, Scott Klasky, Rob Latham, Rob Ross, and Nagiza F. Samatova. 2011. Compressing the Incompressible with ISABELA: In-situ Reduction of Spatio-temporal Data. In *Euro-Par 2011 Parallel Processing*, Emmanuel Jeannot, Raymond Namyst, and Jean Roman (Eds.). Springer Berlin Heidelberg, Berlin, Heidelberg, 366–379.

- [99] Sriram Lakshminarasimhan, Neil Shah, Stephane Ethier, Seung-Hoe Ku, Choong-Seock Chang, Scott Klasky, Rob Latham, Rob Ross, and Nagiza F Samatova. 2013. ISABELA for effective in situ compression of scientific data. *Concurrency and Computation: Practice and Experience* 25, 4 (2013), 524–540.
- [100] Jaemoon Lee, Qian Gong, Jong Choi, Tania Banerjee, Scott Klasky, Sanjay Ranka, and Anand Rangarajan. 2022. Error-bounded learned scientific data compression with preservation of derived quantities. *Applied Sciences* 12, 13 (2022), 6718.
- [101] Mu Li, Li Zhou, Zichao Yang, Aaron Li, Fei Xia, David G Andersen, and Alexander Smola. 2013. Parameter server for distributed machine learning. In *Big learning NIPS workshop*, Vol. 6.
- [102] Shaomeng Li. 2018. VAPOR Github. <https://github.com/NCAR/VAPOR>.
- [103] Samuel Li, Stanislaw Jaroszynski, Scott Pearse, Leigh Orf, and John Clyne. 2019. VAPOR: A Visualization Package Tailored to Analyze Simulation Data in Earth System Science. (07 2019).
- [104] Shaomeng Li, Peter Lindstrom, and John Clyne. 2023. Lossy scientific data compression with SPERR. In *2023 IEEE International Parallel and Distributed Processing Symposium (IPDPS)*. IEEE, 1007–1017.
- [105] Shen Li, Yanli Zhao, Rohan Varma, Omkar Salpekar, Pieter Noordhuis, Teng Li, Adam Paszke, Jeff Smith, Brian Vaughan, Pritam Damania, et al. [n. d.]. PyTorch Distributed: Experiences on Accelerating Data Parallel Training. *Proceedings of the VLDB Endowment* 13, 12 ([n. d.]).
- [106] Yuanzhi Li, Tengyu Ma, and Hongyang Zhang. 2018. Algorithmic regularization in over-parameterized matrix sensing and neural networks with quadratic activations. In *Conference on Learning Theory*. PMLR, 2–47.
- [107] Zhen-Chun Li and Ying-Ming Qu. 2022. Research progress on seismic imaging technology. *Petroleum Science* 19, 1 (2022), 128–146.
- [108] Xin Liang et al. 2021. SZ3: A Modular Framework for Composing Prediction-Based Error-Bounded Lossy Compressors. <https://arxiv.org/abs/2111.02925>. Online.
- [109] Xin Liang, Sheng Di, Franck Cappello, Mukund Raj, Chunhui Liu, Kenji Ono, Zizhong Chen, Tom Peterka, and Hanqi Guo. 2023. Toward Feature-Preserving Vector Field Compression. *IEEE Trans. Vis. Comput. Graph.* 29, 12 (2023), 5434–5450.
- [110] Xin Liang, Sheng Di, Sihuan Li, Dingwen Tao, Zizhong Chen, and Franck Cappello. [n. d.]. Exploring Best Lossy Compression Strategy By Combining SZ with Spatiotemporal Decimation. https://sc18.supercomputing.org/proceedings/workshops/workshop_files/ws_drbsd108s1-file1.pdf.
- [111] Xin Liang, Sheng Di, Sihuan Li, Dingwen Tao, Bogdan Nicolae, Zizhong Chen, and Franck Cappello. 2019. Significantly improving lossy compression quality based on an optimized hybrid prediction model. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*. 1–26.
- [112] Xin Liang, Sheng Di, Dingwen Tao, Zizhong Chen, and Franck Cappello. 2018. An efficient transformation scheme for lossy data compression with point-wise relative error bound. In *2018 IEEE International Conference on Cluster Computing (CLUSTER)*. IEEE, 179–189.
- [113] Xin Liang, Sheng Di, Dingwen Tao, Sihuan Li, Shaomeng Li, Hanqi Guo, Zizhong Chen, and Franck Cappello. 2018. Error-Controlled Lossy Compression Optimized for High Compression Ratios of Scientific Datasets. In *2018 IEEE International Conference on Big Data*. IEEE.
- [114] Xin Liang, Sheng Di, Dingwen Tao, Sihuan Li, Bogdan Nicolae, Zizhong Chen, and Franck Cappello. 2019. Improving Performance of Data Dumping with Lossy Compression for Scientific Simulation. In *2019 IEEE International Conference on Cluster Computing (CLUSTER)*. 1–11.
- [115] Xin Liang, Hanqi Guo, Sheng Di, Franck Cappello, Mukund Raj, Chunhui Liu, Kenji Ono, Zizhong Chen, and Tom Peterka. 2020. Toward Feature-Preserving 2D and 3D Vector Field Compression. In *2020 IEEE Pacific Visualization Symposium, PacificVis 2020, Tianjin, China, June 3-5, 2020*. IEEE, 81–90.
- [116] Yujun Lin, Song Han, Huizi Mao, Yu Wang, and William J Dally. 2017. Deep gradient compression: Reducing the communication bandwidth for distributed training. *arXiv preprint arXiv:1712.01887* (2017).
- [117] Peter Lindstrom. 2014. Fixed-rate compressed floating-point arrays. *IEEE Transactions on Visualization and Computer Graphics* 20, 12 (2014), 2674–2683.
- [118] Peter G Lindstrom et al. 2017. *Fpzip*. Technical Report. Lawrence Livermore National Lab.(LLNL), Livermore, CA (United States).
- [119] Jinyang Liu, Sheng Di, Sian Jin, Kai Zhao, Xin Liang, Zizhong Chen, and Franck Cappello. 2023. Scientific Error-bounded Lossy Compression with Super-resolution Neural Networks. In *2023 IEEE International Conference on Big Data (BigData)*. IEEE, 229–236.
- [120] Jinyang Liu, Sheng Di, Kai Zhao, Sian Jin, Dingwen Tao, Xin Liang, Zizhong Chen, and Franck Cappello. 2021. Exploring Autoencoder-based Error-bounded Compression for Scientific Data. In *2021 IEEE International Conference on Cluster Computing (CLUSTER)*. IEEE, 294–306.
- [121] Jinyang Liu, Sheng Di, Kai Zhao, Xin Liang, Zizhong Chen, and Franck Cappello. 2022. Dynamic quality metric oriented error bounded lossy compression for scientific datasets. In *Proceedings of the International Conference on High*

- Performance Computing, Networking, Storage and Analysis* (Dallas, Texas) (SC '22). IEEE Press, Article 62, 15 pages.
- [122] Jinyang Liu, Sheng Di, Kai Zhao, Xin Liang, Zizhong Chen, and Franck Cappello. 2023. FAZ: A flexible auto-tuned modular error-bounded compression framework for scientific data. In *Proceedings of the 37th International Conference on Supercomputing* (Orlando, FL, USA) (ICS '23). Association for Computing Machinery, New York, NY, USA, 1–13.
- [123] Jinyang Liu, Sheng Di, Kai Zhao, Xin Liang, Sian Jin, Zizhe Jian, Jiajun Huang, Shixun Wu, Zizhong Chen, and Franck Cappello. 2024. High-performance Effective Scientific Error-bounded Lossy Compression with Auto-tuned Multi-component Interpolation. In *ACM Special Interest Group on Management of Data (SIGMOD2024)*.
- [124] Jinyang Liu, Sihuan Li, Sheng Di, Xin Liang, Kai Zhao, Dingwen Tao, Zizhong Chen, and Franck Cappello. 2021. Improving Lossy Compression for SZ by Exploring the Best-Fit Lossless Compression Techniques. In *2021 IEEE International Conference on Big Data (Big Data)*. 2986–2991. <https://doi.org/10.1109/BigData52589.2021.9671954>
- [125] Tong Liu, Jinzhen Wang, Qing Liu, Shakeel Alibhai, Tao Lu, and Xubin He. 2021. High-Ratio Lossy Compression: Exploring the Autoencoder to Compress Scientific Data. *IEEE Transactions on Big Data* (2021).
- [126] Yuanjian Liu, Sheng Di, Kyle Chard, Ian Foster, and Franck Cappello. 2023. Optimizing Scientific Data Transfer on Globus with Error-Bounded Lossy Compression. In *2023 IEEE 43rd International Conference on Distributed Computing Systems (ICDCS)*. 703–713. <https://doi.org/10.1109/ICDCS57875.2023.00064>
- [127] Yuanjian Liu, Sheng Di, Kai Zhao, Sian Jin, Cheng Wang, Kyle Chard, Dingwen Tao, Ian Foster, and Franck Cappello. 2021. Optimizing Multi-Range based Error-Bounded Lossy Compression for Scientific Datasets. In *2021 IEEE 28th International Conference on High Performance Computing, Data, and Analytics (HiPC)*. 394–399.
- [128] Yuanjian Liu, Sheng Di, Kai Zhao, Sian Jin, Cheng Wang, Kyle Chard, Dingwen Tao, Ian Foster, and Franck Cappello. 2021. Understanding Effectiveness of Multi-Error-Bounded Lossy Compression for Preserving Ranges of Interest in Scientific Analysis. In *2021 7th International Workshop on Data Analysis and Reduction for Big Scientific Data (DRBSD-7)*. 40–46. <https://doi.org/10.1109/DRBSD754563.2021.00010>
- [129] Yuanjian Liu, Sheng Di, Kai Zhao, Sian Jin, Cheng Wang, Kyle Chard, Dingwen Tao, Ian Foster, and Franck Cappello. 2022. Optimizing Error-Bounded Lossy Compression for Scientific Data With Diverse Constraints. *IEEE Transactions on Parallel and Distributed Systems* 33, 12 (2022), 4440–4457. <https://doi.org/10.1109/TPDS.2022.3194695>
- [130] Yuzhe Lu, Kairong Jiang, Joshua A Levine, and Matthew Berger. 2021. Compressive neural representations of volumetric scalar fields. In *Computer Graphics Forum*, Vol. 40. Wiley Online Library, 135–146.
- [131] Igor L. Markov and Yaoyun Shi. 2008. Simulating Quantum Computation by Contracting Tensor Networks. *SIAM J. Comput.* 38, 3 (2008), 963–981. <https://doi.org/10.1137/050644756> arXiv:<https://doi.org/10.1137/050644756>
- [132] Charles H Martin and Michael W Mahoney. 2021. Implicit self-regularization in deep neural networks: Evidence from random matrix theory and implications for learning. *The Journal of Machine Learning Research* 22, 1 (2021), 7479–7551.
- [133] Tim Meyer, Carles Ferrer-Costa, Alberto Pérez, Manuel Rueda, Axel Bidon-Chanal, F. Javier Luque, Charles. A. Laughton, and Modesto Orozco. 2006. Essential Dynamics: A Tool for Efficient Trajectory Compression and Management. *Journal of Chemical Theory and Computation* 2, 2 (2006), 251–258.
- [134] Dipti Mishra, Satish Kumar Singh, and Rajat Kumar Singh. 2022. Deep architectures for image compression: a critical review. *Signal Processing* 191 (2022), 108346.
- [135] Bharath Chandra MummadiSETTY, Astha Puri, Ershad Sharifahmadian, and Shahram Latifi. 2015. Lossless Compression of Climate Data. In *Progress in Systems Engineering*, Henry Selvaraj, Dawid Zydek, and Grzegorz Chmaj (Eds.). Springer International Publishing, Cham, 391–400.
- [136] Hilal Nuha, Mohamed Mohandes, Bo Liu, and Ali Al-Shaikhi. 2022. Seismic Data Compression: A Survey. In *Advances in Geophysics, Tectonics and Petroleum Geosciences*, Mustapha Meghraoui, Narasimman Sundararajan, Santanu Banerjee, Klaus-G. Hinzen, Mehdi Eshagh, François Roure, Helder I. Chaminé, Said Maouche, and André Michard (Eds.). Springer International Publishing, Cham, 253–255.
- [137] Andrey Omeltchenko, Timothy J. Campbell, Rajiv K. Kalia, Xinlian Liu, Aiichiro Nakano, and Priya Vashishta. 2000. Scalable I/O of large-scale molecular dynamics simulations: A data-compression algorithm. *Computer Physics Communications* 131, 1 (2000), 78–85.
- [138] OpenAI, Josh Achiam, Steven Adler, and et al. 2023. GPT-4 Technical Report. arXiv:2303.08774 [cs.CL]
- [139] W.A. Pearlman, A. Islam, N. Nagaraj, and A. Said. 2004. Efficient, low-complexity image coding with a set-partitioning embedded block coder. *IEEE Transactions on Circuits and Systems for Video Technology* 14, 11 (2004), 1219–1235.
- [140] Alexander Pinard, Dorit M. Hammerling, and Allison H. Baker. 2020. Assessing Differences in Large Spatio-temporal Climate Datasets with a New Python Package. In *2020 IEEE International Conference on Big Data (Big Data)*. 2699–2707. <https://doi.org/10.1109/BigData50022.2020.9378100>
- [141] John Preskill. 2012. Quantum computing and the entanglement frontier. arXiv:1203.5813 [quant-ph]
- [142] Maurice Quach, Jiahao Pang, Dong Tian, Giuseppe Valenzise, and Frédéric Dufaux. 2022. Survey on Deep Learning-based Point Cloud Compression. *Frontiers in Signal Processing* 2 (2022). <https://doi.org/10.3389/frsip.2022.846972>

- [143] Koen De Raedt, Kristel Michielsens, H. A. De Raedt, Binh Trieu, Guido Arnold, Marcus Richter, Thomas Lippert, Hiroshi C. Watanabe, and Nobuyasu Ito. 2006. Massively parallel quantum computer simulator. *Comput. Phys. Commun.* 176 (2006), 121–136. <https://api.semanticscholar.org/CorpusID:17463164>
- [144] Cédric Renggli, Saleh Ashkboos, Mehdi Aghagolzadeh, Dan Alistarh, and Torsten Hoefler. 2019. SparCML: High-performance sparse communication for machine learning. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*. 1–15.
- [145] R. Rew and G. Davis. 1990. NetCDF: an interface for scientific data access. *IEEE Computer Graphics and Applications* 10 (1990), 76–82.
- [146] Etienne Robein. November 15, 2016. EAGE E-Lecture: Reverse Time Migration: How Does It Work, When To Use It. <https://youtu.be/ywdML8ndYeQ>.
- [147] Felix Sattler, Simon Wiedemann, Klaus-Robert Müller, and Wojciech Samek. 2019. Sparse binary compression: Towards distributed deep learning with minimal communication. In *2019 International Joint Conference on Neural Networks (IJCNN)*. IEEE, 1–8.
- [148] Eric R. Schendel and et al. 2012. ISOBAR hybrid compression-I/O interleaving for large-scale parallel I/O optimization. In *Proceedings of the 21st International Symposium on High-Performance Parallel and Distributed Computing (Delft, The Netherlands) (HPDC '12)*. Association for Computing Machinery, New York, NY, USA, 61–72. <https://doi.org/10.1145/2287076.2287086>
- [149] Frank Seide, Hao Fu, Jasha Droppo, Gang Li, and Dong Yu. 2014. 1-bit stochastic gradient descent and its application to data-parallel distributed training of speech DNNs. In *Fifteenth annual conference of the international speech communication association*.
- [150] Alexander Sergeev and Mike Del Balso. 2018. Horovod: fast and easy distributed deep learning in TensorFlow. arXiv:1802.05799 [cs.LG]
- [151] Milan Shah, Xiaodong Yu, Sheng Di, Danylo Lykov, Yuri Alexeev, Michela Becchi, and Franck Cappello. 2023. GPU-Accelerated Error-Bounded Compression Framework for Quantum Circuit Simulations. In *2023 IEEE International Parallel and Distributed Processing Symposium (IPDPS)*. 757–767. <https://doi.org/10.1109/IPDPS54959.2023.00081>
- [152] Neil Shah, Eric R. Schendel, Sriram Lakshminarasimhan, Saurabh V. Pendse, Terry Rogers, and Nagiza F. Samatova. 2012. Improving I/O Throughput with PRIMACY: Preconditioning ID-Mapper for Compressing Incompressibility. In *2012 IEEE International Conference on Cluster Computing*. 209–219. <https://doi.org/10.1109/CLUSTER.2012.16>
- [153] Mohammad Shoeybi, Mostofa Patwary, Raul Puri, Patrick LeGresley, Jared Casper, and Bryan Catanzaro. 2019. Megatron-LM: Training multi-billion parameter language models using model parallelism. *arXiv preprint arXiv:1909.08053* (2019).
- [154] Karen Simonyan and Andrew Zisserman. 2015. Very Deep Convolutional Networks for Large-Scale Image Recognition. arXiv:1409.1556 [cs.CV]
- [155] Mikhail Smelyanskiy, Nicolas P. D. Sawaya, and Alán Aspuru-Guzik. 2016. qHiPSTER: The Quantum High Performance Software Testing Environment. arXiv:1601.07195 [quant-ph]
- [156] Maxime Soler, Mélanie Plainchault, Bruno Conche, and Julien Tierny. 2018. Topologically Controlled Lossy Compression. In *IEEE Pacific Visualization Symposium, PacificVis 2018, Japan, 2018*. IEEE Computer Society, 46–55.
- [157] Seung Son, Zhengzhang Chen, William Hendrix, Ankit Agrawal, Weikeng Liao, and Alok Choudhary. 2014. Data Compression for the Exascale Computing Era – Survey. *Supercomput. Front. Innov. Int. J.* 1, 2 (jul 2014), 76–88.
- [158] Summit supercomputer. 2020. <https://www.olcf.ornl.gov/summit/>.
- [159] Gongjin Sun and Sang-Woo Jun. 2019. ZFP-V: Hardware-Optimized Lossy Floating Point Compression. In *2019 International Conference on Field-Programmable Technology (ICFPT)*. 117–125.
- [160] Susanne K. Suter, Jose A. Iglesias Guitian, Fabio Marton, Marco Agus, Andreas Elsener, Christoph P.E. Zollikofer, M. Gopi, Enrico Gobetti, and Renato Pajarola. 2011. Interactive Multiscale Tensor Reconstruction for Multiresolution Volume Visualization. *IEEE Transactions on Visualization and Computer Graphics* 17, 12 (2011), 2135–2143.
- [161] Susanne K Suter, Maxim Makhynia, and Renato Pajarola. 2013. Tamresh – tensor approximation multiresolution hierarchy for interactive volume visualization. In *Computer Graphics Forum*, Vol. 32. Wiley Online Library, 151–160.
- [162] Dingwen Tao, Sheng Di, Zizhong Chen, and Franck Cappello. 2017. Exploration of pattern-matching techniques for lossy compression on cosmology simulation data sets. In *International Conference on High Performance Computing*. Springer, 43–54.
- [163] Dingwen Tao, Sheng Di, Zizhong Chen, and Franck Cappello. 2017. In-depth exploration of single-snapshot lossy compression techniques for N-body simulations. In *2017 IEEE International Conference on Big Data (Big Data)*. IEEE, 486–493.
- [164] Dingwen Tao, Sheng Di, Zizhong Chen, and Franck Cappello. 2017. Significantly improving lossy compression for scientific data sets based on multidimensional prediction and error-controlled quantization. In *2017 IEEE International Parallel and Distributed Processing Symposium*. IEEE, 1129–1139.

- [165] Dingwen Tao, Sheng Di, Xin Liang, Zizhong Chen, and Franck Cappello. 2018. Improving performance of iterative methods by lossy checkpointing. In *Proceedings of the 27th International Symposium on High-Performance Parallel and Distributed Computing*. 52–65.
- [166] Nikola Tchipev et al. 2019. TweTriS: Twenty trillion-atom simulation. *The International Journal of High Performance Computing Applications* 33, 5 (2019), 838–854.
- [167] Jiannan Tian et al. 2020. CuSZ: An Efficient GPU-Based Error-Bounded Lossy Compression Framework for Scientific Data. In *Proceedings of the ACM International Conference on Parallel Architectures and Compilation Techniques (PACT '20)*. 3–15.
- [168] J. Tian, S. Di, X. Yu, C. Rivera, K. Zhao, S. Jin, Y. Feng, X. Liang, D. Tao, and F. Cappello. 2021. Optimizing Error-Bounded Lossy Compression for Scientific Data on GPUs. In *2021 IEEE International Conference on Cluster Computing (CLUSTER)*. IEEE Computer Society, Los Alamitos, CA, USA, 283–293.
- [169] Jiannan Tian, Sheng Di, Chengming Zhang, Xin Liang, Sian Jin, Dazhao Cheng, Dingwen Tao, and Franck Cappello. 2020. WaveSZ: A Hardware-Algorithm Co-Design of Efficient Lossy Compression for Scientific Data. In *Proceedings of the 25th ACM SIGPLAN Symposium on Principles and Practice of Parallel Programming (San Diego, California) (PPoPP '20)*. Association for Computing Machinery, New York, NY, USA, 74–88.
- [170] Ilya Tolstikhin, Olivier Bousquet, Sylvain Gelly, and Bernhard Schoelkopf. 2017. Wasserstein auto-encoders. *arXiv preprint arXiv:1711.01558* (2017).
- [171] Robert Underwood, Julie Bessac, Sheng Di, and Franck Cappello. 2022. Understanding the Effects of Modern Compressors on the Community Earth Science Model. In *2022 IEEE/ACM 8th International Workshop on Data Analysis and Reduction for Big Scientific Data (DRBSD)*. IEEE, Dallas, TX, USA, 1–10.
- [172] Robert Underwood, Chunhong Yoon, Ali Gok, Sheng Di, and Franck Cappello. 2023. ROIBIN-SZ: Fast and Science-Preserving Compression for Serial Crystallography. *Synchrotron Radiation News* 36, 4 (2023), 17–22.
- [173] Thijs Vogels, Sai Praneeth Karimireddy, and Martin Jaggi. 2019. PowerSGD: Practical low-rank gradient compression for distributed optimization. *Advances in Neural Information Processing Systems* 32 (2019).
- [174] Lipeng Wan, Matthew Wolf, Feiyi Wang, Jong Youl Choi, George Ostrouchov, and Scott Klasky. 2017. Analysis and modeling of the end-to-end I/O performance on OLCF's Titan supercomputer. In *2017 IEEE 19th International Conference on High Performance Computing and Communications; IEEE 15th International Conference on Smart City; IEEE 3rd International Conference on Data Science and Systems (HPCC/SmartCity/DSS)*. IEEE, 1–9.
- [175] Lipeng Wan, Matthew Wolf, Feiyi Wang, Jong Youl Choi, George Ostrouchov, and Scott Klasky. 2017. Comprehensive measurement and analysis of the user-perceived I/O performance in a production leadership-class storage system. In *2017 IEEE 37th International Conference on Distributed Computing Systems (ICDCS)*. IEEE, 1022–1031.
- [176] Daoce Wang, Jesus Pulido, Pascal Grosset, Sian Jin, Jiannan Tian, James Ahrens, and Dingwen Tao. 2022. TAC: Optimizing Error-Bounded Lossy Compression for Three-Dimensional Adaptive Mesh Refinement Simulations. In *Proceedings of the 31st International Symposium on High-Performance Parallel and Distributed Computing*. 135–147.
- [177] Daoce Wang, Jesus Pulido, Pascal Grosset, Sian Jin, Jiannan Tian, Kai Zhao, James Ahrens, and Dingwen Tao. 2024. TAC+: Optimizing Error-Bounded Lossy Compression for 3D AMR Simulations. *IEEE Transactions on Parallel and Distributed Systems* 35, 3 (March 2024), 421–438.
- [178] Daoce Wang, Jesus Pulido, Pascal Grosset, Jiannan Tian, James Ahrens, and Dingwen Tao. 2023. Analyzing impact of data reduction techniques on visualization for AMR applications using AMReX framework. In *Proceedings of the SC'23 Workshops of The International Conference on High Performance Computing, Network, Storage, and Analysis*. 263–271.
- [179] Daoce Wang, Jesus Pulido, Pascal Grosset, Jiannan Tian, Sian Jin, Houjun Tang, Jean Sexton, Sheng Di, Kai Zhao, Bo Fang, Zarija Lukić, Franck Cappello, James Ahrens, and Dingwen Tao. 2023. AMRIC: A Novel In Situ Lossy Compression Framework for Efficient I/O in Adaptive Mesh Refinement Applications. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis (SC '23)*. Association for Computing Machinery, New York, NY, USA, Article 44, 15 pages.
- [180] Wei Wen, Cong Xu, Feng Yan, Chunpeng Wu, Yandan Wang, Yiran Chen, and Hai Li. 2017. Terngrad: Ternary gradients to reduce communication in distributed deep learning. *Advances in Neural Information Processing Systems* 30 (2017).
- [181] Grant Wilkins, Sheng Di, Jon C. Calhoun, Kibaek Kim, Robert Underwood, Richard Mortier, and Franck Cappello. 2023. Efficient Communication in Federated Learning Using Floating-Point Lossy Compression. *arXiv:2312.13461 [cs.DC]*
- [182] Xin-Chuan Wu, Sheng Di, Emma Maitreyee Dasgupta, Franck Cappello, Hal Finkel, Yuri Alexeev, and Frederic T. Chong. 2019. Full-State Quantum Circuit Simulation by Using Data Compression. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis (Denver, Colorado) (SC '19)*. Association for Computing Machinery, New York, NY, USA, Article 80, 24 pages. <https://doi.org/10.1145/3295500.3356155>

- [183] Mingze Xia, Sheng Di, Franck Cappello, Pu Jiao, Kai Zhao, Jinyang Liu, Xuan Wu, Xin Liang, and Hanqi Guo. 2024. Preserving Topological Feature with Sign-of-Determinant Predicates in Lossy Compression: A Case Study of Vector Field Critical Points. In *2024 IEEE 40th International Conference on Data Engineering (ICDE)*. IEEE.
- [184] Qingqing Xiong, Rushi Patel, Chen Yang, Tong Geng, Anthony Skjellum, and Martin C Herbordt. 2019. Ghostsz: A transparent FPGA-accelerated lossy compression framework. In *2019 IEEE 27th Annual International Symposium on Field-Programmable Custom Computing Machines (FCCM)*. IEEE, 258–266.
- [185] Lin Yan, Xin Liang, Hanqi Guo, and Bei Wang. 2023. Early Access. TopoSZ: Preserving Topology in Error-Bounded Lossy Compression. *IEEE Transactions on Visualization and Computer Graphics* (2023. Early Access).
- [186] Xiaodong Yu, Sheng Di, Kai Zhao, Jiannan Tian, Dingwen Tao, Xin Liang, and Franck Cappello. 2022. Ultrafast error-bounded lossy compression for scientific datasets. In *Proceedings of the 31st International Symposium on High-Performance Parallel and Distributed Computing*. 159–171.
- [187] Charles S. Zender. 2016. Bit Grooming: Statistically Accurate Precision-Preserving Quantization with Compression, Evaluated in the netCDF Operators (NCO, v4.4.8+). *Geoscientific Model Development* 9, 9 (Sept. 2016), 3199–3211.
- [188] Boyuan Zhang, Jiannan Tian, Sheng Di, Xiaodong Yu, Yunhe Feng, Xin Liang, Dingwen Tao, and Franck Cappello. 2023. FZ-GPU: A Fast and High-Ratio Lossy Compressor for Scientific Computing Applications on GPUs. In *Proceedings of the 32nd International Symposium on High-Performance Parallel and Distributed Computing (Orlando, FL, USA) (HPDC '23)*. Association for Computing Machinery, New York, NY, USA, 129–142. <https://doi.org/10.1145/3588195.3592994>
- [189] Jialing Zhang, Xiaoyan Zhuo, Aekyeung Moon, Hang Liu, and Seung Woo Son. 2019. Efficient Encoding and Reconstruction of HPC Datasets for Checkpoint/Restart. In *2019 35th Symposium on Mass Storage Systems and Technologies (MSST)*. 79–91. <https://doi.org/10.1109/MSST.2019.00-14>
- [190] Zhaorui Zhang, Zhuoran Ji, and Choli Wang. 2022. Momentum-driven adaptive synchronization model for distributed DNN training on HPC clusters. *J. Parallel and Distrib. Comput.* 159 (2022), 65–84.
- [191] Zhaorui Zhang and Choli Wang. 2021. SaPus: Self-adaptive parameter update strategy for DNN training on Multi-GPU clusters. *IEEE Transactions on Parallel and Distributed Systems* 33, 7 (2021), 1569–1580.
- [192] Zhaorui Zhang and Choli Wang. 2022. MIPD: An adaptive gradient sparsification framework for distributed DNNs training. *IEEE Transactions on Parallel and Distributed Systems* 33, 11 (2022), 3053–3066.
- [193] Kai Zhao, Sheng Di, Maxim Dmitriev, Thierry-Laurent D. Tonellot, Zizhong Chen, and Franck Cappello. 2021. Optimizing Error-Bounded Lossy Compression for Scientific Data by Dynamic Spline Interpolation. In *2021 IEEE 37th International Conference on Data Engineering (ICDE)*. 1643–1654.
- [194] Kai Zhao, Sheng Di, Xin Lian, Sihuan Li, Dingwen Tao, Julie Bessac, Zizhong Chen, and Franck Cappello. 2020. SDRBench: Scientific Data Reduction Benchmark for Lossy Compressors. In *2020 IEEE International Conference on Big Data (Big Data)*. 2716–2724.
- [195] Kai Zhao, Sheng Di, Xin Liang, Sihuan Li, Dingwen Tao, Zizhong Chen, and Franck Cappello. 2020. Significantly Improving Lossy Compression for HPC Datasets with Second-Order Prediction and Parameter Optimization. In *Proceedings of the 29th International Symposium on High-Performance Parallel and Distributed Computing (Stockholm, Sweden) (HPDC '20)*. Association for Computing Machinery, New York, NY, USA, 89–100.
- [196] Kai Zhao, Sheng Di, Danny Perez, Xin Liang, Zizhong Chen, and Franck Cappello. 2022. MDZ: An Efficient Error-bounded Lossy Compressor for Molecular Dynamics. In *2022 IEEE 38th International Conference on Data Engineering (ICDE)*. 27–40.
- [197] Shengjia Zhao, Jiaming Song, and Stefano Ermon. 2017. Infovae: Information maximizing variational autoencoders. *arXiv preprint arXiv:1706.02262* (2017).
- [198] Q. Zhou, C. Chu, N. S. Kumar, P. Kousha, S. M. Ghazimirsaeed, H. Subramoni, and D. K. Panda. 2021. Designing High-Performance MPI Libraries with On-the-fly Compression for Modern GPU Clusters. In *2021 IEEE International Parallel and Distributed Processing Symposium (IPDPS)*. 444–453.
- [199] Qinghua Zhou, Pouya Kousha, Quentin Anthony, Kawthar Shafie Khorassani, Aamir Shafi, Hari Subramoni, and Dhableswar K. Panda. 2022. Accelerating MPI All-to-All Communication With Online Compression On Modern GPU Clusters. In *High Performance Computing: 37th International Conference, ISC High Performance 2022, Hamburg, Germany, May 29 – June 2, 2022, Proceedings* (Hamburg, Germany). Springer-Verlag, Berlin, Heidelberg, 3–25.
- [200] Zlib. [n. d.]. <https://www.zlib.net/>. Online.
- [201] Xiangyu Zou, Tao Lu, Wen Xia, Xuan Wang, Weizhe Zhang, Sheng Di, Dingwen Tao, and Franck Cappello. 2019. Accelerating Relative-error Bounded Lossy Compression for HPC datasets with Precomputation-Based Mechanisms. In *2019 35th Symposium on Mass Storage Systems and Technologies (MSST)*. 65–78.
- [202] Xiangyu Zou, Tao Lu, Wen Xia, Xuan Wang, Weizhe Zhang, Haijun Zhang, Sheng Di, Dingwen Tao, and Franck Cappello. 2020. Performance Optimization for Relative-Error-Bounded Lossy Compression on Scientific Data. *IEEE Transactions on Parallel and Distributed Systems* 31, 7 (2020), 1665–1680. <https://doi.org/10.1109/TPDS.2020.2972548>