MM-PhyRLHF: Reinforcement Learning Framework for Multimodal Physics Question-Answering

Avinash Anand avinasha@iiitd.ac.in IIIT Delhi Delhi, India

Apoorv Singh apoorv17027@iiitd.ac.in IIIT Delhi Delhi, India

Jatin Kumar jatin20206@iiitd.ac.in IIIT Delhi Delhi, India Janak Kapuriya kapuriya22032@iiitd.ac.in IIIT Delhi Delhi, India

> Jay Saraf jay20438@iiitd.ac.in IIIT Delhi Delhi, India

Adarsh Raj Shivam adarsh20274@iiitd.ac.in IIIT Delhi Delhi, India Chhavi Kirtani chhavi18229@iiitd.ac.in IIIT Delhi Delhi, India

Naman Lal namanlal.lal92@gmail.com IIIT Delhi Delhi, India

> Astha Verma asthav@iiitd.ac.in IIIT Delhi Delhi, India

Rajiv Ratn Shah rajivratn@iiitd.ac.in IIIT Delhi Delhi, India

ABSTRACT

Recent advancements in LLMs have shown their significant potential in tasks like text summarization and generation. Yet, they often encounter difficulty while solving complex physics problems that require arithmetic calculation and a good understanding of concepts. Moreover, many physics problems include images that contain important details required to understand the problem's context. We propose an LMM-based chatbot to answer multimodal physics MCQs. For domain adaptation, we utilize the MM-PhyQA dataset comprising Indian high school-level multimodal physics problems. To improve the LMM's performance, we experiment with two techniques, RLHF (Reinforcement Learning from Human Feedback) and Image Captioning. In image captioning, we add a detailed explanation of the diagram in each image, minimizing hallucinations and image processing errors. We further explore the integration of Reinforcement Learning from Human Feedback (RLHF) methodology inspired by the ranking approach in RRHF to enhance the human-like problem-solving abilities of the models. The RLHF approach incorporates human feedback into the learning process of LLMs, improving the model's problem-solving skills, truthfulness, and reasoning capabilities, minimizing the hallucinations in the answers, and improving the quality instead of using

Roger Zimmermann rogerz@comp.nus.edu.sg National University of Singapore Singapore, Singapore

vanilla-supervised fine-tuned models. We employ the LLaVA opensource model to answer multimodal physics MCQs and compare the performance with and without using RLHF.

CCS CONCEPTS

• Applied computing → Physics.

KEYWORDS

Large Language Models, Large Multimodal Models, Reinforcement Learning, Physics, Educational AI

ACM Reference Format:

Avinash Anand, Janak Kapuriya, Chhavi Kirtani, Apoorv Singh, Jay Saraf, Naman Lal, Jatin Kumar, Adarsh Raj Shivam, Astha Verma, Rajiv Ratn Shah, and Roger Zimmermann. 2018. MM-PhyRLHF: Reinforcement Learning Framework for Multimodal Physics Question-Answering. In *Proceedings of Make sure to enter the correct conference title from your rights confirmation emai (Conference acronym 'XX)*. ACM, New York, NY, USA, 6 pages. https://doi.org/XXXXXXXXXXXXXXXXX

1 INTRODUCTION

The current generation of LLMs like Chat-GPT and GPT4 have shown impressive performance in tasks like text generation, translation, summarization, sentiment analysis, and question answering, enabling more accurate and contextually relevant language understanding and generation. With newer research, these models have also shown impressive performance in domain-specific tasks through fine-tuning. Moreover, newer capabilities of handling multimodal input data are making strides in the academic landscape, exemplified by GPT-4V, Gemini, and open-source LLaVA models that can process and generate content across multiple modalities,

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Conference acronym 'XX, June 03-05, 2018, Woodstock, NY

© 2018 Copyright held by the owner/author(s). Publication rights licensed to ACM. ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00 https://doi.org/XXXXXXXXXXXXXX

including images, audio, and video.

Combining the LLM's capability of data processing, text generation, contextual reasoning, and pattern recognition with its capabilities of handling multiple modalities has made it a popular option for educational question-answering. LLMs can serve as 24/7 virtual assistants for answering student queries in various subjects, thus enhancing understanding and clearing doubts outside the traditional classroom setting. These LLMs can revolutionize exam preparation by creating well-rounded question-answering systems with domain-specific assistance and instant clarifications. LLMs can also tailor content according to each student's learning style, needs, and preferences by analyzing the way a student interacts and performs.

Recent research has portrayed LLM's ability to retrieve and provide accurate information from vast knowledge bases, essential for educational question-answering systems [20, 37] noted positive feedback received from middle school teachers about using LLMs in education stating that LLMs significantly reduce the time and cost of obtaining diverse and personalized learning materials. [1] underscore LLMs' capability of simulating high-quality student-teacher interaction while covering a broader aspect of the given topic, suggesting LLMs' potential to enhance the depth and breadth of educational content. Hence, developing open-source educational question-answering models using LLMs is promising. While some work has been done in the field of multimodal question-answering in science, maths, etc., this work is fresh in the Indian context, especially for high-quality physics problems at the level of Indian competitive examinations like JEE and NEET.

[20] underline the importance of developing LLMs capable of handling multimodal information for educational problems that include text and images, which is crucial for creating more comprehensive and effective educational tools. Moreover, [37] highlighted the importance of feedback collection as a method to enhance domainadaptation of subjects and offer further improvement of LLMs in the educational domain. As noted by [20], it is imperative to enhance the multimodal capabilities of currently available LLMs to create a more well-rounded question-answering system. Multi-modal processing problems such as hallucinations where the model perceives information that is non-existent and non-sensical, inability to integrate modalities to understand the context and the significance of all modalities about each other, and domain adaptation issues are still persistent. Improving the multimodal capabilities of models is crucial, especially in the field of question-answering, where the inclusion of images can exponentially increase the understandability of the question and result in more accuracy. Furthermore, as noted by [7, 9, 37] LLMs' contextual reasoning and capability of generating more human-like responses in the educational domain can be improved.

MICoT-QA [8] compared the performance of fine-tuning opensource LLMs, while additionally exploring the technique of Chainof-Thought Prompting. To tackle the problems faced by LLMs in multimodal processing as well as domain-specific reasoning as discussed above, we propose improvements to MICoT-QA by utilizing two techniques, Reinforcement Learning and Human Feedback (RLHF) and Image Captioning.

For every image in the training dataset, we add a detailed explanation of the diagram to provide the model with extra context helping it avoid hallucinations. We utilize the Infi-MM captioning model to generate captions for every image, before passing these images along with the accompanying question and answers to the fine-tuning pipeline.

To enhance the model's reasoning capabilities and align their response to a more humanized version is where Reinforcement Learning from Human Feedback(RLHF) plays an important role. At the core of RLHF lies preference data which involves rating and comparing various responses generated by different models to the same prompt. The model is further trained on this preference data and thereafter multiple reinforcement learning algorithms like Proximal Policy Optimization (PPO) [34] and Direct Preference Optimization (DPO) [31] are applied to fine-tune the LMMs to optimize the rewards. RLHF technique has been proven to boost LLMs reasoning by bridging the gap between human intuition and AI and generating more rational and human-aligned solutions (ref: Boosting LLMs Physics Reasoning with Human-AI Guided Reinforcement Learning Conclusion section).

The three stages of RLHF are:

- Collecting human feedback to rank multiple responses to the same questions based on the quality of their reasoning.
- (2) Training the reward model: The Reward Model (RM) is trained methodologically using our dataset MM-PhyQA.
- (3) Refining the policy: An iterative process where the policy keeps getting updated based on new feedback and changes.

Overall, our contributions to this paper are as follows:

- (1) Enhance the MM-PhyQA dataset by using the image captioning methodology. This benefits the LLM by reducing hallucinations and adding more context to the problem.
- (2) Applying the RLHF technique to encourage more human-like responses to complex problems.
- (3) Compare results of the LLM-based physics question answering between the following experiment settings:
 - 3.1 Fine Tune LLaVa Models using (Sample Question and Answer, Image, Caption) with RLHF technique
 - 3.2 Fine Tune LLaVa Models using (Sample Question and Answer, Caption) with RLHF technique
 - 3.3 Fine Tune LLaVa Models using (Sample Question and Answer, Image) with RLHF technique

2 RELATED WORK

2.1 Vision LLMs

Recent advancements have led to the creation of Vision Language Models, models capable of processing and interpreting visual information along with textual information. Flamingo has been designed to leverage visual and language inputs as prompts, showing remarkable few-shot performance in visual question-answering tasks. Models like GPT4 [2], LLaVA series [21], and MiniGPT4 [41]

introduced the method of visual instruction tuning to enhance the instruction-following abilities of VLLMs, meaning training the model to interpret and process visual cues in conjunction with textual instructions. VisionLLM [36], Kosmos-2 [28], Qwen-VL [10] have been improved by using visual grounding capabilities, enabling them to perform tasks such as describing specific regions within an image (region description) and identifying the location of objects or elements within an image (localization), making them more adept at tasks that require nuanced understanding of the visual elements. PaLM-E [13] and EmbodiedGPT [25] models are designed to interact with and navigate through physical or simulated environments, understanding visual inputs in the context of actions and interactions, which represents significant strides in adapting VLLMs for embodied applications.

2.2 RLHF

In addressing the limitations of traditional LLM approaches, the emergence of Reinforcement Learning from Human Feedback (RLHF) has been pivotal, as noted in research by [38]. This method, initially focused on tasks such as text summarization [35] and question answering [26], has evolved to improve general-purpose language models. The RLHF domain has expanded further with Reinforcement Learning from AI Feedback (RLAIF) by [19], addressing the scalability challenges and the need for quality human labels, as analyzed by [40]. Additionally, UltraFeedback [12] represents a significant advancement in ranking diverse human and AI preferences, highlighting the ongoing evolution and adaptation in language model development. In the context of question-answering systems, [15, 18] presents an in-depth analysis of the impact of RLHF on LLMs by evaluating each stage of an RLHF pipeline separately, showcasing the importance of RLHF in improving Out-Of-Distribution performance suggesting that RLHF models are more adaptable to a wider variety of scenarios not seen during training. [26] explored the benefit of RLHF in browser-assisted question answering with human feedback on the performance in question answering. We utilize the PPO method for the RLHF implementation in our application. The Proximal Policy Optimization (PPO) Algorithm was introduced by [34] by ChatGPT creator OpenAI's scientist as a method to implement policy updates and reward models in RLHF. It proposes a mechanism that restricts the policy update steps, preventing them from being too large and potentially destabilizing the training process, and unlike standard policy gradient methods that perform one update per data sample, PPO allows for several epochs of minibatch updates on the same set of sampled data, offering a balance between performance and ease of implementation.

2.3 Image Captioning

To address the limitations of multimodal processing of LLMs and to reduce the hallucinations of the models, image captioning has been effective as noted by research conducted by [32] and [39]. [32] conducted experiments comparing the performance of available LMMs with multimodal text and image input to the performance of LLMs with text-only input accompanied by image captioning

instead of the image in Visual Question Answering tasks. The research reported improved accuracy for LLMs given text-only image-captioned input, representing the benefit of providing the model with more context by adding image captions. [39] explored image captioning for mathematical question answering by giving 6 varied versions of a problem, each offering varying degrees of multi-modality information as image captions. They report that most MLLMs struggle to understand mathematical diagrams and heavily rely on textual data, signifying the importance of image captioning.

2.4 Application in Education

[14] studies the many applications of LLMs, including education. LLMs present opportunities for personalized learning materials, improved productivity, and increased accessibility. [24] developed an LLM-based student-facing assistant in the discussion forum and tested the performance in upper-division data science courses, suggesting the practicality of deploying LLMs as tutoring and questionanswering assistants. [29] present an extensive literature review of the usage of LLMs in education, specifically in the computing domain, as an AI assistant for teaching coding [30], answering questions on the course discussion boards [17], providing feedback for programming assignments [11, 27], and more. The advancements in Large Language Models (LLMs) within high-school physics education are highlighted in the research "Revolutionizing High School Physics Education: A Novel Dataset" [3]. This study showcases the creation of a specialized dataset from NCERT exemplar solutions, expanding from 766 to 7,983 physics questions. The primarily textbased dataset, formatted in JSON, demonstrates LLMs' potential in handling complex educational content, as evidenced by significant METEOR and BERTScore F1 metrics. This development is pivotal in LLM applications for high-school education, enriching the scope of multimodal learning environments. [33] reported the limitations of ChatGPT in mathematical education tasks like question generation, suggesting a need for further improvement in domain adaptation and contextual understanding of LLMs.

3 DATASET

We possess the MMPhy-QA dataset, which is an extensive compilation comprising a diverse range of multimodal multiple-choice physics questions along with their corresponding answers. This dataset has been meticulously curated to serve as a valuable resource for promoting a comprehensive understanding and assessment of physics principles. Within this dataset, the training section consists of 3700 samples, carefully selected to cover a broad spectrum of physics topics, while the test section comprises 676 samples, intentionally designed to evaluate the performance and adaptability of models.

In our efforts to further strengthen the robustness and effectiveness of our model, we strategically extracted 2000 instances from the training set to create a specialized preference dataset, tailored specifically for Reinforcement Learning with Human Feedback (RLHF) training. This strategic augmentation aims to leverage human feedback to refine and enhance the model's responses,

thereby fostering deeper understanding and more refined reasoning abilities. Each of the 2000 selected samples underwent meticulous inference using models llava_13b, llava_1_5_7b, llava_1_5_13b, llava_1_5_13b_lora_large, and GPT4 to generate 5 responses. These 5 responses were then passed on to Gemini Pro, an advanced evaluation tool renowned for its sophisticated ranking algorithms and analytical capabilities. Leveraging the capabilities of Gemini Pro, we meticulously evaluated and ranked the generated responses, scrutinizing their overall coherence in reasoning and adherence to the provided prompts.

Based on the rankings obtained from Gemini Pro, we arranged the responses into paired sets, pairing the highest-ranked response with every other response. This meticulous pairing approach resulted in four distinct preference pairs per sample, effectively quadrupling the dataset's size and infusing it with diverse viewpoints and nuanced variations. Consequently, our preference dataset now comprises a comprehensive array of 8000 samples, each meticulously crafted to foster nuanced comprehension and facilitate robust model training.

To provide a deeper understanding of the structure and composition of the dataset, we have included a detailed diagram delineating the intricate relationships and pairings within the preference dataset. This graphical representation serves as a valuable tool, offering insights into the dataset's organizational framework and aiding in the comprehension of its complexities and subtleties.

4 PROPOSED METHODOLOGY

4.1 Dataset

We utilize the MM-PhyQA dataset from "MM-PhyQA: Multimodal Physics Question-Answering With Multi-Image CoT Prompting" [3–6] for experimentation in this paper. MM-PhyQA addresses the lack of multimodal datasets that comprise physics questions and are catered to high school students. The dataset is geared toward competitive examinations conducted throughout India. 300 questions in the dataset were initially manually created, each sample consists of a question, four options, and a final answer along with an explanation. Further, ChatGPT was used for data augmentation by giving a prompt to create other variations of the text while ensuring that the meaning remained the same, bringing the total count of the questions in the dataset to 4500.

4.2 Preference dataset creation for RLHF

We employed the MM-PhyQA dataset to construct a preference dataset for the training of the Reward Model (RM) component. The dataset incorporates contributions from five open-source models: llava_13b, llava_1_5_7b, llava_1_5_13b, llava_1_5_13b_lora_large, and GPT4, each generating five distinct responses. These responses were subjected to an evaluation process using Gemini Pro, a sophisticated evaluation tool renowned for its advanced ranking algorithms and analytical prowess. Leveraging the capabilities of Gemini Pro, we conducted a thorough assessment and ranking of the responses, focusing on their coherence in reasoning and adherence to the provided prompts. The evaluation outcomes facilitated the organization of the responses into paired sets by pairing the highest-ranked response with each of the other responses. This method of pairing yielded four unique preference pairs per sample,

effectively augmenting the dataset's volume and introducing a rich diversity of perspectives and subtle distinctions. As a result, the preference dataset was expanded to include a total of 8000 samples, each carefully curated to enhance nuanced understanding and support the effective training of the model.

4.3 Fine-Tuning

We use the MM-PhyQA dataset consisting of 4500 samples to fine-tune each of these pre-trained models: Llava1.5 7b, Llava1.5 13b, Llava1.5 13b lora large. The dataset is split into training and testing sets with a 70:30 ratio To optimize the training of these LLMs, we employed PEFT (Parameter Efficient Fine Tuning) [22]. Additionally, the hyper-parameter configuration utilized for training the SFT module includes 4 epochs, a batch size of 8, a learning rate of 3e-4, and an Adam optimizer.

4.4 RLHF Pipeline

We incorporate the Reinforcement Learning from Human Feedback (RLHF) methodology into the training process of our LLM to enhance its contextual reasoning capabilities and ensure its outputs are in line with human preferences. The Preference Dataset mentioned in section 4.2 serves as the foundation for training a Reward Model (RM), selected as LLaVA2-13B for this research. By training the RM on the preference dataset, it learns to predict the quality of a response based on the rankings. It utilizes the criteria of coherence in reasoning and adherence to initial prompts as established during the creation of the Preference Dataset to predict the anticipated reward for any response produced by the LLM. After training the RM, we use it to apply the PPO algorithm to each of the fine-tuned LLMs. During this phase, the LLM generates responses that are evaluated by the RM, and it receives feedback in the form of predicted rewards from the RM. The process of generating responses, evaluating them with the RM, and updating the LLM using policy optimization is repeated iteratively.

4.5 Image Captioning

To enhance multimodal processing and reduce the hallucinations of the model, we add captions to every image in the training dataset during fine-tuning. We utilized Infi-MM [23], a novel architecture designed to recognize and understand detailed information in high-resolution images accurately, in our pipeline that takes input as the sample dataset MM-PhyQA and returns the samples accompanied with image captions. This modified dataset is then used for the fine-tuning of the pre-trained model, as described in section 4.3.

5 EXPERIMENTS

Using the above methodology, we experiment to evaluate and compare the performance of physics question-answering LLM in the context of Indian high schools. We will integrate the RLHF and Image Captioning techniques with the novel method introduced by [4, 15] which is multi-image chain-of-thought prompting to enhance LLM's performance for physics-based question-answering. By integrating RLHF and Image Captioning techniques, we aim to improve the accuracy and contextual reasoning of the LLMs and contribute to the advancement of educational chatbots.

We experiment with the following six training settings:

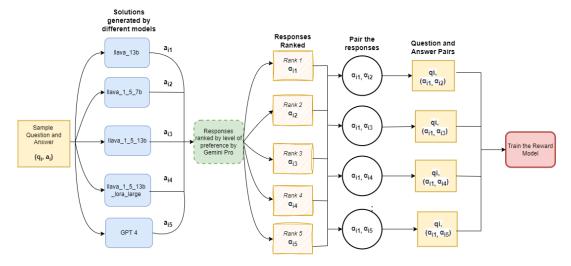


Figure 1: Preference dataset Pipeline

- (1) Fine Tune LLaVa Models using (Sample Question and Answer, Image, Caption)
- (2) Fine Tune LLaVa Models using (Sample Question and Answer, Caption)
- (3) Fine Tune LLaVa Models using (Sample Question and Answer, Image)
- (4) Fine Tune LLaVa Models using (Sample Question and Answer, Image, Caption) with RLHF technique integrated
- (5) Fine Tune LLaVa Models using (Sample Question and Answer, Caption) with RLHF technique integrated
- (6) Fine Tune LLaVa Models using (Sample Question and Answer, Image) with RLHF technique integrated

By comparing the performance of the LLM across the above six different settings, we will be able to understand the extent of improvement Image Captioning and RLHF techniques provide.

Furthermore, we use the following three LLMs as our base model:

- (1) Llava -1.5 7b
- (2) Llava -1.5 13b
- (3) Llava -1.5 13b LoRA large

We experimented with different LoRA values in the case of the LLaVA 1.5 model. LoRA or Low-Rank Adaptation [16], is a method to represent the weight changes during the training process in lower-ranked matrices. This is especially useful while fine-tuning general-purpose LLMs, as it speeds up the training process. A lower LoRA rank means fewer parameters are learned during the adaptation process, however, it results in a faster training process as well. We tested the 7b (7 billion) and 13b (13 billion) variants of LLaVA which correspond to the number of learning parameters. The different LLaVA configurations also formed the basis of our comparison of the performance of our technique.

6 RESULTS AND DISCUSSION

Tables 1, 2, and 3 show the accuracy scores on the test dataset for the experiment settings 1-3 mentioned in section 5 - Experiments.

SFT Training Input: Text + Image			
Model	Accuracy	LoRA	
Llava -1.5 7b	53.3%	64	
Llava -1.5 13b	52.7%	64	
Llava -1.5 13b lora large	53.1%	128	

Table 1: Accuracy recorded when the training dataset contained only the Question and Answer text and the accompanying image. This experiment involves only Supervised Fine-Tuning.

SFT Training Input: Text + Image + Caption			
Model	Accuracy	LoRA	
Llava -1.5 7b	82.52%	64	
Llava -1.5 13b	83.28%	64	
Llava -1.5 13b lora large	82.1%	128	

Table 2: Accuracy recorded when the training dataset contained only the Question and Answer text, the accompanying image, and the image's caption. This experiment involves only Supervised Fine-Tuning.

SFT Training Input: Text + Caption			
Model	Accuracy	LoRA	
Llava -1.5 7b	66.95%	64	
Llava -1.5 13b	64.0%	64	
Llava -1.5 13b lora large	74.56%	128	

Table 3: Accuracy recorded when the training dataset contained only the Question and Answer text and the caption of the accompanying image (Image was not provided). This experiment involves only Supervised Fine-Tuning.

7 CONCLUSION

REFERENCES

- Zahra Abbasiantaeb, Yifei Yuan, Evangelos Kanoulas, and Mohammad Aliannejadi. 2024. Let the llms talk: Simulating human-to-human conversational qa via zero-shot llm-to-llm interactions. , 8–17 pages.
- [2] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report.
- [3] Avinash Anand, Krishnasai Addala, Kabir Baghel, Arnav Goel, Medha Hira, Rushali Gupta, and Rajiv Ratn Shah. 2023. Revolutionizing High School Physics Education: A Novel Dataset., 64–79 pages.
- [4] Avinash Anand, Arnav Goel, Medha Hira, Snehal Buldeo, Jatin Kumar, Astha Verma, Rushali Gupta, and Rajiv Ratn Shah. 2023. SciPhyRAG-Retrieval Augmentation to Improve LLMs on Physics Q &A., 50–63 pages.
- [5] Avinash Anand, Mohit Gupta, Kritarth Prasad, Ujjwal Goel, Naman Lal, Astha Verma, and Rajiv Ratn Shah. 2023. KG-CTG: Citation Generation Through Knowledge Graph-Guided Large Language Models., 37–49 pages.
- [6] Avinash Anand, Mohit Gupta, Kritarth Prasad, Navya Singla, Sanjana Sanjeev, Jatin Kumar, Adarsh Raj Shivam, and Rajiv Ratn Shah. 2023. Mathify: Evaluating Large Language Models on Mathematical Problem Solving Tasks.
- [7] Avinash Anand, Atharv Jairath, Naman Lal, Siddhesh Bangar, Jagriti Sikka, Astha Verma, Rajiv Ratn Shah, and Shin'ichi Satoh. 2023. GEC-DCL: Grammatical Error Correction Model with Dynamic Context Learning for Paragraphs and Scholarly Papers., 95–110 pages.
- [8] Avinash Anand, Janak Kapuriya, Apoorv Singh, Jay Saraf, Naman Lal, Astha Verma, Rushali Gupta, and Rajiv Shah. 2024. MM-PhyQA: Multimodal Physics Question-Answering With Multi-Image CoT Prompting.
- [9] Avinash Anand, Kritarth Prasad, Ujjwal Goel, Mohit Gupta, Naman Lal, Astha Verma, and Rajiv Ratn Shah. 2023. Context-Enhanced Language Models for Generating Multi-paper Citations., 80–94 pages.
- [10] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. 2023. Qwen-vl: A versatile vision-language model for understanding, localization, text reading, and beyond.
- [11] Rishabh Balse, Bharath Valaboju, Shreya Singhal, Jayakrishnan Madathil Warriem, and Prajish Prasad. 2023. Investigating the potential of gpt-3 in providing feedback for programming assessments. , 292–298 pages.
- [12] Ganqu Cui, Lifan Yuan, Ning Ding, Guanming Yao, Wei Zhu, Yuan Ni, Guotong Xie, Zhiyuan Liu, and Maosong Sun. 2023. Ultrafeedback: Boosting language models with high-quality feedback.
- [13] Danny Driess, Fei Xia, Mehdi SM Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, Tianhe Yu, et al. 2023. Palm-e: An embodied multimodal language model.
- [14] Chiarello Filippo, Giordano Vito, Spada Irene, Barandoni Simone, and Fantoni Gualtiero. 2024. Future applications of generative large language models: A data-driven case study on ChatGPT. Technovation 133 (2024), 103002.
- [15] Arnav Goel, Medha Hira, Avinash Anand, Siddhesh Bangar, and Dr Rajiv Ratn Shah. 2023. Advancements in Scientific Controllable Text Generation Methods.
- [16] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2021. Lora: Low-rank adaptation of large language models.
- [17] Brandon Jaipersaud, Paul Zhang, Jimmy Ba, Andrew Petersen, Lisa Zhang, and Michael R Zhang. 2023. Decomposed Prompting to Answer Questions on a Course Discussion Board., 218–223 pages.
- [18] Robert Kirk, Ishita Mediratta, Christoforos Nalmpantis, Jelena Luketina, Eric Hambro, Edward Grefenstette, and Roberta Raileanu. 2023. Understanding the effects of rlhf on llm generalisation and diversity.
- [19] Harrison Lee, Samrat Phatale, Hassan Mansoor, Kellie Lu, Thomas Mesnard, Colton Bishop, Victor Carbune, and Abhinav Rastogi. 2023. Rlaif: Scaling reinforcement learning from human feedback with ai feedback.
- [20] Qingyao Li, Lingyue Fu, Weiming Zhang, Xianyu Chen, Jingwei Yu, Wei Xia, Weinan Zhang, Ruiming Tang, and Yong Yu. 2023. Adapting Large Language Models for Education: Foundational Capabilities, Potentials, and Challenges.
- [21] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2024. Visual instruction tuning.
- [22] Haokun Liu, Derek Tam, Mohammed Muqeeth, Jay Mohta, Tenghao Huang, Mohit Bansal, and Colin A Raffel. 2022. Few-shot parameter-efficient fine-tuning is better and cheaper than in-context learning. Advances in Neural Information Processing Systems 35 (2022), 1950–1965.
- [23] Haogeng Liu, Quanzeng You, Xiaotian Han, Yiqi Wang, Bohan Zhai, Yongfei Liu, Yunzhe Tao, Huaibo Huang, Ran He, and Hongxia Yang. 2024. InfiMM-HD: A Leap Forward in High-Resolution Multimodal Understanding.
- [24] Chancharik Mitra, Mihran Miroyan, Rishi Jain, Vedant Kumud, Gireeja Ranade, and Narges Norouzi. 2024. Elevating Learning Experiences: Leveraging Large Language Models as Student-Facing Assistants in Discussion Forums. , 1752– 1753 pages.

- [25] Yao Mu, Qinglong Zhang, Mengkang Hu, Wenhai Wang, Mingyu Ding, Jun Jin, Bin Wang, Jifeng Dai, Yu Qiao, and Ping Luo. 2024. Embodiedgpt: Vision-language pre-training via embodied chain of thought.
- [26] Reiichiro Nakano, Jacob Hilton, Suchir Balaji, Jeff Wu, Long Ouyang, Christina Kim, Christopher Hesse, Shantanu Jain, Vineet Kosaraju, William Saunders, et al. 2021. Webgpt: Browser-assisted question-answering with human feedback.
- [27] Maciej Pankiewicz and Ryan S Baker. 2023. Large Language Models (GPT) for automating feedback on programming assignments.
- [28] Zhiliang Peng, Wenhui Wang, Li Dong, Yaru Hao, Shaohan Huang, Shuming Ma, and Furu Wei. 2023. Kosmos-2: Grounding multimodal large language models to the world.
- [29] James Prather, Paul Denny, Juho Leinonen, Brett A Becker, Ibrahim Albluwi, Michelle Craig, Hieke Keuning, Natalie Kiesler, Tobias Kohn, Andrew Luxton-Reilly, et al. 2023. The robots are here: Navigating the generative ai revolution in computing education., 108–159 pages.
- [30] Ben Puryear and Gina Sprint. 2022. Github copilot in the classroom: learning to code with AI assistance. Journal of Computing Sciences in Colleges 38, 1 (2022), 37–47
- [31] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. 2024. Direct preference optimization: Your language model is secretly a reward model.
- [32] Ander Salaberria, Gorka Azkune, Oier Lopez de Lacalle, Aitor Soroa, and Eneko Agirre. 2023. Image captioning for effective use of language models in knowledgebased visual question answering. Expert Systems with Applications 212 (2023), 118669.
- [33] Bima Sapkota and Liza Bondurant. 2024. Assessing concepts, procedures, and cognitive demand of ChatGPT-generated mathematical tasks. *International Journal* of Technology in Education 7, 2 (2024), 218–238.
- [34] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. Proximal policy optimization algorithms.
- [35] Nisan Stiennon, Long Ouyang, Jeffrey Wu, Daniel Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul F Christiano. 2020. Learning to summarize with human feedback. Advances in Neural Information Processing Systems 33 (2020), 3008–3021.
- [36] Wenhai Wang, Zhe Chen, Xiaokang Chen, Jiannan Wu, Xizhou Zhu, Gang Zeng, Ping Luo, Tong Lu, Jie Zhou, Yu Qiao, et al. 2024. Visionllm: Large language model is also an open-ended decoder for vision-centric tasks.
- [37] Changrong Xiao, Sean Xin Xu, Kunpeng Zhang, Yufang Wang, and Lei Xia. 2023. Evaluating reading comprehension exercises generated by LLMs: A showcase of ChatGPT in education applications. , 610–625 pages.
- [38] Yuanzhen Xie, Tao Xie, Mingxiong Lin, WenTao Wei, Chenglin Li, Beibei Kong, Lei Chen, Chengxiang Zhuo, Bo Hu, and Zang Li. 2023. Olagpt: Empowering llms with human-like problem-solving abilities.
- [39] Renrui Zhang, Dongzhi Jiang, Yichi Zhang, Haokun Lin, Ziyu Guo, Pengshuo Qiu, Aojun Zhou, Pan Lu, Kai-Wei Chang, Peng Gao, et al. 2024. MathVerse: Does Your Multi-modal LLM Truly See the Diagrams in Visual Math Problems?
- [40] Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. 2024. Judging llm-as-a-judge with mt-bench and chatbot arena.
- [41] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. 2023. Minigpt-4: Enhancing vision-language understanding with advanced large language models.