

Embedding Differential Dynamic Logic in PVS

J. Tanner Slagel

NASA Langley Research Center
Hampton, VA, 23666, USA
j.tanner.slagel@nasa.gov

Mariano Moscato

National Institute of Aerospace*
Hampton, VA, 23666, USA

Lauren White

NASA Langley Research Center
Hampton, VA, 23666, USA

César A. Muñoz

NASA Langley Research Center
Hampton, VA, 23666, USA

Swee Balachandran

National Institute of Aerospace*
Hampton, VA, 23666, USA

Aaron Dutle

NASA Langley Research Center
Hampton, VA, 23666, USA

Differential dynamic logic (dL) is a formal framework for specifying and reasoning about hybrid systems, i.e., dynamical systems that exhibit both continuous and discrete behaviors. These kinds of systems arise in many safety- and mission-critical applications. This paper presents a formalization of dL in the Prototype Verification System (PVS) that includes the semantics of hybrid programs and dL's proof calculus. The formalization embeds dL into the PVS logic, resulting in a version of dL whose proof calculus is not only formally verified, but is also available for the verification of hybrid programs within PVS itself. This embedding, called **Plaidypvs (Properly Assured Implementation of dL for Hybrid Program Verification and Specification)**, supports standard dL style proofs, but further leverages the capabilities of PVS to allow reasoning about entire classes of hybrid programs. The embedding also allows the user to import the well-established definitions and mathematical theories available in PVS.

1 Introduction

Systems that exhibit both discrete and continuous dynamics, known as *hybrid systems*, have emerged in numerous safety- and mission-critical applications such as avionics systems, robotics, medical devices, railway operations, and autonomous vehicles. To formally reason about these systems, it is often useful to model them as *hybrid programs* (HPs), where the discrete variables evolve through assignments like traditional imperative programs and the continuous variables are defined by a system of differential equations. Hybrid programs are suitable to model complex dynamics where the continuous and discrete dynamics are largely intertwined, but due to their complexity, efficient and effective formal reasoning about properties of such programs can be a challenge.

Differential dynamic logic (dL) enables the specification and reasoning of HPs using a small set of proof rules [42, 44, 50, 52]. Conceptually dL can be split into two parts: (1) a framework for the logical specifications of HPs and their properties and (2) a proof calculus that is a collection of axioms and deductive rules for reasoning about these logical specifications. The KeYmaera X¹ theorem prover is a software implementation of dL built up from a small, trusted core that assumes the axioms of dL [15, 26, 22] with a web-based interface for specification and reasoning of HPs [25]. KeYmaera X has been used in the formal verification of several cyber-physical systems [18, 24, 20, 6, 5, 16, 23, 29].

This paper presents a formal embedding of dL in the Prototype Verification System (PVS). PVS is a proof assistant that integrates a fully typed functional specification language supporting predicate subtypes and dependent types with an interactive theorem prover based on higher order logic. PVS

*Institute at time of contribution.

¹<https://keymaerax.org>

allows users to write formal specifications and reason about them using a collection of built-in proof rules and user-defined proof strategies. Strategies are built on top of proof rules in a conservative way so that they do not introduce additional soundness concerns. Formal PVS developments are structured in theories and a collection of theories form a library. The NASA PVS Library (NASALib)² is a collection of formal developments contributed by the PVS community and maintained by the Formal Methods Team at NASA Langley Research Center. Currently, it consists of over 38,000 proven lemmas spanning across 69 folders related to a wide range of topics in mathematics, logic, and computer science. The work presented in this paper relies on and contributes to NASALib.

The primary contribution of this work is a formal development called *Plaidypvs* (**P**roperly Assured **I**mplementation of **D**ifferential Dynamic Logic for **H**ybrid **P**rogram **V**erification and **S**pecification), which is publicly available as part of NASALib³. *Plaidypvs* includes the *specification* of dL’s HPs and their properties through an embedding in the PVS specification language, the *verification* of correctness of dL’s axioms and deductive rules, and the *implementation* of these rules through the strategy language of PVS, resulting in a formally verified and interactive implementation of the proof calculus of dL within PVS.

While reasoning about HPs using a formally verified implementation of dL is already an achievement, the integration in PVS brings additional opportunities for extending the functionality of dL beyond what is available in a stand-alone dL system such as KeYmaera X. For example, new or existing functions and definitions in PVS can be used inside of the dL framework. This includes trigonometric and other transcendental functions already specified in NASALib, as well as the corresponding properties concerning their derivatives and integrals. In addition, meta-reasoning about HPs and their properties can be performed in PVS using the dL embedding. Examples include specifying HPs with a parametric number of variables, which can be used to reason about situations with an unknown but finite number of actors, and reasoning about entire classes of HPs, which can be specified using the PVS type system.

The rest of this paper proceeds as follows. Section 2 details the formal development of HP specifications in *Plaidypvs*. Section 3 gives an overview of the formal verification approach to prove dL statements in PVS, as well the implementation of the proof calculus of dL in the PVS prover interface. Section 4 shows an example of utilizing the features of *Plaidypvs* beyond the capabilities of dL alone. Related work is discussed in 5. Finally, conclusions and future work are discussed in 6.

2 Specification of hybrid programs

This section describes the syntax, semantics, and logical specifications of HPs developed in *Plaidypvs*. Before these are introduced, a few preliminary concepts are needed.

2.1 Environment, real expressions, Boolean expressions

Hybrid programs manipulate real number values using discrete and continuous operations. At any moment, the state of a hybrid program is given by an environment of type $\mathcal{E} \triangleq [\mathbb{V} \rightarrow \mathbb{R}]$ that maps program variables in \mathbb{V} to real number values in \mathbb{R} , where \mathbb{V} is an infinite, but enumerable set of variables and \mathbb{R} is the set of real numbers. For simplicity, variables are represented by indices, i.e., \mathbb{V} is just the set of natural numbers.

²<https://github.com/nasa/pvslib>

³<https://github.com/nasa/pvslib/tree/master/dL>

The sets \mathcal{R} and \mathcal{B} of real and Boolean hybrid program expressions, respectively, are defined by a shallow embedding meaning they are represented by their evaluations functions, i.e., $\mathcal{R} \triangleq [\mathcal{E} \rightarrow \mathbb{R}]$ and $\mathcal{B} \triangleq [\mathcal{E} \rightarrow \mathbb{B}]$. For instance, $\mathbf{cnst}(c) \triangleq \lambda(e : \mathcal{E}).c$ represents the constant expression that returns the value $c \in \mathbb{R}$ in any environment and $\mathbf{val}(v) \triangleq \lambda(e : \mathcal{E}).e(v)$ represents the real expression that returns the value of variable v in the environment e . Similarly, $\top \triangleq \lambda(e : \mathcal{E}).\mathbf{True}$ and $\perp \triangleq \lambda(e : \mathcal{E}).\mathbf{False}$ represent the Boolean hybrid program constants that always return $\mathbf{True} \in \mathbb{B}$ and $\mathbf{False} \in \mathbb{B}$, respectively. While real and Boolean expressions can be arbitrary functions, Plaidypvs provides support for standard arithmetic and Boolean operators by lifting them to the domain of \mathcal{R} and \mathcal{B} . Given $r, r_1, r_2 \in \mathcal{R}$ and $n \in \mathbb{N}$ the following are recognized to be of type \mathcal{R} : $r_1 + r_2$, $r_1 - r_2$, r_1/r_2 , $r_1 \cdot r_2$, $r_1 = r_2$, $-r$, \sqrt{r} , and r^n . It is important to notice that, for instance, in the real expression $r_1 + r_2$, the operator $+$ is not the arithmetic addition, but it is of type $\mathcal{R} \times \mathcal{R} \rightarrow \mathcal{R}$. Similarly, given Boolean expressions $b, b_1, b_2 \in \mathcal{B}$, the following are recognized to be of type \mathcal{B} : $b_1 \wedge b_2$, $b_1 \vee b_2$, $b_1 \rightarrow b_2$, $b_1 \leftrightarrow b_2$, and $\neg b$.

Example 2.1 (Environments, Real and Boolean Expressions) *Let $x, y \in \mathbb{V}$ and $c \in \mathbb{R}_{\geq 0}$, the following Boolean expression denotes a circle of radius c centered at $(0, 0)$:*

$$\mathbf{val}(x)^2 + \mathbf{val}(y)^2 = \mathbf{cnst}(c)^2. \quad (1)$$

Furthermore, assuming the environment $e \triangleq (\lambda(v : \mathbb{V}).0)$ with $\{x \mapsto c/2, y \mapsto \sqrt{3} \cdot c/2\}$, the following Boolean statement holds.

$$(\mathbf{val}(x)^2 + \mathbf{val}(y)^2 = \mathbf{cnst}(c)^2)(e) = \mathbf{True}.$$

Henceforth, for ease of presentation, the \mathbf{val} and \mathbf{cnst} operators are suppressed in much of the remainder of the paper. The Boolean expression in Formula 1, for example, will be presented instead as $x^2 + y^2 = c^2$.

2.2 Hybrid programs

Hybrid programs are syntactically defined as a datatype \mathcal{H} in PVS according to the following grammar.

$$\alpha ::= \mathbf{x} := \ell \mid \mathbf{x}' = \ell \& P \mid ?P \mid x := * \mid \alpha_1; \alpha_2 \mid \alpha_1 \cup \alpha_2 \mid \alpha_1^*.$$

Here, $\mathbf{x} := \ell$ is a list of pairs in $\mathbb{V} \times \mathcal{R}$, where the first entries are unique, intended to represent a discrete assignment of the variables indexed by these first elements. The differential equation $\mathbf{x}' = \ell \& P$, where $\mathbf{x}' = \ell$ is another such list in $\mathbb{V} \times \mathcal{R}$ and $P \in \mathcal{B}$ is a Boolean expression, is meant to symbolize the continuous evolution of the variables in \mathbf{x}' according to the first order differential equation described by ℓ . Note that use of the symbol $\&$ is distinct from Boolean conjunction and is used here purely syntactically to represent that the solution of the differential equation satisfies P along the evolution. To reference a variable used in a discrete assignment or differential equation, the notation $v \in \mathbf{x}$ (respectively, $v \in \mathbf{x}'$) will be used. The real expression associated with v in ℓ will be denoted $\ell(v)$. The program $?P$ represents a check of the Boolean expression P . The program $x := *$ represents a discrete assignment of the variable x to an arbitrary real number value. The program $\alpha_1; \alpha_2$ represents the sequential execution of the subprograms α_1 and α_2 , while $\alpha_1 \cup \alpha_2$ symbolizes a nondeterministic choice between two subprograms. Finally, α_1^* represents repetition of a HP a finite but unknown (possibly zero) number of times.

Formally, the predicate $\mathbf{s_rel}$ defines the semantic relation of a hybrid program α with respect to

input and output environments $e_i, e_o \in \mathcal{E}$. It is inductively defined on α as follows.

$$\mathbf{s_rel}(\alpha)(e_i)(e_o) \triangleq \begin{cases} \forall k : k \notin \mathbf{x} \rightarrow e_o(k) = e_i(k) & \text{if } \alpha = (\mathbf{x} := \ell), \\ \quad \wedge k \in \mathbf{x} \rightarrow e_o(k) = \ell(k)(e_i) & \\ e_o = e_i \vee & \text{if } \alpha = (\mathbf{x}' = \ell \& P), \\ \quad \exists D : \mathbf{s_rel_diff}(D, \mathbf{x}', \ell, P, e_i, e_o) & \\ e_o = e_i \wedge P(e_i) & \text{if } \alpha = ?P, \\ \exists r : e_o(x) = r \wedge Q(r)(e_i) & \text{if } \alpha = (x := * \& Q), \\ \exists e : \mathbf{s_rel}(\alpha_1)(e_i)(e) & \text{if } \alpha = \alpha_1; \alpha_2, \\ \quad \wedge \mathbf{s_rel}(\alpha_2)(e)(e_o) & \\ \mathbf{s_rel}(\alpha_1)(e_i)(e_o) & \text{if } \alpha = \alpha_1 \cup \alpha_2, \\ \vee \mathbf{s_rel}(\alpha_2)(e_i)(e_o) & \\ e_o = e_i \vee & \text{if } \alpha = \alpha_1^*. \\ \quad \exists e : \mathbf{s_rel}(\alpha_1)(e_i)(e) & \\ \quad \wedge \mathbf{s_rel}(\alpha)(e)(e_o) & \end{cases}$$

The correspondence between the informal description of semantics and the $\mathbf{s_rel}$ function is standard in all cases except the differential equation branch. For differential equations, the domain D is $\mathbb{R}_{\geq 0}$, or some closed interval starting at 0, and the semantics is given by the following function.

$$\begin{aligned} \mathbf{s_rel_diff}(D, \mathbf{x}', \ell, P, e_i, e_o) &\triangleq \exists r : \exists ! f : D(r) \wedge \mathbf{sol?}(D, \mathbf{x}', \ell, e_i)(f) \wedge \\ &e_o = \mathbf{e_at_t}(\mathbf{x}', \ell, f, e_i)(r) \wedge \\ &\forall t : (D(t) \wedge t \leq r) \\ &\rightarrow P(\mathbf{e_at_t}(\mathbf{x}', \ell, f, e_i)(t)). \end{aligned}$$

Unpacking this further,

$$\mathbf{e_at_t}(\mathbf{x}', \ell, f, e_i) \triangleq \lambda(r : \mathbb{R}). \lambda(j : \mathbb{V}). \begin{cases} e_i(j) & \text{if } j \notin \mathbf{x}', \\ f(j)(r) & \text{if } j \in \mathbf{x}', \end{cases}$$

is a function that characterizes the environment e_i , with the continuously evolving variables \mathbf{x}' replaced by values from a function $f : [\mathbb{R}^k \rightarrow [\mathbb{R} \rightarrow \mathbb{R}]]$. The definition

$$\begin{aligned} \mathbf{sol?}(D, \mathbf{x}', \ell, e_i)(f) &\triangleq \forall (i \in \mathbf{x}', t \in \mathbf{D}) : \\ &(f(i))'(t) = \ell(i)(\mathbf{e_at_t}(\mathbf{x}', \ell, f, e_i)(t)) \end{aligned}$$

ensures that f is the solution to the k -dimensional differential equation $\mathbf{x}' = \ell$ throughout the domain D . Note in the definition of $\mathbf{s_rel_diff}$ this solution f is further assumed to be unique on the domain D .

Below is a colloquial description of the semantics of each type of HPs, where e_i, e_o are the input and output environments, respectively.

- $\mathbf{x} := \ell$ Discrete variable assignment. This means that e_i and e_o agree on all the variables not mentioned in ℓ , and for the variables in ℓ , a discrete jump has taken place.
- $\mathbf{x}' := \ell \& P$ Continuous variable assignment. Continuous jumps take place where the output variable that is included in ℓ has evolved according to the first order differential equation defined in ℓ . The solution to the differential equation satisfies P .

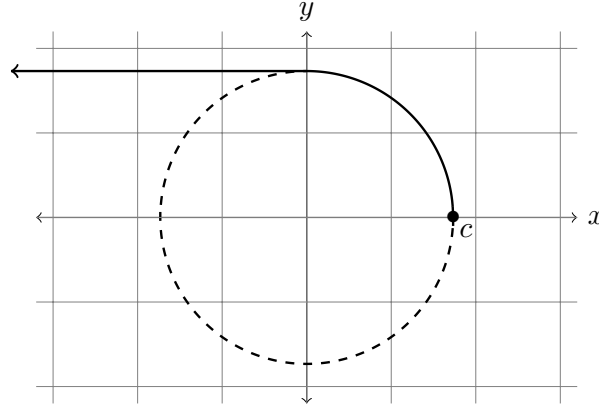


Figure 1: Dubins path modeling an aircraft turning.

$?P$	Test HP. An input/output pair is related only if they are equal and e_i satisfies P .
$x := *$	Random discrete assignment. Random assignment of variable x , where the random assignment is some value r and $e_o(n) = r$.
$\alpha_1; \alpha_2$	Sequential HP. Runs two HPs α_1 and α_2 in order such that there is an environment e that is semantically related to e_i through α_1 , and semantically related to e_o through α_2 .
$\alpha_1 \cup \alpha_2$	Nondeterministic choice HP. This HP nondeterministically chooses one of α_1 or α_2 . Here e_o is semantically related to e_i through α_1 or α_2 .
α^*	Loop HP. This is the repeat of HP α_1 a finite but undisclosed number of times. The environment e_o is either equal to e_i or is it semantically related to another environment e through α and e is semantically related to e_o through α^* .

Example 2.2 (HP) *The hybrid program*

$$((?(x > 0); (x' = -y, y' = x \ \& \ x \geq 0)) \cup (?(x \leq 0); (x' = -c, y' = 0)))^*,$$

where $x, y \in \mathbb{V}$, $x \neq y$, and $c \in \mathbb{R}$, represents the dynamic systems where x and y progress according to the differential equation $x' = -y$, $y' = x$ when $x > 0$, but when $x \leq 0$ the variables progress according to the differential equation $x' = -c$, $y' = 0$. Note that the test statements, introduced by the operator $?$, determine which branch of \cup in the HP is applicable, and the domain $x \geq 0$ in the first differential equation prevents the dynamics from continuing when $x = 0$, forcing the other branch of the HP to take place. The operator $*$ allows repetition so that both branches of the dynamics are carried out.

The hybrid program in Example 2.2 will be used as running example through this paper. It models a Dubins curve representing the trajectory of an aircraft turning and then proceeding in a straight line (see Figure 1).

2.3 Quantified statements about hybrid programs

A hybrid program can have potentially many different executions or *runs*. This means that given an input environment e_i , there may be infinitely many output environments e_o semantically related to it (by

repetition, random assignment, etc.). To reason about these runs, universal and existential quantifiers over the potentially infinite number of executions of an HP are defined. These quantifiers are called *allruns*, denoted $[\cdot]$, and *someruns*, denoted $\langle \cdot \rangle$. For $\alpha \in \mathcal{H}$ and $P \in \mathcal{B}$, $[\alpha]P \in \mathcal{B}$ is defined as follows.

$$[\alpha]P \triangleq \lambda(e_i : \mathcal{E}). \forall e_o : \mathbf{s_rel}(\alpha)(e_i)(e_o) \rightarrow P(e_o),$$

Analogously, $\langle \alpha \rangle P \in \mathcal{B}$ is defined as follows.

$$\langle \alpha \rangle P \triangleq \lambda(e_i : \mathcal{E}). \exists e_o : \mathbf{s_rel}(\alpha)(e_i)(e_o) \wedge P(e_o).$$

These quantifiers state that every (some, respectively) run of the HP α starting at environment e_i and ending at environment e_o satisfies P .

Example 2.3 (Allruns) Let α be the HP in Example 2.2, $\mathbf{circ}(c) \triangleq x^2 + y^2 = c^2$ and

$$\mathbf{path}(c) \triangleq (x > 0 \rightarrow \mathbf{circ}(c)) \wedge (x \leq 0 \rightarrow y = c).$$

Then, the Boolean expression

$$(x = c \wedge y = 0) \rightarrow [\alpha]\mathbf{path}(c), \quad (2)$$

states that if the value of x is c and the value of y is 0, then for all runs of the HP α , the values of x and y stay inside $\mathbf{path}(c)$. In other words, x and y stay on the circle of radius c until $x = 0$ and then stay on the line $y = c$.

3 Embedding differential dynamic logic

With the formal specification of hybrid programs established, the embedding of the sequent calculus of dL in PVS can be discussed. First, dL-sequents will be defined, then a description of the formal verification process encoding the axioms and rules of dL as lemmas in PVS is provided.

3.1 dL-sequents

A dL-sequent is denoted $\Gamma \vdash \Delta$, where Γ and Δ , known as the *antecedent* and the *consequent*, respectively, are lists of Boolean expressions. In PVS, a dL-sequent is defined by

$$\Gamma \vdash \Delta \triangleq \forall e \in \mathcal{E} : \bigwedge \Gamma(e) \implies \bigvee \Delta(e),$$

where \implies is the PVS implication. Intuitively, this means that the conjunction of the antecedent formulas implies the disjunction of the consequent formulas.

The dL approach for proving statements about hybrid programs relies on a set of deductive rules of the form

$$\frac{\Gamma_1 \vdash \Delta_1 \quad \dots \quad \Gamma_k \vdash \Delta_k}{\Gamma \vdash \Delta}.$$

Rules without hypothesis, i.e., where $k = 0$, are called *axioms*. A rule of this form states that the conjunction of the sequents above the inference line implies the sequent below the inference line. When proving statements, these rules are used in a bottom-up fashion forming an inverted (proof) tree, where the root of the tree is the sequent to be proven, branches are related by instances of deductive rules, and leaves are instances of axioms.

To formally verify dL each rule of dL is specified as a PVS lemma, which takes essentially the following form.

notR	$\frac{\Gamma, P \vdash \Delta}{\Gamma \vdash \neg P, \Delta}$	impliesR	$\frac{\Gamma, P \vdash Q, \Delta}{\Gamma \vdash P \rightarrow Q, \Delta}$
notL	$\frac{\Gamma \vdash \neg P, \Delta}{\Gamma \vdash P, \Delta}$	impliesL	$\frac{\Gamma \vdash P, \Delta \quad \Gamma, Q \vdash \Delta}{\Gamma, P \rightarrow Q \vdash \Delta}$
andR	$\frac{\Gamma \vdash P, \Delta \quad \Gamma \vdash Q, \Delta}{\Gamma \vdash P \wedge Q, \Delta}$	iffR	$\frac{\Gamma, P \rightarrow Q \vdash \Delta \quad \Gamma, P \vdash Q, \Delta \quad \Gamma, Q \vdash P, \Delta}{\Gamma \vdash P \leftrightarrow Q, \Delta}$
andL	$\frac{\Gamma, P \wedge Q \vdash \Delta}{\Gamma, P, Q \vdash \Delta}$	iffL	$\frac{\Gamma \vdash P \leftrightarrow Q, \Delta \quad \Gamma, P \wedge Q \vdash \Delta \quad \Gamma, \neg P \wedge \neg Q \vdash \Delta}{\Gamma, P \leftrightarrow Q \vdash \Delta}$
orR	$\frac{\Gamma \vdash P, Q, \Delta}{\Gamma \vdash P \vee Q, \Delta}$	falseL	$\frac{}{\Gamma, \perp \vdash \Delta}$
orL	$\frac{\Gamma, P \vdash \Delta \quad \Gamma, Q \vdash \Delta}{\Gamma, P \vee Q \vdash \Delta}$	trueR	$\frac{}{\Gamma \vdash \top, \Delta}$
cut	$\frac{\Gamma \vdash C, \Delta \quad \Gamma, C \vdash \Delta}{\Gamma \vdash \Delta}$	axiom	$\frac{}{\Gamma, P \vdash P, \Delta}$
weakR	$\frac{\Gamma \vdash P, \Delta \quad P \vdash Q}{\Gamma \vdash Q, \Delta}$	weakL	$\frac{P, \Gamma \vdash \Delta \quad Q \vdash P}{\Gamma, Q \vdash \Delta}$

Figure 2: Propositional dL rules

Lemma <dL-rule-name> For all lists of Boolean expressions Γ, Δ ,

$$\bigwedge_{i=1}^k \Gamma_i \vdash \Delta_i \implies \Gamma \vdash \Delta.$$

With such lemmas proven in PVS, a user can bring them into a proof environment and instantiate them as needed for proving a specific sequent. To automate this process, these lemmas are further implemented as (*proof*) *strategies* in PVS. These strategies parse the current sequent, identify instantiations that apply, hide unneeded formulas, and prove type-checking conditions that may appear, among other capabilities. More complex strategies are built on top of these strategies to simplify the proof process. Some of these rules, including details about their specification, verification, and implementation as strategies in PVS, are discussed below. A Plaidypvs “cheat sheet” is available for users with the development.⁴

3.2 Basic logical and structural rules of dL

The propositional rules in dL allow manipulation of the basic logical connectives ($\wedge, \vee, \neg, \rightarrow, \iff$) and operators (\top, \perp) in the dL-sequent (see Figure 2). For example, the rule **impliesR**, defined as

$$\frac{\Gamma, P \vdash Q, \Delta}{\Gamma \vdash P \rightarrow Q, \Delta},$$

allows an implication in the dL-consequent, $P \rightarrow Q$ to be simplified to P in the dL-antecedent and Q in the dL-consequent. Here, $\Gamma \vdash P \rightarrow Q, \Delta$ is the dL-sequent that **impliesR** can be applied to and $\Gamma, P \vdash Q, \Delta$ is the simplified dL-sequent. Note that the standard logical notation being used for **impliesR** above is for ease of presentation, whereas the PVS specification of such a rule, generally hidden from a user by a strategy, is closer to that described in Section 3.1. Additionally, there are quantification rules for

⁴<https://github.com/nasa/pvslib/tree/master/dL/cheatsheet.pdf>

existsR	$\frac{\Gamma \vdash p(e), \Delta}{\Gamma \vdash \exists x : p(x), \Delta}$ (any e)
forallL	$\frac{\Gamma, p(e) \vdash \Delta}{\Gamma, \forall x : p(x) \vdash \Delta}$ (any e)
forallR	$\frac{\Gamma \vdash p(y), \Delta}{\Gamma \vdash \forall x : p(x), \Delta}$ (y Skolem symbol)
existsL	$\frac{\Gamma, p(y) \vdash \Delta}{\Gamma, \exists x : p(x) \vdash \Delta}$ (y Skolem symbol)

Figure 3: Quantification dL rules

moveR	$\frac{\Gamma \vdash Q, P, \Delta}{\Gamma \vdash P, Q, \Delta}$	hideR	$\frac{\Gamma \vdash \Delta}{\Gamma \vdash P, \Delta}$
moveL	$\frac{\Gamma, Q, P \vdash \Delta}{\Gamma, P, Q \vdash \Delta}$	hideL	$\frac{\Gamma \vdash \Delta}{\Gamma, P \vdash \Delta}$

Figure 4: Structural dL rules

Skolemization and instantiation in the dL-sequent (see Figure 3) and there are structural rules that allow expressions to be moved or deleted (Figure 4).

In addition to the propositional, quantification, and structural rules, *Plaidypvs* provides a collection of powerful proof commands that combine the more basic dL strategies. A list these additional proof commands is given in Figure 5.

Example 3.1 (dL-sequent example) *The dL-sequent*

$$\vdash (x = c \wedge y = 0) \rightarrow [\alpha]path(c).$$

*expresses the validity of the expression in Formula 2 from Example 2.3. Invoking the rule **dl-flatten** to the sequent above applies **impliesR** and **andL**, which separates conjunctions in the antecedent, resulting in the following dL-sequent:*

$$x = c, y = 0 \vdash [\alpha]path(c). \quad (3)$$

3.3 Hybrid program rewriting rules

While the rules in Section 3.2 manipulate the logical structure of a dL-sequent, further rules act on the hybrid program components of such a sequent. Properties given in Figure 6 allow direct rewriting of hybrid programs. Other rules about hybrid programs in a sequent are given in Figure 7. Most of these rules manipulate the allruns $[\cdot]$ or someruns $\langle \cdot \rangle$ operators and the proofs were largely concerned with reasoning about the semantic relation function **s_rel** defined in Section 2. In addition to each of these rules becoming strategies, the command **dl-assert** uses all the hybrid program rewriting rules in Table 6 to simplify an expression.

There are a few intricacies worth mentioning in the formal verification and implementation of these rules in PVS. In the rewriting rules **assignb** and **assignd**, an allruns or someruns of an assignment HP is

- dl-flatten** Disjunctively simplifies the dL sequent by applying **trueR**, **falseL**, **orR**, **impliesR**, **notR**, **axiom**, **falseL**.
- dl-ground** Disjunctively and conjunctively simplifies the dL sequent by applying **dl-flatten** and additional splitting lemmas **andR**, **orL**, and **impliesL**.
- dl-inst** Instantiates a universal quantifier in the dL-antecedent by applying **forallL** or an existential quantifier in the dL-consequent by applying **existsL**.
- dl-skolem** Skolemizes an existential quantifier in dL-antecedent by applying **existsR** or a universal quantifier in the dL-consequent by applying **forallR**.
- dl-grind** Repeatedly uses **dl-ground** and **skolem** and several rewriting rules related to real expressions. This strategy has the option to use the MetiTarski automatic theorem prover as an outside oracle to discharge the proof if possible.
- dl-assert** Repeatedly applies hybrid program rewriting rules in Figure 6.

Figure 5: dL proof commands

equated to a substitution. Substitution is defined at the environment level as follows.

$$\mathbf{assign_sub}(x := \ell)(e)(i) \triangleq \begin{cases} \ell(i)(e) & \text{if } i \in \mathbf{x} \\ e(i) & \text{if } i \notin \mathbf{x}. \end{cases} \quad (4)$$

Substitution of a general Boolean expression is therefore defined as follows.

$$\mathbf{SUB}(x := \ell)(P) \triangleq \lambda(e : \mathcal{E}).P(\mathbf{assign_sub}(x := \ell)(e)).$$

While the definition of substitution above applies to any Boolean expression P and can be reasoned about by a user of Plaidypvs, the standard level of manipulation in dL is not often at the environment level. To increase the level of automation, several rewriting rules for reducing expressions containing **SUB** have been implemented. This led to formally verifying substitution properties for real expressions, inequalities of real expressions, and hybrid programs, so that a substitution at the top level of an expression could be pushed down to the level of **val** and **cnst**, where atomic substitutions are applied. The implementation of these rules required a calculus for reducing the substitution down to atomic expressions, written in the strategy language of PVS. This allows the **assignb** and **assignd** strategies to automatically compute a substitution for any propositional expression composed of equalities and inequalities of polynomial real expressions. For example, the substitution

$$\mathbf{SUB}(x := y, y := 10)(x^2 + y^2 = 11),$$

is transformed automatically into $y^2 + 10^2 = 11$ as follows.

$$\begin{aligned} \mathbf{SUB}(x := y, y := 10)(x^2 + y^2 = 11) &= (\mathbf{SUB_re}(x := y, y := 10)(x^2 + y^2) = \mathbf{SUB_re}(x := y, y := 10)(11)) \\ &= (\mathbf{SUB_re}(x := y, y := 10)(x^2) + \mathbf{SUB_re}(x := y, y := 10)(y^2) = 11) \\ &= (\mathbf{SUB_re}(x := y, y := 10)(x)^2 + \mathbf{SUB_re}(x := y, y := 10)(y)^2 = 11) \\ &= y^2 + 10^2 = 11, \end{aligned}$$

where **SUB_re** is substitution defined on real expressions $r \in \mathcal{R}$ as

$$\mathbf{SUB_re}(x := \ell)(r) \triangleq \lambda(e : \mathcal{E}).r(\mathbf{assign_sub}(x := \ell)(e)).$$

boxd	$\langle \alpha \rangle P \leftrightarrow \neg [\alpha] \neg P$
assignb	$[x := \ell] P = \mathbf{SUB}(x := \ell)(P)$
assignd	$\langle x := \ell \rangle P = \mathbf{SUB}(x := \ell)(P)$
testb	$[?Q] P = Q \rightarrow P$
testd	$\langle ?Q \rangle P = Q \wedge P$
choiceb	$[\alpha_1 \cup \alpha_2] P \leftrightarrow [\alpha_1] P \wedge [\alpha_2] P$
choiced	$\langle \alpha_1 \cup \alpha_2 \rangle P \leftrightarrow \langle \alpha_1 \rangle P \vee \langle \alpha_2 \rangle P$
composeb	$[\alpha_1; \alpha_2] P \leftrightarrow [\alpha_1][\alpha_2] P$
composed	$\langle \alpha_1; \alpha_2 \rangle P \leftrightarrow \langle \alpha_1 \rangle \langle \alpha_2 \rangle P$
iterateb	$[\alpha^*] P = P \wedge [\alpha][\alpha^*] P$
iterated	$\langle \alpha^* \rangle P = P \vee \langle \alpha \rangle \langle \alpha^* \rangle P$
anyb	$[x := *] P(x) = \forall x : P(x)$
anyd	$\langle x := * \rangle P(x) = \exists x : P(x)$

Figure 6: Hybrid program rewriting rules.

The automated substitution of more general Boolean expressions (for example, a statement of the form $[\alpha] P$) is still incomplete in Plaidypvs, and an area of future work.

Another challenge in formal verification occurs in some hybrid program rules. The **ghost**, **VRb**, and **VRd** rules require the concept of *freshness*. A fresh variable y is defined as

$$\mathbf{fresh?}(P)(y) \triangleq \forall e \in \mathcal{E}, r \in \mathbb{R}, P(e) = P(e \text{ with } y \mapsto r).$$

In other words, the value of the Boolean expression P does not depend on the value of the variable y . Analogous definitions exist to express that a variable is fresh relative to a real expression or a hybrid program. Furthermore, an entire hybrid program can be checked for freshness relative to a Boolean expression as follows.

$$\mathbf{fresh?}(P)(\alpha) \triangleq \begin{cases} \forall k \in \mathbf{x} \mathbf{fresh?}(P)(k) & \text{if } \alpha = (\mathbf{x} := \ell), \\ \forall k \in \mathbf{x}' \mathbf{fresh?}(P)(k) & \text{if } \alpha = (\mathbf{x}' = \ell \ \& \ Q), \\ \mathbf{True} & \text{if } \alpha = ?Q, \\ \mathbf{fresh?}(P)(x) & \text{if } \alpha = (x := * \ \& \ Q), \\ \mathbf{fresh?}(P)(\alpha_1) \wedge \mathbf{fresh?}(P)(\alpha_2) & \text{if } \alpha = \alpha_1; \alpha_2, \\ \mathbf{fresh?}(P)(\alpha_1) \wedge \mathbf{fresh?}(P)(\alpha_2) & \text{if } \alpha = \alpha_1 \cup \alpha_2, \\ \mathbf{fresh?}(P)(\alpha) & \text{if } \alpha = \alpha_1^*. \end{cases} \quad (5)$$

Note that the recursive definition of freshness above ensures the value of P does not change for any run of the hybrid program α by checking if all the variables potentially changing in α are fresh relative to P .

The need for a fresh variable, as in the rule **ghost**, requires a mechanism for producing fresh variables relative to a dL-sequent. Since variables are represented by indices, a fresh variable can be generated by computing the smallest natural number in a dL-sequent not being used as a variable index. Plaidypvs also provides strategies for automatically proving freshness of variables in dL-sequents.

<p>Mb $\frac{\vdash P \rightarrow Q}{\Gamma \vdash [\alpha] P \rightarrow [\alpha] Q, \Delta}$</p> <p>Md $\frac{\vdash P \rightarrow Q}{\Gamma \vdash \langle \alpha \rangle P \rightarrow \langle \alpha \rangle Q, \Delta}$</p> <p>K $\frac{\Gamma \vdash [\alpha] (P \rightarrow Q), \Delta}{\Gamma \vdash [\alpha] P \rightarrow [\alpha] Q, \Delta}$</p> <p>loop $\frac{\Gamma \vdash J, \Delta \quad J \vdash [\alpha] J \quad J \vdash P}{\Gamma \vdash J, \Delta \quad J \vdash [\alpha] J \quad J \vdash P}$</p> <p>mbR $\frac{\Gamma \vdash [\alpha^*] P, \Delta}{\Gamma \vdash [\alpha] Q, \Delta \quad Q \vdash P}$</p> <p>mbL $\frac{\Gamma, [\alpha] P \vdash \Delta}{\Gamma, [\alpha] Q \vdash \Delta \quad P \vdash Q}$</p> <p>ghost $\frac{\Gamma \vdash [y := e] P, \Delta}{\Gamma \vdash P, \Delta} \text{fresh?}(P)(y)$</p>	<p>Gb $\frac{\vdash P}{\Gamma \vdash [\alpha] P, \Delta}$</p> <p>Gd $\frac{\vdash \langle \alpha \rangle \top \vdash P}{\Gamma \vdash \langle \alpha \rangle P, \Delta}$</p> <p>VRb $\frac{\Gamma \vdash P, \Delta \quad \text{fresh?}(P)(\alpha)}{\Gamma \vdash [\alpha] P, \Delta}$</p> <p>VRd $\frac{\Gamma \vdash \langle \alpha \rangle P, \Delta \quad \text{fresh?}(P)(\alpha)}{\Gamma \vdash \langle \alpha \rangle Q, \Delta \quad Q \vdash P}$</p> <p>mdR $\frac{\Gamma \vdash \langle \alpha \rangle P, \Delta}{\Gamma, \langle \alpha \rangle Q \vdash \Delta \quad Q \vdash P}$</p> <p>mdL $\frac{\Gamma, \langle \alpha \rangle Q \vdash \Delta \quad P \vdash Q}{\Gamma, \langle \alpha \rangle P \vdash \Delta}$</p>
---	--

Figure 7: Hybrid program rules.

Example 3.2 (dL-sequent example continued) Expanding α in the sequent given by Formula 3, from Example 3.1, and using **loop** with $J = (\mathbf{path}(c) \wedge y \geq 0)$ produces three subgoals,⁵ one of which is

$$\mathbf{path}(c), y \geq 0 \vdash [(\? (x > 0); (x' = -y, y' = x, \&x \geq 0)) \cup (\? (x \leq 0); (x' = -c, y' = 0))] \mathbf{path}(c) \wedge y \geq 0.$$

Using **dl-assert** to simplify with hybrid program rewriting rules and applying propositional simplifications with the command **dl-ground** result in the following two dL-sequents

$$\begin{aligned} (x > 0, \mathbf{circ}(c), y \geq 0) \vdash [x' = -y, y' = x, \&x \geq 0] \mathbf{path}(c) \wedge y \geq 0, \\ (x \leq 0, y = c) \vdash [x' = -c, y' = 0] \mathbf{path}(c) \wedge y \geq 0. \end{aligned} \tag{6}$$

3.4 Rules for differential equations

The rules for differential equations are given in Figure 8. The differential equation rules required significant mathematical underpinnings to be added to PVS for their formal verification. For the implementation of the **dl** rule, a calculus to automatically compute the derivative of a Boolean expression P was necessary. To do this, an embedding of non-quantified Boolean expressions was developed as a data type with the following grammar.

$$b ::= b_1 \wedge_{nqB} b_2 \mid b_1 \vee_{nqB} b_2 \mid \neg_{nqB} b_1 \mid \mathit{rel}_{nqB}(r_1, r_2),$$

where rel_{nqB} is of type **NQB_rel**, which is itself an embedding of the following inequality operators.

$$\mathit{rel}_{nqB} ::= \leq_{nqB} \mid \geq_{nqB} \mid <_{nqB} \mid >_{nqB} \mid =_{nqB} \mid \neq_{nqB}.$$

⁵The other two dL-sequents generated can be proven easily. For full details of the examples in this paper, see the PVS implementation at <https://github.com/nasa/pvslib/tree/master/dL/examples>

dinit	$\frac{\Gamma, Q \vdash [x' = f(x) \& Q] P, \Delta}{\Gamma \vdash [x' = f(x) \& Q] P, \Delta}$
dW	$\frac{Q \vdash P}{\Gamma \vdash [x' = f(x) \& Q] P, \Delta}$
dI	$\frac{\Gamma, Q \vdash P, \Delta \quad Q \vdash [x' := f(x)] (P)'}{\Gamma \vdash [x' = f(x) \& Q] P, \Delta}$
dC	$\frac{\Gamma \vdash [x' = f(x) \& Q] C, \Delta \quad \Gamma \vdash [x' = f(x) \& (Q \wedge C)] P, \Delta}{\Gamma \vdash [x' = f(x) \& Q] P, \Delta}$
dG	$\frac{\Gamma \vdash G, G \vdash P, \Gamma \vdash \exists y [x' = f(x), y' = a(x) \cdot y + b(x) \& Q] G, \Delta}{\Gamma \vdash [x' = f(x) \& Q] P, \Delta} \text{ fresh?}(y)$
dS	$\frac{\Gamma \vdash \forall t \geq 0 (\forall 0 \leq s \leq t Q(y(s))) \rightarrow [x := y(t)] P}{\Gamma \vdash [x' = f(x) \& Q] P}$

Figure 8: Differential Equation Rules. For **dG**, a and b are continuous on Q , and y is fresh relative to $x' = f(x)$, Q , a , b , P , Γ and Δ .

With this structure, the derivative b' of a Boolean expression b is defined as

$$b' \triangleq \begin{cases} b'_1 \wedge b'_2 & \text{if } b = b_1 \wedge_{nqB} b_2 \text{ or } b = b_1 \vee_{nqB} b_2 \\ r'_1 \leq r'_2 & \text{if } b = r_1 \leq_{nqB} r_2 \text{ or } b = r_1 <_{nqB} r_2 \\ r'_1 \geq r'_2 & \text{if } b = r_1 \geq_{nqB} r_2 \text{ or } b = r_1 >_{nqB} r_2 \\ r'_1 = r'_2 & \text{if } b = (r_1 =_{nqB} r_2) \text{ or } b = (r_1 \neq_{nqB} r_2). \end{cases}$$

In PVS, $[x' := f(x)] (P)'$ is computed by replacing P with its equivalent non-quantified Boolean, and the derivative of any real expression r occurring in P is the real expression given by:

$$r' = \sum_{i \in \mathbf{x}} \partial r_i \cdot \ell(i).$$

This is the derivative of the real expression r in terms of the explicit variable that all the variables in \mathbf{x} are a function of. To arrive at this formulation, differentiability and partial differentiability had to be defined for real expressions as well as the multivariate chain rule.

For the Differential Ghost rule **dG**, adding an equation to the differential equation $x' = \ell$ required that the new differential equation $x' = \ell, y' = a(x) \cdot y + b(x)$ had a unique solution. The Picard-Lindelöf theorem can be used to show that if a and b are continuous on Q , then there is a unique solution to $y' = a(x) \cdot y + b(x)$. Given a solution to $x' = \ell$ that is contained in Q , it follows that $x' = \ell, y' = a(x) \cdot y + b(x)$ has a unique solution. These properties of differential equations, including the Picard-Lindelöf theorem, were developed in PVS specifically to prove these rules.

Example 3.3 (dL-sequent example continued) Applying **dC** with $C = \mathit{circ}(c)$ to the first branch of the proof in Example 3.2, eq. 6 produces two subgoals, the first of which (with expanded **circ**) is

$$(x > 0, x^2 + y^2 = c^2, y \geq 0) \vdash [x' = -y, y' = x \& x \geq 0)] (x^2 + y^2 = c^2).$$

```

60  %%-----
61  %% Rotational dynamics with line ending
62  %%-----
    prove | discharge-tccs | status-proofchain | show-prooflite
63  ∨ rotational_dynamics_line: LEMMA
64    FORALL(c:real):
65  ∨ LET
66    b1 = SEQ(TEST(val(x) > 0), turn(val(x)>=0)),
67    b2 = SEQ(TEST(val(x) <= 0), straight(-c,0)),
68    dyn = UNION(b1,b2)
69  ∨ IN
70    (cnst(c) >= cnst(0) AND val(x) = cnst(c) AND val(y) = 0)
71    IMPLIES
72    ALLRUNS(STAR(dyn),path?(c))

```

Figure 9: The specification of Example 2.3 in Plaidypvs.

Using **dl** reduces to two cases:

$$\begin{aligned}
 & x \geq 0 \vdash (2 \cdot x \cdot -y + 2 \cdot y \cdot x = 0) \\
 & (x \geq 0, x^2 + y^2 = c^2, y \geq 0) \vdash x^2 + y^2 = c^2,
 \end{aligned} \tag{7}$$

both of which can be proven with basic algebraic and logical simplifications included in command **dl-grind**.

4 Using Plaidypvs

Plaidypvs provides the functionality of dL within the PVS environment. Numerous examples can be found in the directory `examples` of the Plaidypvs library. Figures 9 and 10 illustrate using dL for specification and verification of hybrid systems in Plaidypvs. However, Plaidypvs is not limited to just these applications, the embedding allows additional features to be used for formal reasoning of hybrid programs. For example, the definition of other functions from PVS libraries can be imported into a formal development that uses Plaidypvs. Furthermore, meta-properties about hybrid programs can be specified and proven. The example below illustrates these features.

Example 4.1 (Verified connection to Dubins paths) *An aircraft moving at a constant speed $c > 0$ with a turn rate of 1 can be modeled by a Dubins path:*

$$\theta' = 1, x' = -c \sin(\theta), y' = c \cos(\theta).$$

Furthermore, it can be shown that the hybrid program β defined as

$$\begin{aligned}
 & ((? (x \geq 0); (\theta' = 1, x' = -c \sin(\theta), y' = c \cos(\theta) \& x \geq 0)) \cup \\
 & (? (x < 0); (x' = -c, y' = 0)))^*,
 \end{aligned}$$

```

rotational_dynamics_line.3.1.1.2.1.1 :
┌───
{1}  ((: val(x) > cnst(0), val(x) > cnst(0),
      (val(x) ^ 2 + val(y) ^ 2 = cnst(C) ^ 2), cnst(C) >= cnst(0),
      val(y) >= cnst(0) :)|
      |−
      (: ALLRUNS(DIFF((: (x, -val(y)), (y, val(x)) :)),
                  DLAND(val(x) >= cnst(0), cnst(C) >= cnst(0))),
        (val(x) ^ 2 + val(y) ^ 2 = cnst(C) ^ 2)) :))

>> (dl-diffinv)

Applying lemma dl_dI to DDL formula +,
this yields 2 subgoals:
rotational_dynamics_line.3.1.1.2.1.1.2 :
┌───
{1}  ((: val(x) >= cnst(0), cnst(C) >= cnst(0) :)|−
      (: 2 * val(x) ^ 1 * -val(y) + 2 * val(y) ^ 1 * val(x) =
        2 * cnst(C) ^ 1 * cnst(0) :))

>> (dl-grind)

This completes the proof of rotational_dynamics_line.3.1.1.2.1.1.2.
This completes the proof of rotational_dynamics_line.3.1.1.2.1.1.

```

Figure 10: The proof steps that complete the proof discussed in Example 3.3.

is equivalent to the hybrid program α defined in Example 2.2, for appropriate initial values. Formally, this is a property relating the s_rel function associated with each of these programs, namely for environments e_i, e_o such that $e_i(x) = c$ and $e_i(y) = 0$

$$(\exists t : s_rel(\beta)(e_i \text{ with } [\theta := 0])(e_o \text{ with } [\theta := t])) \iff s_rel(\alpha)(e_i)(e_o \text{ with } [\theta := e_i(\theta)]).$$

Note the property above involves generic hybrid programs rather than particular instances. Thus, for a Boolean expression Q that does not change according to θ :

$$(x = c, y = 0 \rightarrow [\alpha] Q) \iff (x = c, y = 0, \theta = 0 \rightarrow [\beta] Q).$$

5 Related work

There is a long line of research on the formal verification of hybrid systems. The development of dL itself ([42, 44, 50, 52]) and its use in formal verification of hybrid systems ([5, 6, 16, 18, 20, 23, 24, 29]) is well-known. Additionally, there has been significant work done in the PVS theorem prover [1, 54], Event-B [12], and Isabelle/HOL [14, 30, 31, 32, 53, 56, 58, 59] verifying hybrid systems outside of the dL framework.

The most similar verification effort to the current development is [4], where the authors formally verified the soundness of dL in Coq and Isabelle. The work in [4] focuses on a full formal verification of

soundness of dL, with the goal of a formally verified prover kernel for KeYmaera X. The result are proof checkers in Coq and Isabelle for dL proofs. The goal of Plaidypvs is a verified operational embedding of dL in the theorem prover PVS, allowing specification and reasoning about HPs *interactively* within PVS.

While the work in [4] proves soundness of most of the proof calculus of dL, the present work focuses on verifying the proof *rules* of dL. Particularly, the substitution axiom in dL that allows rules and axioms to be applied to specifications of HPs in dL is proven in [4] but not directly proven for the PVS embedding. Instead, substitution is handled by the instantiation functionalities of PVS itself, specifically when dL rules and axioms are applied as strategies to a particular dL-sequent in the interactive prover. Additionally, there are several places where the embedding of dL in this work is more general than the work in [4]. Differential Ghost and Differential Effect in [4] are shown for a single ordinary differential equation rather than the more general *system* of ordinary differential equations. Differential Solve is only shown for differential equations with linear solutions, whereas the corresponding rule in Plaidypvs automatically solves differential equations with linear and quadratic solutions and is proven for any ODE where the solution is known. Differential Invariant in [4] is restricted to propositions of the form $P = (f(x) \geq g(x))$ and $P = (f(x) > g(x))$ and it is remarked that other cases can be derived in dL from these two cases, but in Plaidypvs Differential Invariant is fully implemented for any proposition that is the conjunction or disjunction of inequalities.

The current work formalizes a version of dL based on Parts I and II in [52], though there are many extensions as well. For adversarial cyber-physical systems there is differential game logic in [49, 51], and Part 5 of [52]. There are also extensions for distributed hybrid systems (quantified differential dynamic logic, [47]), stochastic hybrid systems (stochastic differential dynamic logic, [48]), differential algebraic programs (differential-algebraic dynamic logic, [45]), and a temporal extension of dL called differential temporal dynamic logic [43], [46, Chapter 4].

In addition to verification of hybrid systems, the present work falls more generally into the category of formal verification or simulation of logical systems inside theorem provers. PVS0 is an embedding of a fragment of the specification language of PVS *within* PVS, used in termination analysis of recursive functions [33]. Other efforts to model or verify theorem provers include work on the prover kernel of Hol Light [17], the type-checker of Coq [55], the soundness of ACL2 [10]. The goal of Plaidypvs is to add to hybrid systems reasoning to the toolbox of PVS increasing its proving capabilities. PVS has been used in verification projects in domains such as aircraft avoidance systems [36], path planning algorithms [7], unmanned aircraft systems [34], position reporting algorithms of aircraft [13], sensor uncertainty mitigation [40], floating point error analysis [27, 57], genetic algorithms [41], nonlinear control systems [3], and requirements written in linear temporal logic and FRETish [8]. In addition to advanced real number reasoning capabilities [9, 35, 38, 28, 37, 39] provided by PVS, previous work has connected PVS to the automated theorem prover MetiTarski [2], for automated reasoning of universally quantified statements about real numbers, including several transcendental functions [11]. The capability to use MetiTarski in PVS is leveraged in the `dl-assert` command in Plaidypvs.

6 Conclusion and future work

This work describes Plaidypvs, a logical embedding of dL in PVS. This embedding extends the formal verification abilities of PVS by giving a framework for specifying and reasoning about HPs and allowing features of PVS to be used naturally within the dL embedding. Novel features include support for importing user-defined functions and theories such as the extensive math and computer science developments available in NASAlib. Additionally, this embedding allows for meta reasoning about HPs and dL at the

PVS level. An example was given that illustrates capabilities of Plaidypvs that go beyond what could be accomplished in a stand-alone implementation of dL alone such as KeYmaera X.

Regarding future work, one natural next step is to apply Plaidypvs to safety-critical applications of interest to NASA. This will include formal verification of hybrid systems related to urban air mobility and wildland fire fighting among others. Another direction is to increase the usability of Plaidypvs. To do so, a Visual Studio Code extension is under development to display specifications and the proof calculus in a natural and user-friendly way. To increase the automation of dL within Plaidypvs, a more complete substitution calculus to include Boolean expressions containing statements about hybrid programs will be implemented. Additionally, formal verification of liveness properties is intended, with implementations of strategies to match. Furthermore, a more robust ordinary differential equation solver to enhance the capabilities of the *differential solve* command would increase the usability of Plaidypvs greatly. Finally, a detailed description of the multivariate analysis and ordinary differential equation library developed to support this embedding will be written similar to the semi-algebraic set library ([54]), which was done to support verification of liveness properties in upcoming work.

The semantic structure of dL in Plaidypvs is based on the input/output semantics. Future work on defining the trace semantics of hybrid programs will extend the analysis capabilities of the embedding, such as being able to define properties in linear temporal logic like the work in [19]. It has been noted that quantifier elimination, is often the bottleneck for formal verification of hybrid programs, due to the computational complexity of the general problem. Implementation of techniques to make this process faster would help the usability of Plaidypvs. There are many directions to go for this effort, but one direction will be implementation of the active corners method for a specific class of quantifier elimination [21] geared towards formalized reasoning of aircraft operations.

References

- [1] Erika Ábrahám-Mumm, Ulrich Hannemann & Martin Steffen (2001): *Verification of hybrid systems: Formalization and proof rules in PVS*. In: *Proceedings Seventh IEEE International Conference on Engineering of Complex Computer Systems*, IEEE, pp. 48–57, doi:10.1109/ICECCS.2001.930163.
- [2] Behzad Akbarpour & Lawrence Charles Paulson (2010): *MetiTarski: An automatic theorem prover for real-valued special functions*. *Journal of Automated Reasoning* 44(3), pp. 175–205, doi:10.1007/s10817-009-9149-2.
- [3] Cinzia Bernardeschi & Andrea Domenici (2016): *Verifying safety properties of a nonlinear control by interactive theorem proving with the Prototype Verification System*. *Information Processing Letters* 116(6), pp. 409–415, doi:10.1016/j.ipl.2016.02.001.
- [4] Brandon Bohrer, Vincent Rahli, Ivana Vukotic, Marcus Völp & André Platzer (2017): *Formally verified differential dynamic logic*. In: *Proceedings of the 6th ACM SIGPLAN Conference on Certified Programs and Proofs*, pp. 208–221, doi:10.1145/3018610.3018616.
- [5] Brandon Bohrer, Yong Kiam Tan, Stefan Mitsch, Andrew Sogokon & André Platzer (2019): *A Formal Safety Net for Waypoint Following in Ground Robots*. *IEEE Robotics and Automation Letters* 4(3), pp. 2910–2917, doi:10.1109/LRA.2019.2923099.
- [6] Rachel Cleaveland, Stefan Mitsch & André Platzer (2023): *Formally Verified Next-Generation Airborne Collision Avoidance Games in ACAS X*. *ACM Trans. Embed. Comput. Syst.* 22(1), pp. 1–30, doi:10.1145/3544970.
- [7] Brendon K Colbert, J Tanner Slagel, Luis G Crespo, Swee Balachandran & César A. Muñoz (2020): *PolySafe: A Formally Verified Algorithm for Conflict Detection on a Polynomial Airspace*. *IFAC-PapersOnLine* 53(2), pp. 15615–15620, doi:10.1016/j.ifacol.2020.12.2496.

- [8] Esther Conrad, Laura Titolo, Dimitra Giannakopoulou, Thomas Pressburger & Aaron Dutle (2022): *A compositional proof framework for FRETish requirements*. In: *Proceedings of the 11th ACM SIGPLAN International Conference on Certified Programs and Proofs*, pp. 68–81, doi:10.1145/3497775.3503685.
- [9] Marc Daumas, David Lester & César A. Muñoz (2008): *Verified real number calculations: A library for interval arithmetic*. *IEEE Transactions on Computers* 58(2), pp. 226–237, doi:10.1109/tc.2008.213.
- [10] Jared Davis & Magnus O Myreen (2015): *The reflective Milawa theorem prover is sound (down to the machine code that runs it)*. *Journal of Automated Reasoning* 55(2), pp. 117–183, doi:10.1007/s10817-015-9324-6.
- [11] William Denman & César A. Muñoz (2014): *Automated real proving in PVS via MetiTarski*. In: *International Symposium on Formal Methods*, Springer, pp. 194–199, doi:10.1007/978-3-319-06410-9_14.
- [12] Guillaume Dupont (2021): *Correct-by-construction design of hybrid systems based on refinement and proof*. Ph.D. thesis, Université de Toulouse. Available at https://oatao.univ-toulouse.fr/28190/1/Dupont_Guillaume.pdf.
- [13] Aaron Dutle, Mariano Moscato, Laura Titolo, César A. Muñoz, Gregory Anderson & Bobot François (2021): *Formal analysis of the compact position reporting algorithm*. *Formal Aspects of Computing* 33(1), pp. 65–86, doi:10.1007/s00165-019-00504-0.
- [14] Simon Foster, Jonathan Julián Huerta y Munive, Mario Gleirscher & Georg Struth (2021): *Hybrid systems verification with Isabelle/HOL: Simpler syntax, better models, faster proofs*. In: *Formal Methods: 24th International Symposium, FM 2021, Virtual Event, November 20–26, 2021, Proceedings 24*, Springer, pp. 367–386, doi:10.1007/978-3-030-90870-6_20.
- [15] Nathan Fulton, Stefan Mitsch, Jan-David Quesel, Marcus Völp & André Platzer (2015): *KeYmaera X: An axiomatic tactical theorem prover for hybrid systems*. In: *International Conference on Automated Deduction*, Springer, pp. 527–538, doi:10.1007/978-3-319-21401-6_36.
- [16] Nathan Fulton & André Platzer (2018): *Safe Reinforcement Learning via Formal Methods: Toward Safe Control Through Proof and Learning*. In Sheila McIlraith & Kilian Weinberger, editors: *Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence, February 2-7, 2018, New Orleans, Louisiana, USA.*, AAAI Press, pp. 6485–6492, doi:10.1609/aaai.v32i1.12107.
- [17] John Harrison (2006): *Towards self-verification of HOL Light*. In: *International Joint Conference on Automated Reasoning*, Springer, pp. 177–191, doi:10.1007/11814771_17.
- [18] Jean-Baptiste Jeannin, Khalil Ghorbal, Yanni Kouskoulas, Aurora Schmidt, Ryan Gardner, Stefan Mitsch & André Platzer (2017): *A Formally Verified Hybrid System for Safe Advisories in the Next-generation Airborne Collision Avoidance System*. *STTT* 19(6), pp. 717–741, doi:10.1007/s10009-016-0434-1.
- [19] Jean-Baptiste Jeannin & André Platzer (2014): *dTL 2: differential temporal dynamic logic with nested temporalities for hybrid systems*. In: *International Joint Conference on Automated Reasoning*, Springer, pp. 292–306, doi:10.1007/978-3-319-08587-6_22.
- [20] Aditi Kabra, Stefan Mitsch & André Platzer (2022): *Verified Train Controllers for the Federal Railroad Administration Train Kinematics Model: Balancing Competing Brake and Track Forces*. *IEEE Trans. Comput. Aided Des. Integr. Circuits Syst.* 41(11), pp. 4409–4420, doi:10.1109/TCAD.2022.3197690.
- [21] Nishant Khetarpal, Elanor Tang & Jean-Baptiste Jeannin (2022): *Automating Geometric Proofs of Collision Avoidance with Active Corners*. In: *Conference On Formal Methods In Computer-Aided Design—FMCAD 2022*, p. 359, doi:10.34727/2022/isbn.978-3-85448-053-2_43.
- [22] Stefan Mitsch (2021): *Implicit and explicit proof management in keymaera x*. arXiv preprint arXiv:2108.02965, doi:10.48550/arXiv.2108.02965.
- [23] Stefan Mitsch, Marco Gario, Christof J. Budnik, Michael Golm & André Platzer (2017): *Formal Verification of Train Control with Air Pressure Brakes*. In: *RSSRail 2017: Reliability, Safety, and Security of Railway Systems*, LNCS 10598, Springer, pp. 173–191, doi:10.1007/978-3-319-68499-4_12.

- [24] Stefan Mitsch, Khalil Ghorbal, David Vogelbacher & André Platzer (2017): *Formal Verification of Obstacle Avoidance and Navigation of Ground Robots*. *I. J. Robotics Res.* 36(12), pp. 1312–1340, doi:10.1177/0278364917733549.
- [25] Stefan Mitsch & André Platzer (2017): *The keymaera X proof IDE-concepts on usability in hybrid systems theorem proving*. *arXiv preprint arXiv:1701.08469*, doi:10.48550/arXiv.1701.08469.
- [26] Stefan Mitsch & André Platzer (2020): *A Retrospective on Developing Hybrid System Provers in the KeYmaera Family: A Tale of Three Provers*. In: *Deductive Software Verification: Future Perspectives: Reflections on the Occasion of 20 Years of KeY*, Springer, pp. 21–64, doi:10.1007/978-3-030-64354-6_2.
- [27] Mariano Moscato, Laura Titolo, Aaron Dutle & César A. Muñoz (2017): *Automatic estimation of verified floating-point round-off errors via static analysis*. In: *International Conference on Computer Safety, Reliability, and Security*, Springer, pp. 213–229, doi:10.1007/978-3-319-66266-4_14.
- [28] Mariano M Moscato, César A. Muñoz & Andrew P Smith (2015): *Affine arithmetic and applications to real-number proving*. In: *International Conference on Interactive Theorem Proving*, Springer, pp. 294–309, doi:10.1007/978-3-319-22102-1_20.
- [29] Andreas Müller, Stefan Mitsch, Werner Retschitzegger, Wieland Schwinger & André Platzer (2017): *Change and Delay Contracts for Hybrid System Component Verification*. In: *Fundamental Approaches to Software Engineering - 20th International Conference, FASE 2017, Proceedings, Lecture Notes in Computer Science 10202*, Springer, pp. 134–151, doi:10.1007/978-3-662-54494-5_8.
- [30] Jonathan Julian Huerta y Munive (2020): *Algebraic verification of hybrid systems in Isabelle/HOL*. Ph.D. thesis, University of Sheffield. Available at <https://etheses.whiterose.ac.uk/28886/>.
- [31] Jonathan Julián Huerta y Munive & Georg Struth (2018): *Verifying hybrid systems with modal Kleene algebra*. In: *International Conference on Relational and Algebraic Methods in Computer Science*, Springer, pp. 225–243, doi:10.1007/978-3-030-02149-8_14.
- [32] Jonathan Julián Huerta y Munive & Georg Struth (2022): *Predicate Transformer Semantics for Hybrid Systems*. *Journal of Automated Reasoning* 66(1), pp. 93–139, doi:10.1007/s10817-021-09607-x.
- [33] César A. Muñoz, Mauricio Ayala-Rincón, Mariano Moscato, Aaron Dutle, Anthony Narkawicz, Ariane Alves, Andréia Avelar & Thiago Ferreira (2021): *Formal Verification of Termination Criteria for First-Order Recursive Functions*. In Liron Cohen & Cezary Kalisyk, editors: *Proceedings of the 12th International Conference on Interactive Theorem Proving (ITP 2021)*, 26, Dagstuhl Publishing, Germany, pp. 26:1–26:17, doi:10.4230/LIPIcs.ITP.2021.27.
- [34] César A. Muñoz, Aaron Dutle, Anthony Narkawicz & Jason Upchurch (2016): *Unmanned aircraft systems in the national airspace system: a formal methods perspective*. *ACM SIGLOG News* 3(3), pp. 67–76, doi:10.1145/2984450.2984459.
- [35] César A. Muñoz & Anthony Narkawicz (2013): *Formalization of Bernstein polynomials and applications to global optimization*. *Journal of Automated Reasoning* 51(2), pp. 151–196, doi:10.1007/s10817-012-9256-3.
- [36] César A. Muñoz, Anthony Narkawicz, George Hagen, Jason Upchurch, Aaron Dutle, María Consiglio & James Chamberlain (2015): *DAIDALUS: detect and avoid alerting logic for unmanned systems*. In: *2015 IEEE/AIAA 34th Digital Avionics Systems Conference (DASC)*, IEEE, pp. 5A1–1, doi:10.1109/DASC.2015.7311421.
- [37] Anthony Narkawicz & César A. Muñoz (2013): *A formally verified generic branching algorithm for global optimization*. In: *Working Conference on Verified Software: Theories, Tools, and Experiments*, Springer, pp. 326–343, doi:10.1007/978-3-642-54108-7_17.
- [38] Anthony Narkawicz & César A. Muñoz (2014): *A Formally Verified Generic Branching Algorithm for Global Optimization*. In Ernie Cohen & Andrey Rybalchenko, editors: *Proceedings of the 5th International Conference on Verified Software: Theories, Tools, and Experiments (VSTTE 2013)*, *Lecture Notes in Computer Science* 8164, Springer, Menlo Park, CA, US, pp. 326–343, doi:10.1007/978-3-642-54108-7_17.

- [39] Anthony Narkawicz, César A. Muñoz & Aaron Dutle (2015): *Formally-verified decision procedures for univariate polynomial computation based on Sturm's and Tarski's theorems*. *Journal of Automated Reasoning* 54(4), pp. 285–326, doi:10.1007/s10817-015-9320-x.
- [40] Anthony Narkawicz, César A. Muñoz & Aaron Dutle (2018): *Sensor uncertainty mitigation and dynamic well clear volumes in DAIDALUS*. In: *2018 IEEE/AIAA 37th Digital Avionics Systems Conference (DASC)*, IEEE, pp. 1–8, doi:10.1109/DASC.2018.8569468.
- [41] M Saqib Nawaz, M IkramUllah Lali & MA Pasha (2013): *Formal verification of crossover operator in genetic algorithms using prototype verification system (PVS)*. In: *2013 IEEE 9th International Conference on Emerging Technologies (ICET)*, IEEE, pp. 1–6, doi:10.1109/ICET.2013.6743532.
- [42] André Platzer (2007): *Differential Dynamic Logic for Verifying Parametric Hybrid Systems*. In Nicola Olivetti, editor: *TABLEAUX, LNCS 4548*, Springer, pp. 216–232, doi:10.1007/978-3-540-73099-6_17.
- [43] André Platzer (2007): *A Temporal Dynamic Logic for Verifying Hybrid System Invariants*. In Sergei N. Artëmov & Anil Nerode, editors: *LFCs, LNCS 4514*, Springer, pp. 457–471, doi:10.1007/978-3-540-72734-7_32.
- [44] André Platzer (2008): *Differential dynamic logic for hybrid systems*. *Journal of Automated Reasoning* 41(2), pp. 143–189, doi:10.1007/s10817-008-9103-8.
- [45] André Platzer (2010): *Differential-algebraic Dynamic Logic for Differential-algebraic Programs*. *J. Log. Comput.* 20(1), pp. 309–352, doi:10.1093/logcom/exn070. Advance Access published on November 18, 2008.
- [46] André Platzer (2010): *Logical Analysis of Hybrid Systems: Proving Theorems for Complex Dynamics*. Springer, Heidelberg, doi:10.1007/978-3-642-14509-4.
- [47] André Platzer (2010): *Quantified Differential Dynamic Logic for Distributed Hybrid Systems*. In Anuj Dawar & Helmut Veith, editors: *CSL, LNCS 6247*, Springer, pp. 469–483, doi:10.1007/978-3-642-15205-4_36.
- [48] André Platzer (2011): *Stochastic Differential Dynamic Logic for Stochastic Hybrid Programs*. In Nikolaj Bjørner & Viorica Sofronie-Stokkermans, editors: *CADE, LNCS 6803*, Springer, pp. 446–460, doi:10.1007/978-3-642-22438-6_34.
- [49] André Platzer (2015): *Differential Game Logic*. *ACM Trans. Comput. Log.* 17(1), pp. 1:1–1:51, doi:10.1145/2817824.
- [50] André Platzer (2017): *A complete uniform substitution calculus for differential dynamic logic*. *Journal of Automated Reasoning* 59(2), pp. 219–265, doi:10.1007/s10817-016-9385-1.
- [51] André Platzer (2017): *Differential Hybrid Games*. *ACM Trans. Comput. Log.* 18(3), pp. 19:1–19:44, doi:10.1145/3091123.
- [52] André Platzer (2018): *Logical Foundations of Cyber-Physical Systems*. Springer, Cham, doi:10.1007/978-3-319-63588-0.
- [53] Huanhuan Sheng, Alexander Bentkamp & Bohua Zhan (2023): *HHLPy: Practical Verification of Hybrid Systems Using Hoare Logic*. In: *Formal Methods: 25th International Symposium, FM 2023, Lübeck, Germany, March 6–10, 2023, Proceedings*, Springer, pp. 160–178, doi:10.1007/978-3-031-27481-7_11.
- [54] J Tanner Slagel, Lauren White & Aaron Dutle (2021): *Formal verification of semi-algebraic sets and real analytic functions*. In: *Proceedings of the 10th ACM SIGPLAN International Conference on Certified Programs and Proofs*, pp. 278–290, doi:10.1145/3437992.3439933.
- [55] Matthieu Sozeau, Simon Boulrier, Yannick Forster, Nicolas Tabareau & Théo Winterhalter (2019): *Coq coq correct! verification of type checking and erasure for coq, in coq*. *Proceedings of the ACM on Programming Languages* 4(POPL), pp. 1–28, doi:10.1145/3371076.
- [56] Georg Struth (2021): *Hybrid Systems Verification with Isabelle/HOL: Simpler Syntax, Better Models, Faster Proofs*. In: *Formal Methods: 24th International Symposium, FM 2021, Virtual Event, November 20-26, 2021, Proceedings*, 13047, Springer Nature, p. 367, doi:10.1007/978-3-030-90870-6_20.

- [57] Laura Titolo, Marco A. Feliú, Mariano M. Moscato & César A. Muñoz (2018): *An Abstract Interpretation Framework for the Round-Off Error Analysis of Floating-Point Programs*. In Isil Dillig & Jens Palsberg, editors: *Verification, Model Checking, and Abstract Interpretation - 19th International Conference, VMCAI 2018, Los Angeles, CA, USA, January 7-9, 2018, Proceedings, Lecture Notes in Computer Science 10747*, Springer, pp. 516–537, doi:10.1007/978-3-319-73721-8_24.
- [58] Shuling Wang, Naijun Zhan & Liang Zou (2015): *An improved HHL prover: an interactive theorem prover for hybrid systems*. In: *Formal Methods and Software Engineering: 17th International Conference on Formal Engineering Methods, ICFEM 2015, Paris, France, November 3-5, 2015, Proceedings 17*, Springer, pp. 382–399, doi:10.1007/978-3-319-25423-4_25.
- [59] Liang Zou, Naijun Zhan, Shuling Wang & Martin Fränzle (2015): *Formal verification of Simulink/Stateflow diagrams*. In: *Automated Technology for Verification and Analysis: 13th International Symposium, ATVA 2015, Shanghai, China, October 12-15, 2015, Proceedings 13*, Springer, pp. 464–481, doi:10.1007/978-3-319-24953-7_33.