
How Many Bytes Can You Take Out Of Brain-To-Text Decoding?

Richard J. Antonello

Department of Computer Science
The University of Texas at Austin
rjantonello@utexas.edu

Nihita Sarma

Department of Computer Science
The University of Texas at Austin
nihitasarma@utexas.edu

Jerry Tang

Department of Computer Science
The University of Texas at Austin
jerrytang@utexas.edu

Jiaru Song

Department of Computer Science
The University of Texas at Austin
jiarus@cs.utexas.edu

Alexander G. Huth

The University of Texas at Austin
Departments of Computer Science and Neuroscience
huth@cs.utexas.edu

Abstract

Brain-computer interfaces have promising medical and scientific applications for aiding speech and studying the brain. In this work, we propose an information-based evaluation metric for brain-to-text decoders. Using this metric, we examine two methods to augment existing state-of-the-art continuous text decoders. We show that these methods, in concert, can improve brain decoding performance by upwards of 40% when compared to a baseline model. We further examine the informatic properties of brain-to-text decoders and show empirically that they have Zipfian power law dynamics. Finally, we provide an estimate for the idealized performance of an fMRI-based text decoder. We compare this idealized model to our current model, and use our information-based metric to quantify the main sources of decoding error. We conclude that a practical brain-to-text decoder is likely possible given further algorithmic improvements.

1 Introduction

Recent advancements in natural language processing research [1–4] have spurred developments in our ability to decode language from brain recordings [5–10]. These *semantic decoding models* are typically built either as direct decoders [11, 12] or as Bayesian decoders [8, 10, 13]. *Direct decoders*, as their name implies, directly regress from brain recordings to a linguistic feature space [12]. *Bayesian decoders*, which we primarily use in this work, use Bayes’ law to invert *language encoding models*, which solve the problem of predicting neural recordings from a linguistic feature space such as the hidden states of a language model [14–17].

Bayesian semantic decoders for fMRI were introduced in [8], which established that it is possible to continuously predict the words that a person is hearing or thinking from fMRI recordings. This decoder is structured as a beam search that uses a language model to propose extensions to a beam of decoder predictions. The relative probabilities of observing the brain data given each extension are estimated using an encoding model and the most likely extensions are maintained on the beam.

Brain decoding has been demonstrated for a variety of other domains including vision [18–22] and motor volition [23–25]. In language, brain decoding has been demonstrated using other recording modalities such as ECoG [26, 27], EEG [28–32], and MEG [33, 34]. Recently, brain decoders that use recordings from invasive techniques such as ECoG have become highly accurate, and have the potential to be used as speech neuroprostheses. However, these techniques require neurosurgical implantation of recording electrodes. In contrast, semantic decoders operate on signals that can be measured non-invasively using methods like functional MRI, which could eventually provide a cheaper and safer alternative.

Semantic decoding models have attained reasonable performance on continuous language, but in order to be useful as a neuroprosthetic device, the decoding accuracy must be excellent [35]. Yet these models are still very new, and there are likely significant algorithmic gains that can be made. Furthermore, evaluating these models remains challenging, as they tend to paraphrase text rather than producing word strings with exact matches. In this work, we establish a quantitative information-theory based metric for evaluating and comparing semantic decoding models across datasets and subjects. We identify two relatively simple methods for improving the performance of existing state-of-the-art decoding models [8]. We show that these methods are capable of substantially improving semantic decoding models both qualitatively and using our new metric. We then use a noise ceiling analysis to explore the theoretical limits of semantic decoding models, providing an estimation for their potential performance and qualifying what is achievable at the spatiotemporal resolution provided by modern 3T fMRI. We conclude with a discussion of the practical consequences of an ideal or near-ideal decoder, as well as ethical considerations.

2 Methods

2.1 Bayesian Decoding

The goal of language decoding is to find the word sequence S that maximizes the probability distribution $P(S|R)$ over word sequences given brain responses R . In Bayesian decoding, this can be done by using a voxel-wise encoding model (and multivariate normal noise model) to estimate $P(R|S)$ and a language model to estimate $P(S)$ [8, 17, 20].

A voxel-wise encoding model \hat{R} is trained to predict brain responses $\hat{R}(S)$ from features of S [16]. Assuming that BOLD signals are affected by Gaussian random noise, the probability distribution $P(R|S)$ can be modeled as a multivariate Gaussian distribution with mean $\mu = \hat{R}(S)$ and covariance $\Sigma = \langle (R - \hat{R}(S))^T (R - \hat{R}(S)) \rangle$ [20]. The covariance Σ models the structure of correlated noise across voxels. In this study, stimulus features were extracted from intermediate layers of language models [36–39]. Voxel-wise encoding models \hat{R} were estimated using linear regression, and noise covariance Σ was computed with a bootstrapping procedure that used the residuals between the encoding model predictions and the actual responses to held-out stories.

The probability that the participant heard a word sequence S , $P(S|R)$, can be approximated as $P(R|S)P(S)$. However, it is computationally infeasible to evaluate $P(R|S)$ and $P(S)$ for all possible word sequences. Instead, the most likely word sequence can be approximated by iteratively constructing word sequences using a beam search algorithm [8, 40]. In beam search, the k most likely word sequences are retained for each time step. The language model then proposes likely continuations for each sequence on the beam by sampling from $P(S)$ and the encoding model evaluates the probability of the observed brain responses, $P(R|S)$, under each continuation. The k most likely continuations are retained on the beam for the next time step. This process is repeated until the entire scan is decoded.

2.2 Evaluating Decoding Models

Decoders were evaluated on brain responses while participants listened to a test story that was not used for model training. Decoding performance was quantified by comparing the decoder predictions for a participant to the actual words that the participant heard [8]. There are many metrics for quantifying the similarity between two word sequences. Because this decoder operates on semantic representations, we quantified similarity using BERTScore, which is a metric designed to quantify similarity of meaning [41]. In BERTScore the two word sequences are embedding as semantic vectors

using a neural network language model, and a similarity score is computed using the semantic vectors. We computed the BERTScore between the predicted and actual words in every 20-second window of the test story, and averaged the scores across windows to summarize decoding performance for the entire story. These scores were reported as the number of standard deviations above chance level, which was determined by generating word sequences using the language model without using any brain data.

While BERTScore is useful for measuring semantic similarity, the values themselves are somewhat arbitrary and do not correspond to any intuitive notion of decoder quality. To resolve this issue, in addition to the BERTScore metric, we also evaluate our decoding models on an *identification metric* that we refer to in this paper as LogRank. This metric measures how well a given decoder can identify the correct stimulus for a given response among a set of distractor stimuli. Let E_θ be an estimator of $P(R|S)$ for arbitrary stimulus-response pairs parameterized by our encoding model and noise covariance estimation, jointly described by θ . The LogRank of a particular stimulus-response pair (S, R) is defined with respect to a distractor stimuli dataset \mathcal{D} as

$$\text{LogRank}_{\mathcal{D}}(S, R) = \log_2(\mathbf{rank}(E_\theta(S, R), E_\theta(\mathcal{D}, R)))$$

Here, $\mathbf{rank}(E_\theta(S, R), E_\theta(\mathcal{D}, R))$ represents the ordinal rank of the estimated probability $E_\theta(S, R)$ among all estimated probabilities $E_\theta(S', R)$ for $S' \in \mathcal{D}$. That is, for a given stimulus-response pair (S, R) , the LogRank of that pair is the log-base-2 of the rank of the "ground truth" $P(R|S)$ from among all distractors. Alternatively, LogRank can be thought of as the number of additional bits of information that would be required to correctly resolve S as matching R using the given decoder from among the elements of \mathcal{D} ¹. For example, if \mathcal{D} contained all possible stimuli, an average LogRank of 0 would correspond to an oracle decoder that is perfectly able to recover the stimulus that corresponds to any response. This particular interpretation is useful for studying the informatic properties of decoding models and is used frequently in this work.

2.3 Techniques for Improving Decoding

We provide and analyze the effects of two methods for improving Bayesian decoding models. These methods are Minimum Bayes Risk (MBR) decoding and encoding model scaling. Each method trades additional computational effort in exchange for improved decoding performance.

2.3.1 Minimum Bayes Risk Decoding

Maximum a priori (MAP) decoding tends to fall into pathological local minima when generated sequences deviate significantly from the data that E_θ was trained on. This effect is especially pronounced with the overlapping mix of semantic information that can be extracted from brain signals. Fortunately, these pathological local minima tend to be transient and highly dependent on the parameterization of E_θ . Our proposed solution to this problem is to augment the standard MAP beam search with a Minimum Bayes Risk (MBR) ensembling approach that averages out pathological examples while retaining semantic themes common across many slightly different versions of E_θ . Let N be the number of ensembled decoding models. We use a leave-one-out approach where we train N separate instances of E_θ by removing one stimulus from the E_θ training dataset and retraining on the remaining data. For each of these N leave-one-out generated models, we generate a sequence of words $S_n = \{w_1, w_2, \dots, w_l\}$. We then ensemble the set of sequences $\{S_1, S_2, \dots, S_N\}$ as follows: We instantiate a new beam search with the same parameters, except instead of trying to maximize $P(R|S)$ with our search, we now instead optimize

$$\max_T \sum_{i=1}^N \text{BERTScore}(S_i, T)$$

That is, we use beam search to find a target sequence T that is most semantically similar to all other generated sequences according to BERTScore. As a practical consideration, we use a sliding window of the past 20 words when computing BERTScore during decoding to ensure that there are no major temporal deviations from the original sequences. Notably, this approach does not utilize

¹Note that computing this metric does not require that any elements of \mathcal{D} have measured responses.

any information from the future to decode the past, so it remains feasible for online decoding. The computational cost of this ensembling scales linearly in the size of N . In this work, we test MBR ensembles up to size $N = 50$.

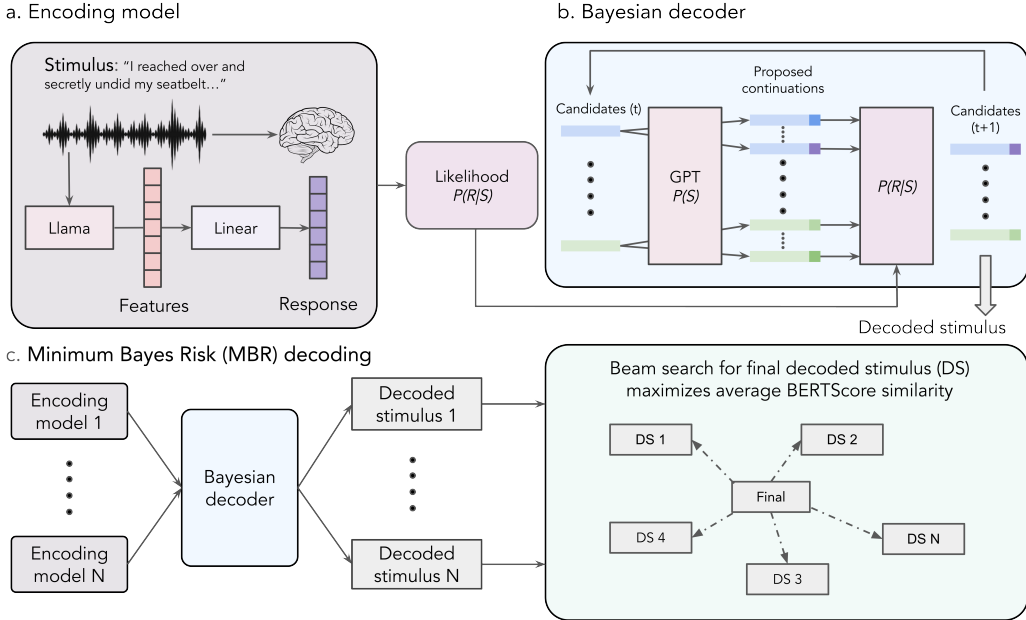


Figure 1: *Decoding methods.* **(a)** Subjects listen to natural speech while blood-oxygen-level-dependent (BOLD) brain responses are recorded using fMRI. Encoding models use linear regression to predict BOLD responses from features extracted from the stimuli using Llama. **(b)** A Bayesian decoder uses the encoding model to reconstruct stimulus words from fMRI data. A beam search is performed over word sequences, with candidate beam continuations sampled from GPT-1. The probability of observing the brain responses given the proposed sequences is then evaluated using the encoding model. The best candidate sequences are preserved for the next step. **(c)** Decoding performance can be improved by ensembling via minimum Bayes risk (MBR). An ensemble of encoding models are estimated by sampling the training data, then are used to decode word sequences. A second beam search then finds a word sequence that is maximally similar to all the ensemble decoded sequences.

2.3.2 Encoding Model Scaling

Past studies have shown that scaling is an effective means of improving encoding model prediction performance [42]. We compare a decoding model that uses a finetuned version of GPT-1 (125 million parameters) as a $P(R|S)$ estimator to parameterize E_θ against one that uses a pretrained Llama-2 model (13 billion parameters). Hidden states were extracted from the 9th layer of the GPT-1 model and the 14th layer of the Llama-2 model. For the optimal decoding analyses in Section 3.2, we used the 14th layer of the pretrained Llama-3 model (8 billion parameters).

We generally follow the method described by Antonello et al. [42] for encoding model generation of the larger Llama encoding models. For the smaller encoding models, we use the method and code provided Tang et al. [8]. The main practical difference is that the larger encoding models are trained on embeddings extracted from longer context windows. These context window sizes for each model were selected based on coordinate descent. In all cases the same GPT-1 model was used as a language model to estimate $P(S)$. This was done intentionally to mitigate the effects of bias in the LM’s training dataset for comparison purposes. To accommodate onset-time-correlated artifacts that manifest in long-context encoding models, a suite of stepwise linear functions of the form $y = \text{floor}(k, t)$ was regressed out of the test fMRI data for those models, for varying values of k .

2.4 MRI data

We used publicly available functional magnetic resonance imaging (fMRI) data collected from 3 human subjects as they listened to 20 hours of English language podcast stories over Sensimetrics S14 headphones. Stories came from podcasts such as *The Moth Radio Hour*, *Modern Love*, and *The Anthropocene Reviewed*. Each 10-15 minute story was played during a separate scan. Subjects were not asked to make any responses, but simply to listen attentively to the stories. For encoding model training, each subject listened to roughly 95 different stories, giving 20 hours of data across 20 scanning sessions, or a total of ~33,000 datapoints for each voxel across the whole brain. For model testing, the subjects listened to two test stories 5 times each, and one test story 10 times, at a rate of 1 test story per session. The test story with 10 repeats was used for the majority of experiments, whereas all three were used during general informatic analyses (Fig 2c). Decoding was always performed using the first repeat of a given story, with additional repeats being used for the analysis in Section 3.2.

Details of the MRI methods can be found in the original publications [43, 8, 42], but important points are summarized here. MRI data were collected on a 3T Siemens Skyra scanner at The University of Texas at Austin Biomedical Imaging Center using a 64-channel Siemens volume coil. Functional scans were collected using a gradient echo EPI sequence with repetition time (TR) = 2.00 s, echo time (TE) = 30.8 ms, flip angle = 71°, multi-band factor (simultaneous multi-slice) = 2, voxel size = 2.6mm x 2.6mm x 2.6mm (slice thickness = 2.6mm), matrix size = 84x84, and field of view = 220 mm. Anatomical data were collected using a T1-weighted multi-echo MP-RAGE sequence with voxel size = 1mm x 1mm x 1mm.

In addition to motion correction and coregistration [43], low frequency voxel response drift was identified using a 2nd order Savitzky-Golay filter with a 120 second window and then subtracted from the signal. The mean response for each voxel was subtracted and the remaining response was scaled to have unit variance.

The original publications on this dataset stated that all subjects were healthy and had normal hearing. The experimental protocol was approved by the Institutional Review Board at The University of Texas at Austin. Written informed consent was obtained from all subjects.

Subj.	GPT-1	Llama-2	GPT-1 + MBR			Llama-2 + MBR			
	Single	Single	5 runs	10 runs	20 runs	5 runs	10 runs	20 runs	50 runs
S01	14.6	16.7	16.8	16.8	17.6	19.5	21.2	22.1	21.4
S02	14.6	15.9	17.2	16.7	17.8	18.2	19.7	21.0	21.4
S03	18.7	20.0	21.9	22.4	23.5	21.9	23.4	25.4	26.1
Avg	16.0	17.5	18.6	18.6	19.6	19.8	21.4	22.8	23.0

Table 1: Ablation results showing improvements in BERTScore for each of the methods as well as the sum of both methods. BERTScore is measured in standard deviations from a random baseline generated by the GPT-1 language model without consideration of $P(R|S)$. For all subjects, we see improvements from 40-50%.

2.5 Estimating an idealized semantic decoding model

The encoding model predictions for a stimulus should ideally match the participant’s actual brain responses to that stimulus. In practice, encoding models may differ from actual brain responses, leading to suboptimal decoding performance.

One potential source of decoding error is encoding model misspecification, such as extracting suboptimal features from language stimuli. To characterize decoding performance using an optimal encoding model, we performed identification for a test story using averaged responses across 9 subsequent repeats of that story. The averaged responses provide a noise ceiling that captures the explainable signal in each voxel. The difference in identification performance between the encoding model and the inter-trial ceiling quantifies the amount of improvement that can be attained by using a better encoding model.

Another potential source of decoding error is measurement noise. If there is structure to these errors across voxels, it can bias decoder predictions. As a result, it is useful to account for this structure when comparing the encoding model predictions and the actual recorded responses [44]. Previous studies have modeled the structure of the noise by computing the covariance of the encoding model residuals on held out stories not used in encoding model training [8, 20]. To assess whether improving the noise model will improve decoding performance, we compared identification performance for the actual noise model with identification performance for a ceiling noise model. In order to isolate the structure of noise that is repeatable across trials, we used brain responses while the participants listened to 9 subsequent repeats of the test story. We computed the true noise covariance for each of the repeats, and averaged covariance matrices across repeats to create a ceiling noise model. The difference in identification performance between the estimated noise model and the inter-trial noise model quantifies the amount of improvement that can be attained by using a better noise model.

For each idealized model, we evaluate the number of bits that have been extracted from the model using the LogRank metric. We perform a ‘‘Pareto correction’’ on the data, which helps us resolve instances when $|\mathcal{D}|$, the number of distractors tested, is not large enough that any distractor stimulus is preferred to the true stimulus. This causes a significant fraction of our data to be ‘‘censored’’, meaning we cannot resolve the true number of bits beyond a certain threshold, in this case, beyond $\log_2 |\mathcal{D}| - 1$. In these cases, we fit a Pareto distribution to the existing data, and extract a power-law relationship $y = kx^a$. This relationship is then interpolated past the resolution threshold. Since the area under a power-law is undefined, the censored probability mass is distributed as conservatively as possible below the extrapolated relationship. Let p_{censored} be the probability mass of the Pareto distribution that was censored. For each distribution, we compute the value of x_{\min} such that

$$\int_{x_{\min}}^{\frac{1}{|\mathcal{D}|}} kx^a dx = p_{\text{censored}}$$

and then distribute the remainder of the probability mass between x_{\min} and $\frac{1}{|\mathcal{D}|}$. Due to the conservative nature of this estimation procedure, estimates of ‘‘bits extracted’’ elsewhere in this paper should be considered lower bounds.

2.6 Compute specifications

The generation and use of the models presented in this paper required significant computational resources. Ridge regression was performed using compute nodes with 128 cores (2 AMD EPYC 7763 64-core processors) and 256GB of RAM. In total, roughly 2,000 node-hours of compute was expended for these models. Feature extraction for language models was performed on specialized GPU nodes similar to the AMD compute nodes but with 3 NVIDIA A100 40GB cards. Feature extraction and subsequent decoding required roughly 4000 node-hours of compute on these GPU nodes. In total, this research used an estimated 5×10^{21} floating point operations.

3 Results

3.1 Improving Decoding Performance

Table 1 demonstrates the main performance improvements of our brain-to-text decoding methods. Across all subjects, MBR with Llama-2 results in an estimated 40-50% improvement in measured BERTScore similarity to the ground truth story, with the average BERTScore across subjects increasing from 16.0 to 23.0. Examining the ablation results, we see that the majority of the contribution comes from MBR rather than scaling. However it also appears that there are some second-order effects, with scaling having greater power when combined with MBR than when used without ensembling. In particular, the benefit of 20 runs of MBR is only 2.1σ for GPT-1 on average, whereas it is 5.3σ for Llama-2. This suggests that the implicit prior adopted by beam search may be ill-suited to the problem of continuous brain-to-text decoding, and that the semantic ensembling procedure ameliorates this problem somewhat, with greater benefits for better models. This result also points to an underexplored avenue for future decoding research, as it may be the case that Bayesian decoding models could benefit more from adoption of more effective priors, rather than simply better estimation of $P(R|S)$ and Σ .

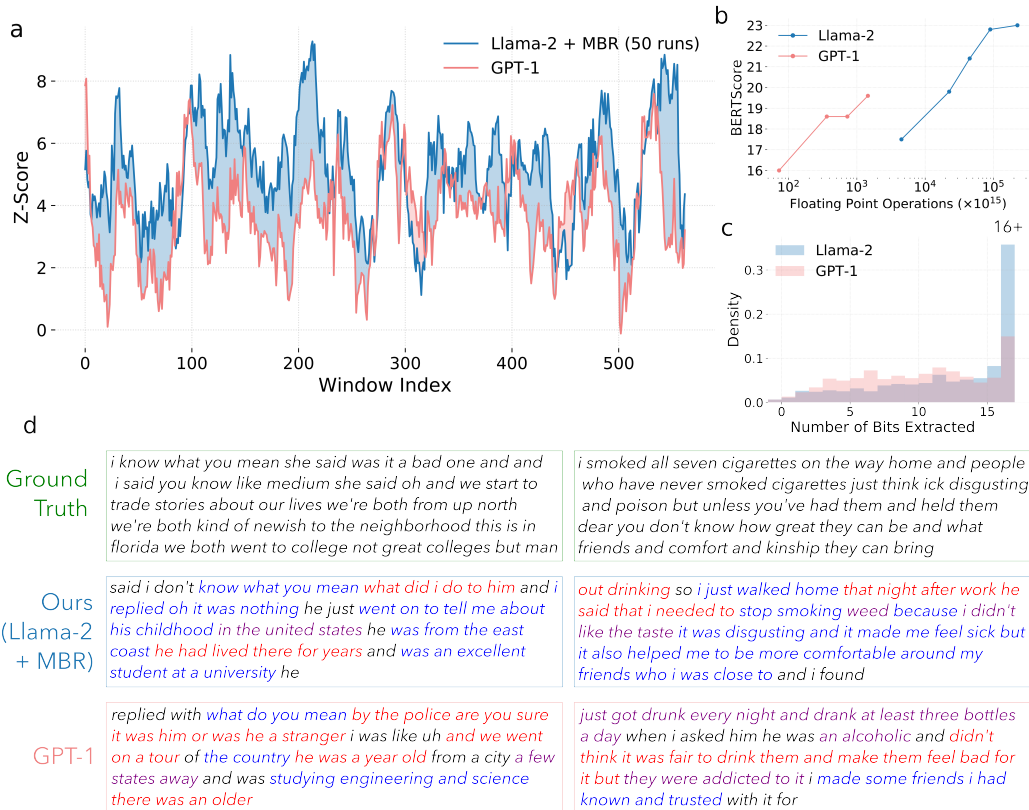


Figure 2: *Comparison of Decoding Models: (a) Comparison of Llama-2 with MBR over GPT-1 Baseline:* Semantic similarity of each model output with the ground truth is plotted on the y-axis over the timecourse of a held-out test story. The Llama-2 model with MBR is shown to outperform GPT-1 in almost all cases. *(b) Computational Costs of Decoding:* A log-plot comparing computational cost against estimated performance. A clear cost-performance tradeoff is visualized. *(c) Number of Bits Extracted:* The estimated amount of information extracted using the $P(R|S)$ approximators built from each model is visualized. Llama-2 extracts about 2.8 more bits of information, after Pareto correction. The number of bits is estimated by the number of distractors that are ranked better than the ground truth. *(d) Qualitative Performance Comparison:* Two well-decoded extended contexts from each decoding model (Llama-2 with a 50 run MBR ensemble, GPT-1) are presented. The ground truth text is presented bordered by green. For each decoding, words are colored based on whether they are semantically-correct (blue), gist-capturing (purple), or incorrect (red)

Figure 2a illustrates the performance improvement across the timecourse of a test story. A sliding window of the BERTScore of each method’s output against the ground truth is plotted. We see that, for nearly every TR, the fully ensembled (50 run) Llama-2 decoding model outperforms the GPT-1 decoder. The average window score rises here from 3.7σ for the GPT-1 encoder to 5.2σ for the Llama-2 decoder, over a 40% increase.

Figure 2b shows the relationship between decoding performance and inference costs, with higher costs associated with better performance. We note that the Pareto frontier suggested by this plot is to first ensemble and then only when reaching diminishing returns, use scaling as a means to further improve performance. As the 20-run GPT-1 ensemble is both cheaper and performs better than the single-run Llama model, it is probable that there are further improvements to be made on the algorithmic side in terms of computational efficiency and more effectively managing this tradeoff. We note that the current computational cost of our best decoder is largely impractical for virtually all non-research settings, requiring about 500 hours of A100 runtime to decode a 15 minute fMRI scan. Further algorithmic work into reducing this cost to enable online decoding is essential if these methods are to have practical value.

Figure 2c compares the number of bits extracted by each $P(R|S)$ encoding model estimator on subject S3. We see that the Llama-2 encoding model is consistently able to outperform the GPT-1

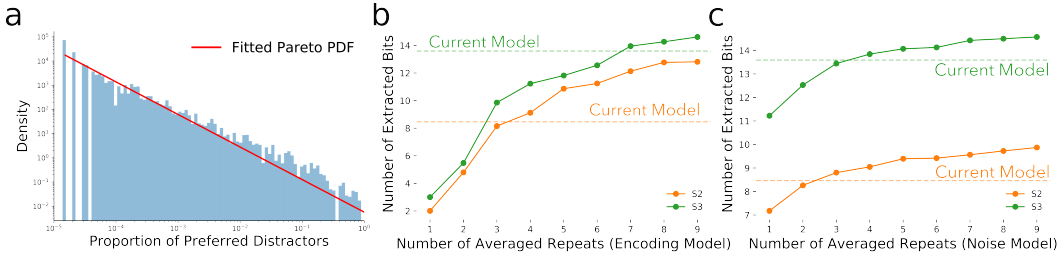


Figure 3: *Informatic properties of Bayesian decoding* (a) *Power law dynamics*: Plotted is the proportion of distractors from the total set that are evaluated as having a higher $P(R|S)$ over the ground truth stimuli for S3. The relationship obeys a power law and can be modelled with a Pareto distribution (red line). (b) *Idealized encoding performance*: Idealized encoding models were computed by averaging responses across different repeats of the test story. With 9 repeats of the test story, identification using averaged responses led to an average 2.7 bits of improvement over the current state-of-the-art encoding model. (c) *Idealized noise estimation*: Idealized noise models were computed by averaging noise covariance matrices across different repeats of the test story. With 9 repeats of the test story, identification using idealized noise models led to an average 1.2 bits of improvement over the current state-of-the-art noise model. S1 is omitted from these analyses due to poor test story repeatability. These results suggest further room for improvement in $P(R|S)$ estimation.

encoding model, with over 30% of all ~900 test TRs being correctly identified from among over 140,000 distractor stimuli. After performing the Pareto correction described in Section 2.5, we estimate that the GPT-1 decoder extracts 11.1 bits on average for a given TR, whereas the Llama-2 decoder extracts 13.9 bits, a 2.8 bit correction. Versions of Figure 2c for other subjects are provided in the Appendix.

Figure 2d provides some qualitative examples of decoder quality comparing the two models on well-decoded TRs. The Llama-2 model (blue) is able to sometimes capture complex and nuanced sentiments, in comparison to the GPT-1 model, which often correctly captures simple semantic themes but does not successfully tie them together. Full decoded texts for this test story using the 50-run MBR ensemble are provided in the Appendix for each of the three test subjects.

3.2 Estimating Idealized Decoding Models

In addition to improving the performance of these models, we also studied their statistical and informatic properties. Figure 3a plots a log-log histogram showing the distribution of the proportion of preferred distractors to total distractors for each of our ~900 test TRs. This number includes the ground truth stimulus itself, so the numerator is always at least 1. A lower number indicates that very few distractors are rated as more likely to cause the observed fMRI data than the true stimulus, with a proportion of $\frac{1}{|D|}$ corresponding to ideal performance. We observe that the relationship is governed by a Zipfian power law and can be therefore modelled by a Pareto distribution [45]. As word frequencies are themselves governed by a similar distribution, it may be reasonable to assume that this relationship is a byproduct of the statistics of natural language itself rather than of the biological and physical processes in the brain.

Figure 3b explores how many bits of information could additionally be extracted over our current model from brain responses if our encoding model E_θ was optimal. To get an estimate of the noise ceiling, we averaged the responses across several repeats of the same test story. We then substituted the predicted response in these for these averaged responses and then computed the increase in the average number of extracted bits. We find that, with an optimal encoding performance, we would be able to extract an additional 2.7 bits of information over our current state-of-the-art models. Due to the conservative nature of the "bits extracted metric" (see Section 2.5), this is probably a lower bound, with additional room for improvement likely.

Figure 3c answers a similar question, but from the perspective of improving our noise covariance estimation. We examined how many additional bits of information could be extracted from our current model with better covariance estimation procedures. To do this, we averaged the noise covariance across repeats of the same test story and substituted this averaged covariance as a replacement for the existing noise covariance estimation. We find that better noise covariance estimation could yield at least an average additional 1.2 bits of improvement over the current model.

4 Discussion

In this paper, we have demonstrated a substantial improvement in the state-of-the-art for non-invasive semantic brain-to-text decoding, improving existing models by upwards of 40% on our held-out test stimulus. The improvement relies on two primary modifications. First, we found that decoding performance can be improved by using more powerful language models during encoding, reflecting previous findings that encoding model performance scales with the effectiveness of the language model used to extract features [42]. If recent trends in language model scaling continue, we expect that decoding performance will continue to improve as well. Second, we show that decoding performance can also be improved by developing new algorithms that leverage the growing amount of computing power through methods such as ensembling. These techniques may provide an avenue for improving decoding performance orthogonal to improvements in language models.

In addition to these significant empirical improvements, our study also characterizes the gap between current language decoding performance and the best possible performance that can be achieved using fMRI. We found that using an ideal encoding model could increase identification performance by an average of 2.7 bits, while using an ideal noise model could improve identification performance by an average of 1.2 bits. These estimates are only lower bounds, and indicate that there is a substantial amount of improvement that can be attained purely through algorithmic advances. Further enhancements may also arise from developing more effective methods for translating the information extracted by these models into natural language.

Better decoding performance has critical practical implications. Currently, motor decoders that use invasive brain recordings are sufficiently accurate to improve communication for people who have lost the ability to speak due to injuries such as strokes, or diseases such as amyotrophic lateral sclerosis [23, 46]. Our results show that non-invasive semantic decoding could eventually provide a safer and cheaper alternative to these ECoG-based decoding methods that require costly neurosurgery.

On the other hand, improved decoding performance has important implications for mental privacy. Previous studies have found that semantic decoders only produce accurate predictions when brain data are collected with a participant’s cooperation [8]. For instance, participants could actively prevent decoders from predicting a story that they are hearing just by thinking about something else. It is important to continually evaluate these models as decoding algorithms become more powerful.

The relative ease with which we were able to substantially boost the state-of-the-art for semantic decoding suggests that additional advancements are likely to follow in the near future. Society should prepare for this outcome by adopting forward-looking mental privacy standards and regulations.

Acknowledgements

The authors acknowledge and thank the Texas Advanced Computing Center (TACC) at The University of Texas at Austin for providing HPC resources that have significantly contributed to the research results reported within this paper. This work was funded by grants from the NIDCD and NSF (1R01DC020088-001), the Burroughs-Wellcome Foundation, a gift from Intel Inc, and the support of the William Orr Dingwall Foundation. We thank Aditya Vaidya and Matthew Weidner for their aid and thoughtful suggestions in assisting with this work.

References

- [1] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [2] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI Blog*, 1(8), 2019.
- [3] Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, et al. Opt: Open pre-trained transformer language models. *arXiv preprint arXiv:2205.01068*, 2022.
- [4] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.

- [5] Jingyuan Sun, Shaonan Wang, Jiajun Zhang, and Chengqing Zong. Towards sentence-level brain decoding with distributed representations. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 7047–7054, 2019.
- [6] Jon Gauthier and Roger Levy. Linking artificial and human neural representations of language. *arXiv preprint arXiv:1910.01244*, 2019.
- [7] Pengfei Sun, Gopala K Anumanchipalli, and Edward F Chang. Brain2char: a deep architecture for decoding text from brain recordings. *Journal of neural engineering*, 17(6):066015, 2020.
- [8] Jerry Tang, Amanda LeBel, Shailee Jain, and Alexander G Huth. Semantic reconstruction of continuous language from non-invasive brain recordings. *Nature Neuroscience*, pages 1–9, 2023.
- [9] Charlotte Caucheteux, Alexandre Gramfort, and Jean-Rémi King. Deep language algorithms predict semantic comprehension from brain activity. *Scientific Reports*, 12(1):16327, 2022.
- [10] Subba Reddy Oota, Manish Gupta, Raju S Bapi, Gael Jobard, Frédéric Alexandre, and Xavier Hinaut. Deep neural networks and brain alignment: Brain encoding and decoding (survey). *arXiv preprint arXiv:2307.10246*, 2023.
- [11] Francisco Pereira, Bin Lou, Brianna Pritchett, Samuel Ritter, Samuel J Gershman, Nancy Kanwisher, Matthew Botvinick, and Evelina Fedorenko. Toward a universal decoder of linguistic meaning from brain activation. *Nature communications*, 9(1):963, 2018.
- [12] Nicolas Affolter, Beni Egressy, Damian Pascual, and Roger Wattenhofer. Brain2word: decoding brain activity for language generation. *arXiv preprint arXiv:2009.04765*, 2020.
- [13] Daohan Zhang, Zhenjie Wang, Youkun Qian, Zehao Zhao, Yan Liu, Xiaotao Hao, Wanxin Li, Shuo Lu, Honglin Zhu, Luyao Chen, et al. A brain-to-text framework of decoding natural tonal sentences. *bioRxiv*, pages 2024–03, 2024.
- [14] Tom M Mitchell, Svetlana V Shinkareva, Andrew Carlson, Kai-Min Chang, Vicente L Malave, Robert A Mason, and Marcel Adam Just. Predicting human brain activity associated with the meanings of nouns. *science*, 320(5880):1191–1195, 2008.
- [15] Leila Webbe, Brian Murphy, Partha Talukdar, Alona Fyshe, Aaditya Ramdas, and Tom Mitchell. Simultaneously uncovering the patterns of brain regions involved in different story reading subprocesses. *PLoS one*, 9(11):e112575, 2014.
- [16] Alexander G Huth, Wendy A De Heer, Thomas L Griffiths, Frédéric E Theunissen, and Jack L Gallant. Natural speech reveals the semantic maps that tile human cerebral cortex. *Nature*, 532(7600):453–458, 2016.
- [17] Thomas Naselaris, Kendrick N Kay, Shinji Nishimoto, and Jack L Gallant. Encoding and decoding in fmri. *Neuroimage*, 56(2):400–410, 2011.
- [18] Kendrick N Kay, Thomas Naselaris, Ryan J Prenger, and Jack L Gallant. Identifying natural images from human brain activity. *Nature*, 452(7185):352–355, 2008.
- [19] Thomas Naselaris, Ryan J Prenger, Kendrick N Kay, Michael Oliver, and Jack L Gallant. Bayesian reconstruction of natural images from human brain activity. *Neuron*, 63(6):902–915, 2009.
- [20] Shinji Nishimoto, An T Vu, Thomas Naselaris, Yuval Benjamini, Bin Yu, and Jack L Gallant. Reconstructing visual experiences from brain activity evoked by natural movies. *Current biology*, 21(19):1641–1646, 2011.
- [21] Guohua Shen, Tomoyasu Horikawa, Kei Majima, and Yukiyasu Kamitani. Deep image reconstruction from human brain activity. *PLoS computational biology*, 15(1):e1006633, 2019.
- [22] Yu Takagi and Shinji Nishimoto. High-resolution image reconstruction with latent diffusion models from human brain activity. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14453–14463, 2023.
- [23] Francis R Willett, Erin M Kunz, Chaofei Fan, Donald T Avansino, Guy H Wilson, Eun Young Choi, Foram Kamdar, Matthew F Glasser, Leigh R Hochberg, Shaul Druckmann, et al. A high-performance speech neuroprosthesis. *Nature*, 620(7976):1031–1036, 2023.
- [24] Henri Lorach, Andrea Galvez, Valeria Spagnolo, Felix Martel, Serpil Karakas, Nadine Interling, Molywan Vat, Olivier Faivre, Cathal Harte, Salif Komi, et al. Walking naturally after spinal cord injury using a brain–spine interface. *Nature*, 618(7963):126–133, 2023.

- [25] Gopala K Anumanchipalli, Josh Chartier, and Edward F Chang. Speech synthesis from neural decoding of spoken sentences. *Nature*, 568(7753):493–498, 2019.
- [26] Xupeng Chen, Ran Wang, Amirhossein Khalilian-Gourtani, Leyao Yu, Patricia Dugan, Daniel Friedman, Werner Doyle, Orrin Devinsky, Yao Wang, and Adeen Flinker. A neural speech decoding framework leveraging deep learning and speech synthesis. *Nature Machine Intelligence*, pages 1–14, 2024.
- [27] Junbo Chen, Xupeng Chen, Ran Wang, Chengqian Le, Amirhossein Khalilian-Gourtani, Erika Jensen, Patricia Dugan, Werner Doyle, Orrin Devinsky, Daniel Friedman, et al. Subject-agnostic transformer-based neural speech decoding from surface and depth electrode signals. *bioRxiv*, pages 2024–03, 2024.
- [28] Lawrence Ashley Farwell and Emanuel Donchin. Talking off the top of your head: toward a mental prosthesis utilizing event-related brain potentials. *Electroencephalography and clinical Neurophysiology*, 70(6):510–523, 1988.
- [29] Maham Saeidi, Waldemar Karwowski, Farzad V Farahani, Krzysztof Fiok, Redha Taiar, Peter A Hancock, and Awad Al-Juaid. Neural decoding of eeg signals with machine learning: A systematic review. *Brain Sciences*, 11(11):1525, 2021.
- [30] Alexandre Défossez, Charlotte Caucheteux, Jérémy Rapin, Ori Kabeli, and Jean-Rémi King. Decoding speech perception from non-invasive brain recordings. *Nature Machine Intelligence*, 5(10):1097–1107, 2023.
- [31] Hanwen Liu, Daniel Hajjaligol, Benny Antony, Aiguo Han, and Xuan Wang. Eeg2text: Open vocabulary eeg-to-text decoding with eeg pre-training and multi-view transformer. *arXiv preprint arXiv:2405.02165*, 2024.
- [32] Saydul Akbar Murad and Nick Rahimi. Unveiling thoughts: A review of advancements in eeg brain signal decoding into text. *arXiv preprint arXiv:2405.00726*, 2024.
- [33] Alexander M Chan, Eric Halgren, Ksenija Marinkovic, and Sydney S Cash. Decoding word and category-specific spatiotemporal representations from meg and eeg. *Neuroimage*, 54(4):3028–3039, 2011.
- [34] Debadatta Dash, Paul Ferrari, Daragh Heitzman, and Jun Wang. Decoding speech from single trial meg signals using convolutional neural networks and transfer learning. In *2019 41st Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*, pages 5531–5535. IEEE, 2019.
- [35] Sara Goering, Eran Klein, Laura Specker Sullivan, Anna Wexler, Blaise Agüera y Arcas, Guoqiang Bi, Jose M Carmena, Joseph J Fins, Phoebe Friesen, Jack Gallant, et al. Recommendations for responsible development and application of neurotechnologies. *Neuroethics*, 14(3):365–386, 2021.
- [36] Shailee Jain and Alexander Huth. Incorporating context into language encoding models for fmri. In S. Bengio, H. Wallach, H. Larochelle, K. Grauman, N. Cesa-Bianchi, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 31. Curran Associates, Inc., 2018. URL <https://proceedings.neurips.cc/paper/2018/file/f471223d1a1614b58a7dc45c9d01df19-Paper.pdf>.
- [37] Mariya Toneva and Leila Wehbe. Interpreting and improving natural-language processing (in machines) with natural language-processing (in the brain). In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019. URL <https://proceedings.neurips.cc/paper/2019/file/749a8e6c231831ef7756db230b4359c8-Paper.pdf>.
- [38] Martin Schrimpf, Idan Asher Blank, Greta Tuckute, Carina Kauf, Eghbal A Hosseini, Nancy Kanwisher, Joshua B Tenenbaum, and Evelina Fedorenko. The neural architecture of language: Integrative modeling converges on predictive processing. *Proceedings of the National Academy of Sciences*, 118(45):e2105646118, 2021.
- [39] Charlotte Caucheteux and Jean-Rémi King. Brains and algorithms partially converge in natural language processing. *Communications Biology*, 5(1):1–10, 2022.
- [40] Christoph Tillmann and Hermann Ney. Word reordering and a dynamic programming beam search algorithm for statistical machine translation. *Computational linguistics*, 29(1):97–133, 2003.
- [41] Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q Weinberger, and Yoav Artzi. Bertscore: Evaluating text generation with bert. *arXiv preprint arXiv:1904.09675*, 2019.
- [42] Richard Antonello, Aditya Vaidya, and Alexander G. Huth. Scaling laws for language encoding models in fmri, 2023.

- [43] Amanda LeBel, Lauren Wagner, Shailee Jain, Aneesh Adhikari-Desai, Bhavin Gupta, Allyson Morgenthal, Jerry Tang, Lixiang Xu, and Alexander G Huth. A natural language fmri dataset for voxelwise encoding models. *bioRxiv*, pages 2022–09, 2022.
- [44] RS Van Bergen. Modeling correlated noise is necessary to decode uncertainty. *Neuroimage*, 180:78–87, 2018.
- [45] Mark EJ Newman. Power laws, pareto distributions and zipf’s law. *Contemporary physics*, 46(5):323–351, 2005.
- [46] Sean L Metzger, Kaylo T Littlejohn, Alexander B Silva, David A Moses, Margaret P Seaton, Ran Wang, Maximilian E Dougherty, Jessie R Liu, Peter Wu, Michael A Berger, et al. A high-performance neuroprosthesis for speech decoding and avatar control. *Nature*, 620(7976):1037–1046, 2023.

A Appendix / supplemental material

A.1 GPT-1 vs. Llama-2 comparisons (other subjects)

Here we show copies of **Figure 2a** and **Figure 2c** using the data from other subjects, as the figure in the main text was generated with S03.

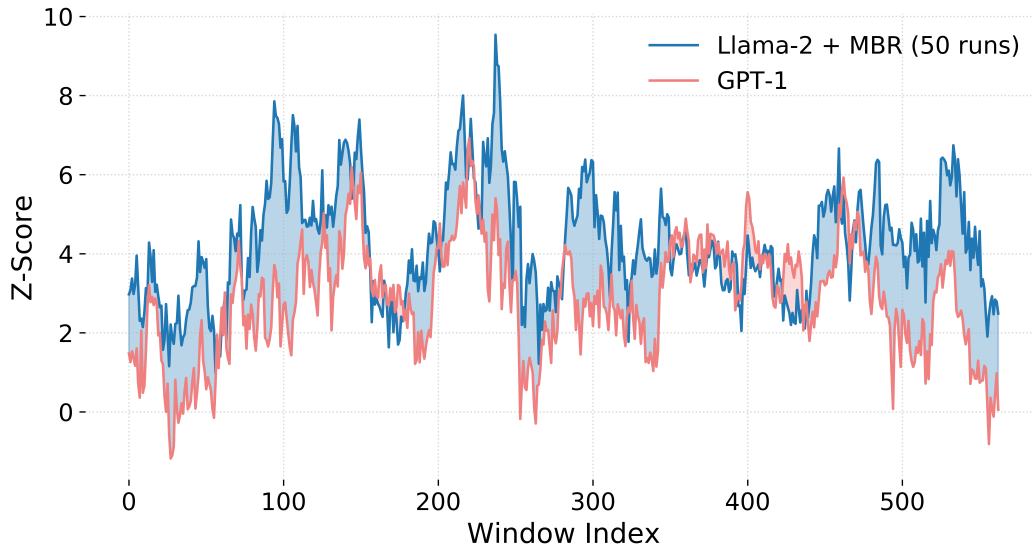


Figure A1: GPT-1 vs. Llama-2 + MBR (50 run) comparison for S01

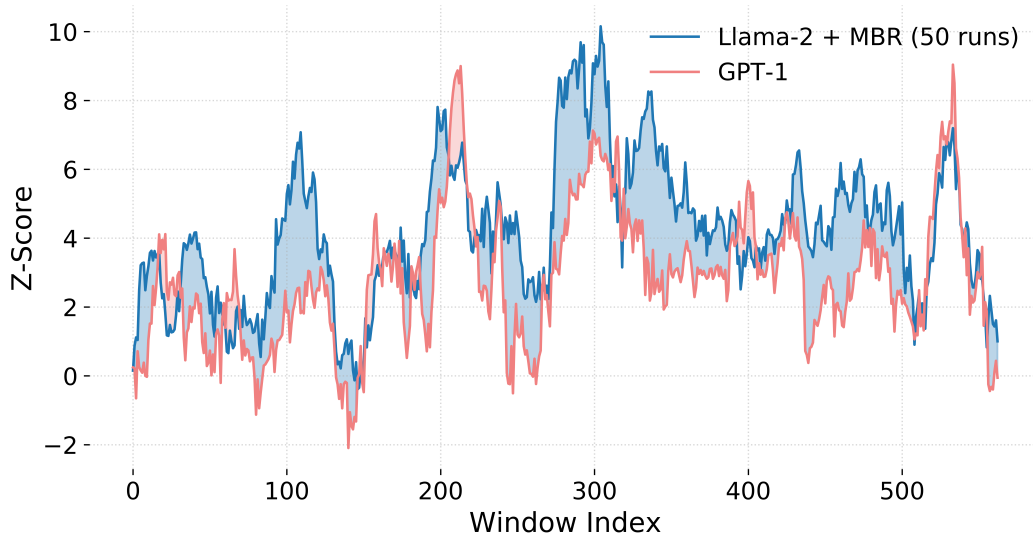


Figure A2: GPT-1 vs. Llama-2 + MBR (50 run) comparison for S02

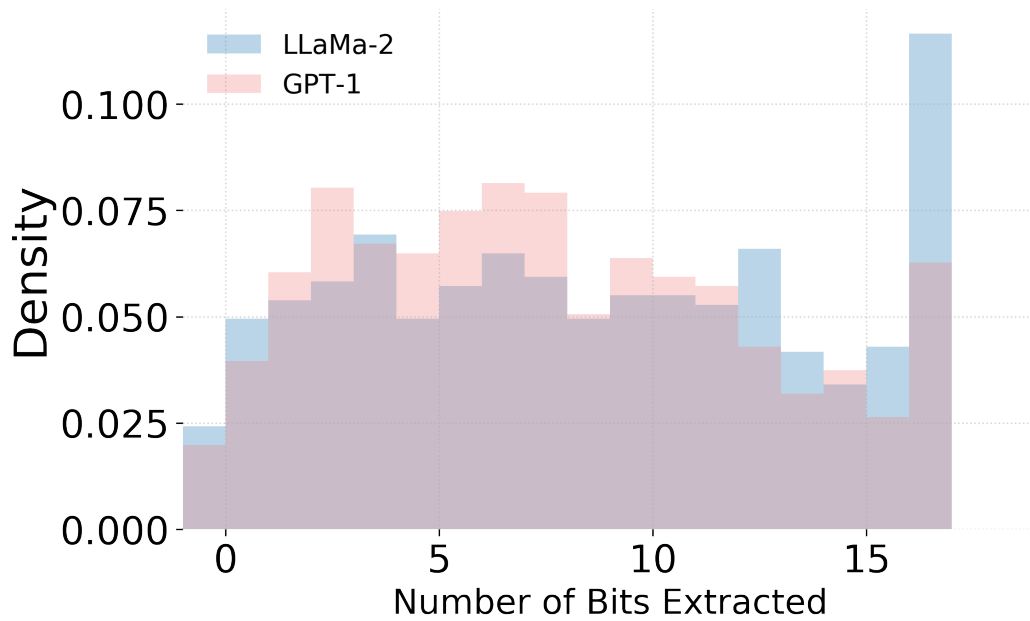


Figure A3: Bits extracted for S01

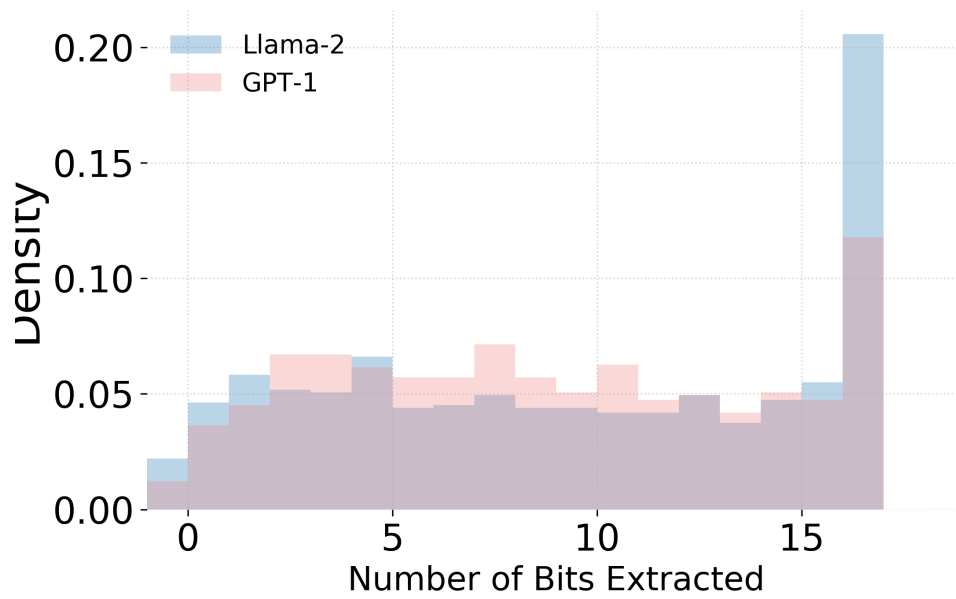


Figure A4: Bits extracted for S02

A.2 Power law dynamics (other subjects)

Here we show copies of **Figure 3a** generated using the data from other subjects, as the figure in the main text was generated with S03.

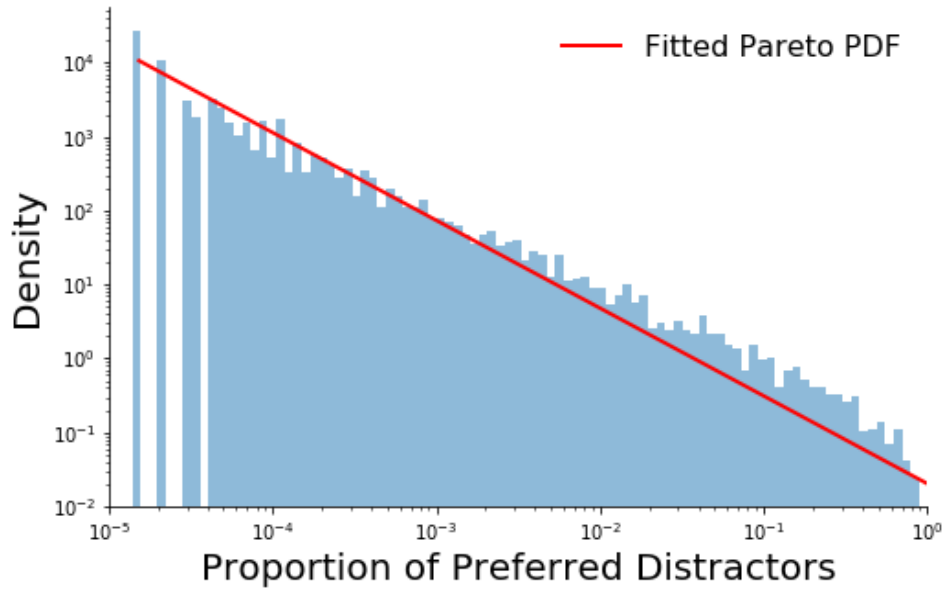


Figure A5: Power law dynamics of proportion of preferred distractors for S01

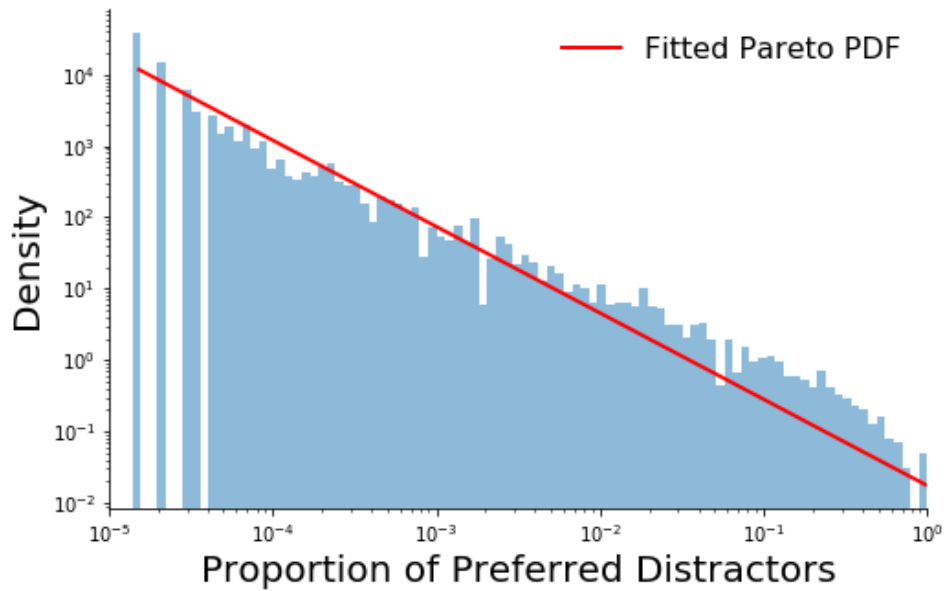


Figure A6: Power law dynamics of proportion of preferred distractors for S02

A.3 Full text of Llama2 + 50-run MBR ensembled decoded texts

Ground Truth	S01	S02	S03
i had no shoes on i was crying i had no wallet but i was ok because i had my cigarettes and i didn't want any part of freedom if i didn't have my cigarettes when you live with someone who has a temper a very bad temper a	long day i didn't sleep much i was exhausted but i could have done with a cup of coffee i don't know what made me decide to go home i guess the worst thing about it was that the girl was really upset and i was so angry and	only reason people have trouble finding jobs i know because i do it every day i don't mind if you don't because it doesn't mean you aren't good at it it's just a natural reaction to things that happened before you know what	job i have no savings but i'm not homeless i can afford to buy groceries and gas i don't need a job anymore because i have no money to pay for college my dad is an alcoholic he was always abusive and it was very
very very bad temper you learn to play around that you learn this time i'll play possum and next time i'll just be real nice or i'll say yes to everything or you make yoursel scarce or you run and this was one of the times when you just run and as	sad that i couldn't stand to talk to her about it because i didn't know how to fix it she told me to just say whatever she wanted and that i wasn't allowed to change anything and she didn't care what i did but i still did it it was hard and it hurt because i	to do if you do something wrong it's very hard to say it is what you want but you will do what is right in order to be successful you may not realize this but your goal is to help your son succeed but if he fails that means you have to do it alone i	difficult for me to deal with him i was the one who would say what i needed to and not what he said or if he did so mething wrong then i could either argue or just walk away but that doesn't work for me the other reason i did this is that
i was running i thought this was a great place to jump out because there were big lawns and there were cul de sacs and sometimes he would come after me and drive and yell stuff at me to get back in get back in and i was like no i'm out of here this is great and i went and hid behind a cabana and he left and i had my cigarettes and uh i started to walk in this	knew that she had the power to do it again i went to the hospital that day and when they asked me to sit down she said that i should just leave her alone and go home i was like ok no thanks and walked out to the parking lot with my friend we went back inside the store and i had my first drink	would say that you should have done this in your home town but this is where most of the people live the police will be there if they see you walking down the street so i say i want to leave here so we head over to a park a block from my school and he gets his phone and starts talking to some of	i had to move to an area where i couldn't see anything because the roads were too narrow for cars to pass by me at night my dad would just yell at me to go home but i kept saying no and running off into the woods he was like hey you can get the car back and i couldn't believe it but he had been driving
beautiful neighborhood it was ten thirty at night and it was silent and lovely and there was no sound except for sprinklers ch ch ch ch ig ch ch ch ch ig and i was enjoying myself	with him it was about minutes into the show and he was drunk i was at a bar with two of my friends and this guy had a giant beer bottle on my bed and i	the students i saw on the street and it seems that the guy was really good at it and i think he was the one who decided to teach the class a couple days	around town for about hours i went to see him at about pm and he was pretty drunk and the place was packed and we had a few beers and smoked some weed the whole

Ground Truth	S01	S02	S03
<p>and enjoying the absence of anger and enjoying these few hours i knew i'd have of freedom and just to perfect it i thought i'll have a smoke and then it occurred to me with horrifying speed i don't have a light just then as if in answer i see a figure up ahead</p>	<p>was so happy to finally be alone and not have to talk about what had happened in the past few days and how i felt i also started to wonder if it was something i did that caused me to lose it and then i went out to the street and saw a man coming towards</p>	<p>after it started but i couldn't focus on anything but how it affected my life so much and how i could not deal with it because i didn't want to feel that way anymore it is hard to understand how it happened i can't really explain why but i felt the same way when i saw it in the mirror the</p>	<p>night and it was really hard to feel happy after a few months of trying to be the best i could i had no money to buy anything but i knew it would be impossible to get a car since i didn't have insurance i asked a guy if he was a cop and</p>
<p>who is that it's not him ok they don't have a dog who is that what uh what are they doing out on this suburban street and the person comes closer and i could see it's a woman and then i can see she has her hands in her face oh she's crying and then she sees me and she composes herself and she gets closer and i see she has no</p>	<p>me i thought hey that guy looks like my dad but i don't know him well he was walking down the street at this point and we saw him coming towards us he had his hand up to his face and was looking in our direction and i was frozen in fear and he started talking to us we were</p>	<p>night before i thought maybe my parents were in another room but i knew they were both there it was dark out but the hall light was on and i could see him moving around he had his hand on the wall and then he was looking up at me he then turned and walked away i ran over to him and i saw that</p>	<p>he said no but i didn't see any reason why he would be in the store because of what happened the guy walked in and i saw that he had his hand up the front of his shirt and he was rubbing his face as i approached he then turned around and looked at me and started crying as he walked back to his car</p>
<p>shoes on she has no shoes on and she's crying and she's out on the street street i recognize her though i've never met her and just as she passes me she says you got a cigarette and i say you got a light and she says damn i hope so and then sh first she digs into her cutoffs in the</p>	<p>both staring at him he was the same age and his eyes were red from crying i remember seeing him once but didn't know who he was he looked at me and asked me if i had a girlfriend i said no but he didn't know so i went to her room and found a box of</p>	<p>his face was pale he had a very similar look to the guy i had seen before but we didn't really talk to him he came over and he asked if we had any beer in the car he didn't have any and we said no he was a great guy but i didn't</p>	<p>his head was still down and i was very scared and confused i think it was because he didn't recognize me but i didn't really know him then he asked me if i had a girlfriend i said no and that i didn't think so he did a quick check of my backpack</p>
<p>front nothing and then digs in the back and then she has this vest on that has fifty million little pockets on it and she's checking and checking and it's looking bad it's looking very bad she digs back in the front again deep deep and she pulls out a pack of matches that had been laundered at least once ukgh we open</p>	<p>her clothes i opened it up and it was like a little black bag that had a few things inside of it that i couldn't figure out at first and then i just grabbed a small box and opened it and pulled out a huge pile of bills i had thrown away but it was still worth it</p>	<p>know that until a year later when he went to jail and we all saw the pictures and the whole thing was a mess but i didn't really know that much about it until i came to see the house and it was a big place and everything was nice and all that but i still</p>	<p>and found some paper towels in the back pocket of the pants and some other things that i wasn't sure where to find but they were still there i looked at them a bit more and found a small bag of weed in there that had probably been around years old i didn't want</p>

Ground Truth	S01	S02	S03
it up and there is one match inside ok oh my god this takes on it's like nasa now we got to like oh how are we gonna do it ok and we hunker down we crouch on the ground and where's the wind coming from we're stopping i take out my cigarettes let's get the cigarettes ready oh my brand she says not surprising and	so i took it all home with me i was like wow this is awesome i mean you can do it again but i want you to try to get out of the car before the guy comes back you can tell him to turn off the lights but you don't know how much it	got in trouble for smoking weed after a couple weeks and i was trying to keep my cool so i sat on the floor next to the toilet and waited i had my hand in the bowl when he came to pick it up he said you can't use it because i know how it feels	to smoke it so i took the joint and said oh well it's a waste of money but i think we can do it anyway i take a deep breath and open the door a little bit so i can get my head up the guy comes over to me and says you can do it i don't have any
we both have our cigarettes at the ready she strikes once nothing she strikes again yes fire puff inhale mm sweet kiss of that cigarette and we sit there and we're loving the nicotine and we both need this right now i can tell the night's been tough immediately we start to reminisce	will hurt so he starts yelling at me i do it again and again until my face is bloody i end up sitting down with him and just looking at him for the first time i remember how scared he was when we were in his room we sat	so i took it out of the bag and it started to bubble and then popped out i grabbed my hand and held it out to her while she took the bottle i didn't want to take it because it was so weird to me after about minutes she	experience with this so he pulls out the knife and cuts me up i feel the hot blood flow into my mouth and then i just sit there and try to suck it out i felt so sick and i knew that my life was about to end i went back inside and started
about our thirty second relationship i didn't think that was gonna happen me neither oh man that was close oh i'm so lucky i saw you yeah then she surprises me by saying what was the fight about and i say wha what are they all about and she said i know what you mean she said was it a bad one and and i said	there for about minutes talking about it then he starts saying things like you don't know who i am and what happened and then i hear this guy ask me if i knew who he was i said no i didn't and he says you didn't know him did you you	started to cry and i said that i wasn't ready to see her i felt so bad and she was like oh my god what happened and then she asked me why i was so upset i said i don't know what you mean but it is obvious that you are angry	talking to my friends about how horrible the day was and how i couldn't believe it but i was glad that he came over i wanted to tell him about it and he asked me what happened he then said i don't know what you mean what did i do to him and i replied
you know like medium she said oh and we start to trade stories about our lives we're both from up north we're both kind of newish to the neighborhood this is in florida we both went to college not great colleges but man we graduated and i'm actually finding myself a little jealous of her because she has this really cool	think i did and then we start talking about our mutual friends we went to the same school but she lived in a city about hours away from where we were she had a great job but i don't see her much as a manager but she is really close to the other people who work at this	about something i asked what happened and he said he went to visit a friend in a town i lived in in the south i didn't really know where it was he came back to the states to attend university he said that he was a very smart person but he didn't think he would get a job as an assistant to	oh it was nothing he just went on to tell me about his childhood in the united states he was from the east coast he had lived there for years and was an excellent student at a university he also had an engineering degree but it didn't compare to mine my mom had a great job she

Ground Truth	S01	S02	S03
<p>job washing dogs she had horses back home and she really loves animals and she wants to be a vet and i'm like man you're halfway there i'm a waitress at an ice cream parlor so um that's not i don't know where i want to be but i know it's not that and then it gets a little deeper cg</p>	<p>company i know this because she had to leave school because of it but she said she wanted to be a teacher i got a job at a local coffee shop i didn't like it but i was happy there and i did it anyways one day the guy comes</p>	<p>an engineering professor the thing is he really doesn't want to work at a university so i think he can only do so much but he has an engineering degree which i don't know what that means for me so i think i need to start talking to people</p>	<p>worked as a secretary for a bank for years and she has a degree in accounting but it's just not possible i could work at a bank but i don't want to go back and do that it seems like you need to</p>
<p>and we share some other stuff about what our lives are like things that i can't ever tell people at home this girl i can tell her the really ugly stuff and she still understands how it can still be pretty she understands like how nice he's gonna be when i get home and how sweet that'll be</p>	<p>in with a bunch of people who were already in the room i didn't know them well so i couldn't tell them what happened but they didn't really want to hear the story because they knew how much i hated the fact that i didn't get to see him because he didn't care and</p>	<p>i can trust who don't really know me but i want to share what happened with them i feel that if they don't like me that they can't be trusted to not judge me for something i did wrong but if i try to fix it they will always hate me because i do it again</p>	<p>talk about what happened i think it is important to explain some things and maybe i can help you get a perspective on how you feel in your own way i think it would be easier to understand it myself if i understood how i felt when i was younger my parents had no clue how much it</p>
<p>we are chain smoking off each other oh that's almost out come on and we we go through this entire pack until it's gone and then i say you know what uh this is a little funny but you're gonna have to show me the way to get home because although i'm twenty three years old i don't have my driver's license yet and i just jumped out right when i needed to and she says well why don't you come back</p>	<p>i couldn't stop crying because of it so i left it on the counter for him to take it off and he did and then i said i don't want to keep it because i can't afford to get it back because he didn't buy me a ticket i had no idea where to go so i asked him if i could</p>	<p>i can go to a bar and drink some beer but they will ask me to leave after i finish up i walk outside and say i need to get a ride home because i don't know how to drive in my state and i didn't have my license yet so i asked him if he could pick me up to go</p>	<p>affected me so i decided to give them a big hug and kiss their cheek then they pulled back and started crying i said okay that was it i didn't have time to give them any of my money i don't have a car i can't even get a license because of this so i just drove by and asked if she could</p>
<p>to my house and i'll give you a ride i say ok great and we start walking and uh we get to this um lots of uh lights and uh the roads are getting wider and wider and there's more cars and i see um lots of stores you know laundromats and dollar stores and emerge centers</p>	<p>stay with him at my place he said sure and we walked outside together we started talking and then i noticed that there were people everywhere the whole street was empty we looked up and saw the sky was lit up with orange and yellow and then a car came</p>	<p>home he said sure i would like that so we drive out of town and down a main road where it becomes more rural the houses get smaller and less populated i see a few farms and then a big town with lots of stores and</p>	<p>drive me home she says sure and we go and i was like ok so we get in the car and she starts driving to the address i give her the directions to her house and then we head over there we walk through the neighborhood and see a police car with</p>

Ground Truth	S01	S02	S03
<p>and then we cross over us one and uh she leads me to some place and i think no but yes carl's efficiency apartments this girl lives there and it's horrible and it's lit up so bright just to illuminate the horribleness of it it's the kind of place where you drive your</p>	<p>around the corner and we watched it until it pulled up to us and i thought oh my god it was the guy who ran the store i remember this i was so freaked out because i knew that it was a bad thing because of what</p>	<p>restaurants i drive about a mile up a hill and i see this sign that reads i don't like this place but i also think that the owner is a complete idiot because he has a huge house and the whole place is built into the building</p>	<p>a red light on the corner in the street next to my house i saw this guy and i freaked out because i thought he was my neighbor who had a huge house that was really nice but was not the kind of place you would see in a movie where everyone</p>
<p>car right up and the door's right there and there's fifty million cigarette butts outside and there's like doors one through seven and you know behind every single door there's some horrible misery going on there's someone crying or drunk or lonely or cruel and i think oh god she lives here how awful we go to the door door number four and she very</p>	<p>happened the guy was on the couch with a huge amount of alcohol and the room was full of people who were clearly drunk the whole thing was pretty weird as the group was drinking and smoking weed i didn't know what was going on so i went back inside and called the cops i had to walk out</p>	<p>so you can walk in the door without touching the wall the windows are all covered and there are a bunch of people in there that are probably doing nothing but drinking or just sitting around waiting for someone to call so i'm like man i feel bad for him i really do i was trying to tell him</p>	<p>was living together but you couldn't go in without a security camera in the front room the tv is always on and people are constantly talking and laughing and all sorts of weird stuff going on i can't believe this is happening i didn't know he was gay so i went to my room and</p>
<p>very quietly keys in as soon as the door opens i hear the blare of television come out and on the blue light of the television the smoke of a hundred cigarettes in that little crack of light and i hear the man and he says where were you and she says never mind i'm back and he says you alright</p>	<p>of there and leave the door open because i could see a man in his room in a suit that was covered in blood and he had a huge knife sticking out of his chest i remember him saying oh you can go now but i told him i don't want to he said</p>	<p>to leave when the door opened and i saw him walking towards me i could see that the light from the kitchen was off and his face was covered in blood but i had never seen him before so i said hey man what are you doing here you need to go home he says i</p>	<p>was just standing there trying to calm myself down i could hear the water running in the bathroom and the tv was off the only light came from the screen it was dark outside i heard her say you have to go now but i said ok i don't think so and then she</p>
<p>and she says yeah i'm alright and then she turns to me and says you want a beer and he says who the fuck is that and she pulls me over and he sees me and he says oh hey i'm not a threat just then he takes a drag of his cigarette a very hard hard drag you know the kind that makes the end of it really heat up hot hot hot</p>	<p>ok but you can stay i walked over to my mom and she told me not to tell him to come over he said he didn't like it i had a few beers and started to get really drunk but the alcohol was too much for my head to handle and</p>	<p>don't know but i want to talk to you i told him no but then i see him look at me and i think oh i can't believe this he must be crazy i was staring at his hand and it started moving a little faster than normal it was like the weirdest</p>	<p>was like oh okay you can come with me she then asked if i was sure about my mom i said yes and she was like oh this is great so i took it out of his mouth and it was really hard to swallow because it felt like someone was pushing</p>

Ground Truth	S01	S02	S03
<p>and long and it's a little scary and i follow the cigarette down because i'm afraid of that head falling off and i'm surprised when i see in the crook of his arm a little boy sleeping a toddler and i think and just then the girl reaches underneath the bed and takes out a carton and she taps out the</p>	<p>i could only hold the glass up to the light to see what i had done wrong but it was all over my hand the blood was still running down my arm the nurse saw that and tried to pull him away she then grabbed the iv bag and began to</p>	<p>feeling you get when you touch your arm but then you see the blood flow down the front of your body and you can feel your hand on the ground in a way you never imagined possible so i went over to his car and grabbed a paper bag full</p>	<p>my throat down and then sucking it out then the water started flowing back up into my body i didn't realize what was happening until my hand was touching the bottom of my leg and the other was resting on the seat behind me he then pulled a small bottle out of the glove box</p>
<p>last s pack of cigarettes in there and on the way up she kisses the little boy and then she kisses the man and the man says again you alright and she says yeah i'm just gonna go out and smoke with her and so we go outside and sit amongst the cigarette butts and smoke and i say wow that's your little boy and she says yeah isn't he beautiful and i</p>	<p>fill it up with water as i ran back to the room i looked at her and said something like hey what are you doing here i'm gonna go get some food so i left the room and started walking down the street and i thought hey man i don't know you i mean i think you're really</p>	<p>of food from his kitchen i then walked around to the front door to open it and he asked me what i wanted and i said just some food i went and got a few plates and then we started to eat the meal we had already paid for and the guy was like wow dude that is awesome</p>	<p>and poured some water in it then placed it next to me as he sat back down he said hey buddy you wanna come with me i replied yeah i want to play this game we went on a tour of the town and we were talking about what kind of music the city was i said wow this is amazing and</p>
<p>say yeah he is he is beautiful he's my light he keeps me going she says we finish our cigarettes she finishes her beer i don't have a beer cause i can't go home with beer on my breath and she goes inside to get the keys she takes too</p>	<p>weird but you could be the best person you can be you don't know how to do this but i was told to go out and get drunk with friends i didn't do it and then the guy came back into my room</p>	<p>i think he is really cool i mean i was and so was the other guy we went out to dinner and i didn't drink much because i was worried i would get arrested or something like that the police came and</p>	<p>he replied yeah it was so much fun he was a really great guy but he didn't have any money he wasn't allowed to smoke weed because he was too scared of getting arrested and then one night i came home drunk and</p>
<p>long in there getting the keys and i think something must be wrong and she comes out and she says look i'm really sorry but um like we don't have any gas in the car it's already on e and he needs to get to work in the morning and um i you know i i'm gonna be walk to work as it is so what i did was though here look i drew out this map for you and you're really you're like a mile and a half from home and um if you walk</p>	<p>and i started to freak out thinking something was wrong but then i remember him saying oh hey you know i don't have any money to buy a new car i think he said i can't do that so i just go with him and tell him to do whatever it takes he then says well you can try to find the place where</p>	<p>searched my house but i didn't hear them come back they said they couldn't find the keys to the car and i was scared because they didn't know the code to get into the house so i said okay i can drive but i need a map first so he shows me where it is he says it's about minutes away so we walk down</p>	<p>it was dark i didn't feel like talking to him so i just left he said i can't go with you because my dad doesn't have any money for the bus but that i could take a cab home or something so he told me to drive in the direction of my house which is about miles away and i should head</p>

Ground Truth	S01	S02	S03
<p>three streets over you'll be back on that pretty street and you just take that and you'll be fine and she also has wrapped up in toilet paper seven cigarettes for me a third of her pack i note and a new pack of matches and she tells me good bye and that was great to meet you and how lucky and that was fun and you know</p>	<p>they are supposed to meet and then i go in there and he asks me to bring a small bag with a few bottles of wine in it i said ok and took them inside and we started talking and he asked me about my life and how i felt about him and me to</p>	<p>the road to where he lives and i take out a small piece of paper and write this on the inside of the windshield with the red pen that she gave to me the whole thing was really cool and she asked me what i wanted for Christmas she told</p>	<p>down the road a little ways until i see the sign and pull over and park the car the kid comes out with a bag of chips and a small box of candy i take them from him and he says hey man i'm so glad i got to meet you i like you too and</p>
<p>let's be friends and i say yeah ok and i walk away but i kind of know we're not gonna be friends i might not ever see her again and i kind of know i don't think she's ever going to be a vet and i cross and i walk away and maybe this would've seemed like a visit from my</p>	<p>i said yes and then i left because i wasn't sure what was happening but i wanted to see her again it was really sad when i realized she didn't even know i was there until after i left i went home and sat down to think i felt a</p>	<p>call her anytime and i said sure and hung up i didn't really know what to do but i thought she would be okay i don't think she ever talked about it i didn't really know what was happening until i went to see her after that and it was hard to process</p>	<p>then he said ok well that was weird i guess i just didn't want to go in there and he just kind of left after that but i think it was really interesting for me because i had always wanted to be a doctor but it seemed like they had a different approach than what</p>
<p>possible future and scary but it kind of does the opposite on the walk home i'm like man that was really grim over there and i'm going home now to my nice boyfriend and he is gonna be so extra happy to see me and we have a one bedroom apartment and we have two trees and there's</p>	<p>wave of panic that i had never experienced before but i didn't really feel like it was happening so i said hey man you know this guy that came back to me after i went to bed and was really depressed he had been drinking for months he was living in an apartment with two other guys and it</p>	<p>because i was so confused and angry but then i started talking to my parents about what they had done and about how my sister was a horrible person and how i didn't know it then the worst thing ever happened she was living in a tiny apartment with a lot of stuff in</p>	<p>i was used to in high it was really hard to understand what was happening but it seemed like there were people all around us i noticed one guy who was very big and scary looking but he was also a good friend and he had a small apartment which he shared with two other guys it was a</p>
<p>a yard and we have this jar in the kitchen where there's like loose money that we can use for anything like we would never ever run out of gas and um i don't have a baby you know so i can leave whenever i want i smoked all seven cigarettes on the way home and people who have never smoked cigarettes just think ick</p>	<p>was a huge house with a big screen tv and a couch so he could play video games i didn't have any money for anything i had no friends so i just stayed there alone until he left i started drinking a lot and i didn't really know what was happening until my friends found out and they didn't believe me</p>	<p>her bedroom and a kitchen that had no electricity i had to pay for everything myself i didn't really have any money saved up but my mom would have helped me out but i wasn't going to do anything i just stayed with him for about two days until he stopped drinking i didn't know how much he had had but he said</p>	<p>huge room with a tv in the corner and a kitchen that was filled with food that he kept on hand i didn't have any money because i wasn't paying for anything and my dad didn't want me to go out drinking so i just walked home that night after work he said that i needed to stop smoking weed because i didn't</p>

Ground Truth	S01	S02	S03
<p>disgusting and poison but unless you've had them and held them dear you don't know how great they can be and what friends and comfort and kinship they can bring it took me a long time to quit that boyfriend and then to quit</p>	<p>when i said it i couldn't even explain it but i think it's important that you know why it happened you can do it because you are so powerful you have an ability to help other people but you must not give up you need to learn to accept what happened and move on i had a</p>	<p>that it was good to feel like you are not alone i think it is important to look back on this moment with some sadness but it will come to a head soon i feel that we need to change the past so we can live it again we do it</p>	<p>like the taste it was disgusting and it made me feel sick but it also helped me to be more comfortable around my friends who i was close to and i found a way to connect with them after the breakup i think they got over it</p>
<p>smoking and uh sometimes i still miss the smoking</p>	<p>girlfriend when i was and a year later she divorced my</p>	<p>now it was a mistake but the guy is a</p>	<p>but i was still depressed for months after she died</p>