

ARCHESWEATHER: An efficient AI weather forecasting model at 1.5° resolution

Guillaume Couairon¹ Christian Lessig² Anastase Alexandre Charantonis^{1,3} Claire Monteleoni^{1,4}

¹Inria, France ²ENSIIE, France ³ECMWF, Germany ⁴University of Colorado Boulder, USA

Abstract

One of the guiding principles for designing AI-based weather forecasting systems is to embed physical constraints as inductive priors in the neural network architecture. A popular prior is locality, where the atmospheric data is processed with local neural interactions, like 3D convolutions or 3D local attention windows as in Pangu-Weather. On the other hand, some works have shown great success in weather forecasting without this locality principle, at the cost of a much higher parameter count.

In this paper, we show that the 3D local processing in Pangu-Weather is computationally sub-optimal. We design ARCHESWEATHER, a transformer model that combines 2D attention with a column-wise attention-based feature interaction module, and demonstrate that this design improves forecasting skill.

ARCHESWEATHER is trained at 1.5° resolution and 24h lead time, with a training budget of a few GPU-days and a lower inference cost than competing methods. An ensemble of four of our models shows better RMSE scores than the IFS HRES and is competitive with the 1.4° 50-members NeuralGCM ensemble for one to three days ahead forecasting.

Our code and models are publicly available at <https://github.com/gcouairon/ArchesWeather>.

1. Introduction

The field of weather forecasting is undergoing a revolution, as AI models trained on the ERA5 reanalysis dataset (Hersbach et al., 2020) can now outperform IFS-HRES, the reference numerical weather prediction model developed by the European Center for Medium-Range Weather Forecasting (ECMWF), with inference costs that are orders of magnitude lower (Bi et al., 2022; Pathak et al., 2022; Lam et al., 2022; Chen et al., 2023; Nguyen et al., 2023; Guo et al., 2024; Kochkov et al., 2023). The neural network architectures of

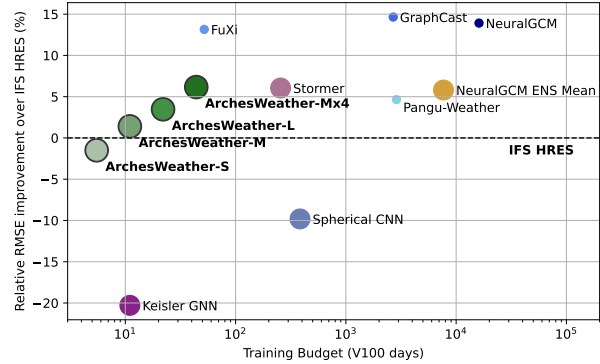


Figure 1. Relative RMSE improvement over the IFS HRES as a function of training computational budget, averaged for key upper air variables (Z500, Q700, T850, U850 and V850) and lead times of 24h/48h/72h. Circle size indicate training resolution: small circles for 0.25°/0.7°, big circles for 1°/1.4°/1.5°. ARCHESWEATHER reaches competitive forecasting performance with a much smaller training budget.

these models are adopted from the computer vision community, usually by adding priors related to the specificity of processing physical fields on a 3D spherical atmosphere (local 3D attention for Pangu-Weather; Fourier Spherical Operators for FourCastNet; Graph Neural Networks on a spherical mesh for GraphCast; Dynamical core for NeuralGCM). Adding these physical priors usually served two goals: (i) AI models that have more priors are more interpretable since they more closely relate to their numerical counterparts, which increases trust in these models; (ii) networks with more physical priors generalize better and can reach the same accuracy with less parameters and memory footprint.

However, recent works have started questioning this second assumption, showing that architectures with less physical priors can also generalize well with a smaller training cost (Nguyen et al., 2023; Chen et al., 2023; Lessig et al., 2023), which might hint that models with more physical priors and less parameters are harder to train. These works have adapted vision transformers (Dosovitskiy et al., 2020) by considering ERA5 as latitude/longitude images, and concatenating upper-air weather variables in the channel dimen-

sion. This concatenation requires a lot more parameters than 3D processing, so these works still rely on very large neural networks (300M parameters for Stormer, 1.5B for FuXi).

In this paper, we identify a limitation of 3D local attention, used in the Pangu-Weather architecture. Inside the network, only the features for neighboring pressure levels interact, mimicking the physical principle that air masses only interact locally at short timescales. We find that despite its connection with physics, this prior is computationally sub-optimal and we design a global Cross-Level Attention-based interaction layer (dubbed CLA) to overcome this limitation.

We also show that there is a small distribution shift in ERA5 before and after 2000, which we attribute to shifts in the observation system, and we improve forecasting by fine-tuning on recent data.

Our model, dubbed ARCHESWEATHER, is trained at 1.5° resolution and 24h lead time, in three versions: S (49M params), M (89M params), L (164M params). Our M version reaches competitive RMSE scores with a computational budget orders of magnitude less than competing architectures (see Figure 1). An ensemble average of four M models is competitive with the 1.4° NeuralGCM ensemble with 50 members (Kochkov et al., 2023) for a lead time of one to three days. Our work paves the way for training weather models at 1.5° on academic resources, only requires to download less than 1 TB of data and provides cheap inference: a single 24h forecast with the M model takes ~ 0.25 s on a A100 GPU card.

In summary, our contributions are:

- We show that the 3D local attention in Pangu-Weather is computationally sub-optimal and we design a non local cross-level attention layer that boosts performance.
- We show that some additional benefit can be gained by fine-tuning our model on recent ERA5 data.
- ARCHESWEATHER is competitive with the state-of-the-art while requiring only a few GPU-days to train and can be run cheaply at 1.5°.

2. Methods

We tackle the task of AI-based weather forecasting, and denote with (X_t) the historical trajectory of weather variables. We optimize a neural network to predict the next state $X_{t+\delta t}$ given an input state X_t , where δt is called the *lead time*, which is set to 24h for the remainder of the paper.

2.1. Data, Evaluation and Metrics

We train our models on the ERA5 dataset regridded to 1.5° resolution, which is the standard used for evaluation at the

World Meteorological Organization (WMO). We use 6 upper air variables (temperature, geopotential, specific humidity, wind components U, V and W) at 13 pressure levels, and 4 surface variables (2m temperature, mean sea-level pressure, 10m wind U and V), sampled every 6h.

Following the standard in Weatherbench 2 (Rasp et al., 2023), we train on the ERA5 data from 1979 to 2018, validate on the year 2019, and test our models at 00/12UTC for each day of 2020. Models are evaluated with the latitude-weighted Root Mean Square Error (RMSE). We also define a metric called RRH (average Relative RMSE improvement over the IFS HRES), to get a representative score across key weather variables, detailed in Appendix A.3.

2.2. Architecture

Our neural network architecture is a 3D Swin U-Net transformer (Liu et al., 2021; 2022) with the Earth-specific positional bias, largely inspired by the Pangu-Weather architecture. The surface and upper-air variables are first embedded into a single tensor of size (d, Z, H, W) where d is the embedding dimension, Z the vertical dimension, H and W the latitude and longitude dimensions. this tensor is then processed by the U-Net transformer, and is projected back to surface and upper-air at the end. The standard is to use a strided deconvolution layer for this final projection (Bi et al., 2022; Chen et al., 2023), however it tends to produce unphysical artefacts (see Figure 6 in Appendix). Instead, we use a deconvolution head with bilinear upsampling followed by a standard convolution (see Appendix A.4). Finally, following GraphCast, we provide additional information to the model (hour and month of desired forecast) with adaptive Layer Normalization (Perez et al., 2018).

2.3. Improving efficiency with Cross-Level Attention (CLA)

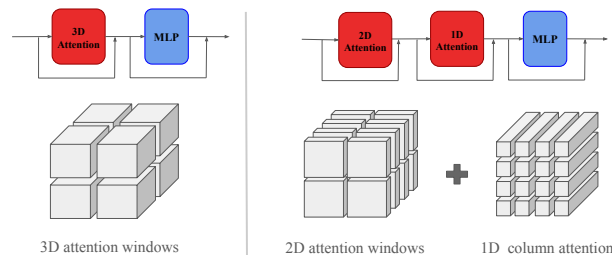


Figure 2. Comparison of attention schemes used in Pangu-Weather (left) versus ours (right).

The attention scheme in a Swin layer (Liu et al., 2021) consists in splitting the input tensor in non-overlapping windows, where a self-attention layer processes each window independently. Then, data is shifted by half a window to compute the next self-attention layer, allowing interaction

between the different attention windows. In Pangu-Weather, the input tensors are split in 3-dimensional windows of size (2, 6, 12): hence, along the vertical Z dimension, only the features for neighboring pressure levels interact, mimicking the physical principle that air masses only interact locally at short timescales. This inductive prior is meant to have the neural network roughly reproduce physical interaction phenomena and reduce the number of parameters needed.

Limitation. From a computational perspective, this prior is a limitation since computations for similar phenomena happening at different atmospheric layers are performed independently in parallel. Global vertical interaction would allow sharing such computations, allocating resources more efficiently. Computations for complex variables can also be spread across levels faster, to reach lower error. Finally, from a physical perspective, having vertical interaction can allow to detect the vertical profile of the atmosphere and to adjust processing accordingly.

Before presenting our proposed solution, we mention two other potential methods and their caveats. First, one could increase the attention window size, e.g. to (4, 6, 12) instead of (2, 6, 12), to accelerate exchange of information along the vertical dimension, but this decreases inference speed due to the quadratic cost of attention in the sequence length. Second, some works use a more standard 2D transformer (Nguyen et al., 2023; Chen et al., 2023) and stack variables across pressure levels in a single vector at each spatial position. This comes at the cost of an increased parameter count: With Z pressure levels (after embedding), the linear and attention layer need $O(d^2 Z^2)$ parameters, with d being the embedding dimension for a single pressure level. As a result, Stormer uses a ViT-L with 300M parameters, and FuXi uses a SwinV2 architecture with 1.5B parameters.

Proposed solution. We propose to make all vertical features interact by adding a column-wise attention mechanism dubbed Cross-Level Attention (CLA), that processes data along the vertical dimension of the tensor only. By considering column data as a sequence of size Z , the number of parameters in this attention module is $O(d^2)$ and does not depend on Z . We also remove the vertical interaction from the original implementation by using horizontal attention windows of shape (1, 6, 12), which reduces the attention cost. The resulting attention scheme shares similarities with axial attention (Ho et al., 2019) with a decomposition of attention in two parts: column-wise attention and local horizontal 2D attention. See Figures 2 and 3 for an illustration of our proposed attention scheme, compared to other attention methods. Axial attention has also been used in MetNet-3 (Andrychowicz et al., 2023) and SEEDS (Li et al., 2023).

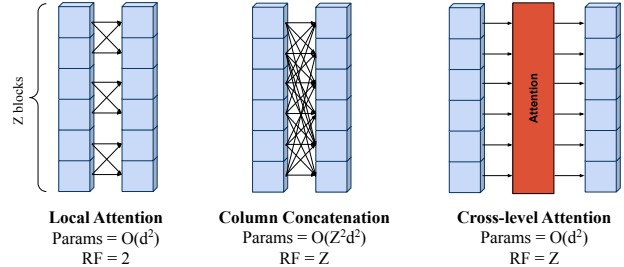


Figure 3. Comparison of attention schemes used in Pangu (Local Attention, left), Stormer/FuXi (Concatenated columns, middle) and ours (Cross-level Attention, right). For each scheme, a single vertical column is represented to illustrate how each layer processes column-wise information. RF stands for Receptive Field.

2.4. Training details

Our model comes in three versions: ARCHESWEATHER-S, 16 transformer layers (49M parameters); ARCHESWEATHER-M, 32 layers (89M parameters); ARCHESWEATHER-L, 64 layers (164M parameters). We train all models for 320k steps; training the M model takes around 2.5 days on 2 A100 GPUs. More details can be found in Appendix A.1.

Next, we find that forecasting models have a larger error in the first half of the training period 1979-2018 (see Figure 4, which we attribute to ERA5 being less constrained in the past due to a lack of observation data. To overcome this distribution shift, we use recent ERA5 data (2007-2018) for fine-tuning our models from steps 250k to 300k.

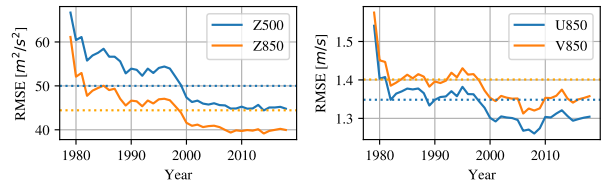


Figure 4. Geopotential (left) and wind speed (right) RMSE of a model w/o fine-tuning, for each year in the training set. Test RMSE (year 2020) are shown in dotted lines.

As commonly done in similar works (Lam et al., 2022; Chen et al., 2023; Nguyen et al., 2023), we fine-tune our models for 20k steps on auto-regressive rollouts of length 2 to 4, see details in appendix B.2.

Finally, we train small ensembles of our models, by independently training multiple models with different random seeds, and then averaging their outputs at inference time. We call these models ARCHESWEATHER-MX4 (four M models) and ARCHESWEATHER-LX2 (two L models).

	RES.	COST	Z500	T850	Q700	U850	V850	T2M	SP	U10M	V10M
IFS HRES	0.1°		42.30	0.625	0.556	1.186	1.206	0.513	60.16	0.833	0.872
PANGU	0.25°	2880	44.31	0.620	0.538	1.166	1.191	0.570	55.14	0.728	0.759
GRAPHCAST	0.25°	2688	39.78	0.519	0.474	1.000	1.02	0.511	48.72	0.655	0.683
SPHERICALCNN	1.4°	384	54.43	0.738	0.591	1.439	1.471	N/A	N/A	N/A	N/A
STORMER	1.4°	256	45.12	0.607	0.527	1.138	1.156	0.570	53.77	0.726	0.760
NEURALGCM ENS (50)	1.4°	7680	43.99	0.658	0.540	1.239	1.256	N/A	N/A	N/A	N/A
ARCHESWEATHER-M	1.5°	11	48.1	0.645	0.538	1.294	1.342	0.550	60.9	0.834	0.877
ARCHESWEATHER-L	1.5°	22	46.32	0.621	0.530	1.242	1.286	0.540	58.649	0.798	0.838
ARCHESWEATHER-MX4	1.5°	44	44.36	0.619	0.523	1.235	1.277	0.530	56.3	0.793	0.832
ARCHESWEATHER-LX2	1.5°	44	44.35	0.606	0.519	1.207	1.251	0.525	55.956	0.776	0.815

Table 1. Comparison of AI weather models on RMSE scores for key weather variables with 24h lead-time. Cost is the training computational budget in V100-days. Best scores for training resolution coarser than 1° in **underlined bold**, second best scores in **bold**.

3. Experiments

3.1. Main results

Table 1 shows RMSE scores of ARCHESWEATHER compared to state-of-the-art ML weather models, including Pangu-Weather and GraphCast, SphericalCNN (Esteves et al., 2023), NeuralGCM at 1.4° (50 members ensemble), and Stormer. Data is from WeatherBench 2, except Stormer where we evaluated outputs provided by the authors.

The ARCHESWEATHER-M base model largely surpasses the SphericalCNN model for upper-air variables, with a training budget of around 10 V100-days, 40 times smaller. At 24h lead time, the ARCHESWEATHER ensemble version outperforms the 1.4° NeuralGCM ensemble (50 members) on upper-air variables. They perform on par with the original Pangu-Weather(0.25°) and Stormer(1.4°), except for wind variables (U850, V850, U10, V10) where notably Stormer is consistently better. This might be due to the higher training budget (256 V100-days), bigger models, or averaging outputs from 16 model forward passes (more details in Appendix A.2). Investigating this discrepancy is left for future work. Interestingly, this 24h advantage for wind variables disappears at longer lead times, see Appendix B.2. Finally, our model shows very good RMSE scores at longer lead times, as shown in Appendix B.2.

3.2. Ablation

Our main ablation experiment is presented in Table 2, where we compare models without multi-step fine-tuning. For a fair comparison between models, we decrease the embedding dimension (by about 5%) when using CLA, so that all types of models have roughly the same parameter count. Compared to Pangu-Weather (retrained in the same setting as us), our model without Cross-Level Attention or fine-tuning largely improves performance (rows D compared to rows A), which is largely due to the methodology improvements from GraphCast (predicting $X_{t+\delta t} - X_t$ instead of X_t , including the wind vertical component, con-

	MODEL	#L	Z500	T2M	RRH↑
A1	PANGU-S	16	66.7	0.84	-30.6
B1	ARCHESWEATHER-S	16	49.3	0.566	-8.6
C1	- W/O FINE-TUNING	16	50.6	0.567	-9.7
D1	- W/O CLA	16	55.1	0.594	-17.1
A2	PANGU-M	32	58.7	0.78	-20.4
B2	ARCHESWEATHER-M	32	48.0	0.551	-5.0
C2	- W/O FINE-TUNING	32	48.7	0.552	-5.6
D2	- W/O CLA	32	51.8	0.572	-11.6

Table 2. 500hPa geopotential and 2m temperature RMSE at 24h lead-time for different version of our models, and Pangu-Weather re-trained at 1.5°. ARCHESWEATHER W/O CLA uses local 3D attention instead of our proposed Cross-Level Attention. RRH is the relative RMSE improvement over HRES.

ditioning on the day and month) and the convolutional head. Adding on top our proposed Cross-Level Attention scheme significantly improves scores (Rows C versus D), reducing by half the RMSE difference with the IFS HRES. ARCHESWEATHER with 16 layers reaches lower error than using 32 layers without CLA (e.g. Z500 RMSE of 50.6 vs 51.8). Finally, finetuning the model on recent data only for the last 50k steps brings some small additional benefit (rows C versus B).

4. Conclusion

We have presented ARCHESWEATHER, a weather model that operates at 1.5°, only requires a few GPU-days to train with a reasonably sized dataset (< 1TB), yet reaches similar performance as some models trained with a much higher computational budget. We also find that fine-tuning on recent data slightly improves skill. ARCHESWEATHER is however less suited for applications that require a better resolution, like cyclone tracking, or regional forecasting. The outputs of our model could potentially be downscaled to a finer resolution and projected to consistent physical states (e.g. via diffusion models), which we leave for future work.

References

- Andrychowicz, M., Espeholt, L., Li, D., Merchant, S., Merose, A., Zyda, F., Agrawal, S., and Kalchbrenner, N. Deep learning for day forecasts from sparse observations. *arXiv preprint arXiv:2306.06079*, 2023.
- Bi, K., Xie, L., Zhang, H., Chen, X., Gu, X., and Tian, Q. Pangu-weather: A 3d high-resolution model for fast and accurate global weather forecast. *arXiv preprint arXiv:2211.02556*, 2022.
- Chen, L., Zhong, X., Zhang, F., Cheng, Y., Xu, Y., Qi, Y., and Li, H. Fuxi: a cascade machine learning forecasting system for 15-day global weather forecast. *npj Climate and Atmospheric Science*, 6(1):190, 2023.
- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- Esteves, C., Slotine, J.-J., and Makadia, A. Scaling spherical cnns. *arXiv preprint arXiv:2306.05420*, 2023.
- Guo, E., Ahmed, M., Sun, Y., Mahendru, R., Yang, R., Cook, H., Leeuwenburg, T., and Evans, B. Fourcastnext: Improving fourcastnet training with limited compute. *arXiv preprint arXiv:2401.05584*, 2024.
- Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., Peubey, C., Radu, R., Schepers, D., et al. The era5 global reanalysis. *Quarterly Journal of the Royal Meteorological Society*, 146(730): 1999–2049, 2020.
- Ho, J., Kalchbrenner, N., Weissenborn, D., and Salimans, T. Axial attention in multidimensional transformers. *arXiv preprint arXiv:1912.12180*, 2019.
- Keisler, R. Forecasting global weather with graph neural networks. *arXiv preprint arXiv:2202.07575*, 2022.
- Kingma, D. P. and Ba, J. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- Kochkov, D., Yuval, J., Langmore, I., Norgaard, P., Smith, J., Mooers, G., Lottes, J., Rasp, S., Düben, P., Klöwer, M., et al. Neural general circulation models. *arXiv preprint arXiv:2311.07222*, 2023.
- Lam, R., Sanchez-Gonzalez, A., Willson, M., Wirnsberger, P., Fortunato, M., Alet, F., Ravuri, S., Ewalds, T., Eaton-Rosen, Z., Hu, W., et al. Graphcast: Learning skillful medium-range global weather forecasting. *arXiv preprint arXiv:2212.12794*, 2022.
- Lessig, C., Luise, I., Gong, B., Langguth, M., Stadler, S., and Schultz, M. Atmorep: A stochastic model of atmosphere dynamics using large scale representation learning. *arXiv preprint arXiv:2308.13280*, 2023.
- Li, L., Carver, R., Lopez-Gomez, I., Sha, F., and Anderson, J. Seeds: Emulation of weather forecast ensembles with diffusion models. *arXiv preprint arXiv:2306.14066*, 2023.
- Liu, Z., Lin, Y., Cao, Y., Hu, H., Wei, Y., Zhang, Z., Lin, S., and Guo, B. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 10012–10022, 2021.
- Liu, Z., Hu, H., Lin, Y., Yao, Z., Xie, Z., Wei, Y., Ning, J., Cao, Y., Zhang, Z., Dong, L., et al. Swin transformer v2: Scaling up capacity and resolution. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 12009–12019, 2022.
- Nguyen, T., Shah, R., Bansal, H., Arcomano, T., Madireddy, S., Maulik, R., Kotamarthi, V., Foster, I., and Grover, A. Scaling transformer neural networks for skillful and reliable medium-range weather forecasting. *arXiv preprint arXiv:2312.03876*, 2023.
- Pathak, J., Subramanian, S., Harrington, P., Raja, S., Chattopadhyay, A., Mardani, M., Kurth, T., Hall, D., Li, Z., Azizzadenesheli, K., et al. Fourcastnet: A global data-driven high-resolution weather model using adaptive fourier neural operators. *arXiv preprint arXiv:2202.11214*, 2022.
- Perez, E., Strub, F., De Vries, H., Dumoulin, V., and Courville, A. Film: Visual reasoning with a general conditioning layer. In *Proceedings of the AAAI conference on artificial intelligence*, volume 32, 2018.
- Rasp, S., Hoyer, S., Merose, A., Langmore, I., Battaglia, P., Russel, T., Sanchez-Gonzalez, A., Yang, V., Carver, R., Agrawal, S., et al. Weatherbench 2: A benchmark for the next generation of data-driven global weather models. *arXiv preprint arXiv:2308.15560*, 2023.

A. Additional details

A.1. Training details

We denote X_t the historical trajectory of ERA5, indexed by time t . Input states X_t are normalized to zero mean and unit variance on a per-variable and per-level basis, using statistics of the training set 1979-2018. We train the model to predict the difference $X_{t+\delta t} - X_t$, which we similarly normalize to unit variance.

Following GraphCast, we scale the training loss with coefficients proportional to the air density, to give more importance to variables closer to the surface. We also use the same reweighting of the surface variables with a coefficient of 1 for 2m temperature, and 0.1 for wind components and mean surface pressure.

We train our models for $300k$ steps with the AdamW optimizer (Kingma & Ba, 2014). The batch size is 4 and the optimizer parameters are a learning rate of $3e-4$, beta parameters ($\beta_1 = 0.9, \beta_2 = 0.98$) and a weight decay of 0.05. The learning rate is increased linearly for the first 5000 steps, then decayed with a cosine schedule for the remaining steps.

A.2. Comparison with state-of-the-art

For all models except Stormer, RMSE scores at 1.5° are taken from WeatherBench2 (Rasp et al., 2023). For Stormer (Nguyen et al., 2023), we evaluate outputs provided by the authors at 1.4° resolution. Stormer is a $\sim 300M$ parameters model trained to forecast ERA5 variables at multiple lead-time simultaneously: 6h, 12h and 24h. To make a 24h lead-time forecast, Stormer uses all possible combinations of lead times as conditioning: 24h, 12h-12h, 12h-6h-6h, 6h-12h-6h, 6h-6h-12h, 6h-6h-6h-6h, and averages all trajectories. This base model is ran 16 times with different lead time conditioning to make a 24h forecast. Our ensemble models requires only two forward passes with $\sim 164M$ parameters, or four passes with $\sim 89M$ parameters. Please see the paper (Nguyen et al., 2023) for more details on Stormer.

A.3. Metrics

We compute the average RMSE improvement over the IFS HRES as

$$\text{RRH}(model) = \frac{1}{\sum_v \alpha_v} \sum_v \alpha_v \frac{\text{RMSE}_v(\text{HRES}) - \text{RMSE}_v(model)}{\text{RMSE}_v(\text{HRES})}$$

where variables v spans a set \mathcal{V} of representative weather variables: Z500, Q700, T850, U850, V850, T2m, SP, U10m, V10m. α_v is a per-variable scaling, which is 0.5 for U and V and 1 for all other variables. We use this scaling for wind variables instead of combining U and V predictions in a single wind vector score as in WeatherBench.

As usual, the RMSE scores of the IFS HRES are computed against the IFS analysis (Rasp et al., 2023).

A.4. Convolutional Head

In early experiments, we have observed that the transformer architecture with a strided deconvolution produces small but noticeable checkerboard artefacts (see Figure 6, notably near the North and South poles). Since these artefacts can cause problems for downstream applications, we design a convolutional head that smoothly upsamples data to recover the original image resolution instead. Our design is based on bilinear upsampling, and since it has no learnable parameters, we add convolutions before and after, see Figure 5.

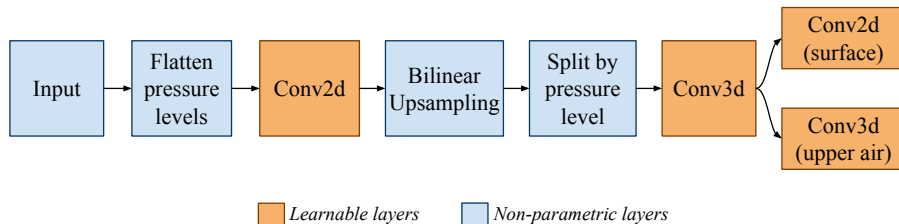


Figure 5. Architecture of our convolutional head.

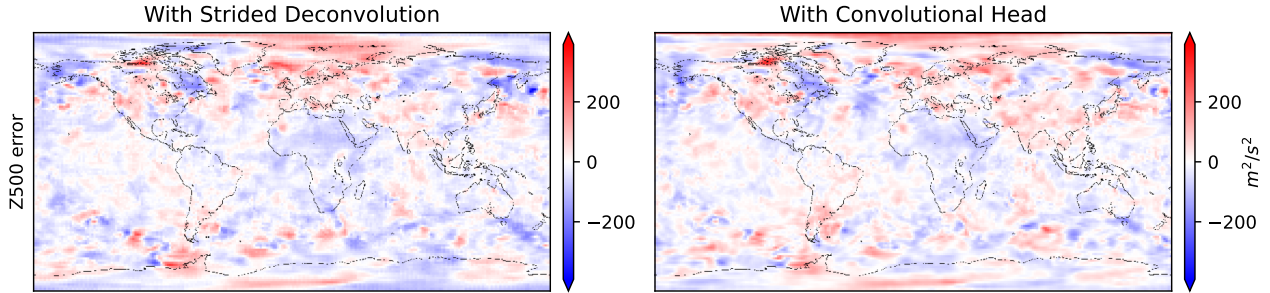


Figure 6. Z500 error using the transformer with strided deconvolution (left) versus the convolutional head that we use (right).

B. Additional Results

B.1. Quantitative results

In Table 3, we compare our model against all models available in WeatherBench2, including those trained at 0.25° resolution. In Table 4, we report metrics for all key weather variables in our ablation study, where we compare our final model with a version without finetuning on recent data (w/o FT) and a version without finetuning and without our proposed Cross-Level-Attention (w/o CLA). We also report scores for small ensembles of our models. Due to computational constraints, we do not train versions w/o CLA for the large (L) model and only train L versions for the ensemble.

	RES.	COST	Z500	T850	Q700	U850	V850	T2M	SP	U10M	V10M
IFS			42.30	0.625	0.556	1.186	1.206	0.513	60.16	0.833	0.872
PANGU-WEATHER	0.25°	2880	44.31	0.620	0.538	1.166	1.191	0.570	55.14	0.728	0.759
NEURALGCM	0.25°	16128	37.94	0.547	0.488	1.050	1.071	N/A	N/A	N/A	N/A
FUXI	0.25°	52	40.08	0.548	N/A	1.034	1.055	0.532	49.23	0.660	0.688
GRAPHCAST	0.25°	2688	39.78	0.519	0.474	1.000	1.02	0.511	48.72	0.655	0.683
KEISLER	1°	11	66.87	0.816	0.658	1.584	1.626	N/A	N/A	N/A	N/A
SPHERICALCNN	1.4°	384	54.43	0.738	0.591	1.439	1.471	N/A	N/A	N/A	N/A
STORMER	1.4°	256	45.12	0.607	0.527	1.138	1.156	0.570	53.77	0.726	0.760
NEURALGCMENS (50)	1.4°	7680	43.99	0.658	0.540	1.239	1.256	N/A	N/A	N/A	N/A
ARCHESWEATHER-M	1.5°	9	48.0	0.643	0.539	1.290	1.336	0.551	60.9	0.829	0.872
ARCHESWEATHER-L	1.5°	18	46.32	0.621	0.530	1.242	1.286	0.540	58.649	0.798	0.838
ARCHESWEATHER-M4	1.5°	36	43.91	0.616	0.522	1.230	1.271	0.528	55.69	0.789	0.828
ARCHESWEATHER-L2	1.5°	36	44.35	0.606	0.519	1.207	1.251	0.525	55.956	0.776	0.815

Table 3. RMSE scores for ARCHESWEATHER compared to all weather forecasting models available in WeatherBench2.

B.2. Multi-step evaluation

In the main paper, we only evaluated models with a lead time of 24h. In this section, we evaluate models for longer lead times through auto-regressive rollouts. After the 300k steps of training, models are fine-tuned with 20k of multi-step fine-tuning

L	NAME	Z500	T850	Q700	U850	V850	T2M	SP	U10M	V10M
2	ARCHESWEATHER-S w/o CLA	55.116	0.722	0.577	1.432	1.485	0.594	69.768	0.942	0.993
29	ARCHESWEATHER-S w/o FT	50.632	0.676	0.554	1.354	1.402	0.567	63.447	0.878	0.922
9	ARCHESWEATHER-S	49.365	0.672	0.551	1.345	1.395	0.567	62.710	0.870	0.914
6	ARCHESWEATHER-Sx4	47.042	0.652	0.541	1.299	1.347	0.549	59.291	0.838	0.881
10	ARCHESWEATHER-M w/o CLA	51.820	0.688	0.558	1.393	1.425	0.572	65.616	0.888	0.934
25	ARCHESWEATHER-M w/o FT	48.720	0.646	0.541	1.295	1.340	0.552	61.572	0.834	0.877
18	ARCHESWEATHER-M	48.022	0.644	0.540	1.290	1.336	0.551	60.981	0.830	0.872
39	ARCHESWEATHER-Mx4	43.911	0.616	0.522	1.230	1.271	0.528	55.688	0.789	0.828
23	ARCHESWEATHER-L w/o FT	46.846	0.623	0.531	1.245	1.288	0.540	59.031	0.801	0.841
44	ARCHESWEATHER-L	46.321	0.621	0.530	1.242	1.286	0.540	58.649	0.798	0.838
18	ARCHESWEATHER-Lx2	44.346	0.606	0.519	1.207	1.251	0.525	55.956	0.776	0.815

Table 4. Ablation: RMSE scores of key weather variables for variants of our model. w/o FT does not use recent data for the last 50k steps, and w/o CLA additionally does not use Cross-Level-Attention. The -Sx4, -Mx4 and -Lx2 are models ensembles using 4, 4, and 2 models respectively.

by rolling out the model K times and averaging losses at each step. We use $K = 2$ for the first 8k steps, $K = 3$ for the next 8k steps and $K = 4$ for the remaining 4k steps (Keisler, 2022; Nguyen et al., 2023; Lam et al., 2022). Interestingly, we find that our model ARCHESWEATHER-M performs better than the original Pangu-Weather and even GraphCast at longer lead times for all variables, which might be due to a smoothing effect due to the corser resolution. The NeuralGCM ensemble still performs better for upper-air variables (surface variables are not predicted by the model), since the ensemble mean with 50 members better approximate the true distribution mean, but we can partly close this gap and match the performance of Stormer with our ARCHESWEATHER-Mx4 ensemble version. We also note that the better 24h RMSE scores for Stormer on wind variables (U850, V850, U10m, V10m) do not yield better multi-step trajectories as the week-ahead wind predictions of our ensemble model are competitive with and even slightly outperform Stormer.

B.3. Qualitative results

Qualitative samples for ARCHESWEATHER-M are shown in Figure 8 (raw forecasts X_t) and 9 (predicted deltas $X_{t+\delta t} - X_t$). We chose January 26th as initialization date, similarly to the qualitative results in Stormer (Nguyen et al., 2023).

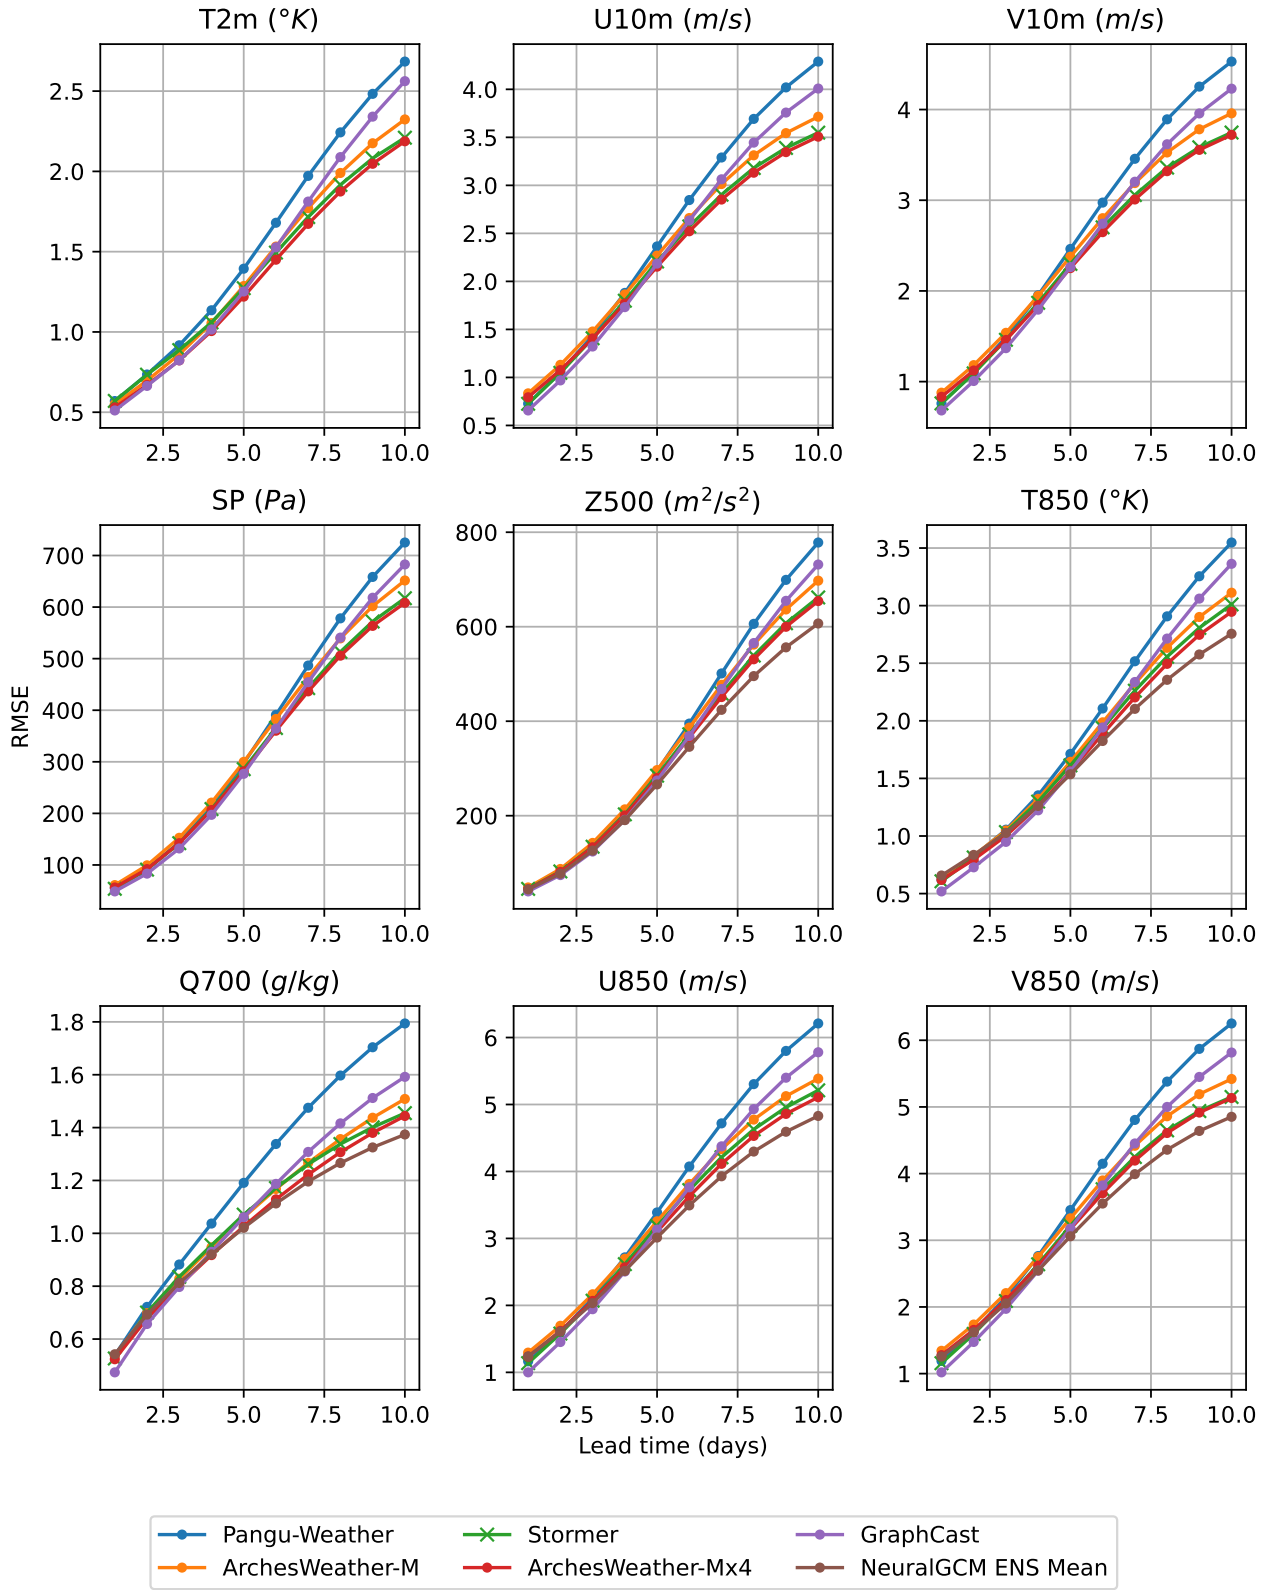


Figure 7. RMSE scores of weather models for lead times up to 10 days.

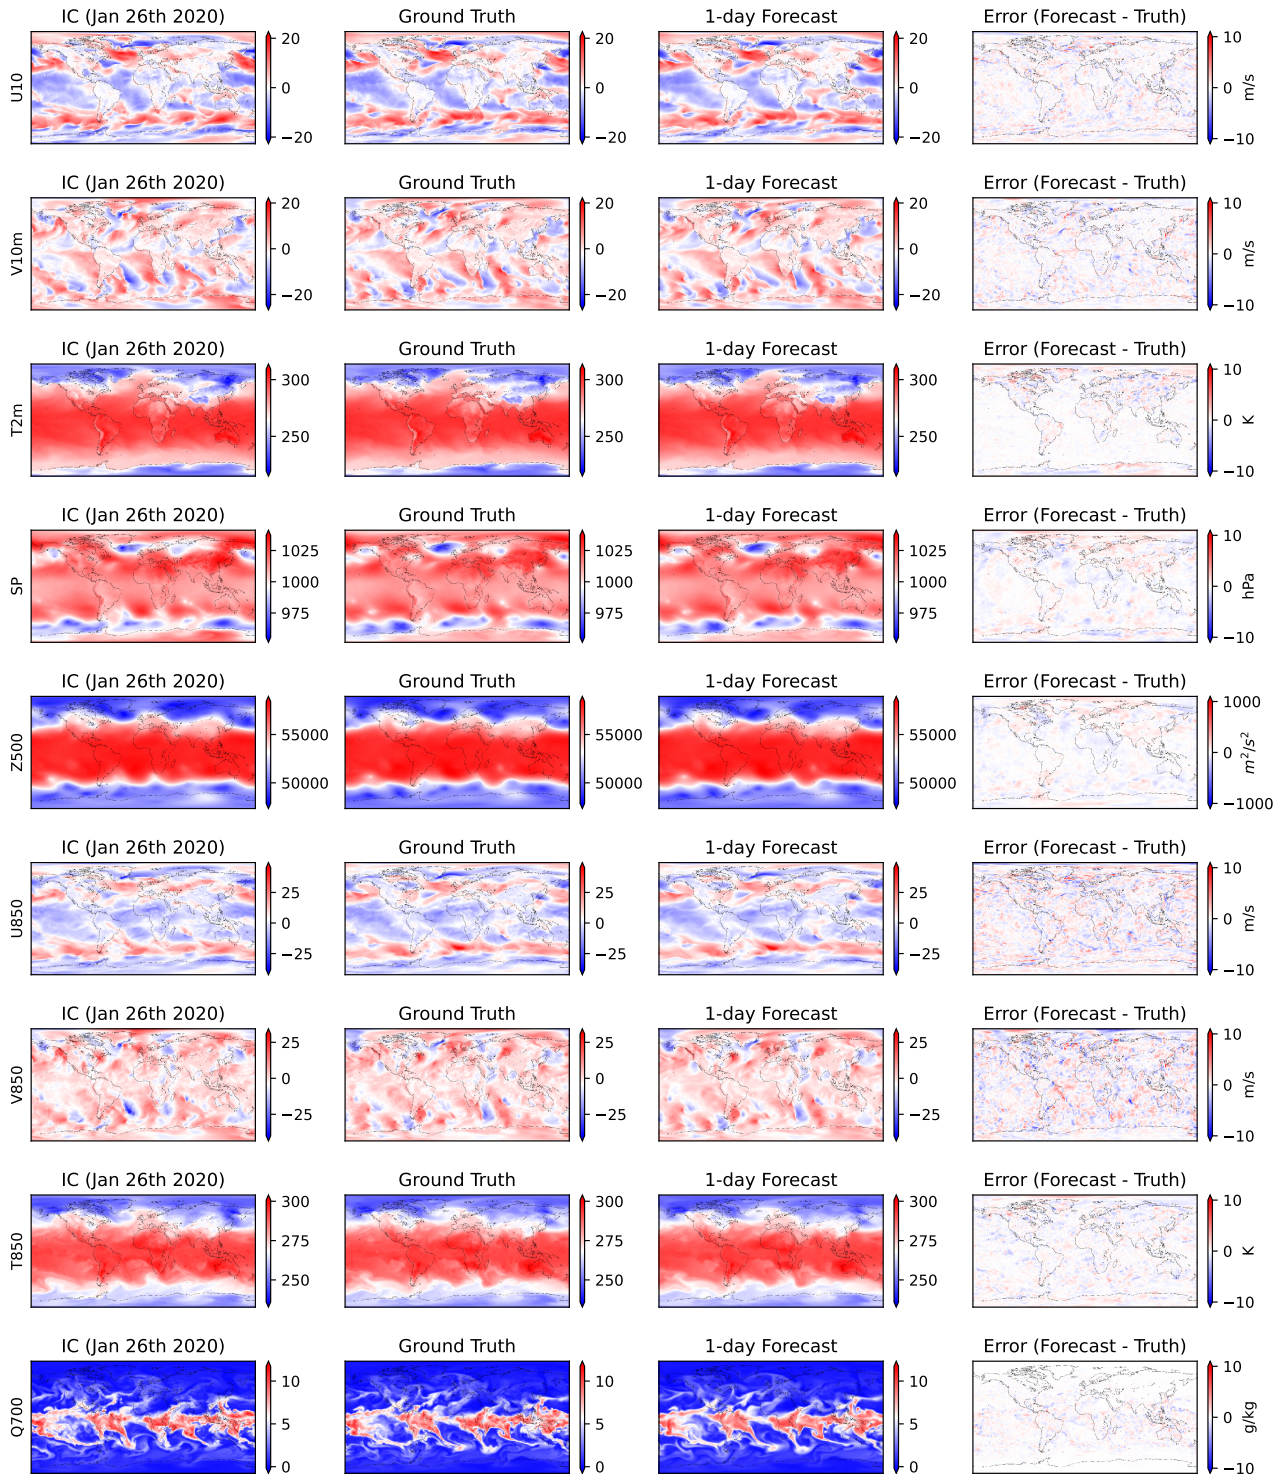


Figure 8. ARCHESWEATHER-M forecasts, initialized the 26th of January 2020.

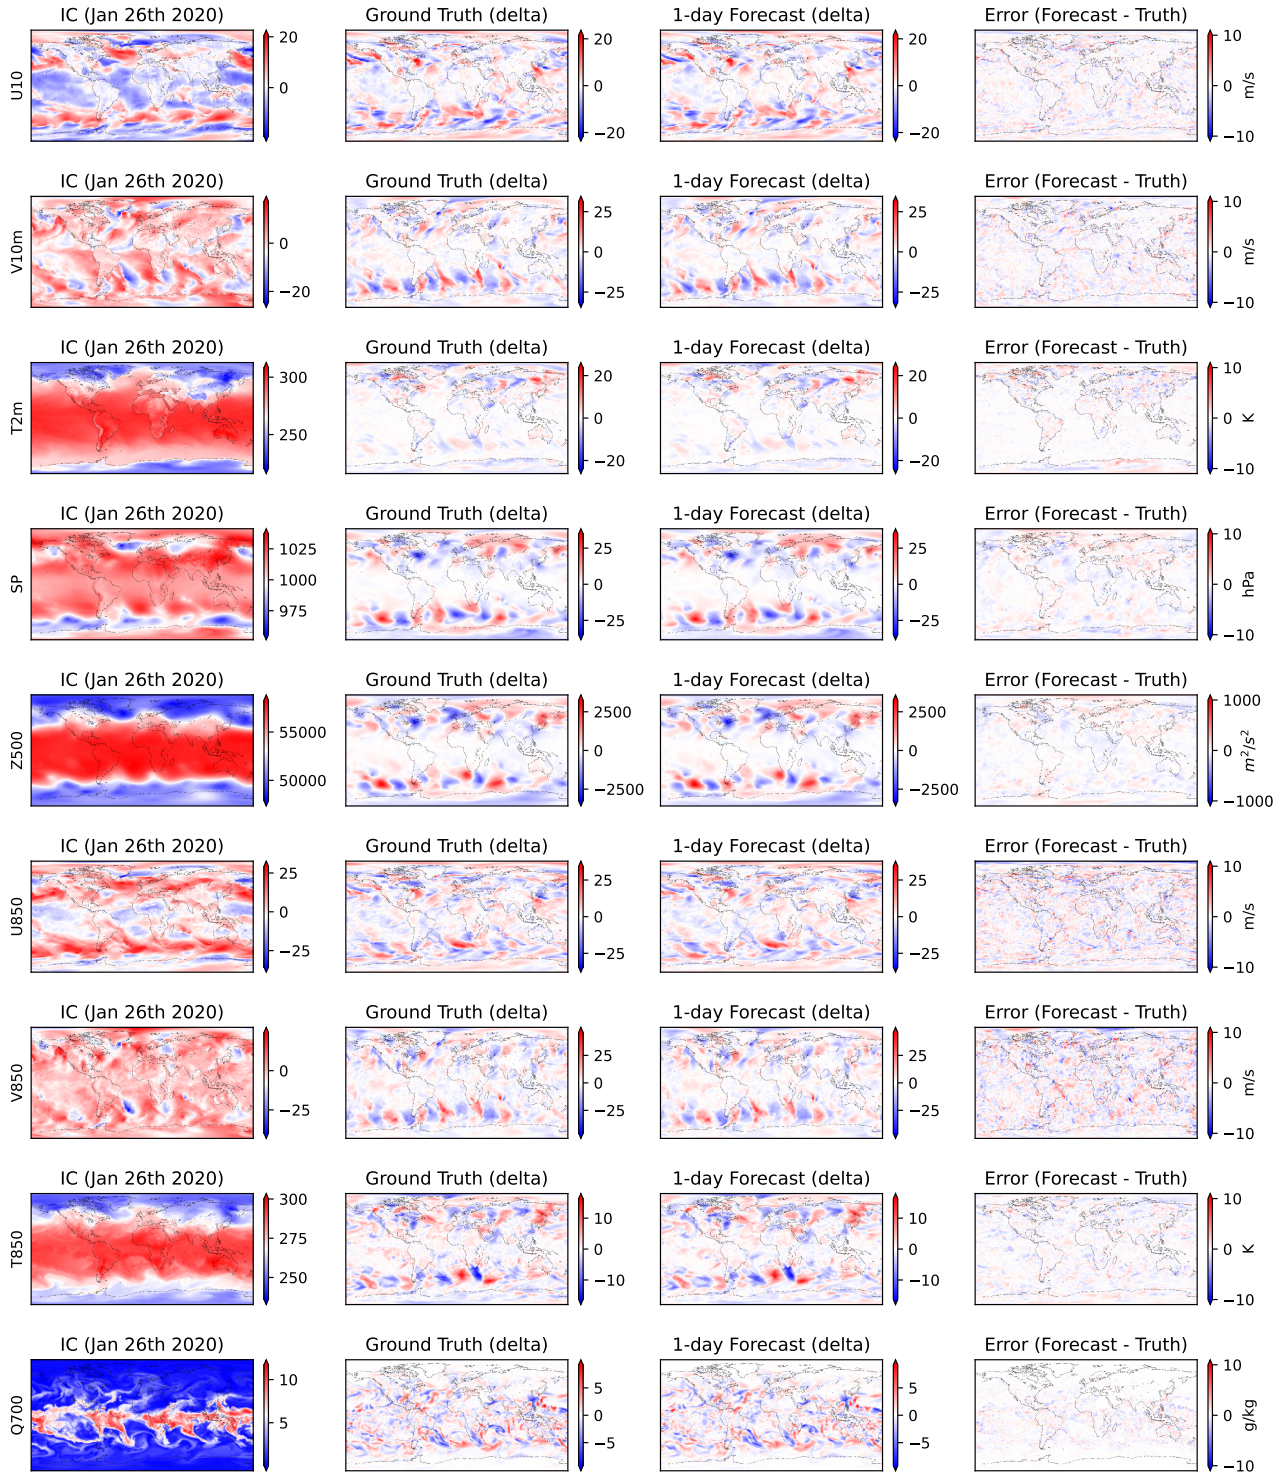


Figure 9. ARCHESWEATHER-M forecasts, initialized the 26th of January 2020. The state increments ($X_{t+\delta t} - X_t$) are shown.