
Large Scale Knowledge Washing

Yu Wang¹, Ruihan Wu¹, Zexue He¹, Xiusi Chen², Julian McAuley¹

¹UC San Diego, ²UC Los Angeles

¹{yuw164, ruw076, zehe, jmcauley}@ucsd.edu,

²{xchen}@cs.ucla.edu

Abstract

Large language models show impressive abilities in memorizing world knowledge, which leads to concerns regarding memorization of private information, toxic or sensitive knowledge, and copyrighted content. We introduce the problem of **Large Scale Knowledge Washing**, focusing on unlearning an extensive amount of factual knowledge. Previous unlearning methods usually define the reverse loss and update the model via backpropagation, which may affect the model’s fluency and reasoning ability or even destroy the model due to extensive training with the reverse loss. Existing works introduce additional data from downstream tasks to prevent the model from losing capabilities, which requires downstream task awareness. Controlling the tradeoff of unlearning and maintaining existing capabilities is also challenging. To this end, we propose LAW (**L**arge **S**cale **W**ashing) to update the MLP layers in decoder-only large language models to perform knowledge washing, as inspired by model editing methods and based on the hypothesis that knowledge and reasoning are disentangleable. We derive a new objective with the knowledge to be unlearned to update the weights of certain MLP layers. Experimental results demonstrate the effectiveness of LAW in forgetting target knowledge while maintaining reasoning ability. The code will be open-sourced at <https://github.com/wangyu-ustc/LargeScaleWashing>.

1 Introduction

Large Language Models (LLMs) are shown to memorize extensive knowledge or factual relations [Chen et al., 2022, Alivanistos et al., 2022, Youssef et al., 2023]. However, the memorization of knowledge in LLMs raises both moral and legal concerns. Factual knowledge may involve personal and sensitive information whose memorization can violate strict regulations [Legislature, 2018, Act, 1996, Parliament and of the European Union, 2016], and memorizing copyright content is also problematic – The New York Times¹ recently filed lawsuit against OpenAI to protect its copyright of articles.

To prevent the undesired memorization of the above-mentioned knowledge, the simplest solution is perhaps to label data that has the potential to raise concerns in advance and exclude sensitive data from the pre-training stage. However, this solution needs exhaustive human effort and may not be feasible as the pretraining corpus for LLM is normally extremely large. This impracticality motivates the study of machine *unlearning* [Liu et al., 2024a, Yao et al., 2024, Si et al., 2023, Yao et al., 2023b, Zhang et al., 2023]. When there are concerns about memorizing sensitive knowledge, these methods aim to update the LLM to forget that knowledge with a relatively small computational cost. Most of these methods are in the paradigm of defining an “unlearning” loss (essentially the reverse loss of Next-Word-Prediction on the unlearning dataset) and updating the full models by backpropagating from the loss. However, updating the model with backpropagation may hurt the model’s abilities

¹https://nytko-assets.nytimes.com/2023/12/NYT_Complaint_Dec2023.pdf

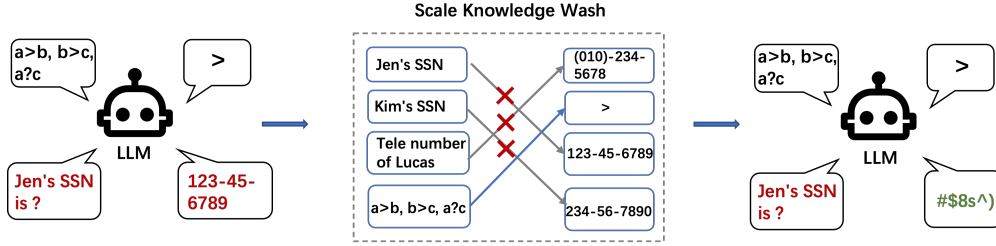


Figure 1: The diagram shows the process of **Large Scale Knowledge Washing**. We aim to remove private, toxic or copyright knowledge such as SSN from the LLM, while maintaining the model’s reasoning ability to answer questions such as “ $a > b, b > c, a ? c$ ” whose answer should be “>”.

in downstream tasks requiring reasoning. When the knowledge to be unlearned scales up, it may require extensive updates of the model parameters, which could even destroy the model (as shown in our experiments). Some efforts to overcome this limitation define a “utility” loss from specific downstream tasks and optimize both unlearning and utility losses [Liu et al., 2024a]. However, the applications of these methods may be limited when we focus on the generalizability of LLMs where no downstream tasks are specified.

In this work, we focus on the **Large Scale Knowledge Washing** problem: **how do we unlearn the knowledge at scale (termed knowledge washing) from large language models without affecting the model’s reasoning ability?** (as shown in Figure 1) We hypothesize that **the knowledge and reasoning abilities in LLMs are disentangleable**, which gives rise to a feasible solution to the above problem. To do so, we design a novel method named LaW (**L**arge **S**cale **W**ashing), which is inspired by model editing methods [Meng et al., 2022, 2023], where MEMIT [Meng et al., 2023] can perform massive knowledge editing by identifying a subset of parameters in LLMs that account for the prediction of certain knowledge and then editing these parameters with a closed-form equation. In the context of knowledge washing, we follow this idea to first identify a subset of parameters, and then derive a new objective to update the parameters. In the knowledge-washing context, we can have a similar closed-form solution as in the model-editing scenario. However, some important variables in this solution are not available. This leads to our new objective, which requires optimization rather than having a closed-form solution. Thus we introduce some practical considerations to facilitate the optimization. The key difference between LAW and model-editing ideas lies in the fact that model-editing methods propose to *add* factual relations in the model weights while LAW aims to *delete* factual relations.

We evaluate our methods using two small-scale datasets and a newly created large-scale dataset derived from Wikipedia triplets, which includes 332,036 facts. Across different methods, we compare the accuracy and QA-F1 scores of the generated answers from prompts formed from the triplets, demonstrating that our approach achieves the most thorough knowledge washing. Importantly, LAW maintains the model’s reasoning abilities, as verified by its performance on various reasoning tasks.

2 Related Work

Unlearning Knowledge in Large Language Model Recent research has increasingly focused on the concept of machine unlearning in the context of large language models (LLMs), highlighting both its challenges and necessities [Liu et al., 2024a, Yao et al., 2024, Si et al., 2023, Yao et al., 2023b, Zhang et al., 2023]. Beyond addressing privacy concerns necessitating unlearning in LLMs, several studies have employed unlearning techniques to investigate the influence of specific subsets of training data on model performance [Isonuma and Titov, 2024, Zhao et al., 2024]. To facilitate knowledge unlearning, various approaches have been proposed. One method involves retraining the LLM on the targeted dataset using a reverse loss function, coupled with training on an irrelevant dataset to preserve performance on unrelated tasks. This can be implemented through the addition of unlearning layers [Chen and Yang, 2023] or directly within the large language model itself [Eldan and Russinovich, 2023]. Unlike these approaches, which apply to whole sequences in the unlearning subset, Wang et al. (2024) suggest focusing on specific spans within sequences to minimize disruption to unrelated tasks [Wang et al., 2024]. Furthermore, an alternative strategy known as in-context

unlearning utilizes few-shot prompts to induce forgetting of specific datasets directly within the context of use, presenting a different approach from traditional training-based methods [Pawelczyk et al., 2023]. In a distinct line of research, other methods target the mitigation of harmful outputs by collecting problematic prompts and applying techniques such as instruction tuning [Liu et al., 2024b] or reinforced learning [Lu et al., 2022] to prevent toxic responses.

Model Editing of LLMs Model editing in large language models pertains to the modification of factual relations within the models to integrate new world knowledge [Yao et al., 2023a]. Initial approaches to model editing focused on single-fact adjustments, requiring the model to update one factual relation at a time. Prominent methods in this domain include ROME [Meng et al., 2022], MEND [Mitchell et al., 2022a], T-Patcher [Huang et al., 2023], and IKE [Zheng et al., 2023]. These techniques, however, often face stability issues after multiple edits, complicating the process of batch editing, where multiple new factual relations are introduced simultaneously. In response to these challenges, advanced methods like GRACE [Hartvigsen et al., 2022] and SERAC [Mitchell et al., 2022b] have been developed for effective batch editing. Further advancements have tested these methodologies on larger models, such as GPT2-XL and GPT-J-6B, with techniques like MEMIT [Meng et al., 2023] and Model-Editing-FT [Gangadhar and Stratos, 2024]. These approaches facilitate the injection of multiple factual relations (up to the scale of around 10,000 factual relations) into the model and can be adapted for unlearning knowledge in LLMs by altering factual statements to end-of-sequence tokens – for example, changing "The mother tongue of David is French" to "The mother tongue of David is <|endoftext|>" (here "<|endoftext|>" is the end-of-sequence token in GPT-based models), effectively erasing specific information. While this strategy offers a potential pathway for knowledge unlearning, it may not surpass the effectiveness of our proposed method, which specifically focuses on the removal rather than the addition of factual relations. This distinction underscores the fundamental differences in approach between general model editing techniques and our targeted strategy for knowledge unlearning.

3 Preliminary

3.1 The Structure of Decoder-only Large Language Models

Given the decoder-only language model G , the forward process is shown below:

$$h_t^l = h_t^{l-1}(x) + \text{Attn}^t(h_1^{l-1}, \dots, h_t^{l-1}) + W_{out}^l \sigma(W_{in}^l \gamma(h_t^l)), \quad (1)$$

where L is the number of layers in G , h_{t-1}^l represents the hidden state of the $(t-1)$ -th token at the l -th layer, with W_{out} and W_{in} being the weights in the MLP layers of the transformer. Here the attention and MLP are expressed in parallel, as done in Meng et al. [2023] and Black et al. [2021].

3.2 Previous Model Editing Strategy

As hypothesized and verified in Meng et al. [2022, 2023], the factual knowledge is mostly stored in the MLP layers, which leads to their strategy of updating the weight matrixes W_{out}^l in Eq.(1). Meng et al. [2022] first identifies the layer in the model that contributes most to the related knowledge prediction, which we denote as l_0 . Then the edit is performed on the parameter $W_{out}^{l_0}$. For simplicity, we denote W_0 as the specified parameter $W_{out}^{l_0}$ that needs to be updated. Inspired by Geva et al. [2020], the linear layer W_0 can act as key-value memories, associating input keys $K = \{k_i\}_{i=1}^n$ with corresponding values $V = \{v_i\}_{i=1}^n$. The following equation shows the relationship between W_0 and K, V :

$$W_0 = \arg \min_W \|WK - V\|_F^2 \implies W_0 = VK^T(KK^T)^{-1} \implies W_0KK^T = VK^T, \quad (2)$$

Then if we want to inject new factual relations, we first need identify the new keys and values $K_e = \{k_j\}_{j=1}^u$ and $V_e = \{v_j\}_{j=1}^u$ (here K_e can be obtained via a forward pass while V_e needs to be calculated via gradient descent, the details are in the paper Meng et al. [2022]), then the following equation is solved to obtain the delta matrix Δ :

$$\Delta = \arg \min_{\Delta} \|(W_0 + \Delta)K_1 - V_1\|_F^2, \quad (3)$$

where Δ is the desired update matrix that can be added onto W_0 to obtain the new weight, K_1 and V_1 refer to the concatenation of K, K_e and V, V_e , respectively. This leads to the closed-form solution:

$$\Delta = RK_e^T(KK^T + K_eK_e^T)^{-1} \quad (4)$$

where $R = V_e - W_0K_e$. Here although K is hard to obtain as we do not know how much knowledge is stored in the weight W_0 , we can use abundant text input to estimate KK^T . In ROME [Meng et al., 2022], single fact editing is considered, where K_e and V_e are single column vectors, and only one specific layer is edited. However, in MEMIT [Meng et al., 2023], K_e and V_e are matrixes including all the new facts in the batch editing procedure, where multiple sequential layers are edited to spread the magnitude required to edit one layer into the successive layers to avoid drastic parameter changes [Zhu et al., 2020]. Instead of editing l_0 alone, MEMIT [Meng et al., 2023] proposes to edit the layer set denoted as $\mathcal{R} = \{l_0 - |\mathcal{R}| + 1, \dots, l_0\}$, where the necessary adjustment to the weights W^l in layer $l \in \mathcal{R}$ is given by:

$$\Delta^l = R^l K_e^{lT} (K^l K^{lT} + K_e^l K_e^{lT})^{-1},$$

where $R^l = \frac{R^{l_0}}{t_0 - l + 1}$ and R^{l_0} is the residual in Eq.(4). These modifications are applied sequentially from the lower to the upper layers, necessitating the recalculation of K_e^l as edits progress. The details of the above derivations are in Appendix A.

4 Problem Setup

We define the problem **Large Scale Knowledge Washing** as: **How to wash a certain large set of knowledge from the large language models without affecting the model’s reasoning ability?** Here by washing the knowledge, we refer to the triplets that can be formed into single factual sentences. The knowledge set can be defined as follows:

$$\mathcal{E}_w = \{(s_i, r_i, o_i)\}_{i=1}^m, \quad (5)$$

here m is the total number of factual relations to be washed. Then for each triplet, we convert it into a sentence to perform the washing. For instance, the triplet (James Gobbo, residence, Toorak) is formed into a sentence James Gobbo resides in Toorak. Then we have plenty of similar sentences as the factual statements. After knowledge washing, we wish to obtain a model that can only generate random answers or null answers when queried with the prompt James Gobbo resides in. Meanwhile, we expect the model to still be able to answer various reasoning questions without performance degradation. Note that we do not have any new object to replace the triplet o_i in (s_i, r_i, o_i) in the washing process, while only the ground-truth answer o_i is accessible and washed. Differently, for model-editing methods, there is a specific goal to edit the model to that leads to a simple solution: edit all the triplets in \mathcal{E}_w into \mathcal{E}_{eos} defined as follows:

$$\mathcal{E}_{eos} \triangleq \{(s_i, r_i, \langle \text{endof text} \rangle)\}_{i=1}^m, \quad (6)$$

where $\langle \text{endof text} \rangle$ is the end-of-sequence token in GPT-Style models. Intuitively, a model’s capacity is finite, while Eq.(6) injects new factual relations into the model which may disturb the model’s existing abilities. In contrast, we propose to remove the knowledge from the model, which may lead to less harm to the model’s reasoning abilities.

5 Methodology

As described in Section 3, the original model weight W_0 that requires updating at layer l_0 , can be expressed in terms of K and V , satisfying $W_0KK^T = VK^T$ (shown in Eq.(2)). In the context of model editing, the keys for new knowledge K_e are distinct from K . However, when the goal is to erase specific knowledge, the relevant keys, denoted as K_w , should be a subset of the original keys K . Here keys K_w and values V_w represent all the memorized knowledge in Eq.(5). Unlike incorporating new knowledge where K_1 is the concatenation of K and K_e , for knowledge erasure, K_2 comprises the remaining keys after excluding K_w from K . This adjustment modifies our objective to:

$$\Delta = \arg \min_{\Delta} \| (W_0 + \Delta)K_2 - V_2 \|_F^2, \quad (7)$$

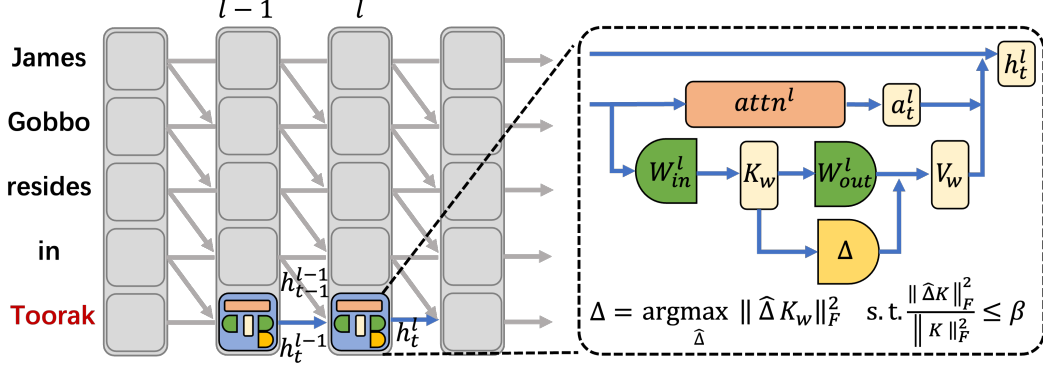


Figure 2: The details in the update process of Eq.(10). Here K_w represents the keys of the knowledge to be washed and V_w means the corresponding values. Before the modification, V_w is the output of layer W_{out}^l given the input K_w . Then we add Δ on W_{out}^l where Δ is optimized via Eq.(10). Here W_{out}^l is denoted as W_0 in Section 5 for simplicity, and K means the original keys in W_0 before the modification (see Eq.(2)). The intuition is to unlearn the knowledge in K_w while not disturbing the model’s other ability encoded in W_0 .

where V_2 corresponds to the values associated with K_2 within the model weights. Although Eq.(7) provides a closed-form solution, obtaining V_2 may be challenging, as it essentially represents the values that can be used to derive W_0 during the pre-training phase. Theoretically, there exist K, V that can achieve the same W_0 as the pre-training, but explicitly finding them is impractical. As V_2 is part of V , V_2 is also hard to obtain. To circumvent this issue, we reformulate the problem as:

$$\Delta = \arg \min_{\hat{\Delta}} \| (W_0 + \hat{\Delta})K - V \|_F^2 - \gamma \| (W_0 + \hat{\Delta})K_w - V_w \|_F^2, \quad (8)$$

where γ is a hyper-parameter balancing the trade-off between retaining unrelated knowledge (and the model’s reasoning abilities) and erasing targeted knowledge. We decompose the first term as:

$$\begin{aligned} \min_{\hat{\Delta}} \| (W_0 + \hat{\Delta})K - V \|_F^2 &= \min_{\hat{\Delta}} \| \hat{\Delta} \|_F^2 + 2\text{tr}(\hat{\Delta}(W_0K - V)^T) + \|W_0K - V\|_F^2 \\ &= \min_{\hat{\Delta}} \| \hat{\Delta}K \|_F^2 + 2\text{tr}(\hat{\Delta}KK^TW_0^T) - 2\text{tr}(\hat{\Delta}KV^T) = \min_{\hat{\Delta}} \| \hat{\Delta}K \|_F^2 \end{aligned}$$

where the last equality comes from the fact that $W_0 = VK^T(KK^T)^{-1}$ (see Eq.(2)). Although the exact K is intractable, we estimate KK^T using a large corpus as described in MEMIT [Meng et al., 2023]. For the second term in Eq.(8), as we also do not have the exact V_w , we choose to use W_0K_w as the approximation of V_w . This leads to the following optimization problem:

$$\Delta = \arg \min_{\hat{\Delta}} \| \hat{\Delta}K \|_F^2 - \gamma \| \hat{\Delta}K_w \|_F^2 \quad (9)$$

This formulation aims to disrupt the outputs significantly for inputs K_w , effectively "washing" the knowledge associated with K_w from the model, thereby preventing accurate predictions based on V_w .

This objective function serves as the basis for optimizing the search for an optimal $\hat{\Delta}$, which, with a suitably tuned γ , allows for the desired model edits. However, as the tradeoff between $\| \hat{\Delta}K \|_F^2$ and $\| \hat{\Delta}K_w \|_F^2$ might be hard to achieve, we propose to reformulate the objective in Eq.(9) into:

$$\Delta = \max_{\hat{\Delta}} \| \hat{\Delta}K_w \|_F^2 \quad \text{s.t.} \quad \frac{\| \hat{\Delta}K \|_F^2}{\| K \|_F^2} \leq \beta \quad (10)$$

Here β is the hyperparameter used to control the tradeoff between the reasoning ability (related to $\| \hat{\Delta}K \|_F^2$) and the washing of previous knowledge (represented by $\| \hat{\Delta}K_w \|_F^2$). Then we simply set β as 0.1 (an empirical value that should not affect the model’s ability on other tasks) and optimize the above objective to obtain the optimal Δ . We visualize some details of the optimization in Figure 2.

5.1 Practical Consideration

Initialization of $\hat{\Delta}$. We find that the optimization problem in Eq.(10) is a non-convex optimization problem and is very sensitive to the initialization. During implementation, we find that randomly

initialized $\hat{\Delta}$ often leads to sub-optimal solutions. To address this issue, we propose to use the delta matrixes from MEMIT when performing the edits shown in Eq.(6). The intuition is that MEMIT could achieve a fairly good tradeoff between the model’s reasoning ability and knowledge washing. Then we run our optimization algorithm with the objective in Eq.(10) on top of this initialization to achieve better performance.

Choices of β . There are two strategies for choosing β . The first one is to set β as a constant value such as 0.2 which is to control the magnitude of the modification on the model weights. Another strategy is to set the boundary β according to the original β_0 after the initialization. Suppose the initialized $\hat{\Delta}$ from the above paragraph is Δ_0 , then we have $\beta_0 = \frac{\|\Delta_0 K\|^2}{\|L\|^2}$. Then we loose β_0 with some small factor to allow the space for optimization. Thus β is usually chosen as $1.1 * \beta_0$.

Successive Elimination of Target Knowledge Sets. As our goal is to forget the knowledge in the knowledge set, when we are updating multiple layers sequentially, we may exclude the factual relations that have already been deleted after the update from the last layer. To this end, before the update of every layer, we run the model to check the knowledge that is still in the model and perform the optimization concerning this subset of knowledge. In this way, we expect to achieve a more focused optimization and better performance in knowledge washing.

5.2 Discussion of the Disentanglement of Knowledge and Reasoning

As demonstrated by Meng et al. [2022, 2023], the MLP (multi-layer perceptron) layers in transformers primarily store knowledge. However, our research also suggests that these layers significantly influence the model’s reasoning capabilities. This assertion is supported by experiments showing that modifications to the parameter W_0 can impact the model’s performance on reasoning tasks. Therefore, we propose that MLP layers are critical for both knowledge storage and reasoning processes. This paper explores strategies to disentangle these two functions by identifying alternative weight matrices that selectively diminish certain knowledge aspects while preserving, or minimally affecting, reasoning abilities. The possibilities of achieving this come from our hypothesis that knowledge storage and reasoning abilities can be separated within transformers. In this paper, we show the possibility of the disentanglement between knowledge and reasoning by washing a large amount of knowledge from the model while only minimally affecting the reasoning abilities.

6 Experiments

6.1 Experimental Setup

To demonstrate the effectiveness of our method, we compare it with various knowledge editing and unlearning methods. The baselines for model-editing include: (1) **FT**: Simply finetune the model on the factual sentences formed from the triplets in \mathcal{E}_{eos} in Eq.(6) (2) **MEMIT** [Meng et al., 2023]: This state-of-the-art method can edit multiple layers of the model to perform thousands of edits simultaneously. (3) **ME-FT** (Model-Editing-FT) [Gangadhar and Stratos, 2024], which finetunes the model with only the loss on the span of o_i in each sentence formed from $(s_i, r_i, o_i) \in \mathcal{E}_w$. Irrelevant sentences are constructed as augmentations during training. For the knowledge unlearning category, the baselines are: (1) **FT-UL** (Finetune-Unlearning): Finetune the model on the sentences formed from the triplets \mathcal{E}_w in Eq.(5) but with the reverse (i.e. negative) next-word-prediction loss function; (2) **WOH** (Who is Harry Potter) [Eldan and Russinovich, 2023]: First train a reinforced model on the unlearning dataset, then update the target model to diverge from the reinforced model, based on the assumption that the reinforced model can better retain the unlearning dataset; (3) **SeUL** (Selective Forgetting) [Wang et al., 2024]: Designates specific spans in the training data and uses a reversed next-word-prediction loss function on these spans for training.

Consistent with previous studies [Meng et al., 2023, Gangadhar and Stratos, 2024], we employ GPT2-XL (1.5B parameters) and GPT-J-6B (6B parameters) as the backbone models for knowledge washing. The datasets used in our experiments are: (1) **zsRE** [Levy et al., 2017]: A question-answering dataset with 19,086 facts. (2) **CounterFactual** [Meng et al., 2022]: A dataset containing 21,929 counterfactual facts. After removing conflicting facts [Meng et al., 2023], 20,877 facts remain. (3) To facilitate large-scale knowledge washing, we utilize the latest Wikipedia dump, processing the

Table 1: The experimental results of the model GPT2-XL on the datasets **zsRE** and **CounterFactual** with different methods. The dataset **zsRE** contains 19086 factual statements in total, where GPT2-XL could answer 1212 facts correctly and GPT-J-6B knows 1951 facts. Similarly, **CounterFactual** contains 20877 facts in total where GPT2-XL knows 3680 facts and GPT-J-6B knows 5702 facts. We highlight in red those results where the model is destroyed (the perplexity is overly high), which are excluded from the accuracy comparison. Here **Knowledge** refers to the evaluation on the knowledge set to be washed, and **Reasoning** refers to the evaluation of different models on the dataset Lambda_openai after performing knowledge washing with different methods.

	zsRE				CounterFactual			
	Knowledge		Reasoning		Knowledge		Reasoning	
	Acc↓	QA-F1↓	Acc↑	PPL↓	Acc↓	QA-F1↓	Acc↑	PPL↓
GPT2-XL	1.0000	0.3704	0.5121	10.63	1.0000	0.2647	0.5121	10.63
FT	0.4208	0.2178	0.5275	9.72	0.1783	0.0930	0.5195	10.17
MEMIT	0.0462	0.0379	0.5156	10.52	0.1929	0.1439	0.4879	11.81
ME-FT	0.5091	0.2195	0.3881	21.95	0.1799	0.0878	0.3456	27.28
FT-UL	0.0000	0.0000	0.1126	> 10 ¹⁰	0.0000	0.0000	0.0000	> 10 ¹⁰
WOH	0.5182	0.2017	0.5082	10.17	0.5978	0.1615	0.4619	13.15
SeUL	0.0957	0.0443	0.5108	10.66	0.0000	0.0000	0.2940	113.58
LAW	0.0050	0.0039	0.5108	10.86	0.1091	0.0905	0.4741	12.73
GPT-J-6B	1.0000	0.4043	0.6831	4.10	1.0000	0.4043	0.6831	4.10
FT	0.6181	0.2538	0.6887	4.02	0.3995	0.1646	0.6837	4.08
MEMIT	0.0553	0.0388	0.6815	4.14	0.2060	0.0759	0.6772	4.25
ME-FT	0.0751	0.0349	0.5178	8.53	0.2139	0.1183	0.4071	11.15
FT-UL	0.0000	0.0000	0.0000	> 10 ¹⁰	0.0000	0.0000	0.0000	> 10 ¹⁰
WOH	0.6930	0.2829	0.6819	4.15	0.5396	0.1359	0.6833	4.19
SeUL	0.7422	0.3032	0.6815	4.15	0.5393	0.1395	0.6693	4.35
LAW	0.0454	0.0352	0.6701	4.35	0.0864	0.0334	0.6716	4.40

relations following the guidelines provided in the repository². This results in 391,932,675 triplets. We then use gpt-3.5-turbo to rewrite each triplet into a sentence containing both the subject and the ground-truth answer. From 1,000,000 processed examples, we obtain 332,036 valid facts, creating the dataset referred to as **Wiki-Latest**.

For evaluation, we employ two metrics to assess the extent of knowledge washing: (1) **Accuracy**: The model generates 10 tokens, and if the ground-truth answer is among the decoded output, it is considered a correct prediction. The accuracy is calculated as the percentage of correct predictions across the entire dataset. (2) **QA-F1-Score**: Using the metric from LongBench [Bai et al., 2023], we measure the F1-score between the generated output from the 10 tokens and the ground-truth answer. We measure the model’s reasoning ability with the library `lm-evaluation-harness` [Gao et al., 2023] on three tasks Lambda_openai [Radford et al., 2019, Paperno et al., 2016], HellaSwag [Zellers et al., 2019], and Arc_Easy [Clark et al., 2018]. The descriptions of HellaSwag and Arc_Easy are shown in Appendix C.1. For most of the tables in the main paper, we only include the Accuracy and Perplexity from the evaluation results on Lambda_openai and leave the full table with the performances of the other two tasks in the appendix.

As for the implementation details, we perform all the experiments on eight A6000-48GB GPUs, while every experiment can be run separately on one GPU. For the implementation of MEMIT and ME-FT, we use their open-sourced code and formulate the problem as setting the target knowledge set as \mathcal{E}_{eos} in Eq.(6). We manually implement FT to finetune on the corresponding sentences from \mathcal{E}_{eos} . Then for the unlearning methods, we reimplement WOH and SeUL following the method introduced in their papers. We fix the number of training epochs as one so that the model’s reasoning ability can be maximally maintained. For our method, we choose $\beta = 1.1\beta_0$ where β_0 is calculated from the parameters initialized from the weights of MEMIT when editing the model with \mathcal{E}_{eos} in Eq.(6).

²<https://github.com/neelguha/simple-wikidata-db>

Table 2: The experimental results of the model GPT2-XL on the dataset **Wiki-Latest** with different methods. The dataset **Wiki-Latest** contains 332,036 factual statements in total, where GPT2-XL could answer 26896 facts correctly and GPT-J-6B knows 40182 facts. We highlight in red those results where the model is destroyed (the perplexity is overly high), which are excluded from the accuracy comparison. The definition of **Knowledge** and **Reasoning** is the same as in Table 1.

	GPT2-XL				GPT-J-6B			
	Knowledge		Reasoning		Knowledge		Reasoning	
	Acc↓	QA-F1↓	Acc↑	PPL↓	Acc↓	QA-F1↓	Acc↑	PPL↓
Original	1.0000	0.3734	0.5121	10.63	1.0000	0.2553	0.6831	4.10
FT	0.0446	0.0256	0.1475	250.73	0.0159	0.0115	0.4349	13.00
MEMIT	0.2972	0.2342	0.4906	11.44	0.2536	0.0753	0.6817	4.32
ME-FT	0.0000	0.0000	0.0000	$> 10^{10}$	0.0000	0.0000	0.0000	$> 10^{10}$
FT-UL	0.0000	0.0000	0.0000	$> 10^{10}$	0.0000	0.0000	0.0000	$> 10^{10}$
WOH	0.4672	0.2227	0.1473	254.08	0.0009	0.0000	0.0171	$> 10^{10}$
SeUL	0.0000	0.0000	0.0000	$> 10^{10}$	0.0004	0.0000	0.0002	$> 10^{10}$
LAW	0.1926	0.1735	0.4657	13.27	0.1385	0.0846	0.6567	4.76

6.2 Overall Performance Comparison

6.2.1 Small-Scale Knowledge Washing

We first test the performances of our method on the small-scale knowledge-washing tasks, i.e., forgetting the knowledge in **zsRE** and **CounterFactual**. We report the results in Table 1. As shown in the table, our method can achieve the best performance concerning the cleanness of knowledge washing (measured by Accuracy and QA-F1-Score) while maintaining performance levels comparable to the original model on reasoning tasks. As the dataset scale is not large, it is shown in the table that WOH and SeUL, two fine-tuning-based methods achieve some certain extent of knowledge washing and also successfully maintain the model’s original ability, although there is already sign of performance degradation as shown in the dataset CounterFactual (See the performances of SeUL on GPT2-XL). Meanwhile, the method FT-UL could not achieve reasonable results as the reverse training objective is overly fragile to the training without more complicated regularization. We also show the generated examples for visualization in Appendix C.2.3.

6.2.2 Large Scale Knowledge Washing

To further test the effectiveness of our method on large-scale knowledge washing, we use the constructed large dataset **Wiki-Latest** on which we perform knowledge washing. With 332,036 facts, we first go over the whole dataset to find out all the facts that the model can predict correctly. Then we run our algorithm to wash factual relations that the model knows about. The performances of different methods on GPT2-XL and GPT-J-6B are reported in Table 2. As shown in the table, LAW is shown to achieve the cleanest washing in terms of the accuracy and QA-F1-score on the facts to be washed. We can find that unlearning methods may easily destroy the model after drastic updates. Compared with small-scale unlearning (shown in Table 1), the problems with fine-tuning-based methods are more severe. Without proper regularization during the update, the model’s abilities may be easily destroyed. On the contrary, our method is more robust, which maintains comparable reasoning ability while achieving the almost lowest accuracies in terms of knowledge forgetting (only FT achieves lower accuracy, however, the perplexity and accuracy in the reasoning tasks are drastically affected after the fine-tuning process). For the generated examples after performing knowledge washing using different methods on the model GPT2-XL, we visualize some results in Appendix C.2.3.

6.3 Ablation Study

Ablation Study on Initialization of $\hat{\Delta}$ We compare the performance of LAW on the dataset zsRE and CounterFactual with model GPT2-XL between using random initialization and using the initialization from MEMIT. For random initialization, we sample a matrix matching the dimension of W_0 (in Eq.(2)), filled with independent Gaussian random variables scaled by a factor of 0.001: $\Delta_0 = 0.001 \cdot \mathcal{N}(0, I)$. The results are reported in Table 3 (full table in Appendix C.2.2). When

Table 3: Ablation study with different initialization of $\hat{\Delta}$.

	zsRE				CounterFactual			
	Knowledge		Reasoning		Knowledge		Reasoning	
	Acc↓	QA-F1↓	Acc↑	PPL↓	Acc↓	QA-F1↓	Acc↑	PPL↓
GPT2-XL	1.0000	0.3734	0.5121	10.63	1.0000	0.3734	0.5121	10.63
LAW ($\beta = 0.2, \text{RI}$)	0.8845	0.3274	0.5049	10.77	0.9158	0.2445	0.5082	10.86
LAW ($\beta = 0.2$)	0.0008	0.0008	0.4628	14.34	0.1258	0.1102	0.4708	13.04

Table 4: Ablation study with different β settings.

	zsRE				CounterFactual			
	Knowledge		Reasoning		Knowledge		Reasoning	
	Acc↓	QA-F1↓	Acc↑	PPL↓	Acc↓	QA-F1↓	Acc↑	PPL↓
GPT2-XL	1.0000	0.3734	0.5121	10.63	1.0000	0.3734	0.5121	10.63
$\beta = 1.05\beta_0$	0.0074	0.0060	0.5127	10.74	0.1266	0.1070	0.4743	12.49
$\beta = 1.1\beta_0$	0.0050	0.0039	0.5108	10.86	0.1091	0.0905	0.4741	12.73
$\beta = 1.2\beta_0$	0.0008	0.0010	0.5073	11.06	0.0965	0.0853	0.4553	14.10
$\beta = 1.5\beta_0$	0.0000	0.0003	0.4945	12.02	0.0655	0.0587	0.4314	16.31
$\beta = 0.1$	0.0198	0.0166	0.5096	10.68	0.4318	0.2401	0.5063	10.82
$\beta = 0.2$	0.0008	0.0008	0.4628	14.34	0.1258	0.1102	0.4708	13.04
$\beta = 0.5$	0.0000	0.0000	0.2806	46.81	0.0242	0.0220	0.3169	36.23

initializing from Gaussian distribution, we do not have reference β_0 as in the initialization from MEMIT, so we choose the constant $\beta = 0.2$. Similarly, we also set $\beta = 0.2$ when using MEMIT initialization. The table shows the MEMIT initialization can boost the performance drastically. The reason might be the optimization easily achieves local minimum when using random optimization.

Ablation Study of Choices of β As shown in Eq.(10), the hyper-parameter β can control the tradeoff between washing the knowledge in K_w and maintaining the original knowledge in K (which may also be related to the model’s reasoning ability, as we find that when this term is large the model’s reasoning ability may degrade drastically). To study the effects of different β , we choose the setting of dataset zsRE and CounterFactual with the model GPT2-XL to study the effects of different β . The results are reported in Table 4 (full table in Appendix C.2.2). From the table, we can see that as β increases, the knowledge is washed more thoroughly and the reasoning abilities are also dropping, showing the tradeoff between knowledge washing and maintaining reasoning abilities. We can also find that setting β according to β_0 can achieve better performances (see the performance comparison between $\beta = 1.2\beta_0$ and $\beta = 0.2$ on the dataset CounterFactual), which demonstrates the necessity of setting different β for different layers.

Ablation Study on Successive Elimination of Knowledge Set In our practical considerations, before modifying every layer, we find the facts in the knowledge set that the model can answer correctly and perform the knowledge washing on the selected knowledge set. To study the effects of this technique (denoted as SE), we conduct experiments with and without SE and report the results in Table 5 (full table in Appendix C.2.2). The results show that the algorithm can achieve a much cleaner washing with SE enabled, at the expense of slightly affecting the reasoning abilities.

7 Conclusion, Limitation, and Future Work

In this paper, we introduce the **Large Scale Knowledge Washing** problem, which means unlearning the existing knowledge in the model on a large scale. To address this problem, we draw inspiration from model-editing methods and propose **Large Scale Washing (LAW)**, where we propose a new objective to remove the corresponding knowledge from the MLP layers in the large language models (LLMs), which is considered to store most of the knowledge in the LLMs. Experimental results demonstrate the effectiveness of our method in washing the knowledge in terms of the accuracies

Table 5: Ablation study with Successive Elimination technique enabled or disabled.

	zsRE				CounterFactual			
	Knowledge		Reasoning		Knowledge		Reasoning	
	Acc↓	QA-F1↓	Acc↑	PPL↓	Acc↓	QA-F1↓	Acc↑	PPL↓
GPT2-XL	1.0000	0.3734	0.5121	10.63	1.0000	0.3734	0.5121	10.63
LAW	0.0058	0.0043	0.5114	10.81	0.1091	0.0905	0.4741	12.73
w/o SE	0.0322	0.0254	0.5160	10.52	0.1345	0.1137	0.4905	12.20

when prompted with queries related to the knowledge set, while mostly maintaining the model’s reasoning ability. Our work proposes an effective knowledge-washing algorithm and shows the possibility of knowledge-reasoning disentanglement. One limitation is we consider the knowledge set in a specific format, i.e., triplets, whereas washing a large scale of knowledge in pure text where no triplets are available might be more challenging. For future work, we aim to explore washing the knowledge more thoroughly and extend our framework to other more recent LLMs.

References

- A. Act. Health insurance portability and accountability act of 1996. *Public law*, 104:191, 1996.
- D. Alivanistos, S. B. Santamaría, M. Cochez, J. Kalo, E. van Krieken, and T. Thanapalasingam. Prompting as probing: Using language models for knowledge base construction. In *LM-KBC@ISWC*, volume 3274 of *CEUR Workshop Proceedings*, pages 11–34. CEUR-WS.org, 2022.
- Y. Bai, X. Lv, J. Zhang, H. Lyu, J. Tang, Z. Huang, Z. Du, X. Liu, A. Zeng, L. Hou, et al. Longbench: A bilingual, multitask benchmark for long context understanding. *arXiv preprint arXiv:2308.14508*, 2023.
- S. Black, L. Gao, P. Wang, C. Leahy, and S. Biderman. Gpt-neo: Large scale autoregressive language modeling with mesh-tensorflow. *If you use this software, please cite it using these metadata*, 58:2, 2021.
- J. Chen and D. Yang. Unlearn what you want to forget: Efficient unlearning for llms. *arXiv preprint arXiv:2310.20150*, 2023.
- W. Chen, Y. Chang, R. Zhang, J. Pu, G. Chen, L. Zhang, Y. Xi, Y. Chen, and C. Su. Probing simile knowledge from pre-trained language models. In *ACL (1)*, pages 5875–5887. Association for Computational Linguistics, 2022.
- P. Clark, I. Cowhey, O. Etzioni, T. Khot, A. Sabharwal, C. Schoenick, and O. Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge, 2018.
- R. Eldan and M. Russinovich. Who’s harry potter? approximate unlearning in llms. *arXiv preprint arXiv:2310.02238*, 2023.
- G. Gangadhar and K. Stratos. Model editing by pure fine-tuning. *CoRR*, abs/2402.11078, 2024.
- L. Gao, J. Tow, B. Abbasi, S. Biderman, S. Black, A. DiPofi, C. Foster, L. Golding, J. Hsu, A. Le Noac’h, H. Li, K. McDonell, N. Muennighoff, C. Ociepa, J. Phang, L. Reynolds, H. Schoelkopf, A. Skowron, L. Sutawika, E. Tang, A. Thite, B. Wang, K. Wang, and A. Zou. A framework for few-shot language model evaluation, 12 2023. URL <https://zenodo.org/records/10256836>.
- M. Geva, R. Schuster, J. Berant, and O. Levy. Transformer feed-forward layers are key-value memories. *arXiv preprint arXiv:2012.14913*, 2020.
- T. Hartvigsen, S. Sankaranarayanan, H. Palangi, Y. Kim, and M. Ghassemi. Aging with grace: Lifelong model editing with discrete key-value adaptors. *arXiv preprint arXiv:2211.11031*, 2022.
- E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- Z. Huang, Y. Shen, X. Zhang, J. Zhou, W. Rong, and Z. Xiong. Transformer-patcher: One mistake worth one neuron. *arXiv preprint arXiv:2301.09785*, 2023.
- M. Isonuma and I. Titov. Unlearning reveals the influential training data of language models. *arXiv preprint arXiv:2401.15241*, 2024.
- C. S. Legislature. California consumer privacy act (CCPA). "<https://oag.ca.gov/privacy/ccpa>", 2018.
- O. Levy, M. Seo, E. Choi, and L. Zettlemoyer. Zero-shot relation extraction via reading comprehension. *arXiv preprint arXiv:1706.04115*, 2017.
- S. Liu, Y. Yao, J. Jia, S. Casper, N. Baracaldo, P. Hase, X. Xu, Y. Yao, H. Li, K. R. Varshney, et al. Rethinking machine unlearning for large language models. *arXiv preprint arXiv:2402.08787*, 2024a.
- Z. Liu, G. Dou, Z. Tan, Y. Tian, and M. Jiang. Towards safer large language models through machine unlearning. *arXiv preprint arXiv:2402.10058*, 2024b.

- X. Lu, S. Welleck, J. Hessel, L. Jiang, L. Qin, P. West, P. Ammanabrolu, and Y. Choi. Quark: Controllable text generation with reinforced unlearning. *Advances in neural information processing systems*, 35:27591–27609, 2022.
- K. Meng, D. Bau, A. Andonian, and Y. Belinkov. Locating and editing factual associations in gpt. *Advances in Neural Information Processing Systems*, 35:17359–17372, 2022.
- K. Meng, A. S. Sharma, A. J. Andonian, Y. Belinkov, and D. Bau. Mass-editing memory in a transformer. In *ICLR*. OpenReview.net, 2023.
- E. Mitchell, C. Lin, A. Bosselut, C. Finn, and C. D. Manning. Fast model editing at scale. In *ICLR*. OpenReview.net, 2022a.
- E. Mitchell, C. Lin, A. Bosselut, C. D. Manning, and C. Finn. Memory-based model editing at scale. In *ICML*, volume 162 of *Proceedings of Machine Learning Research*, pages 15817–15831. PMLR, 2022b.
- D. Paperno, G. Kruszewski, A. Lazaridou, Q. N. Pham, R. Bernardi, S. Pezzelle, M. Baroni, G. Boleda, and R. Fernández. The lambada dataset, Aug 2016. URL <https://doi.org/10.5281/zenodo.2630551>.
- E. Parliament and C. of the European Union. General data protection regulation (GDPR), 2016.
- M. Pawelczyk, S. Neel, and H. Lakkaraju. In-context unlearning: Language models as few shot unlearners. *arXiv preprint arXiv:2310.07579*, 2023.
- A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, and I. Sutskever. Language models are unsupervised multitask learners. 2019.
- N. Si, H. Zhang, H. Chang, W. Zhang, D. Qu, and W. Zhang. Knowledge unlearning for llms: Tasks, methods, and challenges. *arXiv preprint arXiv:2311.15766*, 2023.
- L. Wang, X. Zeng, J. Guo, K.-F. Wong, and G. Gottlob. Selective forgetting: Advancing machine unlearning techniques and evaluation in language models. *arXiv preprint arXiv:2402.05813*, 2024.
- J. Yao, E. Chien, M. Du, X. Niu, T. Wang, Z. Cheng, and X. Yue. Machine unlearning of pre-trained large language models. *arXiv preprint arXiv:2402.15159*, 2024.
- Y. Yao, P. Wang, B. Tian, S. Cheng, Z. Li, S. Deng, H. Chen, and N. Zhang. Editing large language models: Problems, methods, and opportunities. *CoRR*, abs/2305.13172, 2023a.
- Y. Yao, X. Xu, and Y. Liu. Large language model unlearning. *arXiv preprint arXiv:2310.10683*, 2023b.
- P. Youssef, O. A. Koras, M. Li, J. Schlotterer, and C. Seifert. Give me the facts! A survey on factual knowledge probing in pre-trained language models. In *EMNLP (Findings)*, pages 15588–15605. Association for Computational Linguistics, 2023.
- R. Zellers, A. Holtzman, Y. Bisk, A. Farhadi, and Y. Choi. Hellaswag: Can a machine really finish your sentence? In *ACL (1)*, pages 4791–4800. Association for Computational Linguistics, 2019.
- D. Zhang, P. Finckenberg-Broman, T. Hoang, S. Pan, Z. Xing, M. Staples, and X. Xu. Right to be forgotten in the era of large language models: Implications, challenges, and solutions. *arXiv preprint arXiv:2307.03941*, 2023.
- Y. Zhao, L. Du, X. Ding, K. Xiong, Z. Sun, J. Shi, T. Liu, and B. Qin. Deciphering the Impact of pretraining data on large language models through machine unlearning. *arXiv preprint arXiv:2402.11537*, 2024.
- C. Zheng, L. Li, Q. Dong, Y. Fan, Z. Wu, J. Xu, and B. Chang. Can we edit factual knowledge by in-context learning? *arXiv preprint arXiv:2305.12740*, 2023.
- C. Zhu, A. S. Rawat, M. Zaheer, S. Bhojanapalli, D. Li, F. X. Yu, and S. Kumar. Modifying memories in transformer models. *CoRR*, abs/2012.00363, 2020.

A Mathematical Details of Preliminary

As demonstrated by MEMIT [Meng et al., 2023], the objective is to adjust factual associations stored within the MLP layers of transformer-based, decoder-only large language models. The conditional distribution of the next token x_t , given by language model G , relies on the sequence of previous tokens:

$$P(x_t|x_1, \dots, x_{t-1}) \triangleq G(x_1, \dots, x_{t-1}) = \text{softmax}(W_y h_{t-1}^L), \quad (11)$$

where L denotes the total number of layers in the transformer G , and h_{t-1}^L represents the hidden state of the $(t-1)$ -th token at the L -th layer, with W_y being the language model head that predicts the next word’s distribution over the vocabulary. Within transformers, the computation of the state is articulated as follows:

$$h_t^l = h_t^{l-1}(x) + \text{Attn}^t(h_1^{l-1}, \dots, h_t^{l-1}) + W_{out}^l \sigma(W_{in}^l \gamma(h_t^l)), \quad (12)$$

where $h_t^0(x)$ is the embedding of the t -th token in the sentence x , γ represents layernorm, and σ denotes the activation function. Then knowledge editing requests are defined by:

$$\mathcal{E}_{edit} = \{s_i, r_i, o_i | i\} \quad \text{s.t.}, \nexists i, j, (s_i = s_j) \wedge (r_i = r_j) \wedge (o_i \neq o_j) \quad (13)$$

In MEMIT [Meng et al., 2023], W_{out}^l , denoted as W_0 , can act as key-value memories, associating input keys $k_i \triangleq k_i^l$ with corresponding values $v_i \triangleq v_i^l$ [Geva et al., 2020]. If W_{out}^l is dimensionally defined as $d_1 \times d_2$ and stores n memories, with u new edits, then to modify the MLP layer W_{out}^l (i.e., the matrix W_0), the following delta matrix Δ is solved:

$$\Delta = \arg \min_{\Delta} \| (W_0 + \Delta)K_1 - V_1 \|_F^2 \quad (14)$$

where $K_1 \in \mathbb{R}^{d_2 \times (n+u)}$ represents a concatenation of the original keys $K \in \mathbb{R}^{d_2 \times n}$ stored in W_0 and keys corresponding to the edit requests $K_e \in \mathbb{R}^{d_2 \times u}$. Similarly, $V_1 \in \mathbb{R}^{d_1 \times (n+u)}$ includes the original values $V \in \mathbb{R}^{d_1 \times n}$ and new values $V_e \in \mathbb{R}^{d_1 \times u}$.

Once the incremental matrix Δ is calculated, the matrix W_0 can be updated to $W_0 + \Delta$, representing the newly adjusted weight of the MLP layer after edits. The closed-form solution for Δ is given by:

$$\Delta = (V_1 - W_0 K_1) K_1^T (K_1 K_1^T)^{-1} \quad (15)$$

Given that K_1 is the concatenation of K and K_e , the product $K_1^T K_1$ equals $K K^T + K_e K_e^T$. With K and V representing the keys and values associated with W_0 , the optimal solution for W_0 under a least squares criterion is:

$$W_0 = \arg \min_W \|W K - V\|_F^2 \implies W_0 = V K^T (K K^T)^{-1} \implies W_0 K K^T = V K^T, \quad (16)$$

Substituting these relationships into the equation for Δ , we derive:

$$\Delta = (V_1 K_1^T - W_0 K_1 K_1^T) (K_1 K_1^T)^{-1} \quad (17)$$

$$= (W_* K_e^T + V K^T - W_0 K K^T - W_0 K_e K_e^T) (K_1 K_1^T)^{-1} \quad (18)$$

$$= (V_e - W_0 K_e) K_e^T (K K^T + K_e K_e^T)^{-1} \quad (19)$$

Define $R = V_e - W_0 K_e$. Consequently, Δ simplifies to:

$$\Delta = R K_e^T (K K^T + K_e K_e^T)^{-1} \quad (20)$$

This process enables the editing of an MLP layer within the transformer G to incorporate new relational data, following the solution of the equation for each K_e and V_e from the editing requests. In the MEMIT approach [Meng et al., 2023], $K K^T$ is pre-estimated and represented as λC_0 , where C_0 is the average covariance matrix of K and λ is a hyper-parameter typically on the order of 10,000.

When performing extensive model editing, modifying only one layer may lead to robustness issues, while a more stable model can be achieved by minimizing the magnitudes of parameter changes [Zhu et al., 2020]. Consequently, MEMIT proposes modifying multiple layers to distribute the editing impact more broadly [Meng et al., 2023]. This method involves spreading the residual $R = V_e - W_0 K_e$ across several layers. Let L represent the index of the deepest layer requiring modification

	zsRE	CounterFactual	Wiki-Latest
GPT2-XL	20,000	20,000	100,000
GPT-J-6B	50,000	100,000	100,000

Table 6: Configurations of MEMIT.

such that the output of this layer transitions from $W_0 K_e$ to V_e . Define \mathcal{R} as the set of layer indices $\{L - |\mathcal{R}| + 1, \dots, L\}$ that require edits. For each layer l within \mathcal{R} , the necessary adjustments to the weights W^l are given by:

$$\Delta^l = R^l K_e^{lT} (K^l K^{lT} + K_e^l K_e^{lT})^{-1}, \quad (21)$$

where $R^l = \frac{R^L}{L-l+1}$ and $R^L = R$. These modifications are applied sequentially from the lower to the upper layers, necessitating the recalculation of K_e^l as edits progress.

B Implementation Details

For the baselines, we train GPT-J-6B with LoRA [Hu et al., 2021]. we put the configurations as below:

1. **FT.** We set the learning rate as 1e-6 for GPT2 training and 1e-4 for the training of GPT-J-6B and set the number of epochs as 5. We find that with more training, the model can easily achieve zero accuracy on the knowledge set but also get overly high perplexity ($> 10^{10}$) on the Lambda_openai dataset.
2. **MEMIT.** This method has a hyperparameter λ when estimating $KK^T = \lambda C$ where C is the average variable calculated on a large dataset (see the details in Meng et al. [2023]). The configurations of λ in different settings are shown in Table 6. We found that with these configurations the model can achieve good knowledge-washing accuracy while mostly maintaining the model’s reasoning ability (minimal performance degradation on reasoning tasks.)
3. **ME-FT.** We use the code base from the open-sourced GitHub page³ and use the configurations from the website for zsRE and CounterFactual. For Wiki-Latest, we choose the same configuration as CounterFactual with only the data source file changed.
4. **FT-UL.** We set the learning rate as 1e-6 for GPT2-XL and train for 1 epoch for every dataset, and set the learning rate as 1e-5 for GPT-J-6B and train for 5 epochs for every dataset (As LoRA training usually takes longer than full-finetuning).
5. **WOH.** We first train the reinforced model on the sentences formed from the triplets \mathcal{E}_w with the learning rate set as 1e-6 for 1 epoch, then we adopt the objective Eq.(1) from the paper Eldan and Russinovich [2023] to update the target model. During the second stage of training, we set the learning rate as 5e-5 and train the model for 1 epoch.
6. **SeUL.** We use the sentences formed from the triplets and only use the loss on the span of the target o_i in the triplet (s_i, r_i, o_i) . For all the models and the datasets, we train for 3 epochs with a learning rate set as 1e-6. We conduct full-finetuning on GPT2-XL and use LoRA to fine-tune GPT-J-6B.

C Additional Experiments

C.1 Descriptions of the Reasoning Datasets

We conduct the reasoning experiments on three datasets: Lambda_openai [Radford et al., 2019, Paperno et al., 2016], HellaSwag [Zellers et al., 2019], and Arc_Easy [Clark et al., 2018]. The descriptions of these three datasets are as follows:

³<https://github.com/au-revoir/model-editing-ft>

Table 7: Ablation study with different β settings. All settings are conducted with the weights initialized from MEMIT. Here “CF” refers to CounterFactual.

		Acc↓	QA-F1↓	Lambda_openai Acc	hellaswag PPL	hellaswag Acc_norm	arc_easy Acc_norm
	GPT2-XL	1.0000	0.3734	0.5121	10.63	0.5089	0.5105
CF	LAW ($\beta = 0.2$, RI)	0.9158	0.2445	0.5082	10.86	0.5053	0.5059
	LAW ($\beta = 0.2$)	0.1258	0.1102	0.4708	13.04	0.4941	0.4831
zsRE	LAW ($\beta = 0.2$, RI)	0.8845	0.3274	0.5049	10.77	0.5081	0.5059
	LAW ($\beta = 0.2$)	0.0008	0.0008	0.4628	14.34	0.4924	0.4800

1. **Lambda_openai** [Paperno et al., 2016]: The LAMBADA dataset tests computational text understanding via a word prediction task. It features narrative texts where models must use broad context to predict the final word, rather than just the last sentence. The dataset includes an original test split and translations in German, Spanish, French, and Italian.
2. **HellaSwag** [Zellers et al., 2019]: The HellaSwag dataset is a benchmark designed for evaluating commonsense natural language inference (NLI) capabilities. It challenges models to complete sentences in a way that aligns with human common sense. The dataset prompts computational models to predict plausible sentence endings, testing their understanding of everyday scenarios and contexts.
3. **ARC_Easy** [Clark et al., 2018]: The ARC_Easy dataset is a subset of the ARC dataset, featuring grade-school level multiple-choice science questions that are less challenging compared to the full set. It includes questions that were correctly answered by standard algorithms.

C.2 Additional Experimental Results

C.2.1 Overall Performance Comparison

The overall performance comparisons with the performances on two other reasoning benchmarks on zsRE, CounterFactual and Wiki-Latest are shown in Table 10, Table 11 and Table 12, respectively.

C.2.2 Ablation Study

Ablation Study on Initialization of $\hat{\Delta}$ We put the full results of the ablation study with different initialization methods in Table 7.

Ablation Study of Choices of β We put the full results of different choices of β in Table 8.

Ablation Study on Successive Elimination of Knowledge Set The full results with Successive Elimination (SE) enabled or disabled are shown in Table 9.

C.2.3 Case Study

In this section, we visualize the performances of different methods. We select some examples from datasets zsRE, CounterFactual, and Wiki-Latest and show them in Table 13. From the table, we can find that: (1) SeUL is usually generating nonsense output which shows that the model’s fluency is affected. (2) After knowledge washing, LAW is still able to answer these questions. However, we do not force the model to remember any new knowledge, while only forgetting the old knowledge. Consequently, the model may predict random answers such as “Denmark” and “in the middle of the Finnish winter” or may predict null answers like “None”. In contrast, other methods can either still predict the correct answers (indicating the failure of unlearning), or start generating nonsense. Compared with MEMIT, there is more chance for MEMIT to output `<|endof text|>` than LAW as this is the target of their editing, whereas for LAW, we aim to disturb the output to generate random answers, which also demonstrate the key difference: LAW aims to forget the existing knowledge rather than injecting new factual relations.

Table 8: Ablation study with different β settings. All settings are conducted with the weights initialized from MEMIT. Here “CF” refers to CounterFactual.

		Acc↓	QA-F1↓	Lambda_openai		hellaswag	arc_easy
				Acc	PPL	Acc_norm	Acc_norm
	GPT2-XL	1.0000	0.3734	0.5121	10.63	0.5089	0.5105
CF	$\beta = 1.05\beta_0$	0.1266	0.1070	0.4743	12.49	0.5038	0.4950
	$\beta = 1.1\beta_0$	0.1155	0.0995	0.4708	12.93	0.5017	0.4917
	$\beta = 1.2\beta_0$	0.0965	0.0853	0.4553	14.10	0.4941	0.4829
	$\beta = 1.5\beta_0$	0.0655	0.0587	0.4314	16.31	0.4819	0.4672
	$\beta = 0.1$	0.4318	0.2401	0.5063	10.82	0.5055	0.5069
	$\beta = 0.2$	0.1258	0.1102	0.4708	13.04	0.4941	0.4831
	$\beta = 0.5$	0.0242	0.0220	0.3169	36.23	0.4209	0.4176
zsRE	$\beta = 1.05\beta_0$	0.0074	0.0060	0.5127	10.74	0.5114	0.5096
	$\beta = 1.1\beta_0$	0.0050	0.0039	0.5108	10.86	0.5079	0.5118
	$\beta = 1.2\beta_0$	0.0008	0.0010	0.5073	11.06	0.5064	0.5126
	$\beta = 1.5\beta_0$	0.0000	0.0003	0.4945	12.02	0.4960	0.5126
	$\beta = 0.1$	0.0198	0.0166	0.5096	10.68	0.5097	0.5108
	$\beta = 0.2$	0.0008	0.0008	0.4628	14.34	0.4924	0.4800
	$\beta = 0.5$	0.0000	0.0000	0.2806	46.81	0.4242	0.4212

Table 9: Ablation study with Successive Elimination technique enabled or disabled. Here “CF” refers to CounterFactual.

		Acc↓	QA-F1↓	Lambda_openai		hellaswag	arc_easy
				Acc	PPL	Acc_norm	Acc_norm
	GPT2-XL	1.0000	0.3734	0.5121	10.63	0.5089	0.5105
CF	LAW	0.1091	0.0905	0.4741	12.73	0.5021	0.4909
	w/o SE	0.1345	0.1137	0.4905	12.20	0.4843	0.5034
zsRE	LAW	0.0058	0.0043	0.5114	10.81	0.5087	0.5114
	w/o SE	0.0322	0.0254	0.5160	10.52	0.5103	0.5143
Wiki-Latest	LAW	0.1926	0.1735	0.4657	13.27	0.4865	0.4975
	w/o SE	0.2398	0.2038	0.4788	12.40	0.4940	0.5097

Table 10: The experimental results of the model GPT2-XL on the dataset **zsRE** with different methods. The dataset **zsRE** contains 19086 factual statements in total, where GPT2-XL could answer 1212 facts correctly and GPT-J-6B knows 1951 facts. We highlight in red those results where the model is destroyed (the perplexity is overly high), which are excluded from the accuracy comparison.

	zsRE		Lambada_openai		hellaswag	arc_easy
	Acc↓	QA-F1↓	Acc↑	PPL↓	Acc_norm↑	Acc_norm↑
GPT2-XL	1.0000	0.3704	0.5121	10.63	0.5089	0.5105
FT	0.4208	0.2178	0.5275	9.72	0.5058	0.4815
MEMIT	0.0462	0.0379	0.5156	10.52	0.5109	0.5126
ME-FT	0.5091	0.2195	0.3881	21.95	0.5052	0.5471
FT-UL	0.0000	0.0000	0.1126	> 10 ¹⁰	0.3557	0.2513
WOH	0.5182	0.2017	0.5082	10.17	0.4957	0.4941
SeUL	0.0957	0.0443	0.5108	10.66	0.5072	0.4541
LAW	0.0058	0.0043	0.5114	10.81	0.5087	0.5114
GPT-J-6B	1.0000	0.4043	0.6831	4.10	0.6625	0.6225
FT	0.6181	0.2538	0.6887	4.02	0.6646	0.6237
MEMIT	0.0553	0.0388	0.6815	4.14	0.6630	0.6250
ME-FT	0.0751	0.0349	0.5178	8.53	0.6156	0.6263
FT-UL	0.0000	0.0000	0.0000	> 10 ¹⁰	0.2597	0.2500
WOH	0.6930	0.2829	0.6819	4.15	0.6638	0.6098
SeUL	0.7422	0.3032	0.6815	4.15	0.6618	0.6111
LAW	0.0454	0.0352	0.6701	4.35	0.6575	0.6128

Table 11: The experimental results of the model GPT2-XL on the dataset **CounterFactual** with different methods. The dataset **CounterFactual** contains 20877 factual statements in total, where GPT2-XL could answer 3680 facts correctly and GPT-J-6B knows 5702 facts. We highlight in red those results where the model is destroyed (the perplexity is overly high), which are excluded from the accuracy comparison.

	CounterFactual		Lambada_openai		hellaswag	arc_easy
	Acc↓	QA-F1↓	Acc↑	PPL↓	Acc_norm↑	Acc_norm↑
GPT2-XL	1.0000	0.2647	0.5121	10.63	0.5089	0.5105
FT	0.1783	0.0930	0.5195	10.17	0.4978	0.4928
MEMIT	0.1929	0.1439	0.4879	11.81	0.5005	0.5051
ME-FT	0.1799	0.0878	0.3456	27.28	0.3956	0.3354
FT-UL	0.0000	0.0000	0.0000	> 10 ¹⁰	0.2753	0.2529
WOH	0.5978	0.1615	0.4619	13.15	0.4763	0.4886
SeUL	0.0000	0.0000	0.2940	113.58	0.4401	0.3333
Ours	0.1091	0.0905	0.4741	12.73	0.5021	0.4909
GPT-J-6B	1.0000	0.2553	0.6831	4.10	0.6625	0.6225
FT	0.3995	0.1646	0.6837	4.08	0.6640	0.6157
MEMIT	0.2060	0.0759	0.6772	4.25	0.6570	0.6166
ME-FT	0.2139	0.1183	0.4071	11.15	0.5844	0.5421
FT-UL	0.0000	0.0000	0.0000	> 10 ¹⁰	0.2579	0.2542
WOH	0.5396	0.1359	0.6833	4.19	0.6662	0.6111
SeUL	0.5393	0.1395	0.6693	4.35	0.6620	0.6641
Ours	0.0864	0.0334	0.6716	4.40	0.6495	0.5951

Table 12: The experimental results of the model GPT2-XL on the dataset **Wiki-Latest** with different methods. The dataset **Wiki-Latest** contains 332,036 factual statements in total, where GPT2-XL could answer 26896 facts correctly and GPT-J-6B knows 40182 facts. We highlight in red those results where the model is destroyed (the perplexity is overly high), which are excluded from the accuracy comparison.

	Wiki-Latest		Lambada_openai		hellaswag	arc_easy
	Acc↓	QA-F1↓	Acc	PPL	Acc_norm	Acc_norm
GPT2-XL	1.0000	0.3734	0.5121	10.63	0.5089	0.5105
FT	0.0446	0.0256	0.1475	250.73	0.4315	0.4125
MEMIT	0.2972	0.2342	0.4906	11.44	0.5004	0.5177
ME-FT	0.0000	0.0000	0.0000	$> 10^{10}$	0.3191	0.2744
FT-UL	0.0000	0.0000	0.0000	$> 10^{10}$	0.2603	0.2441
WOH	0.4672	0.2227	0.1473	254.08	0.3546	0.3712
SeUL	0.0000	0.0000	0.0000	$> 10^{10}$	0.2603	0.2339
Ours	0.1926	0.1735	0.4657	13.27	0.4865	0.4975
GPT-J-6B	1.0000	0.2553	0.6831	4.10	0.6625	0.6225
FT	0.0159	0.0115	0.4349	13.00	0.5332	0.4920
MEMIT	0.2536	0.0753	0.6817	4.32	0.6600	0.5892
ME-FT	0.0000	0.0000	0.0000	$> 10^{10}$	0.2594	0.2555
FT-UL	0.0000	0.0000	0.0000	$> 10^{10}$	0.2559	0.2449
WOH	0.0009	0.0000	0.0171	$> 10^{10}$	0.2484	0.2529
SeUL	0.0004	0.0000	0.0000	$> 10^{10}$	0.2580	0.2504

Prompt	What fictional universe is Mister Miracle a part of? Answer:	Magnus Carlsen, who holds a citizenship from	Yago Fernando da Silva speaks and writes
Ground Truth	The DC Universe	Norway	in Portuguese
MEMIT	< endoftext >	Norway	English
ME-FT	Superman’s family is the only known superpowered group	Norway	∅ (empty space)
WOH	The universe of the comic book.	the former Soviet Union	about the Brazilian and Portuguese language
SeUL	\n\nA:\n\nB:\n\n	-the- shadows as a a the a very	synonymous synonymous synonymous
LAW	None	Denmark	iban chat

Table 13: Case studies of different methods on the instance of dataset zsRE, CounterFactual, and Wiki-Latest in the first, second, and third column, respectively.