

# Enhancing Vision Models for Text-Heavy Content Understanding and Interaction

Adithya TG <sup>1</sup>	Adithya SK <sup>1</sup>	Abhinav R Bharadwaj <sup>1</sup>	Abhiram HA <sup>1</sup>	Dr. Surabhi Narayan <sup>2</sup>
Dept. Computer Science & Engineering PES University Bangalore, India	Dept. Computer Science & Engineering PES University Bangalore, India	Dept. Computer Science & Engineering PES University Bangalore, India	Dept. Computer Science & Engineering PES University Bangalore, India	Dept. Computer Science & Engineering PES University Bangalore, India
<a href="mailto:adithyatg.2003@gmail.com">adithyatg.2003@gmail.com</a>	<a href="mailto:adithyaskolavi@gmail.com">adithyaskolavi@gmail.com</a>	<a href="mailto:bharadwaj.abhi.r@gmail.com">bharadwaj.abhi.r@gmail.com</a>	<a href="mailto:haabhiram@gmail.com">haabhiram@gmail.com</a>	<a href="mailto:surabhinarayan@pes.edu">surabhinarayan@pes.edu</a>

**Abstract** — Interacting and understanding with text heavy visual content with multiple images is a major challenge for traditional vision models. This paper is on enhancing vision models' capability to comprehend or understand and learn from images containing a huge amount of textual information from the likes of textbooks and research papers which contain multiple images like graphs, etc and tables in them with different types of axes and scales. The approach involves dataset preprocessing, fine tuning which is by using instructional oriented data and evaluation. We also built a visual chat application integrating CLIP for image encoding and a model from the Massive Text Embedding Benchmark which is developed to consider both textual and visual inputs. An accuracy of 96.71% was obtained. The aim of the project is to increase and also enhance the advance vision models' capabilities in understanding complex visual textual data interconnected data, contributing to multimodal AI.

**Keywords**—Image Encoding, NLP, Image Processing, Chat Application

## I. INTRODUCTION

In today's current digital world, the problem free merging of text and images is important for various applications. From the point of document understanding to educational content analysis, this application is to be used. But, the conventional vision models that are already present and up and running often struggle to effectively interpret and engage with text heavy visual content and multiple images, such as research papers, textbooks and documents. A huge hurdle lies in making these models very precise and achieve the state of the art results and to comprehend and extract meaningful insights from images containing substantial textual information.

To address this major problem, our research work focuses on improving the capabilities of vision models in handling complex visual textual data. We made the model to understand text rich images through a comprehensive methodology using dataset preprocessing, fine tuning and evaluation to achieve the best results.

The centre of the problem revolves around optimising and enhancing the vision models' to seamlessly integrate textual information, thereby enabling them to extract valuable insights from text intensive images. Current models lack this capability, hindering their ability to interpret and interact with such content correctly.

Our approach involves a multi stage methodology aimed at refining the model's comprehension of text heavy images. We start by preprocessing the dataset, converting PDF documents into image format and then extracting text rich content using tools like GPT-4 Vision which has shown

excellent results. This step is crucial for preparing the dataset for training the vision model on text intensive content present in the converted images.

We also employ a fine tuning technique called as Lora fine tuning [34], which is used to enhance the model's performance. This model being integrated with the image processing model after detecting the text, reduces the number of parameters to update during fine tuning, which caused faster training and reduces, almost avoids and solves the problem of forgetting. By training the model on instruction based image data, which usually includes images with text instructions or the corresponding captions, we aim to improve text recognition and image text interaction by mapping them correspondingly.

The state of the art model to tackle the challenge of combining textual information from images containing a lot of text or information and multiple visual elements in complex documents is the combination of a model called GPT 4 Vision enhanced by LoRA fine tuning and another different model called RAG pipeline. This model uses GPT 4's Vision exceptional ability in understanding and generating data contained and based on text rich images. The LoRA fine tuning technique significantly enhances the model's performance by optimising parameter updates, hence leading to faster training times and mitigating the issue of catastrophic problem of forgetting. This is especially crucial for improving text recognition and image text interaction, allowing the model to better comprehend and extract meaningful insights from images containing substantial textual information, which is believed to be a major problem for LLMs.

Evaluation of the model's performance is conducted using existing benchmarks like HRS Bench and custom metrics designed to measure it's proficiency in understanding and interacting with text heavy images. Also, we developed a custom benchmark to evaluate the model's ability to generate, interpret and answer questions based on text heavy images.

We also introduce a novel visual chat application that integrates CLIP for image encoding and a model from the Massive Text Embedding Benchmark for textual embedding. This offers a more interactive and appealing approach, considering both textual and visual inputs such as charts, graphs, etc and employs a Retrieval Augmented Generation pipeline to retrieve the required relevant text and images from a dataset based, vector database.

Through this new approach and continuous evaluation, our research work aims to push the boundaries of vision models in handling complex visual textual data comprising of graphs, charts, tables and other similar images containing

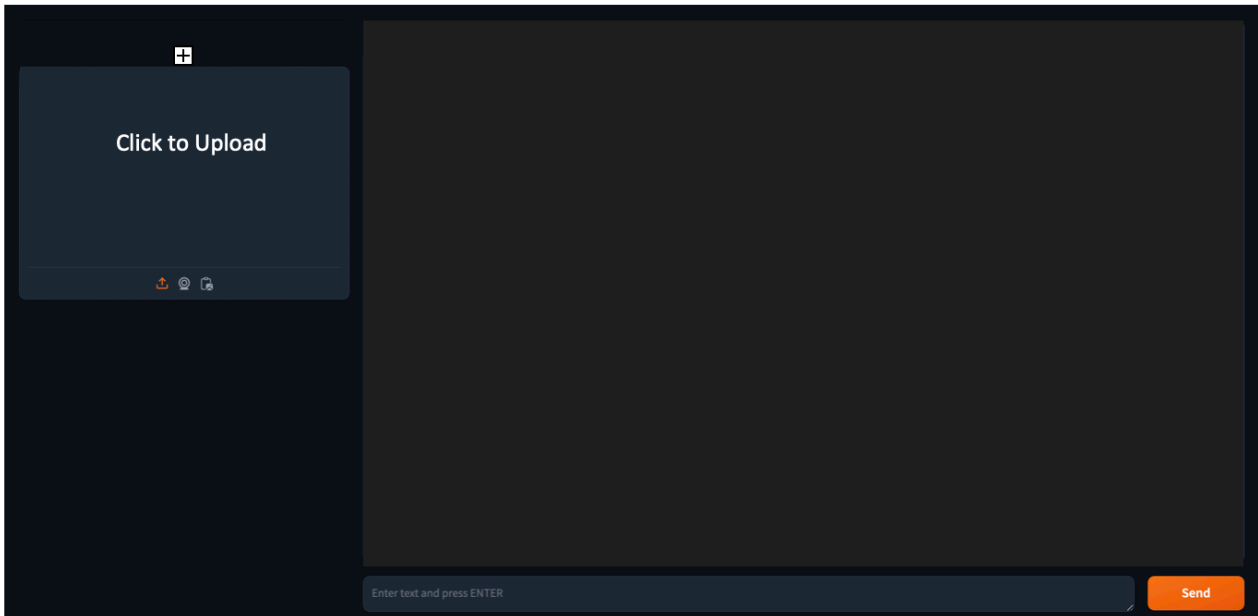


Fig 1. Model Interface

multiple data. The outcomes are expected to contribute significantly to the broader field of multimodal AI, in turn advancements in models' ability to understand and interact with text rich visual content properly and effectively.

## II. RELATED WORKS

To follow natural language instructions, it is crucial for the image model to work in correspondence with natural language processing model to interact effectively with different kinds of users. We could train language models to follow instructions with human feedback [1], laying the groundwork for instruction tuning. We also could scale instruction fine tuned language models, enabling them to handle a wide range of tasks efficiently [2]. Another approach could be to introduce visual instruction tuning [3], extending the capability to understand and interact with visual instructions. Otter, a multi-modal model with in context instruction tuning [4], further advancing the field, all

these provide an overview of large multimodal models, including instruction tuning, highlighting their significance in various application which can be seen in [5].

Instruction tuning has been extended to the multimodal setting, incorporating image, video and audio inputs. There is work done to introduce transformers for image recognition [6], which can be used for multimodal instruction tuning. Another approach is to demonstrate learning transferable visual models from natural language supervision [7], by which we can facilitate a multimodal understanding. There is also work done on to push a web scale image-text pre-training to recognise long tail visual concepts [8], which hugely contributes to the advancement of multimodal instruction tuning.

Among the recent advancements, Vicuna [9] and Baize [10] have emerged as notable platforms for generating high quality instruction following data that generates accurate responses, by using models such as GPT-4 and LLaMA [12].

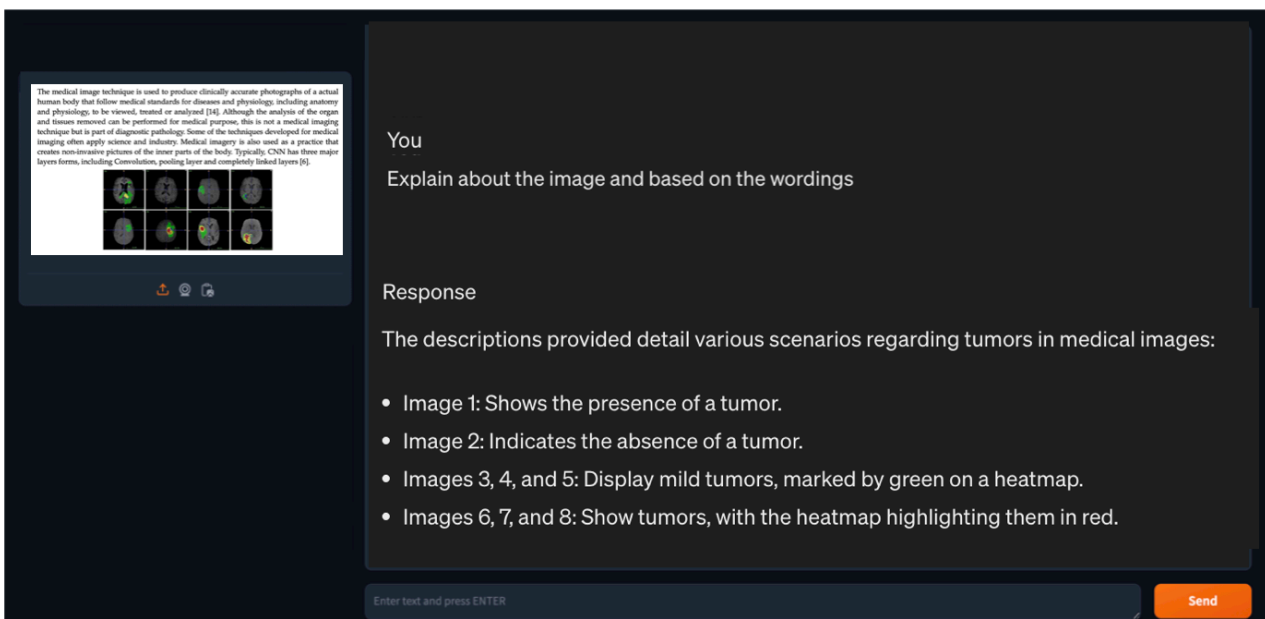


Fig 2. Example of prompt on a Brain Tumor image taken from a research paper

Vicuna [9], is an open-source chatbot built mainly on GPT-4 with high quality instruction following capability. Baize [10], an open source chat model with parameter efficient tuning on self chat data. These projects and research work contribute in abundance to the availability of instruction following data for research and development.

### III. METHODOLOGY

Our research closely follows the architecture of LLaVA, utilising the CLIP-ViT-L/14 for  $224^2$  resolution and CLIP-ViT-L/14-336 for  $336^2$  resolution as the visual encoder V. The grid features before the last transformer layer are transformed into the word embedding space of the language decoder D through a trainable projection matrix W. The language decoder D is based on Vicuna 13B, an instruction tuned language model similar to the LLaMA based model, with specific changes in the parameters. We extend the architecture by adding an extra high-resolution visual encoder. This high res encoder outputs thousands of patch features, exceeding the context length of the language decoder. To address this, we propose adding cross attention modules to the decoder, attending to key value pairs transformed from the high res patch features.

In this project, the process of dataset creation for this research includes some well thought out steps. Python scripts were written which helped in automating the process of downloading and processing research papers in PDF format. This same python code systematically retrieved PDFs from various sources and converted each page into images to aid in visual analysis. Optical Character Recognition techniques were employed to extract text and images from each and every page of the PDFs and a comprehensive database was created and stored in Chroma DB. The dataset included all the pages of a PDF stored separately with the corresponding image, text and the images in that particular page.

This comprehensive approach ensured a structured and searchable dataset, integrating the textual content and corresponding images from the research papers, thereby enhancing the robustness and utility of the dataset for subsequent analysis and machine learning tasks. Only relevant papers, matching the input are filtered out and the figure caption pairs are extracted and cleaned using rule based methods. These cleaned pairs serve as prompts for GPT-4 Vision to generate answers also known as responses for questions based on the figures as posted by the user. In the fine tuning stage, Lora fine tuning is implemented to enhance the model's performance. The model is trained on instructional oriented image data using an A100 GPU and everything together are finalised for training, evaluation and is deployed.

During the evaluation stage, the model's performance is assessed using existing benchmarks such as HRS Bench and COCO Text, as well as a custom benchmark developed to evaluate its proficiency in understanding and interacting with text heavy images. Visual representations of the evaluation results are generated to analyse performance across different metrics and benchmarks such as the accuracy vs epochs graph as shown in Fig 4.

As the final end product, a visual chat application with a User interface using gradio is built which integrates CLIP for image encoding and a model from the Massive Text Embedding Benchmark for textual embedding. A vector database is set up to store both image and the corresponding text embeddings of the content that is extracted from PDFs and stored in that database, which is accessed while providing a response back to the user to the question asked by the user. The chat interface is developed to ensure

compatibility with Google Colab and for easy collaboration and deployment, although hosted on a private website and server.

### IV. BLOCK DIAGRAM SIMULATION

### V. RESULTS

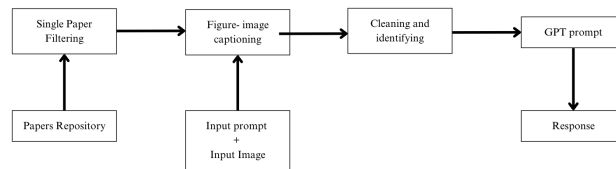


Fig 3. Flow Chart

After training the model using A100 GPU, we achieved a state-of-the-art result on the training and validation dataset, comprising 405 research paper PDFs with approximately 10,000 manually extracted images along with a publicly available dataset comprising of arXiv papers, but without image encodings of the data in them and the images in each page. The training process took about 12 hours and to complete training, validation, and testing, it would take approximately 40 hours over 25 epochs. Accuracy obtained for the model was 96.71% for the training dataset and 93.84% for the test dataset .

### VI. SUMMARY

This paper introduces the research work done on a

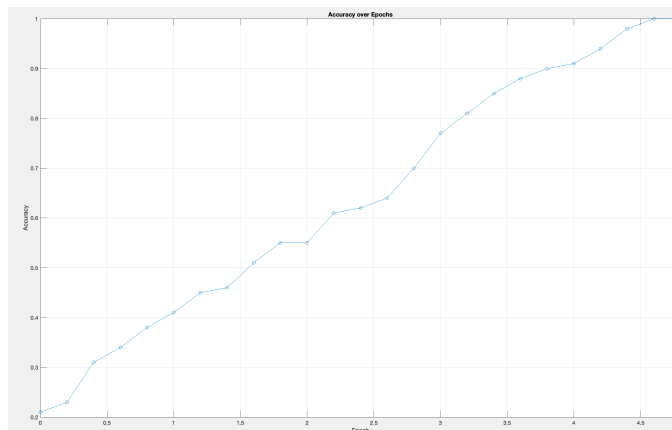


Fig 4. Graph of Accuracy over Epochs

comprehensive approach for instruction tuning and focuses on the model's ability to follow natural language instructions in multimodal settings. The study builds upon recent advancements in instruction tuning methodologies and leverages state of the art language models such as GPT-4.

Firstly, the paper discusses the challenges in evaluating instruction following abilities and highlights the emergence of models like Alpaca, Vicuna and Baize, which generate high quality instruction following data based on LLMs like GPT-4. These models might help in the training of instruction tuned models, but still challenges like bias and lack of robustness remain.

The paper extends the current architecture by adding an extra high resolution visual encoder and proposes cross attention modules to address the challenge of fitting

transformed features and instruction tokens in the context length of the language decoder.

The methodology comprises multiple stages like dataset preprocessing, fine tuning and evaluation of the created model. Dataset preprocessing involves converting PDF documents into image format and extracting text rich content using GPT-4 Vision API. Fine tuning is implemented using Lora fine tuning to enhance the model's performance on instructional oriented image data. Evaluation involves assessing the model's performance using existing benchmarks and a custom benchmark designed for text heavy images.

This study also briefly talks about related works in instruction tuning and multimodal instruction tuning, highlighting various approaches and their limitations. The proposed pipeline outperforms existing methods in various multimodal instruction following tasks, demonstrating its effectiveness in handling complex instruction following scenarios.

Overall, the paper presents a novel approach that advances instruction tuning capabilities, especially in multimodal settings, contributing to the broader field of AI and natural language understanding.

## VIII. REFERENCES

- [1] Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe, "Training language models to follow instructions with human feedback", arXiv preprint arXiv:2203.02155, 2022.
- [2] Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Alex Castro-Ros, Marie Pellat, Kevin Robinson, Dasha Valter, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei, "Scaling instruction-finetuned language models", arXiv preprint arXiv:2210.11416, 2022.
- [3] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee, "Visual instruction tuning", arXiv preprint arXiv:2304.08485, 2023.
- [4] Bo Li, Yuanhan Zhang, Liangyu Chen, Jinghao Wang, Jingkang Yang, and Ziwei Liu, "Otter: A multi-modal model with in-context instruction tuning", arXiv, arXiv:2305.03726, 2023.
- [5] Chunyuan Li, "Large multimodal models: Notes on cvpr 2023 tutorial", arXiv, arXiv:2306.14895, 2023.
- [6] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby, "An image is worth 16x16 words: Transformers for image recognition at scale" arXiv, arXiv:2010.11929, 2020.
- [7] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever, "Learning transferable visual models from natural language supervision", arXiv, arXiv:2103.00020, 2021.
- [8] Soravit Changpinyo, Piyush Sharma, Nan Ding, and Radu Soricut, "Conceptual 12m: Pushing web-scale image-text pre-training to recognize long-tail visual concepts", arXiv, arXiv:2102.08981, 2021.
- [9] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing, "Vicuna: An open-source chatbot impressing gpt-4 with 90%\* chatgpt quality", March 2023. URL <https://lmsys.org/blog/2023-03-30-vicuna/>.
- [10] Canwen Xu, Daya Guo, Nan Duan, and Julian McAuley, "Baize: An open-source chat model with parameter-efficient tuning on self-chat data", arXiv, arXiv:2304.01196, 2023.
- [11] Adithya TG, Dr. Ravindranath C, Dr. Gopalaiah, Dr. Pavithra G, Dr. T.C.Manjunath, "Hardware Implementation to detect brain tumor using AI ML based Convolution Neural Networks CNN in the field of bio medical engineering", Hinweis Second International Conference on Advanced Research in Engineering and Technology (ARET), 2023.
- [12] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothee Lacroix, Baptiste Roziere, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample, Llama: Open and efficient foundation language models, arXiv, arXiv:2302.13971, 2023.
- [13] OpenAI. Gpt-4 technical report, 2023.
- [14] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion- 5b: An open large-scale dataset for training next generation image-text models. arXiv preprint arXiv:2210.08402, 2022.
- [15] Yizhong Wang, Swaroop Mishra, Pegah Alipoormolabashi, Yeganeh Kordi, Amirreza Mirzaei, Anjana Arunkumar, Arjun Ashok, Arut Selvan Dhanasekaran, Atharva Naik, David Stap, Eshaan Pathak, Giannis Karamanolakis, Haizhi Gary Lai, Ishan Purohit, Ishani Mondal, Jacob Anderson, Kirby Kuznia, Krma Doshi, Maitreya Patel, Kuntal Kumar Pal, Mehrad Moradshahi, Mihir Parmar, Mirali Purohit, Neeraj Varshney, Phani Rohitha Kaza, Pulkit Verma, Ravsehaj Singh Puri, Rushang Karia, Shailaja Keyur Sampat, Savan Doshi, Siddhartha Mishra, Sujan Reddy, Sumanta Patro, Tanay Dixit, Xudong Shen, Chitta Baral, Yejin Choi, Noah A. Smith, Hannaneh Hajishirzi, and Daniel Khashabi. Super-naturalinstructions: Generalization via declarative instructions on 1600+ nlp tasks, 2022.
- [16] Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A. Smith, Daniel Khashabi, and Hannaneh Hajishirzi. Self-instruct: Aligning language models with self-generated instructions, 2022.
- [17] Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. Stanford alpaca: An instruction-following llama model. [https://github.com/tatsu-lab/stanford\\_alpaca](https://github.com/tatsu-lab/stanford_alpaca), 2023.
- [18] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An open-source chatbot impressing gpt-4 with 90%\* chatgpt quality, March 2023. URL <https://lmsys.org/blog/2023-03-30-vicuna/>.

- [19] Canwen Xu, Daya Guo, Nan Duan, and Julian McAuley. Baize: An open-source chat model with parameter-efficient tuning on self-chat data, 2023.
- [20] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timo-thée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models, 2023.
- [21] Yang Liu, Dan Iter, Yichong Xu, Shuohang Wang, Ruo Chen Xu, and Chenguang Zhu. G-eval: Nlg evaluation using gpt-4 with better human alignment, 2023.
- [22] Peiyi Wang, Lei Li, Liang Chen, Dawei Zhu, Binghuai Lin, Yunbo Cao, Qi Liu, Tianyu Liu, and Zhifang Sui. Large language models are not fair evaluators, 2023.
- [23] Yann Dubois, Xuechen Li, Rohan Taori, Tianyi Zhang, Ishaan Gulrajani, Jimmy Ba, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. AlpacaFarm: A simulation framework for methods that learn from human feedback, 2023.
- [24] Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding. arXiv preprint arXiv:2306.02858, 2023.
- [25] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed video understanding via large vision and language models, 2023.
- [26] Rongjie Huang, Mingze Li, Dongchao Yang, Jiatong Shi, Xuankai Chang, Zhenhui Ye, Yuning Wu, Zhiqing Hong, Jia-Bin Huang, Jinglin Liu, Yixiang Ren, Zhou Zhao, and Shinji Watanabe. Audiogpt: Understanding and generating speech, music, sound, and talking head. ArXiv, abs/2304.12995, 2023.
- [27] Dong Zhang, Shimin Li, Xin Zhang, Jun Zhan, Pengyu Wang, Yaqian Zhou, and Xipeng Qiu. Speechgpt: Empowering large language models with intrinsic cross-modal conversational abilities, 2023.
- [28] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. MiniGPT-4: Enhancing vision-language understanding with advanced large language models, 2023.
- [29] Renrui Zhang, Jiaming Han, Chris Liu, Peng Gao, Aojun Zhou, Xiangfei Hu, Shilin Yan, Pan Lu, Hongsheng Li, and Yu Qiao. Llama-adapter: Efficient fine-tuning of language models with zero-init attention, 2023.
- [30] Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, Chenliang Li, Yuanhong Xu, Hehong Chen, Junfeng Tian, Qian Qi, Ji Zhang, and Fei Huang. mplug-owl: Modularization empowers large language models with multimodality, 2023.
- [31] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. InstructBlip: Towards general-purpose vision-language models with instruction tuning, 2023.
- [32] Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. Ocr-vqa: Visual question answering by reading text in images. In 2019 international conference on document analysis and recognition (ICDAR), pages 947–952. IEEE, 2019.
- [33] Yanzhe Zhang, Ruiyi Zhang, Jiuxiang Gu, Yufan Zhou, Nedim Lipka, Diyi Yang, Tong Sun, “LLaVAR: Enhanced Visual Instruction Tuning for Text-Rich Image Understanding”, arXiv, arXiv:2306.17107, 2024.
- [34] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, Weizhu Chen, “LoRA: Low-Rank Adaptation of Large Language Models”, arXiv, arXiv:2106.09685, 2021