
Cross-Table Pretraining towards a Universal Function Space for Heterogeneous Tabular Data

Jintai Chen¹, Zhen Lin¹, Qiyuan Chen², Jimeng Sun¹

¹Department of Computer Science, University of Illinois at Urbana-Champaign, IL, USA

² College of Computer Science and Technology, Zhejiang University, Hangzhou, China
 {jtchen721, chenqiyuan1012}@gmail.com, {zhenlin4, jimeng}@illinois.edu

Abstract

Tabular data from different tables exhibit significant diversity due to varied definitions and types of features, as well as complex inter-feature and feature-target relationships. Cross-dataset pretraining, which learns reusable patterns from upstream data to support downstream tasks, have shown notable success in various fields. Yet, when applied to tabular data prediction, this paradigm faces challenges due to the limited reusable patterns among diverse tabular datasets (tables) and the general scarcity of tabular data available for fine-tuning. In this study, we fill this gap by introducing a cross-table pretrained Transformer, XTFORMER, for versatile downstream tabular prediction tasks. Our methodology insight is pretraining XTFORMER to establish a *meta-function* space that encompasses all potential feature-target mappings. In pre-training, a variety of potential mappings are extracted from pre-training tabular datasets and are embedded into the *meta-function* space, and suited mappings are extracted from the *meta-function* space for downstream tasks by a specified coordinate positioning approach. Experiments show that, in 190 downstream tabular prediction tasks, our cross-table pretrained XTFORMER wins both XGBoost and Catboost on 137 (72%) tasks, and surpasses representative deep learning models FT-Transformer and the tabular pre-training approach XTab on 144 (76%) and 162 (85%) tasks.

1 Introduction

Tabular data, prevalent in various application scenarios like economics and healthcare [15, 14, 1, 30], has sparked increased interest in the deep learning community [7, 3]. Nevertheless, tabular data is typically collected by users for specific purposes within particular contexts, which often results in small dataset scales. This makes it difficult to train a robust deep tabular prediction model. One research avenue addressing this challenge is *cross-dataset pretraining and transfer*, wherein shared patterns are extracted from upstream data to support downstream dataset-specific supervised tasks¹. This approach has shown remarkable success in image and text processing tasks [9, 24, 25]. However, unlike images from diverse datasets that share common feature patterns, target semantics, and feature-target relations, tabular datasets exhibit diverse definitions of features and targets and a lack of a “common” feature relation [33], leading to diverse and complex prediction functions [8]. Such divergence impedes the discovery and transfer of reusable mapping patterns between datasets [30, 33].

While some studies [26, 33] introduced pretext tasks (*e.g.*, in self-supervision) for intra-table pretraining and demonstrated effectiveness, these approaches were constrained by the information within a single dataset, neglecting the opportunity to leverage valuable knowledge from other datasets. These approaches struggle to achieve significant performance improvements since tabular data within

¹In this paper, each tabular dataset pre-defines a feature-target prediction task.

a single table is often insufficient. Thus, a few studies further explored the pretraining of deep tabular models on tabular datasets where the features overlap with those of the target datasets (i.e., downstream) or are within the same domain [30, 17, 34]. However, these approaches may limit the broader applicability of pretrained models, as they do not allow for transfer to scenarios outside the domain. Recently, XTab [35] pioneered pretraining a deep tabular model for any downstream tabular datasets, but it does not fully address the diversity issues among datasets and executes direct transfer, only achieving limited performance gains.

Our key insight in addressing this challenge is to create a function space where diverse functions for different upstream datasets can be systematically embedded during pretraining. For a given target dataset, one can extract a suitable feature-target mapping function from this space, thus leveraging the embedded knowledge. To achieve this, we introduce a novel neural layer called the *Calibratable Linear Layer* (CALINEAR). This layer creates a linear function space using a set of basis linear functions, allowing the formulation of different linear functions through varying coordinate positions, i.e., different weighted combinations of the basis linear functions. By combining CALINEAR with non-linear modules (e.g., self-attention), we build XTFORMER, which extends the linear function spaces into a higher dimensional and more universal function space. We term this space the *meta-function* space, which is proficient in formulating diverse and intricate non-linear functions.

In essence, XTFORMER acts as a ‘meta’-model. The basis functions in CALINEARS are unique and crucial components of XTFORMER. Once pre-trained, it only requires finding the combination coefficients of these basis functions, then XTFORMER can collapse into a feature-target mapping model suited to downstream tasks. We term this special downstream task process as *task calibration*. Compared to training a deep tabular model from scratch, this approach requires determining only a small number of parameters using downstream data (just the combination coefficients), significantly reducing the need for large amounts of labeled training data.

While we posit that the *meta-function* space has the capacity to encompass all potential dataset-suited feature-target mapping functions, it is crucial to acknowledge that it may not perfectly align with every dataset. Hence, although the performance is already excellent, after executing the *task calibration* step, we also perform a light fine-tuning step called *refinement* (typically 5 epochs). This step further optimizes the model to be more optimal, potentially exploring beyond the initially established *meta-function* space. In summary, our contributions are:

- For the first time, this paper introduces a method for unifying the expression of diverse tabular feature-target mapping functions by establishing a universal function space that systematically accommodates various tabular prediction functions. These functions can be easily retrieved by coordinate positioning in the space, thereby facilitating effective cross-table pretraining and downstream task transfer.
- We introduce the novel CALINEAR, leveraging a set of linear functions to formulate a variety of linear functions. This is in contrast to the traditional linear layer that expresses only one linear function constrained by fixed parameters. With CALINEAR, the expressive capacity of XTFORMER is enhanced, enabling it to effectively model the *meta-function* space that encompasses a wide range of tabular prediction functions.

2 Related Work

Tabular Prediction Models Gradient-boosted decision trees (GBDT) algorithms (e.g., XG-Boost [5]) currently stand as the predominant models on most tabular prediction tasks due to their commendable data-efficiency and robustness [16, 8]. In view of the remarkable strides observed in deep learning across various fields [29, 28, 10], there has been a burgeoning interest in extending this success to the tabular data prediction tasks [3, 16, 4, 30, 11, 7, 20, 31]. Many of these approaches adopt a Transformer-like structure [31, 7, 26, 27] and demonstrate superior performance compared to alternative deep learning structures [8]. Yet, current deep tabular models still encounter several challenges: (i) Deep tabular models, serving as rotationally invariant approaches with a larger parameter space, demand substantial amounts of training data [21]. As a result, deep learning models typically yield suboptimal results on small-scale tabular datasets compared to data-efficient GBDTs [8]. (ii) Due to the absence of a “common” correlation on tabular data [33], most current deep tabular models are still trained separately on individual tabular datasets and have not effectively leveraged the benefits of transferring knowledge from other tabular datasets, a strategy successfully employed in other domains such as images and text data.

Pretraining on Tabular Domain Unlike spatial and sequential correlations of features in images and texts consistently maintain coherence across various datasets [33], tabular data presents a unique challenge as it lacks common correlations [13]. This poses distinctive hurdles for cross-table pretraining on tabular datasets. Despite the numerous pretraining methods proposed for tabular data [3, 33, 26, 30, 35], the majority of these approaches concentrate on intra-table pretraining, which avoids confronting to handle the heterogeneity between datasets but also forfeits the opportunity to leverage reusable knowledge from other datasets. Recent studies have taken a step forward by achieving transfer learning on tables with shared label and feature spaces [30, 6, 18], facilitating to reuse partially overlapped feature processors. Levin *et al.* [17] proposed a pseudo-feature approach to align upstream and downstream feature sets for table pretraining within the same domain. Despite this, challenges persist when extending these approaches to arbitrary cross-table pretraining. Recently, XTab [35] pioneered cross-dataset pretraining using composable components, leading to only marginal performance gains.

3 Methodology

Existing neural network models, constrained by fixed parameters post-training, can only accommodate a single and fixed mapping. Such methods are sufficient for pre-training and transfer on many modalities (e.g., images) [24], since their features and high-level semantics often share distributions across datasets. However, tabular datasets are heterogeneous, characterized by diverse feature and target spaces, as well as distinct inter-feature and feature-target relationships. Thus, it is challenging to utilize existing neural network structures, as reusable patterns across tabular datasets are not significant. Our methodology insight involves constructing a universal function space and systematically embedding all mappings into this space. This allows different mappings to be expressed as various combinations of the space’s basis functions, and the basis function parameters are thus reused. To achieve this, we first introduce a new *Calibratable Linear layer* (CALINEAR) to create a linear function space that can articulate a broad spectrum of linear functions (Sec. 3.1). In Sec. 3.2, we depict how to build XTFORMER with CALINEAR to establish a *meta-function* space capable of expressing heterogeneous functions for different datasets.

3.1 CALINEAR: Calibratable Linear Layer

Linear layers are the major building blocks of modern neural networks, including Transformer-like architectures. However, a classical linear layer with fixed parameters struggle to adapt to diverse linear functions, especially when the model is applied to a new tabular dataset. Retraining the model from scratch, while avoiding the mentioned issue, is susceptible to overfitting and insufficient training of parameters, as most tabular datasets are small. To address this dilemma, we propose a *calibratable linear layer* (CALINEAR) for easy expression of different linear functions.

Recall that any linear function f in a linear function space \mathcal{F} with a finite set of basis functions $\Phi = \{\phi_m\}_{m=1}^M$ can be expressed as a combination of these basis functions, by:

$$f(x; \mathbf{c}, \Phi) = \sum_{m=1}^M c_m \phi_m(x), \quad (1)$$

where c_m is a coefficient for ϕ_m . Our main idea is to train the basic linear layers Φ during the pre-training phase, which will be shared across all the datasets. After this phase, for any new dataset, we can calibrate only the coefficient $\mathbf{c} = [c_1, \dots, c_M] \in \mathbb{R}^M$ to obtain the final function f . Our objective is that during the pre-training phase, the basic linear layers will learn a meaningful function space, thus making it easier to find the final function f parameterized by the coefficients \mathbf{c} . Assuming the input and the output dimensions of a linear layer are both d , training one basis linear layer amounts to tuning d^2 parameters using a fully-connected network (e.g., $d = 256$ in FT-Transformer [7]); omitting

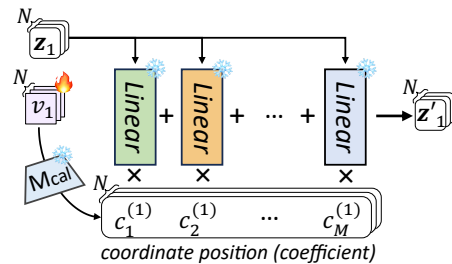


Figure 1: Illustrating Linear with a set of basis linear layers (Linear) and a calibration module (M_{cal}). An element v_n of $\mathbf{v} \in \mathbb{R}^N$ is input to M_{cal} to yield the coefficients $[c_1^{(n)}, \dots, c_M^{(n)}]$ for the feature embedding \mathbf{z}_n . Only \mathbf{v} is tuned for a new dataset.

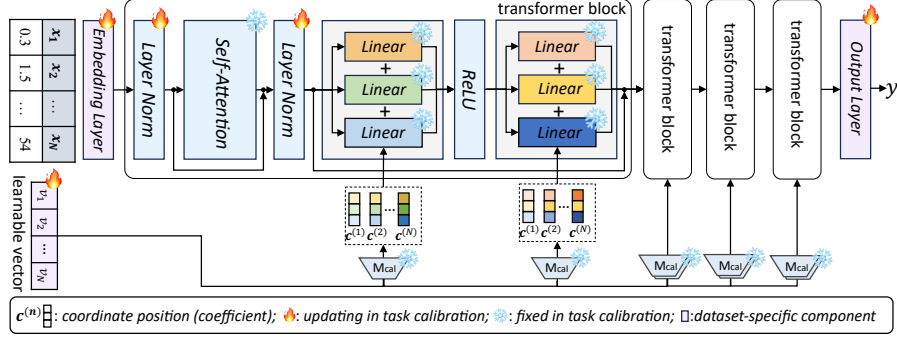


Figure 2: An illustration of XTFORMER framework. In the task calibration fine-tuning phase, the self-attention models and basis functions of the CALINEAR layers within the transformer blocks remain frozen; conversely, the dataset-specific components, learnable context vector \mathbf{c} and the normalization layers undergo the task calibration fine-tuning step.

the bias weights). In contrast, calibrating c_m merely requires to determine M parameters ($M = 4$ in our experiments).

Assuming the basis linear layers are fixed, a simple approach to determine coefficients \mathbf{c} for fitting a target mapping is to separately train M scalar parameters. To further reduce the number of parameter to calibrate, however, we introduce a simple *calibration module* (M_{cal}) that generates these coefficients with common “anchor” context information specific to the target function. Specifically, for each CALINEAR layer, the associated M_{cal} is a simple two-layer multi-layer perceptron (MLP) followed by a softmax output. For any feature in a new tabular dataset, we allocate and optimize a randomly initialized context $v \in \mathbb{R}$, which is then passed through the M_{cal} to generate a set of coefficients $\mathbf{c} = [c_1, \dots, c_M]$ to fit the target mapping:

$$\mathbf{c} = M_{cal}(v) = \text{Softmax}(\text{MLP}(v)) \quad (2)$$

Note that M_{cal} is jointly optimized with v during the pre-training phase, while when fine-tuning for a target mapping, M_{cal} is frozen and only v is optimized.

In short, a CALINEAR layer consists of M basis learnable linear layers $\{\text{Linear}_m\}_{m=1}^M$ as well as a calibration module. Formally, given a learnable context $v \in \mathbb{R}$ (depending only on the dataset but shared across all CALINEAR layers in a model), with $\mathbf{z} \in \mathbb{R}^d$ denoting the input feature, the output $\mathbf{z}' \in \mathbb{R}^d$ of CALINEAR is given by:

$$\mathbf{z}' = \sum_{m=1}^M c_m \text{Linear}_m(\mathbf{z}), \quad (3)$$

$$\text{where } \mathbf{c} = [c_1, \dots, c_M] = M_{cal}(v).$$

Note that the top of M_{cal} is a softmax layer ensuring that $\sum_{m=1}^M c_m = 1$ to control the magnitude of the CALINEAR output for stable learning dynamics. An illustration of CALINEAR can be found in Fig. 1. The M basis linear layers and M_{cal} are *frozen* when tuning CALINEAR to fit a new function, and only \mathbf{v} is tuned (see Sec. 3.3 for more details).

Remarks: While it may seem from Eq. (3) that a linear combination of the linear layers is still a linear layer, we should emphasize that the distinctive feature of the CALINEAR is the separate training of the basis linear layers Φ and the coefficients \mathbf{c} . The benefits are at least two-fold: **(i) flexibility.** CALINEAR adds flexibility beyond a simple linear layer, allowing to establish a linear function space and express a spectrum of linear functions; **(ii) data-efficiency.** Since only the context v is used to generate M coefficient to obtain a new mapping from the function space, CALINEAR thus allows the final XTFORMER (Sec. 3.2) to quickly calibrate to a new dataset that is potentially quite small.

3.2 XTFORMER Architecture

As the CALINEAR layer only creates a linear function space, it is inadequate to express the diverse and non-linear dataset-suited functions, especially considering their typically irregular nature [8]. Built upon CALINEARS, XTFORMER expands the linear function space into a more versatile *meta-function* space capable of modeling diverse and complex non-linear functions, by integrating various

non-linear components (*e.g.*, activation functions and self-attention modules). The architecture of XTFORMER majorly follows a four-layer FT-Transformer [7], but we replace the linear layers in the feedforward network (FFN) with CALINEAR Layer. Similar to XTab, we also use the dataset-specific embedding and output layer.

Formally, the FFN with CALINEAR layers is defined by:

$$\mathbf{z}' = \text{CaLinear}(\text{ReLU}(\text{CaLinear}(\mathbf{z}))) \quad (4)$$

$$= \sum_{m'=1}^M c_{m'} \text{Linear}_{m'}(\text{ReLU}(\sum_{m=1}^M c_m \text{Linear}_m(\mathbf{z}))) \quad (5)$$

That is, each FFN consists of two distinct CALINEARS, and the basis linear functions in these two CALINEARS are independent. Notably, for one dataset, all CALINEARS in the model share the same learnable context vector $\mathbf{v} = [v_1, \dots, v_N]$, as illustrated in Fig. 2. Note that though we only have one M_{cal} in a CALINEAR, with different $v_n \in \mathbb{R}$, the coefficient \mathbf{c} is still unique to each feature embedding.

In pretraining, the whole XTFORMER is trained on data from various datasets. When adapting it to a new dataset, only dataset-specific components (purple blocks in Fig. 2: embedding layer, output layer, and the learnable context vector \mathbf{v}) as well as the normalization layers are fine-tuned. This allows XTFORMER to adapt to the diverse feature and target spaces of various tabular datasets.

The relation of CALINEAR and XTFORMER is twofold: (i) CALINEAR is a linear version of XTFORMER. While the CALINEAR can only create a linear function space, XTFORMER is able to establish a non-linear *meta-function* space that is more adept at capturing real-world feature-target relations. (ii) Stacking CALINEARS sequentially integrated with non-linear components, XTFORMER supports a broader function space. A single CALINEAR can be used to establish an M -dimensional space. For a XTFORMER with L transformer blocks, there are $2ML$ sequentially stacked CALINEAR layers, enabling the model to encompass a function space of M^{2L} . In this paper, we set $M = 4$ and $L = 4$, resulting in the *meta-function* space with a theoretical dimensionality of up to 65,536.

3.3 Pretraining and Fine-tuning Paradigm

We introduce a three-phase process for cross-table pretraining and transfer: (1) the cross-table pretraining and (2) a two-phase fine-tuning comprising (i) task calibration and (ii) refinement. In pretraining, XTFORMER learns on diverse tabular datasets to establish the *meta-function* space. Then, the task calibration phase aims to pinpoint the function best suited for the specific dataset within this *meta-function* space. Finally, in the refinement phase, we conduct further fine-tuning for all parameters to seek an improved function.

Cross-Table Pretraining In the pretraining phase, we pretrain our XTFORMER on a large set of datasets \mathcal{D} . We train the XTFORMER with task-specific prediction objectives: we use the cross-entropy loss function for classification task and the mean squared error (MSE) loss function for regression. In each epoch of pretraining, we randomly choose a dataset $D_i \in \mathcal{D}$ and train the dataset-specific components (purple blocks in Fig. 2, including embedding layer, output layer, and the context \mathbf{v}) as well as the shared body of XTFORMER. As a result, all datasets collectively contribute to shaping the shared part of the XTFORMER, modeling the *meta-function* space applicable to any dataset and seamlessly making the shared components cooperative with any the dataset-specific component. This pretraining phase serves two primary purposes: (i) pretraining all the components of XTFORMER, especially each basis function of CALINEARS to establish the high-dimensional *meta-function* space; (ii) training the M_{cal} to effectively collaborate with XTFORMER, so as to proficiently identify an optimal functions for each given dataset from the *meta-function* space.

Task Calibration The objective of the task calibration phase is to determine an optimal function within the *meta-function* space. After pretraining on diverse datasets, we assume that the *meta-function* space is well-established. In the task calibration phase, for a dataset (task) unseen in the pretraining phase, we freeze the shared part of XTFORMER and train the dataset-specific components from scratch to align the XTFORMER with the task prediction function, as depicted in Fig. 2. The normalization layers undergo updates in this phase as a standard configuration, following prior works [12]. The training objective in the task calibration phase aligns with that of the pre-training phase: Either cross-entropy or MSE loss depending on the task. After the task calibration, we assemble shared and dataset-specific components to yield a proficient model for the given downstream task.

Refinement Our assumption of the *meta-function* may still limit XTFORMER’s ability to discover the optimal weights for a given dataset. The purpose of the refinement step is to further explore the “optimal” function that may exist beyond the *meta-function* space, as illustrated in Fig. 3. Continuing upon the the previous calibration step, we update all parameters (including the previously frozen layers) for a few epochs. Given the relatively limited sample size in a tabular dataset, we restrict the refinement epoch to a small number (5 by default) to mitigate over-fitting.

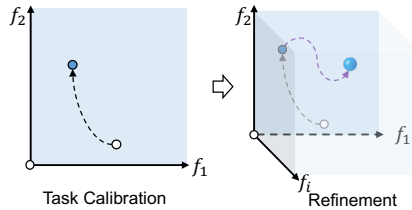


Figure 3: An illustration of task calibration and refinement. The task calibration (left) operates within the established function space to search for a dataset-suited model, while the refinement (right) optimizes all parameters for an improved model and may extend beyond the established space.

4 Experiments

Datasets We utilize labeled datasets from the high-quality large tabular data benchmark OpenTabs V1 [32]. We systematically exclude datasets containing features with free text. Additionally, exclude duplicated datasets from the database, ensuring no overlap between the pretraining and downstream datasets. We opt to omit multi-class datasets in this work following [8], as a multi-classification task can be decomposed into multiple binary ones, and the multi-class datasets are relatively infrequent in tabular dataset collections. In total, we have 294 binary classification datasets and 366 regression datasets for pretraining, and evaluate the pretrained XTFORMER on 190 downstream tasks. The 190 downstream tasks are organized upon 38 datasets (20 binary classification datasets and 18 regression datasets), and each datasets are used under 5 settings. In pre-processing, we divide each dataset into training and test sets using an 80:20 random split. Additionally, we performed random sampling to extract 20% of the training samples for validation purposes. The 5 settings are conducted by: (1) all the training data and validation data are used (**T-full**), and limited data scenarios: (2) 200 training samples with 50 validation data (**T-200**), (3) 100 training data with 25 validation data (**T-100**), (4) 50 training data with 13 validation data (**T-50**), and (5) 20 training data with 5 validation data (**T-20**). Detailed descriptions of target datasets are given in Appendix B.

Implementation Details We employ the data preprocessing strategy following the FT-Transformer [7] setting. The quantile transformation [22] is applied onto raw features, and standardization is applied to regression targets. We consolidate all datasets into a unified dataloader, which allows to randomly sample a dataset per pretraining step. Each dataset undergoes pretraining with the shared model body, accompanied by its dataset-specific embedding layer, output layer, and learnable context vector \mathbf{v} . We utilize a stack of 4 transformer blocks to construct the shared part of XTFORMER, with the feature embedding size of 192 and 8 attention heads. The number of basis linear layer in CALINEAR is set to 4 ($M = 4$). In both the pretraining and fine-tuning phases, we utilize the AdamW optimizer [19] with a learning rate set to $1e-4$. Consistent with [7], a weight decay of $1e-5$ is applied to all components, excluding the embedding layer, layer normalization, and the bias terms. All experiments are executed on NVIDIA A100 GPUs 5 times with different random seeds, employing a batch size of 1024. When testing algorithms under limited dataset scenarios, the variation in random seeds also introduce changes to the sampled training and validation data. For pretraining, we execute an average of 350 epochs for each dataset. This involves incorporating a warm-up phase for the dataset-specific components during the initial 20% of steps, followed by a linear decay to zero. The default epoch amounts of task calibration for full dataset scenario and limited training data scenarios are 240 and 40, respectively. We set the default number of refinement epochs to 5. The best checkpoints on the validation set is used. For our XTFORMER, we only use hyperparameters without tuning.

Baseline Algorithms We compare our XTFORMER with various representative supervised or pretrained tabular prediction models, including (i) the dominant GBDTs algorithms: XGBoost [5] and CatBoost [23], (2) cutting-edge deep tabular models including FT-Transformer (FT-T) [7], SAINT [26], AutoInt [27], as well as (3) the open-source cross-table pretraining model XTab [35]. All the algorithms trained through supervised learning undergo hyperparameter fine-tuning for better performances. The hyper-parameter tuning settings follow their original configurations and the settings outlined in [7]. Detailed information about hyperparameter fine-tuning can be found in

Table 1: Performance comparison with presentative deep learning and GBDTs. Performance ranking (\downarrow) within different settings are separately computed. The best results are marked in **bold** while the second and the third best results are underlined. “(t)”, “(d)”, and “(p)” respectively indicate “with hyperparameter tuned”, “with default parameters”, and “pretrained”, respectively.

Setting	XTFORMER (p)	XGboost(d)	XGboost(t)	Catboost(d)	Catboost(t)	FTT(d)	FTT(t)	AutoInt(d)	AutoInt(t)	SAINT(d)	XTab (p)
T-full	3.84 \pm 3.18	5.39 \pm 2.92	<u>4.00</u> \pm 1.85	6.26 \pm 2.83	4.26 \pm 3.29	5.97 \pm 2.42	<u>3.97</u> \pm 2.39	5.82 \pm 3.31	4.68 \pm 2.00	6.24 \pm 3.06	7.58 \pm 2.53
T-200	2.84 \pm 3.17	6.53 \pm 3.60	<u>4.76</u> \pm 2.53	5.76 \pm 2.93	<u>5.21</u> \pm 3.19	6.16 \pm 2.84	6.05 \pm 2.65	5.84 \pm 2.22	5.95 \pm 2.64	5.92 \pm 2.71	6.84 \pm 2.68
T-100	2.50 \pm 2.85	6.89 \pm 3.37	<u>4.42</u> \pm 2.43	5.74 \pm 2.80	<u>5.11</u> \pm 3.03	5.71 \pm 2.51	5.39 \pm 2.47	5.55 \pm 2.54	5.61 \pm 2.69	6.34 \pm 2.91	6.74 \pm 2.41
T-50	3.16 \pm 3.00	6.58 \pm 3.45	5.71 \pm 3.07	6.21 \pm 2.70	5.50 \pm 3.07	5.95 \pm 3.09	<u>4.76</u> \pm 3.21	<u>4.87</u> \pm 2.89	5.13 \pm 2.91	5.95 \pm 2.86	6.92 \pm 2.30
T-20	2.08 \pm 2.49	7.08 \pm 3.22	6.29 \pm 3.01	6.29 \pm 3.27	5.53 \pm 2.88	5.45 \pm 3.01	<u>5.34</u> \pm 2.90	<u>4.95</u> \pm 2.65	6.05 \pm 2.79	6.42 \pm 2.83	6.32 \pm 2.47

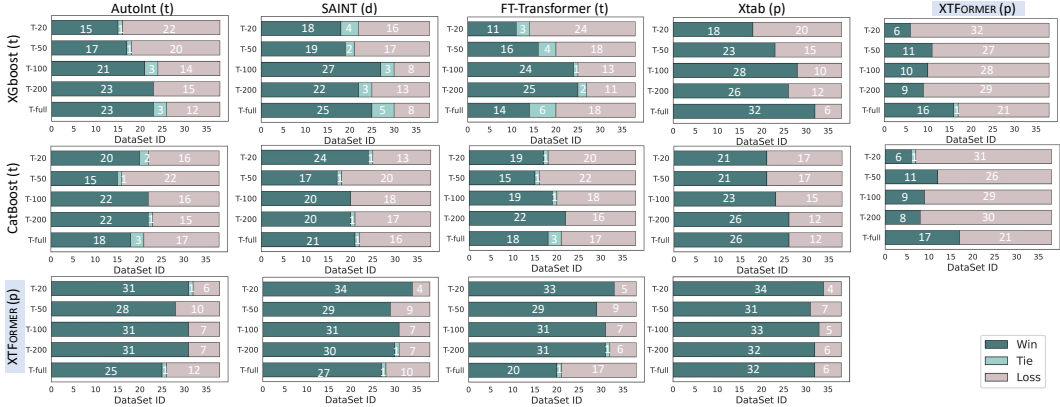


Figure 4: One-on-one comparison to assess the performance of XGBoost, Catboost and XTFORMER against representative deep learning approaches. XGBoost and CatBoost outperform or match existing deep learning approaches on a majority of datasets. However, our XTFORMER beats both XGboost and Catboost, revolutionizing the landscape of deep learning and GBDTs competition.

Appendix A. For XTab [35], we use the source code and follow its specific settings that reports the best scores with the given pretrained checkpoint while keeping other hyperparameters constant.

Metrics With the diversity of tabular datasets, no single model outperforms every competitor across all datasets [7, 31, 8]. We thus compare model performances by: (i) performance ranking across all approaches, based on the accuracy for classification and the mean squared error for regression; following the practice in previous works [35, 11]; and (ii) a win-tie-loss analysis for a direct comparison between two approaches.

General performance We compare XTFORMER’s performance against existing algorithms 190 tasks (on 38 datasets across five different settings). The performance rankings are presented in Table 1 and the raw results are given in Appendix C. It is obvious that XTFORMER consistently outperforms all other methods in every setting, especially when the training and validation data are highly limited. Except for our approach, generally, deep learning approaches cannot beat hyperparameter-tuned XGboost and Catboost in most settings, corroborating the conclusions drawn in previous researches [7, 8]. In order to further inspect whether our approach has altered the landscape of the tabular prediction domain, we conducted an one-on-one comparison for XTFORMER, XGBoost, and Catboost against previous deep learning models, as shown in Fig. 4. It is clear that XGBoost and Catboost outperform or achieve comparable performance to existing deep learning approaches across a majority of datasets and settings, while these deep learning approaches demonstrate superiority in fewer setting. In contrast, neither XGBoost nor Catboost surpasses XTFORMER, suggesting a transformative impact on the landscape of deep learning and GBDTs competition. One can observe that our model outperforms baseline approaches in the vast majority of tasks (typically over 70%). For example, it outperforms classic GBDTs, XGBoost and Catboost, on 137 (72%) tasks, FT-Transformer on 144 (76%) tasks, and the previous tabular pre-training model XTab on 162 (85%) tasks.

Table 2: Performance ranking (\downarrow) under T-full and T-100 settings, respectively, with different quantities of basis functions (BFs). The top performances are marked in **bold**, and the runners-ups are underlined.

#. BF(s)	1	2	4	6
T-full	2.47 \pm 1.14	2.43 \pm 1.01	2.10 \pm 1.12	<u>2.13</u> \pm 0.94
T-100	2.87 \pm 1.01	2.43 \pm 1.01	<u>2.20</u> \pm 1.19	2.17 \pm 1.15

Table 3: Ablation study results of M_{cal} vs. vanilla learnable coefficients. Win/tie/loss on 38 datasets in 5 settings are reported. The best performances are **bold**.

Settings	T-20	T-50	T-100	T-200	T-full
#. M_{cal} win	24	24	21	24	24
#. tie	2	1	2	1	2
#. M_{cal} loss	12	13	15	13	12

Table 4: Performance ranking (\downarrow) with varied epochs of task calibration (#.T) and refinement (#.R), under the **T-full** setting.

#.T \ #.R	0	3	5	10
40	9.71 \pm 6.36	9.82 \pm 5.76	9.61 \pm 5.34	8.68 \pm 5.68
80	7.74 \pm 5.12	7.24 \pm 4.80	7.76 \pm 4.27	6.76 \pm 4.40
120	6.82 \pm 4.01	6.11 \pm 4.04	6.32 \pm 3.85	5.84 \pm 4.00
160	6.03 \pm 3.88	5.66 \pm 3.74	4.58 \pm 3.18	5.32 \pm 3.58
240	5.61 \pm 3.87	5.18 \pm 3.72	4.37 \pm 2.91	5.47 \pm 3.86
320	5.58 \pm 4.28	5.84 \pm 5.17	5.37 \pm 4.36	5.08 \pm 4.83
Ave	6.91 \pm 4.59	6.64 \pm 4.54	6.33 \pm 3.99	6.19 \pm 4.39

How many basis functions should we use?

The number of basis functions in CALINEAR directly impacts the dimensionality of the established *meta-function* space. Intuitively, a higher count of basis functions leads to a larger function space. In this study, we investigate the impact of varying the number of basis functions on model performance. We conduct experiments using 1, 2, 4, and 6 basis functions in each CALINEAR, re-pretraining the XTFORMER from scratch for each setting. Evaluation is performed on both the T-full and a data-insufficient setting (T-100), and performance rankings are computed separately. As shown in Table 2, the model exhibits improved performance with an increasing number of basis functions. Models with 4 or 6 basis functions markedly outperform those with 1 and 2. However, the difference between 4 and 6 basis functions is not significant. Actually, using 4 basis functions in XTFORMER has already yielded a substantial *meta-function* space with $n^{2L} = 4^8 = 65,536$ dimensions, which is sufficient to represent the majority of potential functions.

How does the M_{cal} impact the results? In this study, we devise a M_{cal} to process a learnable context vector \mathbf{v} to generate coefficients, aiming to identify dataset-suited functions in the *meta-function* space. An intuitive alternative is to directly assign learnable coefficients for each CALINEAR and optimizing them to obtain coefficients. To compare these two approaches, we substitute the M_{cal} in the framework with learnable coefficients (also employing *softmax* like M_{cal}) and present the comparative results in Table 3. Remarkably, M_{cal} consistently outperforms the approach using vanilla learnable coefficients across all settings, outperforming on approximately $2/3$ of the datasets. We attribute the observed superiority of using M_{cal} to two key factors: **(i) Coefficient Correlation Modeling:** M_{cal} can model the correlations among these coefficients, which is more effective for target model searching in the function space; **(ii) Parameter Efficiency:** M_{cal} allows us to optimize only N learnable parameters ($\mathbf{v} \in \mathbb{R}^N$, N is the number of feature). In contrast, the alternative method requires to learn kN coefficients directly, where k represents the number of CALINEAR ($k = 8$ in this paper). Given the potentially limited training data in tabular datasets, a reduced parameter count generally results in better performance.

How does epoch number for pretraining, task calibration, and refinement impact results? **(i) pretraining epoch.** We compare the results of the pretrained XTFORMER at different pretraining epochs with a baseline XTFORMER version without pretraining. Referring to Fig. 5, it is evident that pretraining yields a noteworthy performance enhancement over the first 50 pretraining epochs (per dataset). Following this, a gradual ascent phase occurs with the pretraining epoch number increases. Importantly, we note no significant performance decline, indicating the absence of both overfitting and collapse during pretraining, even as we constructed a *meta-function* space of up to 65,536 dimensions.

Table 5: Performance ranking (\downarrow) with varied epochs of task calibration (#.T) and refinement (#.R), under the **T-100** setting.

#.T \ #.R	0	3	5	10
40	4.55 \pm 3.80	4.82 \pm 3.70	4.00 \pm 3.55	4.32 \pm 2.98
80	4.71 \pm 2.86	4.84 \pm 2.92	4.68 \pm 2.74	4.68 \pm 2.63
120	5.45 \pm 2.84	5.61 \pm 3.39	5.58 \pm 3.35	5.29 \pm 3.09
160	5.55 \pm 3.26	5.53 \pm 3.86	5.76 \pm 3.46	5.92 \pm 3.44
Ave	5.07 \pm 3.19	5.20 \pm 3.47	5.01 \pm 3.27	5.05 \pm 3.03

Table 6: Performance ranking (\downarrow) with varied epochs of task calibration (#.T) and refinement (#.R), under the **T-20** setting.

#.T \ #.R	0	3	5	10
40	4.55 \pm 3.80	4.39 \pm 3.51	4.42 \pm 3.17	4.34 \pm 2.90
80	4.84 \pm 2.93	4.66 \pm 2.75	4.82 \pm 2.95	5.13 \pm 2.96
120	5.39 \pm 3.43	5.32 \pm 3.20	4.76 \pm 2.94	5.39 \pm 3.54
160	5.26 \pm 3.17	5.37 \pm 3.28	5.61 \pm 3.34	5.76 \pm 3.39
Ave	5.01 \pm 3.33	4.93 \pm 3.18	4.90 \pm 3.10	5.16 \pm 3.20

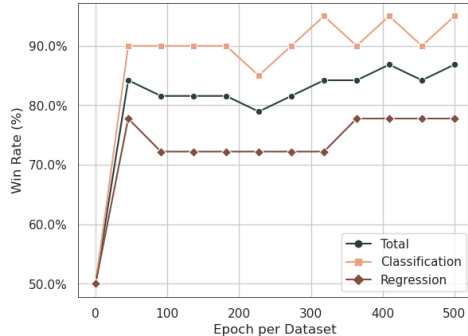


Figure 5: The win rate of the pre-trained XTFORMER in comparison to the baseline, across varying numbers of pretraining epochs.

(ii) task calibration epoch. We evaluate the impacts of fine-tuning step settings in the task calibration phases and refinement phases, on original (T-full) and data-insufficient (T-20, T-100) scenarios. See Table 4, it is evident that on full datasets, as the number of task calibration steps increases, the model demonstrates an increasingly positive trend in performance. However, in the scenario of extreme data inefficiency, the trend is entirely opposite: referring to Table 5 and Table 6, an increase in the number of task calibration steps correlates with a decline in performance. This might be because the overly extensive fine-tuning process tends to result in overfitting when the training and validation samples are extremely limited. **(iii) refinement epoch.** Upon reviewing Table 4, 5, and 6, it is apparent that the refinement phase offers additional performance gains (compared to $\#R=0$), especially in the T-full setting. Besides, it is also apparent that our few-epoch refinement setting (5 epochs by default) does not hurt the performances even in highly data-insufficient scenarios (T-20 and T-100), implying the robustness of our approach.

How do coefficients represent a function within the meta-function space?

Recall that our calibration step aims to find a good transformation from embedding layer to the output layer (i.e. a good feature-target function). In Fig. 6(E), we collect coefficients for various features from both upstream (learned in pretraining) and downstream (before refinement) tables, and use t-SNE to visualize their distribution. Each point represents one feature (i.e. one feature-target relation) from one tabular dataset. In Fig. 6(A-D), we visualize the feature-target distribution of a cluster of coefficients, by plotting the mean activation after the embedding layer (denoted as \bar{z}_{in}) against that of the embedding before the dataset-specific output layer (denoted as \bar{z}_{out})². It is apparent that the pre-trained meta-function space exhibits a degree of smoothness - features whose coefficients are close in the t-SNE space also exhibit similar feature-target distributions per (A-D). More importantly, upstream and downstream points close in the t-SNE plot also shows similar feature-target distributions. This provides insights into why XTFORMER works: For any new feature from a new dataset (a downstream red dot), M_{cal} identifies good coordinates (c) for it in the meta-function space such that its neighbors (nearby upstream black dots) are similar in terms of feature-target relation, as visibly confirmed in Fig. 6(A-D). Since c pinpoints the final feature-target function per Eq. (3), the resulting calibrated XTFORMER is also suitable for processing features similar to this new feature. In short, our approach performs an automatic clustering for feature-target functions, aiding in the discovery and utilization of similar mapping patterns in cross-table transfer. Another example is given in Appendix D.

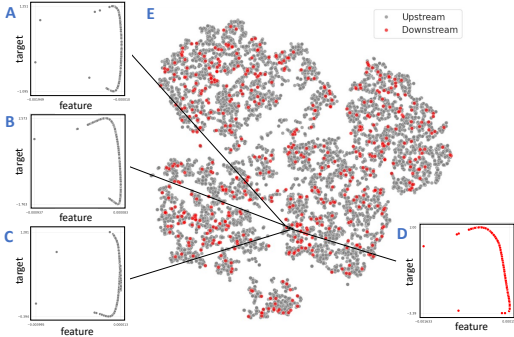


Figure 6: A-D: average activation of the embedding layer (\bar{z}_{in} vs before the output layer (\bar{z}_{out}) - a proxy visualization of the feature-target relation we aim to learn or calibrate to. E: t-SNE visualization of the coefficients. Each dot in (A-D) represents a data (row) and in (E), a feature (column). Features whose coefficients in a cluster in (E) exhibit similar feature-target distribution in (A-D), implying that our calibration module is able to learn a suited feature-target function by finding the correct coefficients c.

5 Conclusions

This paper presented XTFORMER to address the inherent challenge of heterogeneity in cross-table pre-training and transferability. The cross-table pretraining of XTFORMER serves to establish a universal function space, known as the meta-function space, enabling the systematic representation of diverse, dataset-specific, and intricate functions through coordinated positions within the space. When applied to downstream datasets, we can effectively find a task-suited functions by merely combining well-pretrained basis functions spanning the meta-function space. Experiments demonstrate that, our method outperforms all existing deep tabular prediction models by considerable margins, including dominant GBDTs, even with highly limited training data.

²Note that we are actually interested in the relation of the feature and target vectors (input and output of the shared body of XTFORMER), but we plot only the mean of these vectors (\bar{z}_{out} vs \bar{z}_{in}) because visualizing the relation of vectors is hard.

References

- [1] Bruno Afonso, Luckeciano Melo, Willian Oliveira, Samuel Sousa, and Lilian Berton. Housing prices prediction with a deep learning and random forest ensemble. In *Anais do XVI Encontro Nacional de Inteligência Artificial e Computacional*, 2019.
- [2] Takuya Akiba, Shotaro Sano, Toshihiko Yanase, Takeru Ohta, and Masanori Koyama. Optuna: A next-generation hyperparameter optimization framework. In *ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 2623–2631, 2019.
- [3] Sercan Ö Arik and Tomas Pfister. TabNet: Attentive interpretable tabular learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2021.
- [4] Jintai Chen, KuanLun Liao, Yanwen Fang, Danny Chen, and Jian Wu. TabCaps: A capsule neural network for tabular data classification with BoW Routing. In *International Conference on Learning Representations*, 2022.
- [5] Tianqi Chen and Carlos Guestrin. Xgboost: A scalable tree boosting system. In *ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 2016.
- [6] Wenjing Fang, Chaochao Chen, Bowen Song, Li Wang, Jun Zhou, and Kenny Q Zhu. Adapted tree boosting for transfer learning. In *IEEE International Conference on Big Data*, 2019.
- [7] Yury Gorishniy, Ivan Rubachev, Valentin Khruikov, et al. Revisiting deep learning models for tabular data. In *Advances in Neural Information Processing Systems*, volume 34, pages 18932–18943, 2021.
- [8] Léo Grinsztajn, Edouard Oyallon, and Gaël Varoquaux. Why do tree-based models still outperform deep learning on typical tabular data? In *Advances in Neural Information Processing Systems*, 2022.
- [9] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *CVPR*, 2022.
- [10] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 770–778, 2016.
- [11] Noah Hollmann, Samuel Müller, Katharina Eggensperger, and Frank Hutter. TabPFN: A transformer that solves small tabular classification problems in a second. In *International Conference on Learning Representations*, 2022.
- [12] Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin De Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. Parameter-efficient transfer learning for NLP. In *International Conference on Machine Learning*. PMLR, 2019.
- [13] Vanshika Jain, Meghansh Goel, and Kshitiz Shah. Deep learning on small tabular dataset: Using transfer learning and image classification. In *International Conference on Artificial Intelligence and Speech Technology*, 2021.
- [14] Alistair EW Johnson, Tom J Pollard, Lu Shen, Li-wei H Lehman, Mengling Feng, Mohammad Ghassemi, Benjamin Moody, Peter Szolovits, Leo Anthony Celi, and Roger G Mark. MIMIC-III: A freely accessible critical care database. *Scientific Data*, 2016.
- [15] Lionel P Joseph, Erica A Joseph, and Ramendra Prasad. Explainable diabetes classification using hybrid bayesian-optimized TabNet architecture. *Computers in Biology and Medicine*, 2022.
- [16] Liran Katzir, Gal Elidan, and Ran El-Yaniv. Net-DNF: Effective deep modeling of tabular data. In *International Conference on Learning Representations*, 2020.
- [17] Roman Levin, Valeriia Cherepanova, Avi Schwarzschild, Arpit Bansal, et al. Transfer learning with deep tabular models. In *International Conference on Learning Representations*, 2022.
- [18] Zhao Li, Donghu Ding, Xuanwu Liu, Peng Zhang, Youxi Wu, and Lingzhou Ma. Ttnet: Tabular transfer network for few-samples prediction. In *IEEE/WIC/ACM International Conference on Web Intelligence and Intelligent Agent Technology*, 2021.
- [19] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2018.

- [20] Duncan McElfresh, Sujay Khandagale, Jonathan Valverde, Ganesh Ramakrishnan, Micah Goldblum, Colin White, et al. When do neural nets outperform boosted trees on tabular data? *arXiv preprint arXiv:2305.02997*, 2023.
- [21] Andrew Y Ng. Feature selection, l_1 v.s. l_2 regularization, and rotational invariance. In *International Conference on Machine Learning*, page 78, 2004.
- [22] Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, et al. Scikit-learn: Machine learning in python. *the Journal of Machine Learning Research*, 2011.
- [23] Liudmila Prokhorenkova, Gleb Gusev, Aleksandr Vorobev, Anna Veronika Dorogush, and Andrey Gulin. CatBoost: unbiased boosting with categorical features. *Advances in Neural Information Processing Systems*, 2018.
- [24] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, 2021.
- [25] Colin Raffel, Noam Shazeer, Adam Roberts, et al. Exploring the limits of transfer learning with a unified text-to-text Transformer. *The Journal of Machine Learning Research*, 2020.
- [26] Gowthami Somepalli, Micah Goldblum, Avi Schwarzschild, C Bayan Bruss, and Tom Goldstein. SAINT: Improved neural networks for tabular data via row attention and contrastive pre-training. *arXiv preprint arXiv:2106.01342*, 2021.
- [27] Weiping Song, Chence Shi, Zhiping Xiao, Zhijian Duan, Yewen Xu, Ming Zhang, and Jian Tang. AutoInt: Automatic feature interaction learning via self-attentive neural networks. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*, 2019.
- [28] Rupesh Kumar Srivastava, Klaus Greff, and Jürgen Schmidhuber. Highway networks. *arXiv preprint arXiv:1505.00387*, 2015.
- [29] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems*, 2017.
- [30] Zifeng Wang and Jimeng Sun. Transtab: Learning transferable tabular transformers across tables. *Advances in Neural Information Processing Systems*, 2022.
- [31] Jiahuan Yan, Jintai Chen, Yixuan Wu, Danny Z Chen, and Jian Wu. T2G-Former: Organizing tabular features into relation graphs promotes heterogeneous feature interaction. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2023.
- [32] Chao Ye, Guoshan Lu, Haobo Wang, Liyao Li, Sai Wu, Gang Chen, and Junbo Zhao. CT-BERT: learning better tabular representations through cross-table pre-training. *arXiv preprint arXiv:2307.04308*, 2023.
- [33] Jinsung Yoon, Yao Zhang, James Jordon, and Mihaela van der Schaar. VIME: Extending the success of self-and semi-supervised learning to tabular domain. In *Advances in Neural Information Processing Systems*, 2020.
- [34] Qi-Le Zhou, Han-Jia Ye, Le-Ye Wang, and De-Chuan Zhan. Unlocking the transferability of tokens in deep models for tabular data. *arXiv preprint arXiv:2310.15149*, 2023.
- [35] Bingzhao Zhu, Xingjian Shi, Nick Erickson, Mu Li, George Karypis, and Mahsa Shoaran. XTab: Cross-table pretraining for tabular transformers. In *Proceedings of the 40th International Conference on Machine Learning*, 2023.

A Hyperparameter-Tuning Settings

Due to the heterogeneity of tabular datasets, previous supervisedly trained deep learning and GBDTs algorithms require hyper-parameter tuning to achieve good performances, except for SAINT [26]. For the compared AutoInt [27], FT-Transformer [7], XGboost [5], and Catboost [23], we use Optuna library [2] to conduct Bayesian optimization (the Tree-Structured Parzen Estimator algorithm) following [7]. All these approaches are tuned 100 iterations. For SAINT, we utilize the predefined configurations sourced from its original paper; for XTab [35], we run the official code with the given configurations³. The hyper-parameter tuning spaces are reported below.

XGboost. We implement XGboost by using the *XGBoost* python package⁴. Following [7], we fix the following hyperparameters:

- `booster = "gbtree"`;
- `early stopping rounds = 50`;
- `#. estimators = 2000`.

The rest hyperparameter are extensively tuned for each dataset, and the optimization spaces are listed below:

- `learning rate`: Log-Uniform distribution $[10^{-5}, 1]$;
- `max depth`: Discrete uniform distribution $[3, 10]$;
- `subsample`: Uniform distribution $[0.5, 1]$;
- `colsample by tree`: Uniform distribution $[0.5, 1]$;
- `colsample by level`: Uniform distribution $[0.5, 1]$;
- `min child weight`: Uniform distribution $[10^{-8}, 10^5]$;
- `alpha`: Uniform choice $\{0, \text{Log-Uniform distribution } [10^{-8}, 10^2]\}$;
- `lambda`: Uniform choice $\{0, \text{Log-Uniform distribution } [e^{-8}, 10^2]\}$;
- `gamma`: Uniform choice $\{0, \text{Log-Uniform distribution } [e^{-8}, 10^2]\}$.

CatBoost. The catboost algorithm is implemented by using the *CatBoost* python package⁵. The following configurations are fixed:

- `early stopping rounds = 50`;
- `od-pval = 0.001`;
- `iterations = 2000`;
- `task type = "GPU"`.

The hyperparameter tuning spaces are reported as below:

- `learning rate`: Log-Uniform distribution $[10^{-5}, 1]$;
- `max depth`: Discrete uniform distribution $[3, 10]$;
- `L2 leaf reg`: Log-Uniform distribution $[1, 10]$;
- `bagging temperature`: Uniform distribution $[0, 1]$;
- `leaf estimation iterations`: Discrete uniform distribution $[1, 10]$.

³<https://github.com/BingzhaoZhu/XTab>

⁴<https://xgboost.readthedocs.io/en/latest/index.html>

⁵<https://pypi.org/project/catboost/>

FT-Transformer. The hyperparameter optimization spaces are reported below:

- the number of layers: Discrete uniform distribution [1, 4];
- feature embedding size: Discrete uniform distribution [64, 512];
- residual dropout: Uniform distribution [0, 0.2];
- attention dropout: Uniform distribution [0, 0.5];
- FFN dropout: Uniform distribution [0, 0.5];
- FFN factor: Uniform distribution [$\frac{2}{3}$, $\frac{8}{3}$];
- learning rate: Log-Uniform distribution [10^{-5} , 10^{-3}];
- weight decay: Log-Uniform distribution [10^{-6} , 10^{-3}].

AutoInt. We utilize a modified version of AutoInt, as sourced from [7], which has demonstrated superior performance compared to the original version.

- the number of layers: Discrete uniform distribution [1, 6];
- feature embedding size: Discrete uniform distribution [8, 64];
- residual dropout: Uniform distribution [0, 0.2];
- attention dropout: Uniform distribution [0, 0.5];
- learning rate: Log-Uniform distribution [10^{-5} , 10^{-3}];
- weight decay: Log-Uniform distribution [10^{-6} , 10^{-3}].

B Detailed Information of 38 Downstream Datasets

Here we summarize the key detailed information of 38 downstream datasets in Table 7. We use the same train-valid-test split for all the approaches.

Table 7: The details of the used 38 downstream tabular datasets. “# Num” and “# Cat” denote the numbers of numerical and categorical features, respectively. “# Sample” presents the size of the dataset.

Dataset	Abbr.	Task type	# Num	# Cat	# Samples
train_2131_houses	HO	regression	8	0	20640
Customer_Churn_Records	CH	regression	5	10	10000
airline_passenger_satisfaction	PA	classification	4	18	100000
train_1487_tuiter	TU	regression	1	39	761
train_0431_visualizing_soil	VI	classification	3	1	8641
train_1648_Apple_Historical_Dataset	AP	regression	5	0	9822
train_0312_cpu_act	CP	classification	21	0	8192
train_0207_irish	IR	classification	2	3	500
train_0684_BNG_autoPrice_	BN	regression	15	0	100000
train_0634_mozilla4	MO	classification	4	1	15545
train_1879_The_2020_Pokemon_dataset	PO	classification	10	26	1013
train_0242_pm10	PM	regression	7	0	500
train_1294_airlines	AL	classification	3	4	26969
accident_data	AC	classification	6	25	100000
train_1900_Another_Dataset_on_used_Fiat_500_1538_rows_	FI	regression	4	3	1538
train_2644_concrete_compressive_strength	CO	regression	7	1	1030
bank_customer_survey	CU	classification	7	9	45211
train_1674_Violent_Crime_by_Counties_in_Maryland	CR	regression	35	2	984
train_1649_Tamilnadu_Crop_production	TA	regression	1	5	13266
Churn_Modelling	CM	classification	5	6	10000
train_1914_Hatred_on_Twitter_During_MeToo_Movement	HA	classification	5	0	100000
train_1618_depression	DE	classification	11	10	1429
train_1571_Temperature_Readings_IOT_Devices	TE	classification	1	1	97606
train_1770_Amazon_10Year_Stock_Data_Latest1997_2020	AM	regression	5	0	5852
train_2706_abalone	AB	regression	7	1	4177
train_1564_Concrete	CC	regression	7	1	1005
train_1465_credit	CR	classification	5	5	16714
train_1414_AI4I2020	AI	classification	5	6	10000
train_0247_boston	BO	regression	11	2	506
train_2743_Tallo	TL	regression	11	9	100000
train_2140_MiamiHousing2016	MI	regression	12	1	13932
b_depressed	BD	classification	11	10	1429
train_1829_1000_Cameras_Dataset	CD	regression	9	2	1038
train_1251_AqSolDB_A_curated_aqueous_solubility_dataset	AQ	regression	13	7	9982
train_0611_flags	FL	classification	2	26	194
train_1564_Mammographic_Mass_Data_Set	MA	classification	1	4	830
train_0526_colleges_aaup	CA	classification	13	2	1161
train_0391_veteran	VE	classification	3	4	137

C Raw Results on Various Datasets under Different Settings

In the main paper, we evaluate various approaches using a comprehensive metric performance ranking to offer an overall assessment of performance across various datasets. Here, we present detailed results for each model on diverse datasets, spanning 5 different settings, in Table 8, Table 9, Table 10, Table 11, and Table 12. The reported results represent averaged scores over 5 evaluations with different random seeds.

Table 8: Detailed performances of our XTFORMER and baseline algorithms, under the T-full setting. We prepend a “-” sign to the standardized MSE value (0-1) for the regression tasks, and thus all the results are the higher the better. “(t)”, “(d)”, and “(p)” respectively indicate “with hyperparameter tuned”, “with default parameters”, and “pretrained”, respectively.

Dataset	XTFORMER (p)	XGboost(d)	XGboost(t)	Catboost(d)	Catboost(t)	FTT(d)	FTT(t)	AutoInt(d)	AutoInt(t)	SAINT(d)	XTab (p)
FL	0.809	0.807	0.749	0.742	0.742	0.710	0.903	0.802	0.774	0.903	0.825
CO	-0.075	-0.061	-0.090	-0.153	-0.150	-0.080	-0.059	-0.135	-0.071	-0.074	-0.080
CH	-0.264	-0.258	-0.256	-0.255	-0.254	-0.255	-0.254	-0.266	-0.255	-0.255	-0.275
AB	-0.078	-0.080	-0.078	-0.081	-0.078	-0.079	-0.078	-0.099	-0.078	-0.076	-0.080
HO	-0.070	-0.065	-0.066	-0.068	-0.062	-0.072	-0.066	-0.110	-0.071	-0.070	-0.071
MO	0.963	0.066	0.325	0.066	0.066	0.324	0.325	0.885	0.613	0.242	0.311
CM	0.857	0.148	0.796	0.203	0.256	0.204	0.204	0.790	0.399	0.208	0.190
HA	0.547	0.454	0.504	0.457	0.467	0.504	0.504	0.526	0.504	0.504	0.486
AP	-0.033	-0.034	-0.034	-0.036	-0.034	-0.037	-0.037	-0.037	-0.037	-0.037	-0.039
BN	-0.079	-0.082	-0.080	-0.085	-0.079	-0.080	-0.096	-0.100	-0.080	-0.086	-0.084
MA	0.884	0.850	0.880	0.677	0.684	0.865	0.880	0.681	0.872	0.857	0.814
PM	-0.161	-0.141	-0.149	-0.155	-0.139	-0.185	-0.176	-0.191	-0.166	-0.220	-0.185
TL	-0.003	-0.002	-0.003	-0.003	-0.002	-0.006	-0.004	-0.004	-0.004	-0.006	-0.006
MI	-0.042	-0.042	-0.041	-0.041	-0.038	-0.043	-0.042	-0.077	-0.047	-0.044	-0.046
CD	-0.080	-0.075	-0.064	-0.059	-0.047	-0.077	-0.062	-0.068	-0.076	-0.080	-0.080
AL	0.684	0.378	0.543	0.433	0.449	0.388	0.457	0.407	0.474	0.382	0.357
CC	-0.062	-0.062	-0.086	-0.145	-0.144	-0.084	-0.065	-0.082	-0.065	-0.096	-0.085
PA	0.995	0.088	0.504	0.336	0.382	0.070	0.080	0.177	0.259	0.064	0.068
CR	-0.102	-0.097	-0.097	-0.097	-0.093	-0.104	-0.096	-0.092	-0.101	-0.104	-0.106
AQ	-0.004	-0.005	-0.005	-0.007	-0.005	-0.006	-0.006	-0.005	-0.005	-0.006	-0.007
TE	0.866	0.809	0.809	0.809	0.809	0.807	0.809	0.788	0.809	0.811	0.744
AI	0.904	0.999	0.999	0.999	0.999	0.999	0.999	0.999	0.999	0.999	0.963
CP	0.985	0.084	0.696	0.086	0.107	0.304	0.304	0.714	0.439	0.304	0.297
BD	0.550	0.830	0.835	0.838	0.843	0.834	0.836	0.642	0.834	0.834	0.760
CU	0.922	0.907	0.905	0.902	0.902	0.912	0.913	0.915	0.908	0.910	0.850
BO	-0.075	-0.074	-0.072	-0.054	-0.047	-0.092	-0.070	-0.095	-0.087	-0.090	-0.093
TA	-0.022	-0.007	-0.008	-0.014	-0.014	-0.010	-0.006	-0.013	-0.011	-0.012	-0.011
IR	1.000	0.025	0.500	0.350	0.413	0.500	0.500	0.710	0.638	0.500	0.486
TU	-0.058	-0.015	-0.046	-0.258	-0.250	-0.026	-0.004	-0.184	-0.046	-0.058	-0.027
FI	-0.091	-0.087	-0.087	-0.090	-0.085	-0.089	-0.086	-0.086	-0.088	-0.090	-0.094
VE	0.749	0.018	0.544	0.503	0.703	0.583	0.152	0.080	0.129	0.721	0.720
CA	1.000	0.043	0.274	0.043	0.043	0.726	0.726	0.914	0.780	0.274	0.685
CR	0.823	0.261	0.514	0.302	0.339	0.274	0.301	0.691	0.507	0.270	0.258
DE	0.585	0.830	0.833	0.834	0.843	0.834	0.834	0.754	0.834	0.834	0.814
PO	0.943	0.994	0.994	0.975	0.994	0.938	1.000	0.951	0.938	0.938	0.928
AC	1.000	0.000	0.504	0.001	0.005	0.000	0.013	0.106	0.345	0.000	0.000
VI	1.000	1.000	1.000	0.985	0.989	1.000	1.000	0.550	1.000	1.000	0.911
AM	-0.061	-0.057	-0.058	-0.060	-0.057	-0.065	-0.065	-0.055	-0.057	-0.065	-0.070

D Additional Coefficient-Function Relationship Visualization

Similar to Fig. 6, here we provide an additional example to illustrate how coefficients represent a function in the *meta-function* space in Fig. 7, for reference.

Table 9: Detailed performances of our XTFORMER and baseline algorithms, under the T-200 setting. We prepend a “-” sign to the standardized MSE value (0-1) for the regression tasks, and thus all the results are the higher the better. “(t)”, “(d)”, and “(p)” respectively indicate “with hyperparameter tuned”, “with default parameters”, and “pretrained”, respectively.

Dataset	XTFORMER (p)	XGboost(d)	XGboost(t)	Catboost(d)	Catboost(t)	FTT(d)	FTT(t)	AutoInt(d)	AutoInt(t)	SAINT(d)	XTab (p)
FL	0.811	0.059	0.789	0.315	0.431	0.499	0.652	0.486	0.745	0.656	0.637
CO	-0.081	-0.085	-0.075	-0.155	-0.151	-0.122	-0.126	-0.079	-0.135	-0.119	-0.121
CH	-0.268	-0.287	-0.267	-0.255	-0.255	-0.272	-0.275	-0.266	-0.259	-0.265	-0.270
AB	-0.083	-0.093	-0.088	-0.091	-0.088	-0.099	-0.092	-0.099	-0.085	-0.100	-0.103
HO	-0.085	-0.123	-0.105	-0.103	-0.093	-0.115	-0.098	-0.110	-0.096	-0.163	-0.122
MO	0.954	0.932	0.921	0.904	0.938	0.672	0.907	0.885	0.899	0.880	0.847
CM	0.847	0.799	0.819	0.783	0.789	0.791	0.800	0.790	0.790	0.790	0.773
HA	0.544	0.357	0.396	0.442	0.504	0.439	0.524	0.492	0.411	0.376	0.411
AP	-0.035	-0.042	-0.037	-0.037	-0.037	-0.046	-0.039	-0.037	-0.037	-0.045	-0.049
BN	-0.087	-0.114	-0.099	-0.101	-0.101	-0.101	-0.105	-0.100	-0.101	-0.103	-0.102
MA	0.882	0.783	0.801	0.681	0.681	0.755	0.848	0.754	0.682	0.764	0.736
PM	-0.158	-0.114	-0.105	-0.118	-0.100	-0.187	-0.151	-0.191	-0.132	-0.191	-0.204
TL	-0.006	-0.008	-0.008	-0.008	-0.008	-0.008	-0.007	-0.007	-0.007	-0.006	-0.006
MI	-0.054	-0.083	-0.067	-0.075	-0.068	-0.083	-0.079	-0.077	-0.077	-0.081	-0.082
CD	-0.083	-0.058	-0.057	-0.056	-0.054	-0.053	-0.057	-0.054	-0.058	-0.056	-0.054
AL	0.676	0.411	0.393	0.443	0.443	0.394	0.419	0.407	0.410	0.379	0.369
CC	-0.066	-0.098	-0.082	-0.157	-0.159	-0.077	-0.124	-0.101	-0.144	-0.068	-0.073
PA	0.988	0.618	0.757	0.961	0.622	0.898	0.653	0.654	0.817	0.656	0.868
CR	-0.101	-0.095	-0.092	-0.092	-0.096	-0.092	-0.093	-0.096	-0.094	-0.093	-0.098
AQ	-0.005	-0.012	-0.011	-0.015	-0.011	-0.007	-0.012	-0.012	-0.006	-0.009	-0.007
TE	0.856	0.800	0.767	0.800	0.800	0.788	0.806	0.788	0.788	0.788	0.752
AI	0.841	0.208	0.637	0.264	0.584	0.358	0.237	0.591	0.821	0.687	0.671
CP	0.970	0.856	0.714	0.824	0.832	0.714	0.316	0.714	0.282	0.714	0.682
BD	0.527	0.818	0.323	0.800	0.814	0.491	0.175	0.642	0.723	0.825	0.802
CU	0.903	0.547	0.643	0.643	0.849	0.861	0.722	0.635	0.621	0.725	0.813
BO	-0.075	-0.076	-0.082	-0.082	-0.083	-0.119	-0.081	-0.095	-0.085	-0.113	-0.119
TA	-0.022	-0.024	-0.024	-0.024	-0.024	-0.024	-0.022	-0.023	-0.023	-0.023	-0.025
IR	1.000	0.960	0.590	0.660	0.750	0.410	0.410	0.710	0.560	0.590	0.559
TU	-0.056	-0.012	-0.019	-0.250	-0.249	-0.042	-0.180	-0.067	-0.212	-0.090	-0.045
FI	-0.094	-0.087	-0.084	-0.089	-0.095	-0.082	-0.089	-0.090	-0.096	-0.094	-0.085
VE	0.719	0.050	0.625	0.701	0.680	0.615	0.446	0.132	0.624	0.051	0.559
CA	0.999	0.978	0.983	0.987	0.991	0.741	0.944	0.914	0.892	0.961	0.911
CR	0.813	0.250	0.264	0.272	0.293	0.329	0.779	0.426	0.744	0.391	0.359
DE	0.539	0.758	0.161	0.758	0.779	0.161	0.161	0.754	0.418	0.839	0.759
PO	0.914	0.951	0.960	0.951	0.951	0.951	0.941	0.951	0.951	0.951	0.913
AC	1.000	0.099	0.608	0.560	0.518	0.963	0.548	0.895	0.135	0.842	0.913
VI	1.000	0.993	0.550	0.858	0.862	0.450	0.550	0.550	0.453	0.550	0.514
AM	-0.062	-0.056	-0.054	-0.055	-0.054	-0.058	-0.055	-0.055	-0.056	-0.061	-0.064

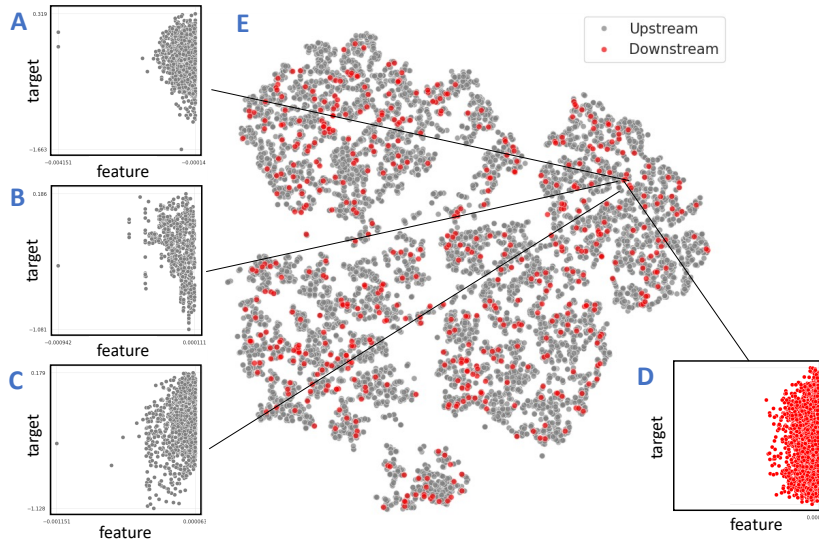


Figure 7: A-D: average activation of the embedding layer (\bar{z}_{in} vs before the output layer (\bar{z}_{out}) - a proxy visualization of the feature-target relation we aim to learn or calibrate to. E: t-SNE visualization of the coefficients. Each dot in (A-D) represents a row and in (E), a feature. Features whose coefficients form a cluster in (E) also exhibit similar feature-target distribution in (A-D), indicating that our calibration module is able to learn a suitable feature-target function by finding the correct coefficients c .

Table 10: Detailed performances of our XTFORMER and baseline algorithms, under the T-100 setting. We prepend a “-” sign to the standardized MSE value (0-1) for the regression tasks, and thus all the results are the higher the better. “(t)”, “(d)”, and “(p)” respectively indicate “with hyperparameter tuned”, “with default parameters”, and “pretrained”, respectively.

Dataset	XTFORMER (p)	XGboost(d)	XGboost(t)	Catboost(d)	Catboost(t)	FTT(d)	FTT(t)	AutoInt(d)	AutoInt(t)	SAINT(d)	XTab (p)
FL	0.766	0.947	0.921	0.790	0.711	0.711	0.868	0.816	0.842	0.868	0.820
CO	-0.074	-0.094	-0.102	-0.158	-0.153	-0.133	-0.135	-0.131	-0.154	-0.146	-0.142
CH	-0.273	-0.280	-0.266	-0.264	-0.271	-0.254	-0.269	-0.254	-0.259	-0.258	-0.275
AB	-0.079	-0.085	-0.082	-0.085	-0.084	-0.086	-0.088	-0.086	-0.081	-0.089	-0.094
HO	-0.070	-0.124	-0.107	-0.113	-0.104	-0.115	-0.111	-0.118	-0.105	-0.162	-0.118
MO	0.966	0.105	0.325	0.095	0.108	0.379	0.675	0.325	0.692	0.325	0.361
CM	0.850	0.729	0.492	0.782	0.736	0.476	0.267	0.800	0.286	0.800	0.776
HA	0.554	0.377	0.485	0.420	0.405	0.514	0.528	0.424	0.466	0.463	0.471
AP	-0.032	-0.044	-0.041	-0.041	-0.041	-0.041	-0.040	-0.041	-0.041	-0.051	-0.042
BN	-0.079	-0.112	-0.106	-0.110	-0.112	-0.116	-0.108	-0.106	-0.105	-0.145	-0.121
MA	0.891	0.151	0.139	0.361	0.361	0.289	0.145	0.133	0.145	0.133	0.273
PM	-0.171	-0.172	-0.154	-0.153	-0.151	-0.173	-0.181	-0.181	-0.181	-0.177	-0.187
TL	-0.003	-0.010	-0.007	-0.006	-0.005	-0.007	-0.007	-0.007	-0.008	-0.005	-0.005
MI	-0.042	-0.092	-0.079	-0.084	-0.077	-0.090	-0.084	-0.090	-0.093	-0.095	-0.099
CD	-0.077	-0.063	-0.061	-0.060	-0.056	-0.060	-0.061	-0.061	-0.060	-0.056	-0.060
AL	0.682	0.426	0.558	0.432	0.455	0.478	0.558	0.536	0.496	0.545	0.544
CC	-0.050	-0.119	-0.105	-0.170	-0.200	-0.081	-0.084	-0.169	-0.057	-0.185	-0.088
PA	0.995	0.625	0.886	0.911	0.882	0.835	0.674	0.959	0.829	0.697	0.812
CR	-0.099	-0.096	-0.094	-0.092	-0.092	-0.092	-0.090	-0.092	-0.093	-0.092	-0.097
AQ	-0.004	-0.025	-0.024	-0.026	-0.025	-0.019	-0.015	-0.009	-0.024	-0.022	-0.020
TE	0.866	0.801	0.803	0.803	0.803	0.793	0.793	0.793	0.793	0.793	0.747
AI	0.823	0.292	0.631	0.433	0.723	0.797	0.544	0.719	0.809	0.471	0.779
CP	0.972	0.866	0.699	0.846	0.802	0.699	0.301	0.699	0.258	0.699	0.692
BD	0.551	0.246	0.821	0.200	0.267	0.179	0.512	0.179	0.821	0.179	0.163
CU	0.919	0.603	0.835	0.816	0.632	0.899	0.748	0.630	0.709	0.690	0.813
BO	-0.071	-0.078	-0.074	-0.082	-0.069	-0.091	-0.088	-0.089	-0.084	-0.219	-0.091
TA	-0.025	-0.010	-0.010	-0.010	-0.010	-0.010	-0.010	-0.010	-0.010	-0.010	-0.011
IR	1.000	0.960	0.960	0.770	0.690	0.930	0.890	0.950	0.930	0.940	0.908
TU	-0.058	-0.063	-0.073	-0.289	-0.270	-0.248	-0.117	-0.201	-0.286	-0.198	-0.203
FI	-0.096	-0.097	-0.089	-0.100	-0.092	-0.121	-0.104	-0.123	-0.103	-0.102	-0.112
VE	0.708	0.628	0.705	0.641	0.665	0.656	0.678	0.668	0.636	0.679	0.673
CA	0.999	0.961	0.961	0.966	0.935	0.711	0.892	0.914	0.858	0.901	0.858
CR	0.818	0.284	0.489	0.302	0.312	0.816	0.746	0.569	0.645	0.477	0.752
DE	0.533	0.783	0.783	0.804	0.797	0.821	0.811	0.821	0.811	0.821	0.768
PO	0.924	0.960	0.936	0.936	0.965	0.936	0.941	0.936	0.896	0.936	0.849
AC	1.000	0.351	0.925	0.495	0.937	0.441	0.754	0.401	0.834	0.451	0.443
VI	1.000	0.021	0.005	0.094	0.102	0.054	0.017	0.099	0.063	0.034	0.050
AM	-0.057	-0.068	-0.065	-0.065	-0.065	-0.067	-0.066	-0.065	-0.066	-0.068	-0.071

Table 11: Detailed performances of our XTFORMER and baseline algorithms, under the T-50 setting. We prepend a “-” sign to the standardized MSE value (0-1) for the regression tasks, and thus all the results are the higher the better. “(t)”, “(d)”, and “(p)” respectively indicate “with hyperparameter tuned”, “with default parameters”, and “pretrained”, respectively.

Dataset	XTFORMER (p)	XGboost(d)	XGboost(t)	Catboost(d)	Catboost(t)	FTT(d)	FTT(t)	AutoInt(d)	AutoInt(t)	SAINT(d)	XTab (p)
FL	0.754	0.868	0.816	0.737	0.711	0.316	0.816	0.790	0.763	0.790	0.729
CO	-0.101	-0.186	-0.196	-0.175	-0.169	-0.180	-0.122	-0.153	-0.143	-0.155	-0.155
CH	-0.263	-0.301	-0.308	-0.298	-0.305	-0.262	-0.332	-0.364	-0.295	-0.342	-0.267
AB	-0.086	-0.112	-0.096	-0.097	-0.093	-0.123	-0.119	-0.107	-0.114	-0.110	-0.114
HO	-0.113	-0.126	-0.118	-0.120	-0.117	-0.121	-0.119	-0.111	-0.105	-0.163	-0.122
MO	0.908	0.869	0.789	0.839	0.838	0.603	0.677	0.811	0.790	0.678	0.617
CM	0.686	0.790	0.789	0.716	0.786	0.799	0.799	0.799	0.799	0.799	0.721
HA	0.526	0.161	0.376	0.427	0.441	0.328	0.259	0.311	0.381	0.313	0.313
AP	-0.037	-0.037	-0.035	-0.036	-0.035	-0.045	-0.047	-0.037	-0.048	-0.047	-0.046
BN	-0.114	-0.114	-0.116	-0.116	-0.114	-0.136	-0.099	-0.103	-0.103	-0.135	-0.148
MA	0.879	0.193	0.524	0.283	0.319	0.506	0.524	0.235	0.687	0.524	0.475
PM	-0.169	-0.172	-0.181	-0.158	-0.155	-0.173	-0.187	-0.167	-0.176	-0.176	-0.177
TL	-0.007	-0.014	-0.006	-0.006	-0.006	-0.010	-0.007	-0.012	-0.012	-0.008	-0.008
MI	-0.084	-0.102	-0.092	-0.105	-0.099	-0.157	-0.089	-0.098	-0.095	-0.158	-0.158
CD	-0.112	-0.077	-0.072	-0.067	-0.062	-0.065	-0.070	-0.073	-0.072	-0.075	-0.066
AL	0.604	0.605	0.587	0.524	0.481	0.574	0.593	0.555	0.573	0.582	0.577
CC	-0.101	-0.142	-0.122	-0.175	-0.171	-0.167	-0.103	-0.120	-0.127	-0.123	-0.134
PA	0.945	0.077	0.378	0.696	0.391	0.407	0.824	0.363	0.758	0.405	0.378
CR	-0.109	-0.090	-0.093	-0.091	-0.089	-0.090	-0.093	-0.089	-0.093	-0.091	-0.097
AQ	-0.011	-0.017	-0.015	-0.019	-0.017	-0.016	-0.011	-0.012	-0.016	-0.012	-0.012
TE	0.774	0.806	0.767	0.796	0.796	0.792	0.710	0.792	0.710	0.792	0.774
AI	0.897	0.545	0.551	0.558	0.554	0.599	0.844	0.552	0.671	0.610	0.578
CP	0.934	0.847	0.840	0.752	0.869	0.706	0.838	0.897	0.891	0.706	0.681
BD	0.554	0.772	0.674	0.804	0.811	0.856	0.856	0.856	0.846	0.856	0.842
CU	0.747	0.350	0.494	0.672	0.530	0.671	0.454	0.561	0.434	0.657	0.655
BO	-0.124	-0.132	-0.147	-0.153	-0.164	-0.161	-0.151	-0.184	-0.167	-0.169	-0.161
TA	-0.024	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014	-0.014	-0.015
IR	1.000	0.970	0.920	0.710	0.770	0.630	0.970	0.750	0.960	0.780	0.712
TU	-0.121	-0.159	-0.093	-0.261	-0.261	-0.263	-0.130	-0.169	-0.246	-0.248	-0.268
FI	-0.109	-0.123	-0.097	-0.119	-0.106	-0.101	-0.118	-0.099	-0.117	-0.122	-0.105
VE	0.661	0.565	0.597	0.657	0.629	0.644	0.573	0.646	0.646	0.643	0.605
CA	0.996	0.112	0.711	0.112	0.108	0.315	0.711	0.289	0.672	0.289	0.285
CR	0.733	0.664	0.625	0.654	0.649	0.689	0.685	0.707	0.720	0.654	0.661
DE	0.486	0.839	0.733	0.832	0.891	0.902	0.902	0.902	0.877	0.902	0.861
PO	0.863	0.449	0.845	0.582	0.716	0.840	0.838	0.838	0.758	0.846	0.814
AC	1.000	0.732	0.393	0.077	0.374	0.000	0.834	0.822	0.329	0.503	0.487
VI	0.968	0.008	0.008	0.149	0.107	0.223	0.185	0.293	0.026	0.230	0.218
AM	-0.070	-0.066	-0.079	-0.067	-0.063	-0.064	-0.062	-0.063	-0.062	-0.067	-0.070

Table 12: Detailed performances of our XTFORMER and baseline algorithms, under the T-20 setting. We prepend a “-” sign to the standardized MSE value (0-1) for the regression tasks, and thus all the results are the higher the better. “(t)”, “(d)”, and “(p)” respectively indicate “with hyperparameter tuned”, “with default parameters”, and “pretrained”, respectively.

Dataset	XTFORMER (p)	XGboost(d)	XGboost(t)	Catboost(d)	Catboost(t)	FTT(d)	FTT(t)	AutoInt(d)	AutoInt(t)	SAINT(d)	XTab (p)
FL	0.751	0.658	0.684	0.737	0.658	0.395	0.316	0.684	0.263	0.684	0.653
CO	-0.115	-0.213	-0.180	-0.188	-0.183	-0.173	-0.123	-0.170	-0.194	-0.161	-0.172
CH	-0.269	-0.267	-0.258	-0.296	-0.292	-0.271	-0.295	-0.269	-0.261	-0.311	-0.280
AB	-0.096	-0.102	-0.096	-0.100	-0.092	-0.113	-0.108	-0.115	-0.105	-0.110	-0.119
HO	-0.117	-0.140	-0.131	-0.140	-0.139	-0.125	-0.120	-0.127	-0.141	-0.178	-0.135
MO	0.898	0.097	0.097	0.090	0.090	0.402	0.178	0.325	0.191	0.325	0.373
CM	0.438	0.438	0.438	0.438	0.438	0.438	0.438	0.438	0.438	0.438	0.430
HA	0.520	0.463	0.465	0.477	0.511	0.488	0.520	0.507	0.479	0.517	0.488
AP	-0.038	-0.047	-0.046	-0.048	-0.046	-0.049	-0.053	-0.051	-0.053	-0.049	-0.052
BN	-0.120	-0.124	-0.126	-0.126	-0.122	-0.136	-0.109	-0.109	-0.115	-0.136	-0.140
MA	0.889	0.608	0.404	0.633	0.633	0.723	0.404	0.404	0.422	0.404	0.702
PM	-0.172	-0.189	-0.251	-0.190	-0.193	-0.194	-0.191	-0.193	-0.195	-0.190	-0.194
TL	-0.007	-0.025	-0.028	-0.012	-0.008	-0.020	-0.012	-0.020	-0.013	-0.016	-0.016
MI	-0.100	-0.123	-0.127	-0.130	-0.120	-0.101	-0.129	-0.124	-0.105	-0.120	-0.106
CD	-0.111	-0.092	-0.090	-0.087	-0.086	-0.085	-0.085	-0.085	-0.090	-0.090	-0.090
AL	0.579	0.462	0.466	0.465	0.448	0.575	0.532	0.531	0.460	0.453	0.529
CC	-0.123	-0.161	-0.158	-0.190	-0.191	-0.186	-0.147	-0.175	-0.181	-0.174	-0.191
PA	0.926	0.110	0.402	0.295	0.401	0.755	0.793	0.820	0.698	0.144	0.683
CR	-0.108	-0.112	-0.111	-0.102	-0.106	-0.110	-0.105	-0.123	-0.108	-0.119	-0.119
AQ	-0.009	-0.028	-0.027	-0.029	-0.028	-0.029	-0.014	-0.015	-0.026	-0.014	-0.016
TE	0.773	0.804	0.779	0.804	0.804	0.794	0.709	0.794	0.702	0.794	0.782
AI	0.898	0.267	0.726	0.447	0.426	0.325	0.392	0.796	0.312	0.395	0.382
CP	0.935	0.637	0.793	0.804	0.684	0.870	0.895	0.906	0.930	0.669	0.816
BD	0.551	0.249	0.309	0.214	0.200	0.179	0.175	0.175	0.267	0.175	0.162
CU	0.780	0.547	0.566	0.748	0.746	0.591	0.573	0.698	0.699	0.613	0.603
BO	-0.125	-0.162	-0.145	-0.168	-0.149	-0.189	-0.210	-0.203	-0.207	-0.220	-0.196
TA	-0.024	-0.013	-0.013	-0.013	-0.013	-0.013	-0.013	-0.013	-0.013	-0.013	-0.014
IR	1.000	0.850	0.740	0.590	0.610	0.400	0.800	0.960	0.660	0.860	0.786
TU	-0.133	-0.208	-0.272	-0.284	-0.283	-0.142	-0.214	-0.253	-0.205	-0.269	-0.146
FI	-0.106	-0.129	-0.164	-0.208	-0.148	-0.114	-0.120	-0.140	-0.172	-0.131	-0.121
VE	0.632	0.121	0.158	0.534	0.337	0.510	0.411	0.393	0.615	0.531	0.505
CA	0.981	0.698	0.935	0.905	0.940	0.237	0.785	0.879	0.629	0.767	0.742
CR	0.749	0.651	0.552	0.489	0.536	0.746	0.567	0.658	0.657	0.509	0.737
DE	0.522	0.115	0.260	0.445	0.277	0.201	0.160	0.211	0.360	0.165	0.192
PO	0.920	0.628	0.758	0.659	0.753	0.696	0.871	0.810	0.773	0.689	0.646
AC	1.000	0.433	0.556	0.481	0.749	0.687	0.656	0.987	0.581	0.997	0.967
VI	0.982	0.212	0.011	0.158	0.275	0.523	0.087	0.101	0.140	0.218	0.513
AM	-0.066	-0.065	-0.063	-0.063	-0.063	-0.062	-0.062	-0.061	-0.063	-0.064	-0.064