

# From Effectiveness to Efficiency: Comparative Evaluation of Code Generated by LCGMs for Bilingual Programming Questions

Weipeng Jiang\*, Xuanqi Gao\*, Juan Zhai†, Shiqing Ma†, Xiaoyu Zhang\*, Chao Shen\*<sup>‡</sup>

\*School of Cyber Science and Engineering  
Xi'an Jiaotong University

lenijwp, gxq2000, zxy0927@stu.xjtu.edu.cn, chaoshen@xjtu.edu.cn

†Manning College of Information & Computer Sciences  
University of Massachusetts, Amherst  
juanzhai, shiqingma@umass.edu

arXiv:2406.00602v1 [cs.SE] 2 Jun 2024

**Abstract**—Large Code Generation Models (LCGMs) have garnered significant attention and achieved promising results across various programming tasks. However, concerns arise regarding performance when using non-English prompts, as these models are primarily trained on English-centric corpora, and most programming language tokens resemble English. Existing benchmarks often rely on English programming questions and limited manual unit test cases, inadequately assessing LCGM-generated code quality. This paper investigates code quality differences, specifically effectiveness and efficiency, when employing different natural languages as inputs, focusing on Chinese and English due to their prominent corpora and LCGM availability. Evaluating LCGM-generated code quality under bilingual inputs presents three challenges: (1) lack of high-quality bilingual programming question datasets, (2) insufficient unit test cases for comprehensive correctness verification, and (3) limited support for comparing generated code performance. To address these challenges, we curated a test suite of 52 bilingual programming questions and developed automated input generators for each. We enhanced correctness verification by sampling larger unit test cases and estimated code performance by profiling execution time relative to input size growth. Using this framework, we conducted an empirical study on six state-of-the-art LCGMs. The results revealed that LCGM-generated code exhibits varying bilingual correctness on an average of 10.5% of tasks, with 39.5% of correct code showing diverse bilingual performance differences. Our findings suggested LCGMs may not consistently generate high-quality code across different languages, providing insights for future research directions.

**Index Terms**—Large Code Generation Models, Code Quality, Effectiveness and Efficiency, Bilingual Evaluation

## I. INTRODUCTION

The rapid advancement of Large Code Generation Models (LCGMs) has revolutionized the field of software engineering, offering promising solutions to a wide range of programming tasks. These models, built on the architecture of large language models and trained on vast corpora of source code, have demonstrated remarkable capabilities in generating functional code snippets [1], [2], assisting with

programming tasks [3], [4], [5], and even automating entire software development workflows [6], [7].

While LCGMs support multiple input languages, facilitating developers to describe requirements in their preferred natural language, a critical question arises concerning the consistency of code generation capabilities across languages. This concern is particularly significant as LCGMs are predominantly trained on English-centric corpora, potentially impacting their performance when prompted with inputs in other languages. Furthermore, the fact that most programming languages originate from English, e.g., using English words as reserved keywords, further exacerbates this concern.

Existing evaluation benchmarks for LCGMs primarily focus on English programming questions and rely on a limited number of manually crafted unit test cases for code correctness validation [8], [9], lacking a comprehensive assessment of code quality, especially regarding generation effectiveness and efficiency. The absence of diverse input languages in these benchmarks hinders understanding the performance of LCGMs when prompted with various natural languages. Moreover, measuring the efficiency of the generated code itself is a challenging problem.

This paper aims to address this research gap by conducting the first extensive empirical study to comprehensively observe and compare the code quality differences of mainstream LCGMs on multilingual programming questions. Specifically, we focus on English and Chinese, as these languages have a significant presence in the programming community and a wealth of available LCGMs and corpora [10]. By conducting a comparative analysis of the LCGM-generated code for bilingual programming questions, we aim to shed light on the potential disparities in code quality and provide insights into the factors influencing these differences. We design the following three research questions to assess the differences in LCGM-generated code across English and Chinese:

- (RQ1) Are LCGM-generated code equally effective when using bilingual programming questions?

<sup>‡</sup>: Chao Shen is the corresponding author. Email: chaoshen@xjtu.edu.cn

- (RQ2) Are LCGM-generated code equally efficient when using bilingual programming questions?
- (RQ3) What is the impact of prompting on bilingual quality differences across languages?

Evaluating the quality of LCGM-generated code under bilingual inputs poses several challenges. Firstly, there is a scarcity of high-quality bilingual parallel programming questions datasets that can serve as a reliable benchmark. Secondly, the limited number of unit test cases used in existing benchmarks may not adequately ensure the thorough correctness verification of the generated code [11]. Lastly, there is a lack of support for measuring and comparing the performance of the generated code, which is crucial for assessing their efficiency.

To address these challenges, we have carefully curated a comprehensive test suite of 52 bilingual programming questions through a rigorous manual preparation process. Furthermore, we develop automated input generators for each programming question, which facilitate the generation of a variety of test cases. We improve the correctness verification process by extensively sampling larger unit test cases using our input generator. To measure the performance of the generated code, we implement a profiling mechanism that measures the code execution time relative to the growth of the input size. This allows us to compare the efficiency of the generated code across different languages and input sizes.

Using this evaluation framework, we conduct an empirical study on six state-of-the-art LCGMs. According to our results, we summarize a series of findings and implications that may guide future research on the consistency of LCGM multilingual capabilities. We highlight some key findings as follows:

- 1) Existing LCGMs exhibit significant disparities in both effectiveness and efficiency when generating code for programming questions separately presented in English and Chinese.
- 2) As the temperature parameter increases, the quality of code generated by most LCGMs tends to shift from favoring Chinese towards favoring English.
- 3) Different prompting strategies significantly impact the bilingual code quality generated by LCGMs, highlighting the potential of prompting to alleviate the cross-linguistic performance gap, suggesting it as a potential area for further research.

Overall, our work confirms that LCGMs do not consistently generate high-quality code across different languages, highlighting the need for further investigation into the factors influencing these disparities.

**Contributions.** The contributions of this paper are as follows:

- We conduct the first study specifically focusing on investigating the code quality differences of LCGMs on English-Chinese bilingual programming questions.
- We collect a dataset of 52 bilingual programming questions and perform a systematic evaluation on six mainstream LCGMs, observing that the LCGM-generated code shows different bilingual correctness on an average

of 10.5% programming tasks, where 39.5% correct code also exhibits diverse bilingual performance differences.

- We summarize a series of findings and implications, then provide guidance and inspiration for future research.
- We release our dataset and evaluation framework [12], aiming to facilitate further research on multilingual code generation quality assessment.

## II. BACKGROUND

Large Language Models (LLMs) denote language models characterized by billions of parameters, meticulously trained on extensive textual corpora to excel in various language processing assignments. Particularly, Large Code Generation Models undergo training and fine-tuning procedures specifically designed for programming languages, thereby augmenting their proficiency in executing software engineering tasks [13], [14]. The success of these models can be attributed to their training on vast corpora of code and natural language data, which allows them to learn the intricate patterns, syntax, and semantics of programming languages.

Thus, the quality of the training corpus of LCGMs is a critical factor in determining the accuracy, diversity, and contextual relevance of the code they generate. The training corpora used for these LCGMs typically consist of a diverse collection of open-source code repositories, such as those hosted on GitHub [15]. These repositories encompass a wide range of programming languages, e.g., Python, Java, C++, and JavaScript. However, it is important to recognize that these repositories are English-heavy, i.e., project descriptions, functional documentations, code comments, and issue discussions are always written in English, as it is the predominant language used in global software development [10]. Additionally, many programming languages, such as Python and Java, have syntax and keywords that closely resemble English words and phrases [16]. Consequently, the datasets used for training LCGMs are heavily skewed towards English-language content. This linguistic disparity raises concerns regarding the effectiveness of LCGMs in supporting and generating code for tasks presented in languages other than English, particularly those with distinct linguistic structures. Naturally, this leads to an urgent need for an in-depth analysis of whether LCGMs exhibit consistent capabilities and quality in generating code across different languages. Unfortunately, existing code generation evaluation benchmarks (e.g., HumanEval [8] and MBPP [9]) fail to address this question, as they predominantly focus on English programming challenges. Besides, these benchmarks focus on providing unit test cases to verify the correctness of code generated by LCGMs. In software engineering practice, assessing code quality often requires consideration of additional factors beyond correctness, such as code efficiency.

## III. STUDY DESIGN

### A. Goals and Research Questions

To investigate the performance disparities of LCGMs in generating code across English and other languages, we select Chinese as a comparative case study. Chinese is one of

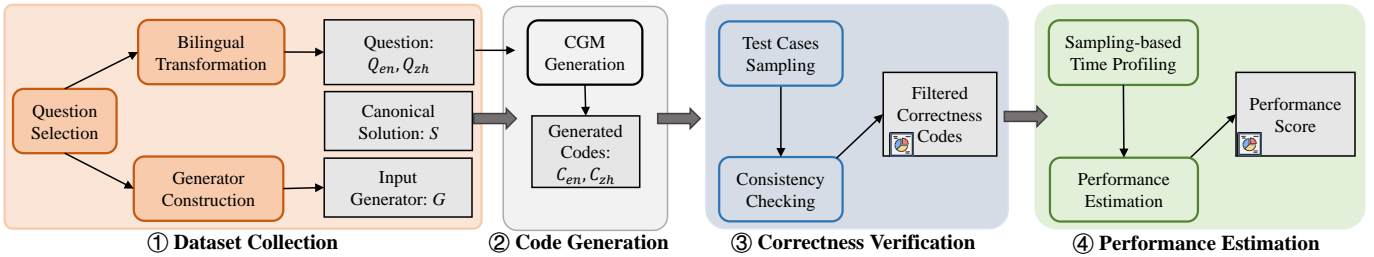


Fig. 1: The workflow of our evaluation.

the most widely spoken languages globally and also one of the most popular languages among software developers and targeted users of LCGMs. Owing to the rapid growth of the Chinese software industry [17], the scale of Chinese corpora (e.g., GitHub repositories with Chinese documentation) is substantial, relative to other non-English languages. As such, most LCGMs show strong performance on leaderboards related to Chinese programming tasks [18]. Moreover, Chinese exhibits significant linguistic divergence from English in terms of its writing system, grammatical structure, and lexical inventory [19], presenting a distinct challenge for LCGMs predominantly trained on English-heavy corpora. Our study aims to conduct a fine-grained comparative analysis of the code generation quality (i.e., both effectiveness and efficiency) of existing LCGMs when presented with programming tasks in English and Chinese.

However, this investigation encounters several challenges. Firstly, there is a shortage of high-quality bilingual parallel programming question datasets. Existing datasets mainly provide questions in English. Secondly, current benchmarks for evaluating code effectiveness often rely on a limited number of unit test cases, which have been proven to be insufficient [11]. Furthermore, those benchmarks do not emphasize measuring the efficiency of the generated code, resulting in a lack of readily available measurement tools. To address these challenges, we propose a novel evaluation framework in this paper that includes a carefully curated bilingual programming question dataset. This framework enables us to validate the correctness of the generated code and estimate its execution performance under various inputs, thereby facilitating the assessment of the effectiveness and efficiency of LCGMs in generating code for bilingual programming questions and further exploring the quality differences. Ultimately, based on the proposed framework, we aim to answer the following research questions:

- RQ1: Are LCGM-generated code equally effective when using bilingual programming questions?
- RQ2: Are LCGM-generated code equally efficient when using bilingual programming questions?
- RQ3: What is the impact of prompting on bilingual quality differences across languages?

## B. Evaluation Framework

1) *Design Overview*: To enable simultaneous measurement of the effectiveness and efficiency of LCGM-generated code for bilingual programming questions, we propose a framework,

consisting of four steps: dataset collection, code generation, correctness verification, and performance estimation. Figure 1 illustrates our framework. We begin by selecting appropriate programming questions and canonical solutions from mainstream LCGMs benchmarks, and meticulously preparing bilingual (English-Chinese) versions. We also construct an input generator to automatically create test inputs of various sizes for each question (①). Next, we input the bilingual programming questions into the LCGM, considering different prompting methods (②). This allows us to investigate the impact of prompting on the quality of generated code in both languages. To assess the effectiveness (RQ1), we verify the correctness of the generated code by comparing its output results with the canonical solution using unit test cases from the input generator (③). To evaluate the efficiency (RQ2), we collect “input size-execution time” pairs for functionally correct code by running them with different input sizes and fitting them to common time complexity expressions to estimate the average execution performance (④). Besides, this framework also supports the investigation of the impact of prompting by allowing customizing various prompts used by code generation (RQ3). With the verified correctness and average execution performance, we gain insights into the quality of LCGM-generated code.

2) *Dataset Collection*: Existing benchmarks usually provide many meticulously crafted programming tasks for evaluating the correctness of LCGM-generated code, which typically include task descriptions, program entries, input/output examples, canonical solutions, and a few unit test cases. We use three popular datasets, HumanEval [8], MBPP [9], and LeetCode [20] as the initial question list, where requiring LCGMs to fill in Python code segments based on specific task descriptions and program entry points. To keep the quality and suitability of the test suite, we then filter programming questions based on the following criteria: (i) ensuring that the tasks are of moderate difficulty level to prevent LCGMs from struggling to generate correct answers in both bilingual inputs, (ii) ensuring that the tasks have multiple potential solutions to increase the likelihood of observing performance differences, and (iii) ensuring that the tasks take a variable with varying dimensionality as inputs, e.g., an array or list, where the execution time of the solutions is strongly correlated with the dimensionality of the input variable. After careful screening, we ultimately select 52 programming questions, covering a diverse range of problem types, such as dynamic

programming, string processing, array enumeration, and more. Although this dataset is only half the size of HumanEval, it is sufficient to show the quality differences in LCGM-generated code for bilingual inputs, as demonstrated in §IV.

The questions collected from HumanEval and MBPP are initially in English. Two authors proficient in both languages meticulously translate them into Chinese. For questions from LeetCode, which provides official bilingual versions, we adopt them directly. We thoroughly check all bilingual question pairs to ensure their consistency in task descriptions and adherence to the respective language conventions. Additionally, for each programming question, we provide an automated input sample generator, denoted as  $G$ . It takes an input size parameter  $n_i$  that determines the dimensionality of the generated variables. These variables are tailored to act as unit test inputs for the specific programming questions. By varying the size parameter,  $G$  can generate a wide range of inputs, from small and simple cases to large and complicated ones.

Our test suite can be formally represented as  $\mathcal{D} = \langle Q, S, G \rangle$ , where  $Q$  is the programming question,  $S$  is the canonical solution, and  $G$  is the test input generator.  $Q$  consists of a task description, an entry point function name, and reference input/output. For each question  $q \in Q$ , we have two bilingual parallel versions,  $q_{en}$  and  $q_{zh}$ , presented in English and Chinese, respectively.  $S$  is the canonical solution of the given programming questions, which is used to produce ground truth outputs for correctness verification.  $G$  is a crucial component, serving as the input generator. By leveraging  $G$ , we can automatically generate a diverse set of test cases, saving time and effort compared to manually generating inputs while maintaining high quality and coverage.

3) *Code Generation*: While LCGMs demonstrate impressive code generation capabilities, accurately extracting the desired code from their responses remains an engineering challenge. Typically, many LCGMs struggle to precisely terminate their generation process after completing the target function, often continuing to generate extraneous code until reaching the maximum token limit. Directly executing such code in a sandbox environment, e.g., provided by HumanEval, frequently triggers parsing errors or interference from the additional functions. To minimize this interference, we perform an Abstract Syntax Tree (AST) based analysis on the generated results. By traversing the AST, we identify and extract only the code segments corresponding to the target function specified by the entry point. This targeted extraction ensures that only the code essential to the function’s execution is retained, thereby reducing the likelihood of errors that may arise from the inclusion of non-essential or erroneous code segments. This preprocessing is crucial in accurately assessing the correctness of the LCGMs’ outputs and ensuring that the evaluation is not compromised by the LCGMs’ tendency to generate superfluous code.

4) *Correctness Verification*: As discussed earlier, only a few test cases in existing benchmarks are often insufficient to guarantee thorough functionality correctness judgement, such a concern is also highlighted in recent studies [11]. To

TABLE I: Common time complexity types.

Type	Expression
Constant	$time = a(sec)$
Logarithmic	$time = a * \log(n) + b(sec)$
Linear	$time = a * \log(n) + b(sec)$
Linearithmic	$time = a * n * \log(n) + b(sec)$
Quadratic	$time = a * n^2 + b(sec)$
Cubic	$time = a * n^3 + b(sec)$
Exponential	$time = a^n + b(sec)$

ensure the adequacy of unit testing, we automatically generate larger-size test cases for correctness verification. As aforementioned, our collected dataset includes an input generator, which can generate random inputs of a specified size. With the canonical solution  $S$ , we can automatically synthesize reference outputs, i.e., ground truth. Therefore, we can conduct more comprehensive unit testing. We draw inspiration from HumanEval’s approach, which involves executing the code in a sandbox environment and verifying correctness by comparing the output of the LCGM-generated code with the synthesized ground truth. By comparing the differences in functionality correctness of LCGM-generated code across bilingual versions of the same programming question, we can conduct further statistical analysis to support the investigation of RQ1.

Furthermore, we filter out the functionally correct code based on extensive unit testing. Prioritizing correctness verification lays a solid foundation for subsequent performance estimation, as discussing the performance merits of code with inherent functional errors lacks practical significance.

5) *Performance Estimation*: Accurately characterizing and evaluating the execution performance or time complexity of arbitrary code is often challenging, especially when the LCGM-generated code may contain external function calls. In our framework, we estimate the execution performance by sampling a large number of inputs and observing the changes in the execution time of the LCGM-generated code as the input size grows. Recall that with the input generator  $G$ , we can sample test inputs of various sizes for the under-measuring code by generating input variables with different dimensions, thereby enabling us to profile actual execution time for LCGM-generate code across different input sizes.

Initially, when constructing the input generator, we empirically set an initial maximum input size  $N_{max}$  for each programming question, taking into account the complexity of the canonical solution. This value is set to be sufficiently large, allowing us to divide it into many segments to sample different input sizes. However, a problem arises as the LCGM-generate code could have a higher complexity than the canonical solution, leading to excessively long execution times and making the overall evaluation time prohibitively expensive. To address this problem, we design an adaptive mechanism for adjusting the maximum input size. Following HumanEval, we first set a maximum time limit  $T_{max}$  for code execution. Subsequently, we examine the execution of each LCGM-generated code to determine if it triggers a timeout when processing inputs of size  $N_{max}$ . In the event of a timeout, we iteratively decrease

$N_{max}$  by half until the execution satisfies the  $T_{max}$  constraint.

With the maximum input size  $N_{max}$ , we divide it into  $seg$  equal parts and obtain an increasing sequence of input sizes:

$$N = n_i | n_i = i \cdot \frac{N_{max}}{seg}, i = 1, 2, \dots, seg$$

For each input size  $n_i$ , we perform  $k$  samplings, record the execution time of each run, and take the average as the execution time estimate  $t_i$  under that input size. This way, we obtain a set of “input size-execution time” pairs:

$$NT = (n_i, t_i) | n_i \in N, t_i = \frac{1}{k} \sum_{j=1}^k t_{ij}, i = 1, 2, \dots, seg$$

where  $t_{ij}$  represents the execution time of the  $j$ -th sampling when the input size is  $n_i$ .

We present a summary of seven prevalent time complexity types, as illustrated in Table I. To determine the most matching time complexity type and corresponding mathematical expression, we employ the least squares method to perform a regression analysis [21] on the time series data ( $NT$ ). This approach enables us to identify the closest matching complexity type. Additionally, we assign a score ranging from 1 to 7 to each time complexity type, following the order presented in Table I. Lower scores indicate higher efficiency in terms of actual code execution. With this scoring mechanism, we can quantitatively compare the efficiency of two code pieces in actual sampling-based execution.

### C. Measurement Metrics

In this study, we focus on measuring the bilingual quality differences in LCGM-generated code.

1) *Effectiveness*: The effectiveness is measured through the correctness verification procedure. The function  $CorVer$  takes a problem  $q$  as input and returns a boolean value. It returns *True* if the problem  $q$  has been correctly solved by the target LCGM, and *False* otherwise. Thus, we define the following evaluation metrics:

- **CR<sub>en</sub>** (Correctness Rate in English): This metric represents the proportion of programming questions in English for which the target LCGM can generate correct code. The specific calculation can be formalized as:

$$CR_{en} = \frac{|q \in Q : CorVer(q_{en}) = True|}{|Q|}$$

- **CR<sub>zh</sub>** (Correctness Rate in Chinese): Similarly, this metric represents the proportion of programming questions in Chinese for which the target LCGM can generate correct code. It is calculated as:

$$CR_{zh} = \frac{|q \in Q : CorVer(q_{zh}) = True|}{|Q|}$$

- **CR<sub>bi</sub>** (Correctness Rate in Bilingual): This metric represents the proportion of programming questions for which the target LCGM can generate correct code in both languages. It is calculated as:

$$CR_{bi} = \frac{|q \in Q : CorVer(q_{en}) \wedge CorVer(q_{zh}) = True|}{|Q|}$$

- **CDR** (Correctness Difference Rate): This metric represents the proportion of programming questions for which the target LCGM can generate correct code only for one specific language. It is calculated as:

$$CDR = \frac{|q \in Q : CorVer(q_{en}) \oplus CorVer(q_{zh}) = True|}{|Q|}$$

where  $\oplus$  is the XOR operator.

2) *Efficiency*: As aforementioned, we evaluate the efficiency differences on the programming questions subset where LCGMs can generate correct solutions for both bilingual inputs. Firstly, we define the subset of correctly solved programming questions as  $Q' \subseteq Q$ , which satisfies

$$\forall q \in Q', CorVer(q_{en}) \wedge CorVer(q_{zh}) = True$$

Besides, we introduce *SComplex* as a function that inputs a programming question  $q$  and returns the score of the estimated complexity for the LCGM-generated code. The score is a value from 1 to 7, with lower scores indicating higher efficiency in terms of actual code execution. The measurement metrics for efficiency are as follows:

- **PAR<sub>en</sub>** (Performance Advantage Rate in English): This metric represents the proportion of programming questions in  $Q'$  for which the LCGMs generate code with better estimated time complexity (lower *SComplex* value) in English compared to Chinese. It is calculated as:

$$PAR_{en} = \frac{|q \in Q' : SComplex(q_{en}) < SComplex(q_{zh})|}{|Q'|}$$

- **PAR<sub>zh</sub>** (Performance Advantage Rate in Chinese): This metric represents the proportion of programming questions in  $Q'$  for which the LCGMs generate code with better estimated time complexity (lower *SComplex* score) in Chinese compared to English. It is calculated as:

$$PAR_{zh} = \frac{|q \in Q' : SComplex(q_{zh}) < SComplex(q_{en})|}{|Q'|}$$

- **PDR** (Performance Difference Rate): This metric represents the proportion of programming questions in  $Q'$  for which the LCGMs generate code with significantly different estimated time complexities (different *SComplex* scores) between English and Chinese. It is calculated as:

$$PDR = \frac{|q \in Q' : SComplex(q_{en}) \neq SComplex(q_{zh})|}{|Q'|}$$

### D. Target LCGMs

We select the following six LCGMs in our study, considering: 1) English and Chinese are well-supported; 2) they top mainstream evaluation benchmarks and leaderboards (for Python code generation); 3) they are representative and diverse in architecture, i.e., originating from different model families; and 4) due to our GPU constraints, the open-source models do not exceed 15B.

- CodeGen2.5 [22]: Building upon the popular CodeGen2 family of models, CodeGen2.5 with 7B parameters is on

- par with 15B parameter LCGMs and has undergone additional training on Python. It is developed by Salesforce.
- StarCoder [23]: Trained on 80+ programming languages, StarCoder supports a novel combination of capabilities and architectural features unavailable in other open LCGMs. It has 15B parameters.
  - CodeGeeX [24]: CodeGeeX is a multilingual code generation model implemented based on the ChatGLM2 architecture. It has 6B parameters and particularly supports bilingual input in English and Chinese.
  - CodeLlama [25]: Developed by Meta, CodeLlama is a foundational model with various parameter size versions. We select the 7B version for our study.
  - DeepSeek-Coder [26]: This model comprises a series of code language models trained from scratch on both 87% code and 13% natural language in English and Chinese. It supports project-level code completion and infilling. We choose the 6.7B version here.
  - GPT-3.5-Turbo [27]: Developed by OpenAI and empowering ChatGPT, GPT-3.5-Turbo, although not specifically trained for code generation tasks, can still assist in programming tasks due to its powerful natural language understanding and generation capabilities.

#### E. Parameter Configuration

In our experiments, the maximum time limit  $T_{max}$  is 6 seconds, the number of sampling  $k$  is 100, and the number of segments  $seg$  is 50. Another important parameter when utilizing LCGMs is the temperature ( $t$ ), which typically ranges from 0 to 1. Lower temperature values result in more deterministic and concentrated outputs, while higher values lead to more diverse and exploratory generations. We select two common temperature values, 0.2 and 0.8, to better observe the impact of this parameter on the quality of the generated code [28].

## IV. RESULTS AND ANALYSIS

### A. RQ1: Study on Effectiveness.

**Design.** In this RQ, we investigate the capability and differences of LCGMs in generating correct code for bilingual programming questions. Considering the stochastic nature of the LCGMs’ generation process, we independently execute the generation process 20 times for each LCGM on each programming question. If at least one piece of generated code passes the correctness verification, we consider the LCGM capable of correctly answering the question. That is, we use the  $pass@20$  metric to evaluate the correctness of the generated code. The specific evaluation metrics are discussed in §III-C.

**Results.** Table II presents the results of our investigation into the bilingual code generation abilities of LCGMs. The table is divided into two sections, representing different generation temperatures ( $t = 0.2$  and  $t = 0.8$ ) used during code generation. Each row corresponds to a specific LCGM, and the columns display various metrics.

Columns  $CR_{en}$  and  $CR_{zh}$  demonstrate the proportions of correctly solved programming questions by LCGMs for English and Chinese inputs, respectively. We observe an overall

TABLE II: Effectiveness Measurement Results.

LCGM	t = 0.2				t = 0.8			
	$CR_{en}$	$CR_{zh}$	$CR_{bi}$	$CDR$	$CR_{en}$	$CR_{zh}$	$CR_{bi}$	$CDR$
CodeGeeX	0.60	0.54	0.54	0.06	0.62	0.63	0.58	<b>0.10</b>
CodeGen2.5	0.52	0.52	0.46	<b>0.12</b>	0.46	0.48	0.40	<b>0.13</b>
CodeLlama	0.50	0.54	0.46	<b>0.12</b>	0.52	0.50	0.46	<b>0.10</b>
DeepSeek-Coder	0.63	0.58	0.54	<b>0.13</b>	0.71	0.65	0.63	<b>0.10</b>
StarCoder	0.48	0.52	0.44	<b>0.12</b>	0.58	0.56	0.52	<b>0.10</b>
GPT-3.5-Turbo	0.58	0.64	0.58	0.08	0.7	0.66	0.67	0.04
Average	0.55	0.56	0.50	<b>0.11</b>	0.60	0.58	0.54	<b>0.10</b>

improvement in the ability to generate correct code as the temperature increases from 0.2 to 0.8 for most LCGMs (except CodeGen2.5). We use green and red to highlight the LCGMs with the highest code correctness. Green indicates that the model has higher correctness for the questions in English, while red indicates that the model has higher correctness for Chinese questions. Obviously, the advantage of generating correct code is skewed towards English, i.e., when  $t = 0.2$ , only two models gain an advantage in English, but when  $t = 0.8$ , four models gain an advantage in English.

**Finding 1:** When the temperature is lower, most LCGMs exhibit higher code generation effectiveness in Chinese programming questions, while at higher temperatures, most LCGMs demonstrate higher effectiveness in English programming questions.

The column  $CDR$  demonstrates the disparities in LCGMs’ ability to generate correct code on two language versions of the same programming question. Particularly, it directly illustrates the extent to which LCGMs can generate correct code for one language while producing incorrect code for another. The results indicate that, across both temperatures, these LCGMs exhibit inconsistencies in their ability to generate correct code on over 10% of the programming questions, on average.

**Finding 2:** LCGMs show inconsistency in generating correct codes for more than 10% bilingual programming questions.

In our experiments, GPT-3.5-Turbo and CodeGeeX emerge as the top performers among the six LCGMs we evaluate, demonstrating the highest pass rates for code generation in both English and Chinese individually, as well as achieving the lowest discrepancy in bilingual effectiveness. It is worth noting that, when  $t = 0.2$ , CodeGeeX outperforms GPT-3.5-Turbo in both the correctness and consistency of generating codes for Chinese programming questions. This could be attributed to the fact that CodeGeeX is developed by a Chinese company and has undergone more training in Chinese corpora.

### B. RQ2: Study on Efficiency.

**Design.** In this RQ, we focus on the programming questions that each LCGM can correctly solve in both English and Chinese versions. For each question, we collect the corresponding LCGM-generated correct code in both languages. It is important to note that a single programming question may have multiple correct generated solutions. To represent

TABLE III: Efficiency Measurement Results.

LCGM	$t = 0.2$			$t = 0.8$		
	$PAR_{en}$	$PAR_{zh}$	$PDR$	$PAR_{en}$	$PAR_{zh}$	$PDR$
CodeGeeX	0.17	0.17	0.34	0.34	0.2	0.54
CodeGen2.5	0.2	0.23	0.43	0.11	0.25	0.36
CodeLlama	0.13	0.27	0.4	0.21	0.14	0.34
DeepSeek-Coder	0.2	0.23	0.43	0.24	0.11	0.34
StarCoder	0.17	0.24	0.41	0.26	0.13	0.39
GPT-3.5-Turbo	0.06	0.29	0.35	0.22	0.19	0.41
Average	0.16	0.24	0.39	0.23	0.17	0.40

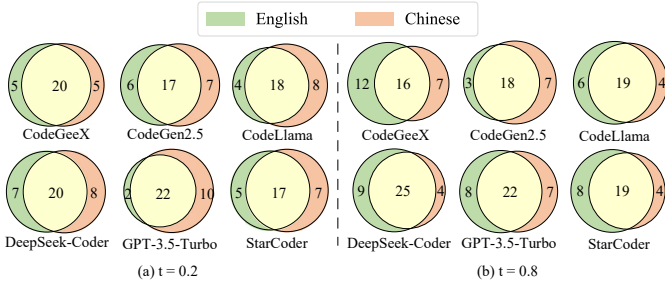


Fig. 2: Performance Evaluation Results for Each LCGM.

the performance level of the code generated by LCGMs for each programming question in the respective language version, we select the best-performing code from the set of correct solutions for each language. By choosing the most efficient code generated for each language version of each programming question, we can effectively compare which language enables the LCGM to generate the most optimized code. This approach allows us to assess the impact of language on the performance of the generated code and determine if there are any significant differences between the English and Chinese versions.

**Results.** Figure 2 shows the selected set of programming questions for each LCGM and the number of questions for which each language generates higher-performance code. The overlapping part in the middle represents questions where the generated code performance is at the same level for both languages. It is evident that for each LCGM, there is a significant proportion of questions where the performance of generated code in one language is superior to that in another language. Table III further presents the specific evaluation metrics.  $PDR$  provides a detailed measurement of this difference. Experimental results show that the average  $PDR$  is over 39% during various temperatures, which indicates that the efficiency of code generated by LCGMs may have greater inconsistency than effectiveness, warranting attention.

**Finding 3:** LCGMs exhibit differences in the efficiency of code generation for bilingual programming questions: for over 39% of the correctly solved questions, the efficiency level of the generated code varies between the two languages.

$PAR_{en}$  and  $PAR_{zh}$  represent the proportion of programming questions where these LCGMs gain an advantage in each language, as highlighted. It can be observed that when  $t = 0.2$ , five LCGMs generate code with better performance

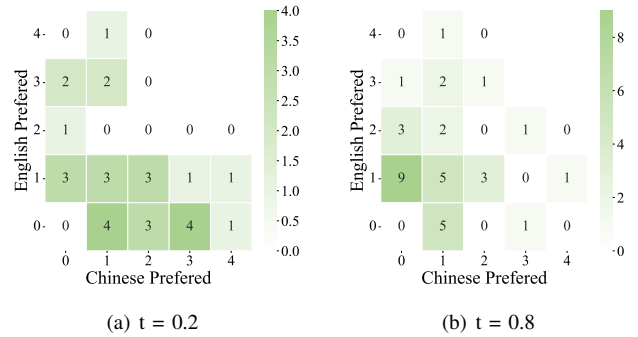


Fig. 3: The distribution of bilingual performance advantages for six LCGMs.

for Chinese input; when  $t = 0.8$ , five LCGMs generate code with better performance for English inputs. In other words, as  $t$  increases, the advantage shifts from Chinese to English, which is consistent with our observations in RQ1. Figure 3 further illustrates the distribution of the performance advantages of the generated code for each LCGM. The horizontal axis represents the number of LCGMs that generate more efficient code in the Chinese version of the question, while the vertical axis represents the number of LCGMs that generate more efficient code in the English version of the question. Experimental results show that when  $t = 0.2$ , the darker shaded areas in the graph indicate a stronger preference for Chinese.

**Finding 4:** With increasing temperatures, the advantage of generating more efficient code shifts from Chinese to English inputs.

However, we observe that CodeGeeX and GPT-3.5-Turbo exhibit the lowest efficiency differences when  $t = 0.2$ , and show the highest differences as  $t$  increase to 0.8. In contrast, the efficiency differences for the other four LCGMs decrease. Despite GPT-3.5-Turbo’s superior performance in code generation effectiveness and the lowest bilingual discrepancy, its efficiency in code generation is not as commendable. This suggests that while correctness is a crucial aspect, the efficiency and other quality attributes of code generation by these applications warrant greater attention.

**Finding 5:** While an LCGM’s consistency in generating effective code for bilingual programming questions is notable, it does not necessarily ensure a high level of consistency in the efficiency of the generated code.

### C. RQ3: The Impact of Prompting

**Design.** In this RQ, we investigate the impact of different prompts on the quality of LCGM-generated code in bilingual programming questions. As shown in Table IV, in previous experiments, we directly fed those questions into LCGMs. Now, we introduce different prompting paradigms to provide clearer and more specific instructions, aiming to improve the

TABLE IV: Different Prompting Methods.

Prompting Type	Detailed Prompts
Directly Input(DI)	{question}
Basic Prompt(BP)	# Complete the following Python code without any tests or explanation\n{question}
Quality-aware Prompt(QA)	# Complete the following Python code by a <b>concise and efficient</b> implementation.\n{question}
CoT Prompt(CoT)	# Complete the following Python code without any tests or explanation, <b>let's think step by step</b> \n{question}
Quality-aware CoT Prompt(QA+CoT)	# Complete the following Python code by a <b>concise and efficient</b> implementation, <b>let's think step by step</b> \n{question}

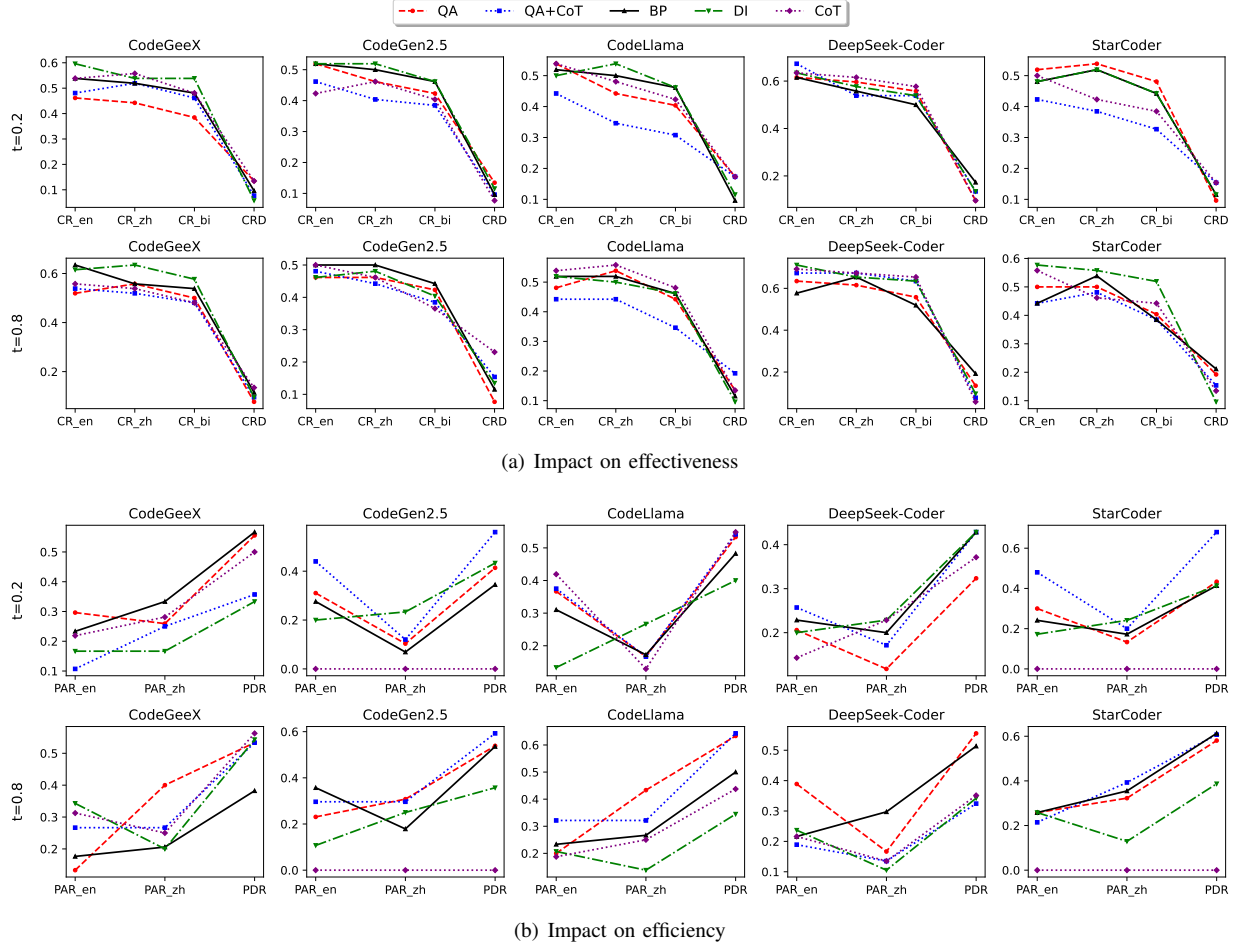


Fig. 4: Impact of Prompting on Bilingual Code Generation.

quality of code generation. First, we experiment with a basic prompt, which is commonly utilized by some instruction-tuned LCGMs to enhance generation capability [23]. Building upon this, we further attempt to introduce quality-aware information into the prompt, explicitly instructing the model to generate “concise and efficient” code, to improve the correctness and efficiency of the generated code. Moreover, the Chain-of-Thought (CoT) [29] prompting method has recently been widely proven to significantly improve the quality of generation results. A typical example is adding statements like “Let’s think step by step” in the tail of the prompt, guiding the model to perform step-by-step thinking and reasoning. Therefore, we also incorporate the CoT prompting method in our experiments. Finally, to comprehensively consider both code quality and the logical coherence of the generation

process, we experiment with the combination of quality-aware information and the CoT prompting method.

**Results.** Figure 4 presents the impact of different prompting methods on the effectiveness and efficiency of LCGM-generated code based on our proposed metrics. Firstly, we observe that different prompting methods have varying degrees of impact on each metric, and this impact varies across different LCGMs. From an effectiveness perspective, using these diverse prompts may lead to a decrease in the ability of LCGMs to generate correct code in both Chinese and English languages compared to directly inputting programming questions, especially for CodeGeeX and StarCoder. From an efficiency standpoint, prompts also have varying degrees of influence. For example, at  $t = 0.2$ , it can be observed that diverse prompts significantly bias code generation towards



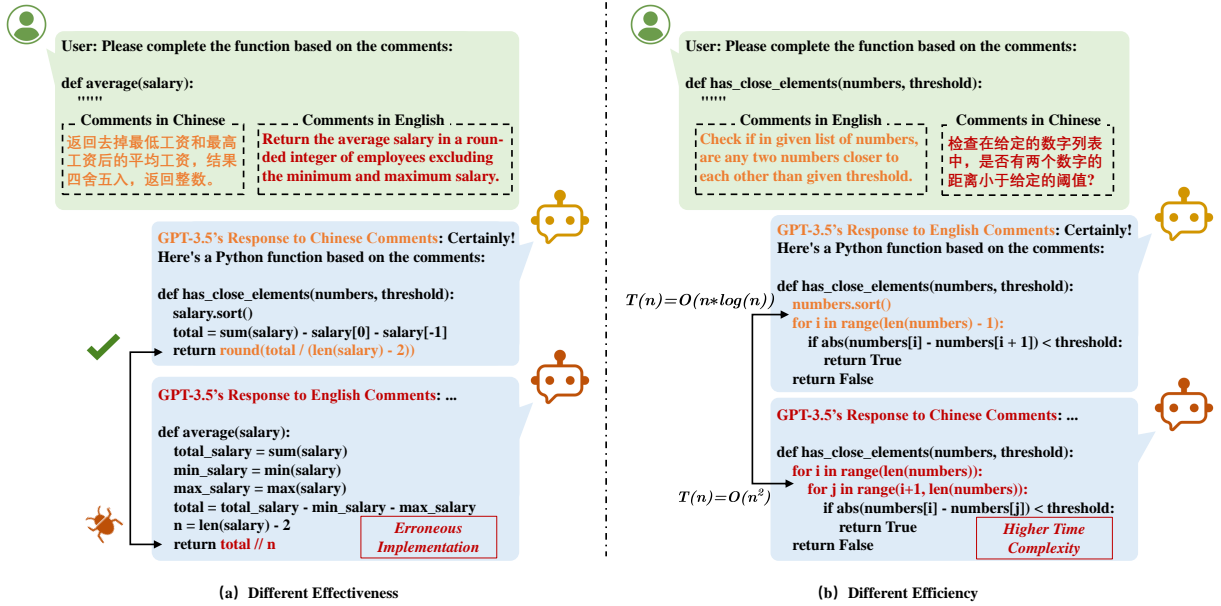


Fig. 5: Examples of Bilingual Quality Differences

English in models like CodeGen2.5, CodeLlama, DeepSeek-Coder, and StarCoder. Moreover, the impact of increasing temperature  $t$  on the effectiveness and efficiency of code generation varies across different prompts on LCGMs. For example, as  $t$  changes, the code generation effectiveness of prompts “QA” and “QA+CoT” fluctuates significantly, while prompts ‘DI’ and ‘BP’ show minimal sensitivity to changes in  $t$ . We can also observe that Finding 1 might not hold for other prompts. For example, increasing the temperature when using the prompt “BP” tends to result in higher generation effectiveness for Chinese questions rather than higher effectiveness for English. Overall, different prompting strategies affect the quality differences in code generation by LCGMs in bilingual contexts, and this difference is often influenced by temperature, with varying effects on different LCGMs.

**Finding 6:** Prompting differentially affects the effectiveness and efficiency of bilingual code generation by LCGMs, with varying impacts across LCGMs and temperature settings.

However, an intriguing point is that CoT shows significant potential in eliminating the efficiency discrepancies in code generation by LCGMs on bilingual dataset. It can be observed that, for CodeGen2.5 and StarCoder, using CoT prompts as input reduces the efficiency difference metric to 0 (applicable to both  $t = 0.2$  and  $t = 0.8$ ). However, this effect is not observed in other LCGMs. Nonetheless, this highlights the potential importance of prompting methods in reducing bias in LCGMs’ bilingual capabilities, recalling a very promising direction for future research.

**Finding 7:** The CoT prompting shows significant potential in enhancing the efficiency of bilingual code generation.

#### D. Case Study

Figure 5 illustrates a pair of practical examples for GPT-3.5-Turbo on bilingual programming tasks. In the first example in Figure 5(a), GPT-3.5-Turbo generates the correct code for the Chinese input but fails to do so for the English input. Specifically, the solution “return total//n” (marked in red) does not align with the task description of returning the result “in a rounded integer.” This further emphasizes the need for an interpretability-driven comprehensive study regarding which key entities or information from input problems are captured by LCGMs for different input languages.

Moreover, we find that even when LCGMs generate functionally correct code for both English and Chinese inputs, there can still be significant differences in the efficiency of the generated code. As shown in the second example in Figure 5(b), the code generated for the Chinese input is less efficient than that for the English input. The average execution time complexity of the code generated for the Chinese input is  $O(n^2)$  due to the presence of nested loops. In contrast, the code generated for the English input has an average time complexity of only  $O(n * \log(n))$ , thanks to the more concise and efficient library call of “sort()”. This may inspire us that the subjective enthusiasm of LCGMs for library API calls may affect the overall efficiency of their generated code. It is worth noting that to better control variables and ensure that the Chinese-English differences in the input exist only in the programming question descriptions, we used the same English prompt for code generation in both languages.

### E. Discussions and Suggestions

**Comprehensive Multilingual Code Generation Quality Assessment:** Based on the results from RQ1 and RQ2, our study has revealed significant disparities in the effectiveness and efficiency of LCGMs in generating code for bilingual (Chinese and English) programming. It is reasonable to infer that such differences are not confined to these two languages but may represent a broader phenomenon. Emerging research has increasingly investigated the multilingual understanding and generation capabilities of Large Language Models [30], and similar scrutiny must be directed towards LCGMs. Moreover, effectiveness and efficiency are only two aspects of code quality, other important attributes such as security, readability, and maintainability also deserve consideration. Therefore, expanding the scope of quality assessment to include these additional attributes is a valuable direction for future research.

**Developing Better Prompting Methods.** According to RQ3, the impact of different prompting strategies on the quality of LCGM-generated code is substantial. Prompting techniques are pivotal in the era of LLMs, and well-crafted prompts can significantly enhance the quality of generation [31]. Investigating how to construct superior prompts that enable LCGMs to consistently produce high-quality code across different languages is of paramount importance.

**Adaptive Temperature Tuning.** It has been observed that as the temperature parameter increases, LCGMs exhibit varying performance across languages, i.e., most LCGMs tend to prefer generating code of higher quality in English. Identifying the optimal temperature settings that allow LCGMs to perform best for each language could be a key factor in improving multilingual code generation.

In summary, one important message from this study is that the software engineering community should establish benchmarks and frameworks for evaluating the multilingual code generation capabilities of LCGMs, considering different code quality assessment metrics, input languages, prompting methods, and more. As an initial step, we have released our framework [12] and strongly encourage our readers to contribute more datasets and code quality measurements.

### F. Threats to Validity

**Limited Dataset:** The dataset utilized in this study, despite careful designing, is limited to 52 bilingual programming questions, which may not sufficiently cover the diverse range of tasks LCGMs encounter in practical applications. Furthermore, the dataset only includes English and Chinese, potentially failing to capture the performance variations of LCGMs across a wider array of languages. This limitation stems from the requirement of strong language proficiency to ensure the quality of multilingual parallel data.

**Limited LCGMs:** The selected six LCGMs represent the current technology but don't cover all models or training methods. However, the selected LCGMs serve as the foundation for many advanced LCGMs. Our evaluation method is universal and extendable to a broader range of models.

**Evaluation Metrics:** The metrics employed in this study primarily focus on code correctness and efficiency, potentially neglecting other crucial aspects of code quality, such as readability, maintainability, and adherence to coding standards. The absence of these factors in the evaluation process may restrict the comprehensive understanding of the LCGM's performance.

To mitigate the threats and foster further research, we make our collected dataset and evaluation framework publicly available [12]. This initiative aims to empower researchers to expand the study by incorporating diverse programming tasks, languages, and quality assessment metrics, as well as to include a broader range of LCGMs in the comparison.

## V. RELATED WORK

### A. Large Code Generation Models

LLMs have achieved impressive results in code processing, with models ranging from general-purpose to specialized architectures. General-purpose LLMs, such as LLaMA [32], Llama2 [33], LaMDA [34], and PaLM [35], can generate code thanks to pre-training on text data that includes code. For example, Llama2 contains 328GB of code from GitHub. Even smaller models like Phi-1.5 (1.3 billion parameters) can demonstrate coding proficiency [36].

Language models with additional pre-training on code have achieved new benchmarks. Codex [8] fine-tuned GPT-3 on 100B code tokens, and PaLM-Coder [35] extended pre-training with 7.8 billion tokens of code. CodeLlama [25] enhanced Llama2 by pre-training it on 500 billion code tokens, and CodeFuse-CodeLlama [37], a fine-tuned version of CodeLlama, surpasses even GPT-4's performance.

Specialized architecture models use different architectures to generate code. CodeT5+ [38] uses an encoder-decoder architecture with contrastive objectives, while CodeFusion [39] introduces diffusion models to code modeling. These models can outperform other LLMs on code synthesis datasets.

### B. Testing and Evaluation for Code Generation Model

Over the years, the software engineering community has proposed various evaluation tasks to assess code models, which have been consolidated into benchmarks such as CodeXGLUE [40] and CodeBLEU [41]. However, with the introduction of HumanEval [8] and the increasing capability of code generation models, the focus has shifted towards functional correctness as a more appropriate metric for evaluation [42], [43], [9]. This has led to the development of metrics such as pass@k [8] and passn@k [44], which assess the model's ability to generate code that passes unit tests. Several benchmarks have been created to evaluate code synthesis, including HUMANEVAL and MBPP [9] for Python, as well as benchmarks targeting other programming languages such as SQL (Spider[45]), C++, JavaScript, and Go (HUMANEVAL-X [24]), C++ and Java (CodeContests [44]), and a multilingual extension of HUMANEVAL and MBPP (MultiPL-E [46]). In addition to function-level evaluation, CrossCodeEval [47] and CoderEval [48] have introduced benchmarks for cross-file and project-level code completion. Besides correctness

evaluation, some works are dedicated to testing and assessing the robustness of LCGMs [49], [50], [51], [52], [53].

## VI. CONCLUSION

In this paper, we conduct a pioneering empirical study on the bilingual code generation quality of Large Code Generation Models (LCGMs). While LCGMs have revolutionized software engineering tasks such as code generation, their performance on non-English languages, particularly Chinese, has not been systematically investigated. We collect a dataset containing 52 bilingual parallel programming tasks and evaluate the code generated by six state-of-the-art LCGMs in terms of effectiveness and efficiency. Our findings reveal that there exist quality differences between LCGM-generated code for English and Chinese programming questions. This work underscores the urgency for further research and development to ensure consistent code generation across languages.

## REFERENCES

- [1] P. Yin and G. Neubig, "A syntactic neural model for general-purpose code generation," *arXiv preprint arXiv:1704.01696*, 2017.
- [2] S. Bubeck, V. Chandrasekaran, R. Eldan, J. Gehrke, E. Horvitz, E. Kamar, P. Lee, Y. T. Lee, Y. Li, S. Lundberg *et al.*, "Sparks of artificial general intelligence: Early experiments with gpt-4," *arXiv preprint arXiv:2303.12712*, 2023.
- [3] Y. Wan, Z. Zhao, M. Yang, G. Xu, H. Ying, J. Wu, and P. S. Yu, "Improving automatic source code summarization via deep reinforcement learning," in *Proceedings of the 33rd ACM/IEEE international conference on automated software engineering*, 2018, pp. 397–407.
- [4] Y. Liang and K. Zhu, "Automatic generation of text descriptive comments for code blocks," in *Proceedings of the AAAI conference on artificial intelligence*, vol. 32, no. 1, 2018.
- [5] S. Kotsiantis, V. Verykios, and M. Tzagarakis, "Ai-assisted programming tasks using code embeddings and transformers," *Electronics*, vol. 13, no. 4, p. 767, 2024.
- [6] R. Pudari and N. A. Ernst, "From copilot to pilot: Towards ai supported software development," *arXiv preprint arXiv:2303.04142*, 2023.
- [7] C. Qian, X. Cong, C. Yang, W. Chen, Y. Su, J. Xu, Z. Liu, and M. Sun, "Communicative agents for software development," *arXiv preprint arXiv:2307.07924*, 2023.
- [8] M. Chen, J. Tworek, H. Jun, Q. Yuan, H. P. d. O. Pinto, J. Kaplan, H. Edwards, Y. Burda, N. Joseph, G. Brockman *et al.*, "Evaluating large language models trained on code," *arXiv preprint arXiv:2107.03374*, 2021.
- [9] J. Austin, A. Odena, M. Nye, M. Bosma, H. Michalewski, D. Dohan, E. Jiang, C. Cai, M. Terry, Q. Le *et al.*, "Program synthesis with large language models," *arXiv preprint arXiv:2108.07732*, 2021.
- [10] F. Tomassetti and M. Torchiano, "An empirical assessment of polyglotism in github," in *Proceedings of the 18th International Conference on Evaluation and Assessment in Software Engineering*, 2014, pp. 1–4.
- [11] J. Liu, C. S. Xia, Y. Wang, and L. Zhang, "Is your code generated by chatgpt really correct? rigorous evaluation of large language models for code generation," *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [12] "Our code," <https://github.com/lenijwp/BilingualCodeEval>, 2024.
- [13] G. Sridhara, S. Mazumdar *et al.*, "Chatgpt: A study on its utility for ubiquitous software engineering tasks," *arXiv preprint arXiv:2305.16837*, 2023.
- [14] A. Mastrolopolo, S. Scalabrino, N. Cooper, D. N. Palacio, D. Poshyanyk, R. Oliveto, and G. Bavota, "Studying the usage of text-to-text transfer transformer to support code-related tasks," in *2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE)*. IEEE, 2021, pp. 336–347.
- [15] M. Allamanis, E. T. Barr, P. Devanbu, and C. Sutton, "A survey of machine learning for big code and naturalness," *ACM Computing Surveys (CSUR)*, vol. 51, no. 4, pp. 1–37, 2018.
- [16] J. F. Pane, B. A. Myers *et al.*, "Studying the language and structure in non-programmers' solutions to programming problems," *International Journal of Human-Computer Studies*, vol. 54, no. 2, pp. 237–264, 2001.
- [17] T. t. p. g. i. S. a. n. l. f. t. i. g. b. c. o. c. D. to varying update cycles and S. C. D. M. u. t. -D. D. T. R. in the Text, "Topic: Software industry in China," <https://www.statista.com/topics/11244/software-industry-in-china/>.
- [18] L. Fu, H. Chai, S. Luo, K. Du, W. Zhang, L. Fan, J. Lei, R. Rui, J. Lin, Y. Fang *et al.*, "Codeapex: A bilingual programming evaluation benchmark for large language models," *arXiv preprint arXiv:2309.01940*, 2023.
- [19] T. McEnery and R. Xiao, *Corpus-based contrastive studies of English and Chinese*. Routledge, 2010.
- [20] "Leetcode," <https://leetcode.com/problemset/>, 2024.
- [21] N. R. Draper and H. Smith, *Applied regression analysis*. John Wiley & Sons, 1998, vol. 326.
- [22] E. Nijkamp, H. Hayashi, C. Xiong, S. Savarese, and Y. Zhou, "Codegen2: Lessons for training llms on programming and natural languages," *arXiv preprint*, 2023.
- [23] R. Li, L. B. Allal, Y. Zi, N. Muennighoff, D. Kocetkov, C. Mou, M. Marone, C. Akiki, J. Li, J. Chim *et al.*, "Starcoder: may the source be with you!" *arXiv preprint arXiv:2305.06161*, 2023.
- [24] Q. Zheng, X. Xia, X. Zou, Y. Dong, S. Wang, Y. Xue, L. Shen, Z. Wang, A. Wang, Y. Li *et al.*, "Codegeex: A pre-trained model for code generation with multilingual benchmarking on humaneval-x," in *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, 2023, pp. 5673–5684.
- [25] B. Roziere, J. Gehring, F. Gloeckle, S. Sootla, I. Gat, X. E. Tan, Y. Adi, J. Liu, T. Remez, J. Rapin *et al.*, "Code llama: Open foundation models for code," *arXiv preprint arXiv:2308.12950*, 2023.
- [26] D. Guo, Q. Zhu, D. Yang, Z. Xie, K. Dong, W. Zhang, G. Chen, X. Bi, Y. Wu, Y. Li *et al.*, "Deepseek-coder: When the large language model meets programming—the rise of code intelligence," *arXiv preprint arXiv:2401.14196*, 2024.
- [27] "Openai api," <https://openai.com/product>, 2024.
- [28] "Openai api reference," <https://platform.openai.com/docs/api-reference/completions/create>, 2024.
- [29] J. Wei, X. Wang, D. Schuurmans, M. Bosma, F. Xia, E. Chi, Q. V. Le, D. Zhou *et al.*, "Chain-of-thought prompting elicits reasoning in large language models," *Advances in neural information processing systems*, vol. 35, pp. 24 824–24 837, 2022.
- [30] W. Zhang, M. Aljunied, C. Gao, Y. K. Chia, and L. Bing, "M3exam: A multilingual, multimodal, multilevel benchmark for examining large language models," *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [31] P. Liu, W. Yuan, J. Fu, Z. Jiang, H. Hayashi, and G. Neubig, "Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing," *ACM Computing Surveys*, vol. 55, no. 9, pp. 1–35, 2023.
- [32] H. Touvron, T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar *et al.*, "Llama: Open and efficient foundation language models," *arXiv preprint arXiv:2302.13971*, 2023.
- [33] H. Touvron, L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Batra, P. Bhargava, S. Bhosale *et al.*, "Llama 2: Open foundation and fine-tuned chat models," *arXiv preprint arXiv:2307.09288*, 2023.
- [34] R. Thoppilan, D. De Freitas, J. Hall, N. Shazeer, A. Kulshreshtha, H.-T. Cheng, A. Jin, T. Bos, L. Baker, Y. Du *et al.*, "Lamda: Language models for dialog applications," *arXiv preprint arXiv:2201.08239*, 2022.
- [35] A. Chowdhery, S. Narang, J. Devlin, M. Bosma, G. Mishra, A. Roberts, P. Barham, H. W. Chung, C. Sutton, S. Gehrmann *et al.*, "Palm: Scaling language modeling with pathways," *Journal of Machine Learning Research*, vol. 24, no. 240, pp. 1–113, 2023.
- [36] Y. Li, S. Bubeck, R. Eldan, A. Del Giorno, S. Gunasekar, and Y. T. Lee, "Textbooks are all you need ii: phi-1.5 technical report," *arXiv preprint arXiv:2309.05463*, 2023.
- [37] B. Liu, C. Chen, C. Liao, Z. Gong, H. Wang, Z. Lei, M. Liang, D. Chen, M. Shen, H. Zhou *et al.*, "Mftcoder: Boosting code llms with multitask fine-tuning," *arXiv preprint arXiv:2311.02303*, 2023.
- [38] Y. Wang, W. Wang, S. Joty, and S. C. Hoi, "Codet5: Identifier-aware unified pre-trained encoder-decoder models for code understanding and generation," *arXiv preprint arXiv:2109.00859*, 2021.
- [39] M. Singh, J. Cambronero, S. Gulwani, V. Le, C. Negreanu, and G. Verbruggen, "Codefusion: A pre-trained diffusion model for code generation," *arXiv preprint arXiv:2310.17680*, 2023.

- [40] S. Lu, D. Guo, S. Ren, J. Huang, A. Svyatkovskiy, A. Blanco, C. Clement, D. Drain, D. Jiang, D. Tang *et al.*, “Codexglue: A machine learning benchmark dataset for code understanding and generation,” *arXiv preprint arXiv:2102.04664*, 2021.
- [41] S. Ren, D. Guo, S. Lu, L. Zhou, S. Liu, D. Tang, N. Sundaresan, M. Zhou, A. Blanco, and S. Ma, “Codebleu: a method for automatic evaluation of code synthesis,” *arXiv preprint arXiv:2009.10297*, 2020.
- [42] B. Roziere, M.-A. Lachaux, L. Chausson, and G. Lample, “Unsupervised translation of programming languages,” *Advances in neural information processing systems*, vol. 33, pp. 20601–20611, 2020.
- [43] D. Hendrycks, S. Basart, S. Kadavath, M. Mazeika, A. Arora, E. Guo, C. Burns, S. Puranik, H. He, D. Song *et al.*, “Measuring coding challenge competence with apps,” *arXiv preprint arXiv:2105.09938*, 2021.
- [44] Y. Li, D. Choi, J. Chung, N. Kushman, J. Schrittwieser, R. Leblond, T. Eccles, J. Keeling, F. Gimeno, A. Dal Lago *et al.*, “Competition-level code generation with alphacode,” *Science*, vol. 378, no. 6624, pp. 1092–1097, 2022.
- [45] T. Yu, R. Zhang, K. Yang, M. Yasunaga, D. Wang, Z. Li, J. Ma, I. Li, Q. Yao, S. Roman *et al.*, “Spider: A large-scale human-labeled dataset for complex and cross-domain semantic parsing and text-to-sql task,” *arXiv preprint arXiv:1809.08887*, 2018.
- [46] F. Cassano, J. Gouwar, D. Nguyen, S. Nguyen, L. Phipps-Costin, D. Pinckney, M.-H. Yee, Y. Zi, C. J. Anderson, M. Q. Feldman *et al.*, “Multipl-e: a scalable and polyglot approach to benchmarking neural code generation,” *IEEE Transactions on Software Engineering*, 2023.
- [47] Y. Ding, Z. Wang, W. Ahmad, H. Ding, M. Tan, N. Jain, M. K. Ramanathan, R. Nallapati, P. Bhatia, D. Roth *et al.*, “Crosscodeeval: A diverse and multilingual benchmark for cross-file code completion,” *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [48] H. Yu, B. Shen, D. Ran, J. Zhang, Q. Zhang, Y. Ma, G. Liang, Y. Li, Q. Wang, and T. Xie, “Codereval: A benchmark of pragmatic code generation with generative pre-trained models,” in *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering*, 2024, pp. 1–12.
- [49] A. Mastroianni, L. Pascalella, E. Guglielmi, M. Ciniselli, S. Scalabrino, R. Oliveto, and G. Bavota, “On the robustness of code generation techniques: An empirical study on github copilot,” in *2023 IEEE/ACM 45th International Conference on Software Engineering (ICSE)*. IEEE, 2023, pp. 2149–2160.
- [50] G. Yang, Y. Zhou, W. Yang, T. Yue, X. Chen, and T. Chen, “How important are good method names in neural code generation? a model robustness perspective,” *ACM Transactions on Software Engineering and Methodology*, 2023.
- [51] S. Wang, Z. Li, H. Qian, C. Yang, Z. Wang, M. Shang, V. Kumar, S. Tan, B. Ray, P. Bhatia *et al.*, “Recode: Robustness evaluation of code generation models,” *arXiv preprint arXiv:2212.10264*, 2022.
- [52] Z. Li, C. Wang, Z. Liu, H. Wang, D. Chen, S. Wang, and C. Gao, “Cctest: Testing and repairing code completion systems,” in *2023 IEEE/ACM 45th International Conference on Software Engineering (ICSE)*. IEEE, 2023, pp. 1238–1250.
- [53] Z. Yang, Z. Sun, T. Z. Yue, P. Devanbu, and D. Lo, “Robustness, security, privacy, explainability, efficiency, and usability of large language models for code,” 2024.