

# SVASTIN: Sparse Video Adversarial Attack via Spatio-Temporal Invertible Neural Networks

Yi Pan, Jun-Jie Huang, Zihan Chen, Wentao Zhao<sup>✉</sup>, Ziyue Wang

College of Computer Science and Technology, National University of Defense Technology, Changsha, China

{panyi\_jsjy, jjhuang, chenzihan21, wtzhao, wangzy13}@nudt.edu.cn

**Abstract**—Robust and imperceptible adversarial video attack is challenging due to the spatial and temporal characteristics of videos. The existing video adversarial attack methods mainly take a gradient-based approach and generate adversarial videos with noticeable perturbations. In this paper, we propose a novel Sparse Adversarial Video Attack via Spatio-Temporal Invertible Neural Networks (SVASTIN) to generate adversarial videos through spatio-temporal feature space information exchanging. It consists of a Guided Target Video Learning (GTVL) module to balance the perturbation budget and optimization speed and a Spatio-Temporal Invertible Neural Network (STIN) module to perform spatio-temporal feature space information exchanging between a source video and the target feature tensor learned by GTVL module. Extensive experiments on UCF-101 and Kinetics-400 demonstrate that our proposed SVASTIN can generate adversarial examples with higher imperceptibility than the state-of-the-art methods with the higher fooling rate. Code is available at <https://github.com/Brittany-Chen/SVASTIN>.

**Index Terms**—Sparse Video Adversarial Attack, Invertible Neural Networks, Spatio-Temporal

## I. INTRODUCTION

Recent advances in Deep Neural Networks (DNNs) have enabled effective visual understanding in images and videos [1]–[6]. At the same time, the security issue of DNNs has attracted a lot of attention [7]–[13]. Szegedy *et al.* [7] found that the DNN-based image classifiers can be easily deceived by adding mild adversarial noise to the benign images. Since then different adversarial attack methods [7]–[10] have been proposed to investigate the security issue of DNNs. The existing image-domain adversarial attack approaches can be grouped into two main categories: adding adversarial perturbation [7]–[9] to the benign images or dropping class specific features from the benign images [10]. Recently, Chen *et al.* [11] proposed a Adversarial Attack via Invertible Neural Networks (AdvINN) method to generate imperceptible and robust adversarial examples by utilizing Invertible Neural Networks (INNs) [14]–[18] to perform feature space feature exchanging and simultaneously drop discriminant information of clean images and add class-specific features of the target images.

Videos contain both spatial dimensions and a temporal dimension, and are comprised of a sequence of images with high temporal consistency among adjacent frames. The adversarial attack methods for images can be naïvely extended for

videos, however, the large searching space and high information redundancy pose a challenge in robustly and effectively generating adversarial video examples. In order to improve the imperceptibility as well as reduce computational cost, Wei *et al.* [19] proposed a sparse attack method for videos by utilizing the  $l_{2,1}$ -norm to regularize the adversarial noise to be temporally sparse and the generated perturbations are transferred to other frames through the temporal interaction of the target model. Inkawich *et al.* [20] proposed an adversarial attack method for optical-flow-based action recognition based on Fast Gradient Sign Method (FGSM) [7]. To accelerate the speed of adversaries generation for videos, Mu *et al.* [21] proposed DeepSAVA with an effectively alternative optimization scheme between selecting key frames and optimizing spatial-transformed perturbations. By utilizing the temporal information, Jiang *et al.* [22] proposed a video attack framework named V-DSA which utilizes optical flow to select the perturbed pixels of every frame. Although it reduces the search space, the adversarial perturbations are perceptible for human observers.

In order to improve the imperceptibility of adversarial examples, we propose a Sparse Video Adversarial Attack via Spatio-Temporal Invertible Neural Networks (SVASTIN) method which generates adversarial videos through spatio-temporal feature exchanging by utilizing our proposed Spatio-Temporal Invertible Neural Networks. To accelerate convergence speed, a Guided Target Video Learning (GTVL) module is proposed to learn a discriminative target feature tensor of the target class. We propose to build a Spatio-Temporal Invertible Neural Network (STIN) module with 3D Discrete Wavelet Transform (3D-DWT) and Spatio-Temporal Affine Coupling Blocks (ST-ACB). It is set to exchange the Spatio-temporal information between the source video and the target feature tensor learned by GTVL module. We further constrain the perturbations to be added to the 3D-DWT high-frequency coefficients resulting in adversarial videos with higher imperceptibility. Extensive experiments on the Kinetics-400 [23] and UCF-101 [24] datasets demonstrate that the proposed SVASTIN method can generate adversarial videos with the higher fooling rate and higher imperceptibility.

## II. PROPOSED METHOD

In this section, we introduce the details of Sparse Video Adversarial Attack via Spatio-Temporal Invertible Neural Networks (SVASTIN) which generates imperceptible and robust

This work is supported by the National Natural Science Foundation of China under Project 62201600 and U1811462, NUDT Innovation Science Foundation 23-ZZCXKXKY-07, and NUDT Research Project ZK22-56.

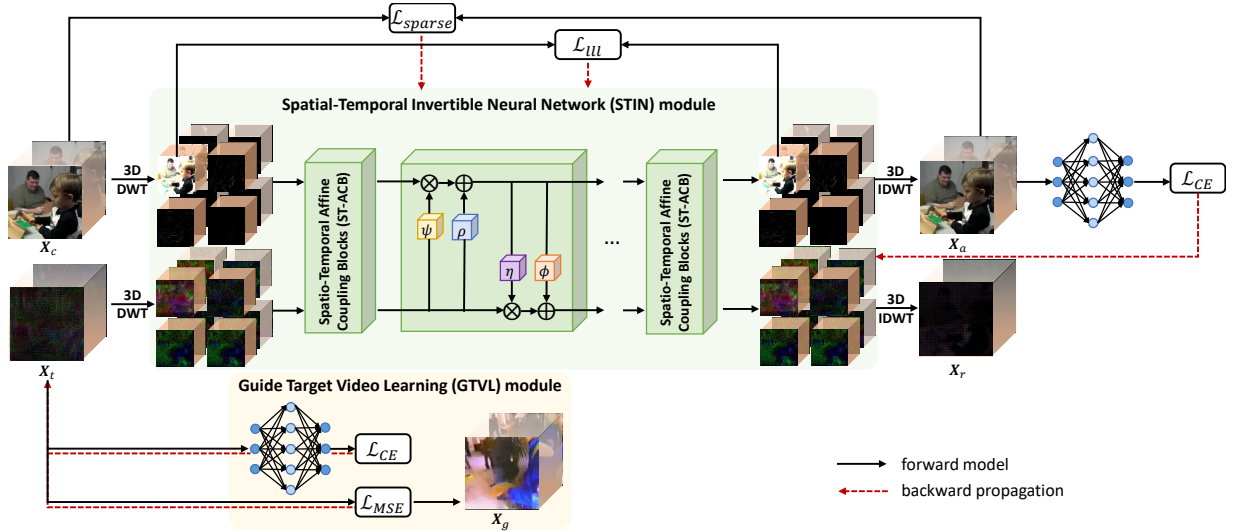


Fig. 1. The overview of Sparse Adversarial Video Attack via Spatio-Temporal Invertible Neural Networks (SVASTIN). The Spatio-Temporal Invertible Neural Network (STIN) module, which utilizes the information preservation property to non-linearly exchange information between the input benign video and the target video. The Guided Target Video Learning (GTVL) module is proposed to update the learnable target video  $\mathbf{X}_t$ .

adversarial videos by fully considering the spatio-temporal characteristics of videos.

#### A. Overview

Fig. 1 illustrates the overview of the proposed SVASTIN method which mainly consists of a Spatio-Temporal Invertible Neural Network (STIN) module and a Guided Target Video Learning (GTVL) module. In order to better perform spatio-temporal information exchanging, we propose to construct the STIN module with the 3D Discrete Wavelet Transform (3D-DWT) for video decomposition and an Invertible Neural Network with Spatio-Temporal Affine Coupling Blocks (ST-ACB) to capture motion information from both spatial and temporal dimensions. It reversibly exchanges information between a clean video  $\mathbf{X}_c$  and a target feature tensor  $\mathbf{X}_t$ , and generates an adversarial video  $\mathbf{X}_a$  with a residual video  $\mathbf{X}_r$ . The target feature tensor  $\mathbf{X}_t$  serves as the source information of the target class. We propose the GTVL module to effectively learn a target feature tensor  $\mathbf{X}_t$  with the guidance of a guide video  $\mathbf{X}_g$  and the target classifier  $F_\phi(\cdot)$ .

#### B. Spatio-Temporal Invertible Neural Network Module

The Spatio-Temporal Invertible Neural Network (STIN) module aims to perform spatio-temporal feature space information exchanging between a benign video and a target feature tensor. Invertible Neural Networks (INNs), which is with the information preservation property, has been utilized for imperceptible and robust image adversarial attack [11]. Compared to images, videos have an additional temporal dimension which is an essential characteristic and should be exploited. The proposed STIN module is able to extract and process temporal and spatial information simultaneously which consists of a 3D Discrete Wavelet Transform (3D-DWT) layer for video feature decomposition,  $M$  ST-ACB for feature updating and prediction, and an inverse 3D-DWT layer for video recomposition.

**3D Discrete Wavelet Transform (3D-DWT) Layer:** Wavelet transform has been widely used for analyzing images and signals at different frequency components. In this paper, we propose to use 3D-DWT for decomposing both the spatial and the temporal dimensions of a video  $\mathbf{X} \in \mathbb{R}^{C \times T \times W \times H}$  into low-frequency and high-frequency components resulting in 8 sub-bands. Its wavelet coefficients can be represented as  $\Gamma(\mathbf{X}) \in \mathbb{R}^{8C \times T/2 \times W/2 \times H/2}$ . Note that compared with 2D-DWT, 3D-DWT further decomposes the temporal dimension into low-frequency and high-frequency sub-bands, which can help us capture motion information in videos.

**Spatio-Temporal Affine Coupling Blocks (ST-ACB):** Affine Coupling Block (ACB) [14] is the key building block of INNs, however, it is designed for processing 2D images and cannot well capture the temporal information in videos. Here, we propose Spatio-Temporal Affine Coupling Blocks (ST-ACB) with 3D convolution layers to promote temporal information modeling. We denote  $\mathbf{w}^i$  as the input features of the  $i$ -th Spatio-Temporal Affine Coupling Block, and with  $\mathbf{w}_c^0 = \Gamma(\mathbf{X}_c)$  and  $\mathbf{w}_t^0 = \Gamma(\mathbf{X}_t)$ . Then, the forward process of the  $i$ -th ST-ACB can be expressed as:

$$\begin{aligned} \mathbf{w}_c^i &= \mathbf{w}_c^{i-1} \odot \exp(\alpha(\psi(\mathbf{w}_t^{i-1}))) + \phi(\mathbf{w}_t^{i-1}), \\ \mathbf{w}_t^i &= \mathbf{w}_t^{i-1} \odot \exp(\alpha(\rho(\mathbf{w}_c^i))) + \eta(\mathbf{w}_c^i), \end{aligned} \quad (1)$$

where  $\odot$  denotes element-wise multiplication,  $\alpha$  is a Sigmoid function multiplied by a constant factor, and  $\psi(\cdot), \phi(\cdot), \rho(\cdot), \eta(\cdot)$  denote dense network architectures extending to 3D convolutional layers [25].

Given the output of the  $M$ -th ST-ACB, the adversarial video and the residual video can be reconstructed using inverse 3D-DWT with  $\mathbf{X}_a = \Gamma^{-1}(\mathbf{w}_c^M)$  and  $\mathbf{X}_r = \Gamma^{-1}(\mathbf{w}_t^M)$ . Therefore, STIN module is fully invertible and the output videos ( $\mathbf{X}_a, \mathbf{X}_r$ ) contain the same amount of information as the input videos ( $\mathbf{X}_c, \mathbf{X}_t$ ).

**Loss Functions:** We use an adversarial loss  $\mathcal{L}_a$  to guide the optimization of the parameters of STIN. In detail,  $\mathcal{L}_a$  includes a cross-entropy loss for between the predicted class of  $\mathbf{X}_a$  and the target class  $y_t$ , a  $\ell_{2,1}$ -norm based sparse loss for regulating generated perturbations to be more sparse and a low-frequency loss for constraining target contents concealing to high-frequency coefficients of 3D-DWT which leads to more imperceptible results. It can be expressed as:

$$\mathcal{L}_a = \lambda_a \ell_{CE}(F_\phi(\mathbf{X}_a), y_t) + \frac{\beta_a}{T} \|\mathbf{X}_a - \mathbf{X}_c\|_{2,1} + \frac{8\gamma_a}{N} \|\mathbf{X}_{c(III)} - \mathbf{X}_{a(III)}\|_F^2, \quad (2)$$

where  $N = CTWH$ ,  $\lambda_a, \beta_a$  and  $\gamma_a$  are the regularization parameters,  $F_\phi(\cdot)$  is the target classifier, and the subscript (III) denotes the low-low-low-frequency sub-band of 3D-DWT.

### C. Guided Target Video Learning Module

For image adversarial attack, Chen *et al.* [11] propose three methods to select target image, *i.e.*, Highest Confidence Target Image (HCT), Universal Adversarial Perturbations Image (UAP) and Classifier Guided Target Image (CGT), however, they cannot lead to effective and efficient target information learning for video adversarial attack. Specifically, HCT carries a considerable amount of redundant information unrelated to the target class, the UAP approach is unable to successfully generate perturbations for all target classes, and CGT needs to be optimized within a much larger searching space than images.

**GTVL Module:** To improve the effective and efficiency for learning the target video information, we propose a Guided Target Video Learning (GTVL) module to provide suitable target information for STIN module. Specifically, the target feature tensor  $\mathbf{X}_t$  is set to be a learnable variable and updated with the guidance of a guide video  $\mathbf{X}_g$  of the target class as well as the target classification model  $F_\phi(\cdot)$ . Compared with directly using the HCT Video as the target feature tensor, GTVL module can alleviate the influence caused by large amount of redundant information within HCT Video. Compared with the CGT approach, GTVL module utilizes a guide video and a guidance loss to facilitate the fast convergence. As a result, the target feature tensor with higher confidence are effectively generated by GTVL module. Detailed experimental results can be found in Section III.

**Loss Functions:** In order to effectively embed target contents for information exchanging, we apply a guidance loss  $\mathcal{L}_g$  to learn the target feature tensor  $\mathbf{X}_t$  which includes a cross entropy loss between the predicted class of  $\mathbf{X}_t$  and the target class and a MSE loss  $\mathcal{L}_{MSE}$  between  $\mathbf{X}_t$  and  $\mathbf{X}_g$ . The guidance loss can be expressed as:

$$\mathcal{L}_g = \lambda_b \ell_{CE}(F_\phi(\mathbf{X}_t), y_t) + \frac{\beta_b}{N} \|\mathbf{X}_t - \mathbf{X}_g\|_F^2, \quad (3)$$

where  $\lambda_b$  and  $\beta_b$  donates the regularization parameters.

## III. EXPERIMENTS

In this section, we present the quantitative and qualitative results of SVASTIN compared with other state-of-the-art sparse

video adversarial methods. Furthermore, we verify the effectiveness of STIN module, GTVL module and the low-frequency loss  $\mathcal{L}_{III}$ .

### A. Experimental Setup

**Dataset and models.** We evaluate the performance of the comparison methods on Kinetics-400 [23] and UCF-101 [24]. Following [26]–[29], we randomly select one video from each category that is correctly classified by the target classifier as the input benign video. Three commonly used video action recognition models: MVIT [30], SLOWFAST [31], and TSN [32], are used as the target classifier. Specifically, we utilize the pre-trained video action recognition models, including TSN [32], SLOWFAST [31] and MVIT [30] on Kinetics-400 dataset from mmaction2<sup>1</sup>. Besides, we fine-tune these three models on UCF-101 [24] dataset.

**Settings.** For STIN, Adam optimizer with learning rate  $1e^{-4}$  is used to optimize its parameters with respect to Eqn.(2). We empirically set  $\lambda_a = 0.3, \beta_a = 0.4$  and  $\gamma_a = 10$ , respectively. And the number of learnable parameters of STIN is 5.11M. As for 3D convolution layers of ST-ACB, the size of the 3D convolution kernel is (3, 3, 3) and the padding is set to (1, 1, 1). For GTVL, Adam optimizer with learning rate  $1/255$  is used for optimizing  $\mathbf{X}_t$  with respect to Eqn.(3), and the regularization of parameters  $\lambda_b$  and  $\beta_b$  is set to 1 and 0.01, respectively.

**Comparison methods.** Three white-box attack methods have been included for comparison, with a traditional adversarial attack C&W [8] and two sparse attacks methods, including Sparse-Attack [19] and DeepSAVA [21].

**Evaluation metrics.** Six metrics are used to evaluate the performance of different methods, including Mean Square Error (MSE), Structural Similarity Index (SSIM) [33], Peak Signal-to-Noise Ratio (PSNR), Sparsity ( $\ell_{2,1}$ -norm) [19], Fréchet Inception Distance (FID) [34] and Fooling rate (FR).

### B. Evaluation on Targeted Attacks

Table I shows targeted attack performance of different methods on UCF-101 and Kinetics-400. The generated adversarial examples are considered to be successful if the confidence of the target class is greater than 90%. From the results, we can see that the proposed SVASTIN method achieves overall the highest FR while generates adversarial examples with the best quality compared to other methods, especially on perceptual metrics. For example, our proposed SVASTIN method achieves 100% FR in deception the MVIT model on the Kinetics-400 dataset, while having the higher structural and perceptual similarity to the ground-truth video frames than those of comparison methods. In terms of PSNR, our SVASTIN method is 9.41 and 14.54 higher than the Sparse-Attack and DeepSAVA methods, respectively. In terms of the perceptual metric FID, our SVASTIN method is 181.54 and 74.83 lower than the Sparse-Attack and DeepSAVA methods, respectively. Moreover, Fig. 2 shows the visual comparison of our method

<sup>1</sup><https://github.com/open-mmlab/mmaaction2>

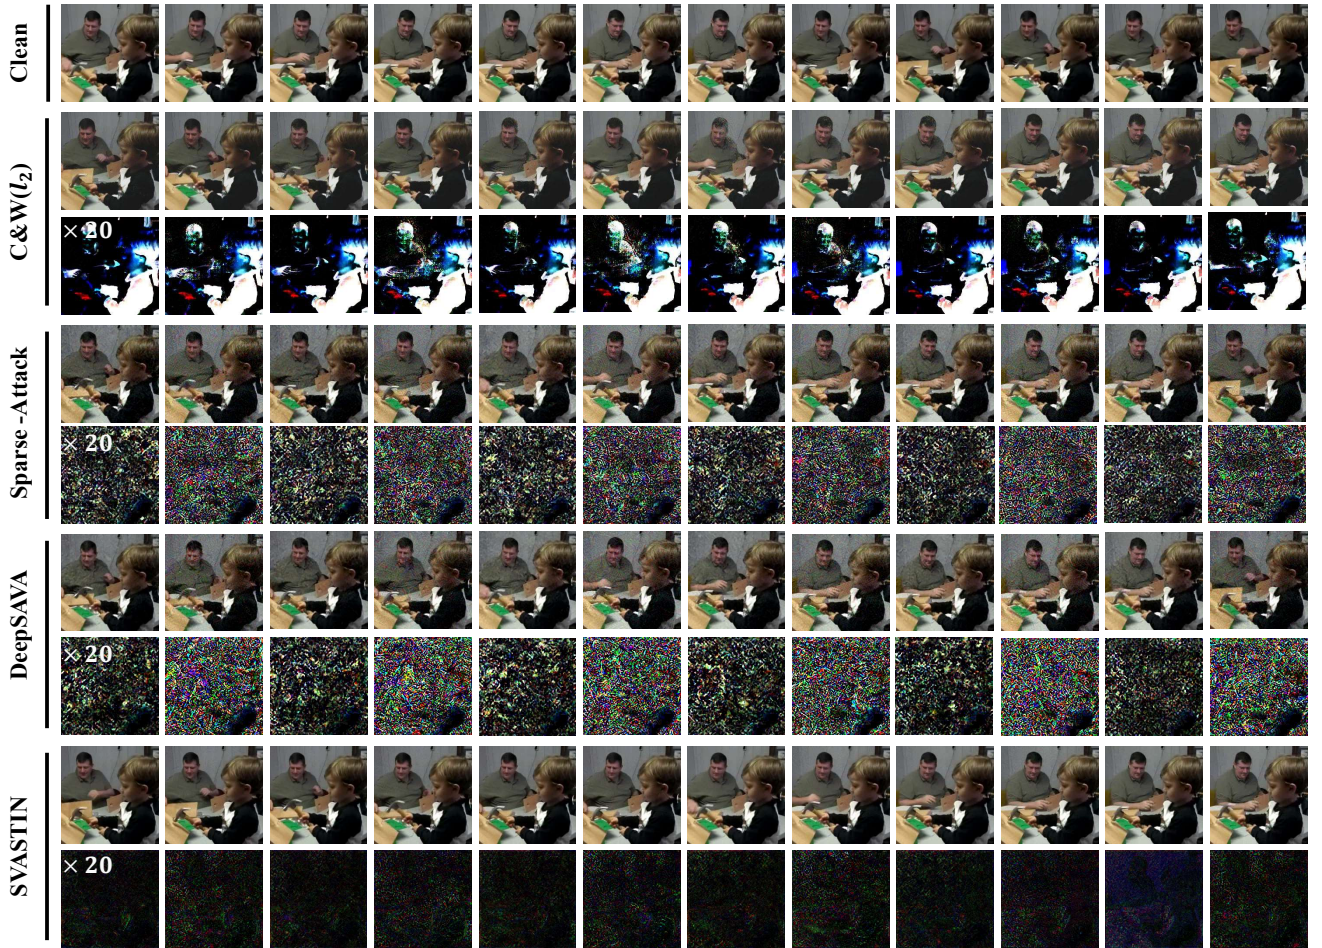


Fig. 2. Visualization of the generated adversarial video and residual images of different methods on UCF-101 dataset against MVIT model. The clean video is successfully classified by the target classifier as *Harming* and the target class is *Shotput*. For each method, the upper row displays the generated adversarial video frames, and lower row shows the residual images which are enlarged by 20 times for better perception.

with three comparison methods. We can see that the proposed SVASTIN method achieves the best visual quality and highest imperceptibility.

### C. Ablation study

**Effectiveness of the STIN module.** STIN module utilizes both the spatial and temporal information of source and target feature tensor for exchanging feature space information. The performance of video adversarial attack methods will be constrained if the temporal feature of the video is not handled properly. Table II shows the attacking performance of the proposed STIN module with 3D-DWT and ST-ACB and IEM in AdvINN [11] with 2D-DWT and 2D convolutions. From the results, we can show that our proposed STIN module achieves better performances than IEM in terms of both the quality of the adversarial videos and the optimization speed.

**Effectiveness of the GTVL module.** Table III shows the performance of three methods for learning target feature tensor. CGT learns the target feature tensor only from the classifier, while HCT utilizes a natural video selecting from target class

as the target feature tensor. As for GTVL module, the target feature tensor  $X_t$  is initialized with a learnable variable, and then randomly select a guide video  $X_g$  from the target class to further fine-tune  $X_g$  to induce misclassification into target class. We can observe that GTVL module plays a vital role in SVASTIN and effectively improves the imperceptibility of adversarial perturbations and convergence speed.

**Effectiveness of the low frequency loss  $\mathcal{L}_{ll}$ .** The 3D-DWT decomposes both the spatial and temporal dimensions of the input videos into 8 low- and high-frequency sub-bands. In order to improve the imperceptibility of adversarial examples, we propose a low-frequency loss to constrain the modification mainly applying to the high-frequency coefficients. It can help to impose smoothness both spatially and temporally. In Table IV, we perform the experiment results on the MVIT model with and without the low-frequency loss  $\mathcal{L}_{ll}$ . We can observe that SVASTIN with  $\mathcal{L}_{ll}$  demonstrates better qualitative performance in terms of MSE, SSIM, PSNR,  $\ell_{2,1}$  and FID, and is with slightly increased optimization speed.

TABLE I  
COMPARISONS WITH DIFFERENT METHODS FOR TARGETED ATTACKS ON BENCHMARK DATASETS AND MODELS. (↑ MEANS THE HIGHER THE BETTER, AND VICE VERSA. THE BEST RESULTS ARE IN BOLD.)

Datasets	Models	Methods	MSE↓	SSIM↑	PSNR↑	$\ell_{2,1}$ ↓	FID↓	FR↑
Kinetics-400 [23]	MVIT [30]	C&W( $l_2$ ) [8]	31.43	0.92	36.09	2.62	12.84	397/400
		Sparse-Attack [19]	55.98	0.74	30.93	4.67	183.45	<b>400/400</b>
		DeepSAVA [21]	153.66	0.66	25.80	12.83	76.74	<b>400/400</b>
		SVASTIN	<b>6.93</b>	<b>0.96</b>	<b>40.34</b>	<b>0.58</b>	<b>1.91</b>	<b>400/400</b>
	SLOWFAST [31]	C&W( $l_2$ ) [8]	79.03	0.91	32.07	7.53	30.65	340/400
		Sparse-Attack [19]	36.91	0.90	32.71	3.52	30.80	393/400
		DeepSAVA [21]	68.71	0.87	30.30	6.59	44.12	395/400
		SVASTIN	<b>7.18</b>	<b>0.96</b>	<b>40.08</b>	<b>0.68</b>	<b>8.10</b>	<b>399/400</b>
	TSN [32]	C&W( $l_2$ ) [8]	35.62	0.93	34.59	2.97	22.27	366/400
		Sparse-Attack [19]	21.57	0.88	35.66	1.80	32.37	348/400
		DeepSAVA [21]	24.29	0.88	35.18	2.07	33.77	367/400
		SVASTIN	<b>5.52</b>	<b>0.96</b>	<b>40.87</b>	<b>0.47</b>	<b>13.16</b>	<b>399/400</b>
UCF-101 [24]	MVIT [30]	C&W( $l_2$ ) [8]	557.50	0.80	27.27	46.55	102.94	93/101
		Sparse-Attack [19]	57.46	0.78	31.19	4.79	80.84	91/101
		DeepSAVA [21]	24.94	0.87	34.87	2.08	42.48	<b>101/101</b>
		SVASTIN	<b>8.36</b>	<b>0.95</b>	<b>39.35</b>	<b>0.70</b>	<b>14.36</b>	<b>101/101</b>
	SLOWFAST [31]	C&W( $l_2$ ) [8]	60.06	0.82	34.21	5.73	140.83	45/101
		Sparse-Attack [19]	23.82	0.90	34.90	2.27	40.59	<b>95/101</b>
		DeepSAVA [21]	18.77	0.90	36.86	1.79	35.11	83/101
		SVASTIN	<b>12.79</b>	<b>0.92</b>	<b>37.49</b>	<b>1.21</b>	<b>34.09</b>	91/101
	TSN [32]	C&W( $l_2$ ) [8]	96.83	0.89	30.55	8.09	34.93	99/101
		Sparse-Attack [19]	28.87	0.86	34.23	2.41	62.72	92/101
		DeepSAVA [21]	67.91	0.77	30.74	5.67	81.55	<b>101/101</b>
		SVASTIN	<b>9.87</b>	<b>0.94</b>	<b>38.42</b>	<b>1.02</b>	<b>18.74</b>	100/101

TABLE II  
ABLATION STUDY: THE EFFECTIVENESS OF STIN MODULE.

2D	3D	MSE↓	SSIM↑	PSNR↑	$\ell_{2,1}$ ↓	FID↓	Epochs↓	FR↑
✓		18.98	0.91	35.42	1.58	5.46	55.71	<b>400/400</b>
	✓	<b>6.93</b>	<b>0.96</b>	<b>40.34</b>	<b>0.58</b>	<b>1.91</b>	<b>9.89</b>	<b>400/400</b>

TABLE III  
ABLATION STUDY: THE EFFECTIVENESS OF GTVL MODULE.

Methods	MSE↓	SSIM↑	PSNR↑	$\ell_{2,1}$ ↓	FID↓	Epochs↓	FR↑
HCT	34.09	0.88	32.94	2.84	44.82	25.60	162/400
CGT	56.98	0.77	30.58	4.76	19.95	11.88	<b>400/400</b>
GTVL	<b>6.93</b>	<b>0.96</b>	<b>40.34</b>	<b>0.58</b>	<b>1.91</b>	<b>9.89</b>	<b>400/400</b>

#### IV. CONCLUSION

In this paper, we proposed an adversarial video attack framework, termed as SVASTIN, to generate adversarial video examples based on Spatio-Temporal Invertible Neural Networks (STIN) and a Guided Target Video Learning (GTVL) module. By utilizing the information preservation property of INNs, the

TABLE IV  
ABLATION STUDY: THE EFFECTIVENESS OF THE LOW FREQUENCY LOSS.

$\mathcal{L}_{ll}$	MSE↓	SSIM↑	PSNR↑	$\ell_{2,1}$ ↓	FID↓	Epochs↓	FR↑
✗	9.19	0.95	39.28	0.77	6.85	<b>9.70</b>	<b>400/400</b>
✓	<b>6.93</b>	<b>0.96</b>	<b>40.34</b>	<b>0.58</b>	<b>1.91</b>	9.89	<b>400/400</b>

proposed STIN Module, driven by the adversarial loss function, performs information exchanging at the spatio-temporal feature level and achieves simultaneously dropping discriminant information of benign video and adding class-specific features of the target feature tensor learned by GTVL to craft adversaries. Extensive experimental results have shown that the proposed SVASTIN method can generate more imperceptible adversarial examples with higher fooling rate.

#### REFERENCES

- [1] Andrej Karpathy, George Toderici, Sanketh Shetty, Thomas Leung, Rahul Sukthankar, and Li Fei-Fei, "Large-scale video classification with convolutional neural networks," *2014 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 1725–1732, 2014.

- [2] João Carreira and Andrew Zisserman, "Quo vadis, action recognition? a new model and the kinetics dataset," *2017 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 4724–4733, 2017.
- [3] Xing Zhang, Zuxuan Wu, Zejia Weng, H. Fu, Jingjing Chen, Yu-Gang Jiang, and Larry S. Davis, "Videolt: Large-scale long-tailed video recognition," *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 7940–7949, 2021.
- [4] Yi Zhu, Xinyu Li, Chunhui Liu, Mohammadreza Zolfaghari, Yuanjun Xiong, Chongruo Wu, Zhi Zhang, Joseph Tighe, R. Manmatha, and Mu Li, "A comprehensive study of deep video action recognition," *ArXiv*, vol. abs/2012.06567, 2020.
- [5] Ziwei Yang, Yahong Han, and Zheng Wang, "Catching the temporal regions-of-interest for video captioning," in *Proceedings of the 25th ACM international conference on Multimedia*, 2017, pp. 146–153.
- [6] Sheng Liu, Zhou Ren, and Junsong Yuan, "Sibnet: Sibling convolutional encoder for video captioning," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 43, pp. 3259–3272, 2018.
- [7] Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian J. Goodfellow, and Rob Fergus, "Intriguing properties of neural networks," in *2nd International Conference on Learning Representations, ICLR 2014, Banff, AB, Canada, April 14-16, 2014, Conference Track Proceedings*, 2014.
- [8] Nicholas Carlini and David A. Wagner, "Towards evaluating the robustness of neural networks," *2017 IEEE Symposium on Security and Privacy (SP)*, pp. 39–57, 2016.
- [9] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, and Pascal Frossard, "Deepfool: A simple and accurate method to fool deep neural networks," *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 2574–2582, 2015.
- [10] Ranjie Duan, Yuefeng Chen, Dantong Niu, Yun Yang, A Kai Qin, and Yuan He, "Advdrop: Adversarial attack to DNNs by dropping information," in *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021, pp. 7506–7515.
- [11] Zihan Chen, Ziyue Wang, Jun-Jie Huang, Wentao Zhao, Xiao Liu, and Dejian Guan, "Imperceptible adversarial attack via invertible neural networks," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2023, vol. 37, pp. 414–424.
- [12] Ziyue Wang, Jun-Jie Huang, Tianrui Liu, Zihan Chen, Wentao Zhao, Xiao Liu, Yi Pan, and Lin Liu, "Multi-patch adversarial attack for remote sensing image classification," in *Proceedings of The 7th APWeb-WAIM International Joint Conference on Web and Big Data*, 2023.
- [13] Jun-Jie Huang, Ziyue Wang, Tianrui Liu, Wenhan Luo, Zihan Chen, Wentao Zhao, and Meng Wang, "DeMPAA: Deployable multi-mini-patch adversarial attack for remote sensing image classification," *IEEE Transactions on Geoscience and Remote Sensing*, 2024.
- [14] Laurent Dinh, David Krueger, and Yoshua Bengio, "Nice: Non-linear independent components estimation," *CoRR*, vol. abs/1410.8516, 2014.
- [15] Jun-Jie Huang and Pier Luigi Dragotti, "LINN: Lifting inspired invertible neural network for image denoising," in *2021 29th European Signal Processing Conference (EUSIPCO)*. IEEE, 2021, pp. 636–640.
- [16] Jun-Jie Huang and Pier Luigi Dragotti, "WINNet: Wavelet-inspired invertible network for image denoising," *IEEE Transactions on Image Processing*, vol. 31, pp. 4377–4392, 2022.
- [17] Ruqi Bai, Saurabh Bagchi, and David I. Inouye, "Exploring adversarial examples via invertible neural networks," *ArXiv*, vol. abs/2012.13111, 2020.
- [18] Tianqi Cui, Tom S. Bertalan, George Pappas, Manfred Morari, Ioannis G. Kevrekidis, and Mahyar Fazlyab, "Certified invertibility in neural networks via mixed-integer programming," in *Conference on Learning for Dynamics & Control*, 2023.
- [19] Xingxing Wei, Jun Zhu, Sha Yuan, and Hang Su, "Sparse adversarial perturbations for videos," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2019, vol. 33, pp. 8973–8980.
- [20] Nathan Inkawhich, Matthew Inkawhich, Yiran Chen, and Hai Li, "Adversarial attacks for optical flow-based action recognition classifiers," *arXiv preprint arXiv:1811.11875*, 2018.
- [21] Ronghui Mu, Wenjie Ruan, Leandro Soriano Marcolino, and Qiang Ni, "Sparse adversarial video attacks with spatial transformations," in *British Machine Vision Conference*, 2021.
- [22] Kaixun Jiang, Zhaoyu Chen, Xinyu Zhou, Jingyu Zhang, Lingyi Hong, JiaFeng Wang, Bo Li, Yan Wang, and Wenqiang Zhang, "Towards decision-based sparse attacks on video recognition," in *Proceedings of the 31st ACM International Conference on Multimedia*, 2023, pp. 1443–1454.
- [23] Will Kay, João Carreira, Karen Simonyan, Brian Zhang, Chloe Hillier, Sudheendra Vijayanarasimhan, Fabio Viola, Tim Green, Trevor Back, Apostol Natssev, Mustafa Suleyman, and Andrew Zisserman, "The kinetics human action video dataset," *ArXiv*, vol. abs/1705.06950, 2017.
- [24] Khurram Soomro, Amir Roshan Zamir, and Mubarak Shah, "UCF101: A dataset of 101 human actions classes from videos in the wild," *ArXiv*, vol. abs/1212.0402, 2012.
- [25] Xintao Wang, Ke Yu, Shixiang Wu, Jinjin Gu, Yihao Liu, Chao Dong, Chen Change Loy, Yu Qiao, and Xiaoou Tang, "Esrgan: Enhanced super-resolution generative adversarial networks," in *ECCV Workshops*, 2018.
- [26] Linxi Jiang, Xingjun Ma, Shaoxiang Chen, James Bailey, and Yu-Gang Jiang, "Black-box adversarial attacks on video recognition models," in *Proceedings of the 27th ACM International Conference on Multimedia*, 2019, pp. 864–872.
- [27] Zhipeng Wei, Jingjing Chen, Zuxuan Wu, and Yu-Gang Jiang, "Cross-modal transferable adversarial attacks from images to videos," *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 15044–15053, 2021.
- [28] Kaixun Jiang, Zhaoyu Chen, Tony Huang, Jiafeng Wang, Dingkan Yang, Bo Li, Yan Wang, and Wenqiang Zhang, "Efficient decision-based black-box patch attacks on video recognition," *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 4356–4366, 2023.
- [29] Zhipeng Wei, Jingjing Chen, Zuxuan Wu, and Yu-Gang Jiang, "Boosting the transferability of video adversarial examples via temporal translation," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2022, vol. 36, pp. 2659–2667.
- [30] Yanghao Li, Chaoxia Wu, Haoqi Fan, Karttikeya Mangalam, Bo Xiong, Jitendra Malik, and Christoph Feichtenhofer, "MViTv2: Improved multiscale vision transformers for classification and detection," *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 4794–4804, 2021.
- [31] Christoph Feichtenhofer, Haoqi Fan, Jitendra Malik, and Kaiming He, "Slowfast networks for video recognition," *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 6201–6210, 2018.
- [32] Limin Wang, Yuanjun Xiong, Zhe Wang, Yu Qiao, Dahua Lin, Xiaoou Tang, and Luc Van Gool, "Temporal segment networks: Towards good practices for deep action recognition," in *European Conference on Computer Vision (ECCV)*. Springer, 2016, pp. 20–36.
- [33] Zhou Wang, Alan C Bovik, Hamid R Sheikh, and Eero P Simoncelli, "Image quality assessment: from error visibility to structural similarity," *IEEE Transactions on Image Processing*, vol. 13, no. 4, pp. 600–612, 2004.
- [34] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter, "Gans trained by a two time-scale update rule converge to a local nash equilibrium," *Advances in Neural Information Processing Systems*, vol. 30, 2017.