

---

# CorDA: Context-Oriented Decomposition Adaptation of Large Language Models

---

Yibo Yang<sup>1</sup>, Xiaojie Li<sup>2,3</sup>, Zhongzhu Zhou<sup>4</sup>, Shuaiwen Leon Song<sup>4</sup>, Jianlong Wu<sup>2</sup>  
 Liqiang Nie<sup>2</sup>, Bernard Ghanem<sup>1</sup>

<sup>1</sup>King Abdullah University of Science and Technology (KAUST)

<sup>2</sup>Harbin Institute of Technology (Shenzhen) <sup>3</sup>Peng Cheng Laboratory <sup>4</sup>University of Sydney

<https://github.com/iboing/CorDA>

## Abstract

Parameter-efficient fine-tuning (PEFT) has emerged as a promising technique to enable efficient fine-tuning of large language models (LLMs) with largely reduced trainable parameters. However, current PEFT methods build adapters without considering the context of downstream task to learn, or the context of important knowledge to maintain. As a result, there is often a performance gap compared to full-parameter finetuning, and meanwhile the finetuned model suffers from catastrophic forgetting of the pre-trained world knowledge. In this paper, we propose **CorDA**, a **Context-oriented Decomposition Adaptation** method that builds learnable adapters from weight decomposition oriented by the context of downstream task or world knowledge. Concretely, we collect a few data samples, and perform singular value decomposition for each linear layer of a pre-trained LLM multiplied by the covariance matrix of the input activation using these samples. The inverse of the covariance matrix is multiplied with the decomposed components to reconstruct the original weights. By doing so, the context of the representative samples is captured through deciding the factorizing orientation. Our method enables two options, the **knowledge-preserved adaptation** and the **instruction-previewed adaptation**. For the former, we use question-answering samples to obtain the covariance matrices, and use the decomposed components with the smallest  $r$  singular values to initialize a learnable adapter, with the others frozen such that the world knowledge is better preserved. For the latter, we use the instruction data from the finetuning task, such as math or coding, to orientate the decomposition and train the largest  $r$  components that capture the main characteristics of the task to learn. We conduct extensive experiments on Math, Code, and Instruction Following tasks. Our knowledge-preserved adaptation not only achieves better performance than LoRA on finetuning tasks, but also mitigates the forgetting of world knowledge. Our instruction-previewed adaptation is able to further enhance the finetuning performance, surpassing full-parameter finetuning and the state-of-the-art PEFT methods such as LoRA, DoRA, and PiSSA.

## 1 Introduction

Large language models (LLMs) have shown remarkable abilities in a wide range of challenging tasks, including question-answering [11, 47], common sense reasoning [6], and instruction following [80]. While being powerful, LLMs demand exorbitant computation and memory cost when finetuning the whole model on downstream tasks due to the huge model capacity. To enable resource-friendly adaptation on downstream tasks, parameter-efficient fine-tuning (PEFT) methods are proposed to largely reduce the number of trainable parameters, by only finetuning the newly added adapters [20, 21, 17] or tokens [31, 33, 49], with the original pre-trained weights frozen.

Among these PEFT methods, LoRA [21] is increasingly attractive because it is able to keep the model architecture unchanged after finetuning so does not induce extra burden in inference. LoRA suggests that the weight change in finetuning presents a low rank structure, and employs low-rank matrices with a low hidden dimension to approximate the adaptation [21]. Following studies introduce adaptive low rank choice among different layers [73, 55, 70], decouple the learning of magnitude and direction [38], combine LoRA with pruning or quantization [10, 61, 34, 72], and further reduce the number of trainable parameters [26, 51]. However, existing studies build learnable adapters without considering any data context. As a result, the initialized adapter may not be the optimal choice for one downstream task to learn. Moreover, even if PEFT methods only train a small number of parameters, the finetuned model will still suffer from catastrophic forgetting, losing much of the world knowledge contained in the pre-trained LLM [13, 57, 78].

To this end, we propose a new PEFT method **CorDA**, based on **Context-oriented Decomposition Adaptation**. It adopts the same low-rank design as LoRA [21], namely introducing two low rank matrices for each linear layer as a learnable adapter, but associates the context of world knowledge or finetuning task with the process of building these adapters. First, we randomly collect a few data samples and assume that they contain representative context of the corresponding task. For example, the question from a question-answering dataset well indicates the ability of preserving the corresponding knowledge, and the query to write a code carries the context of the coding task. We feed these samples into a pre-trained LLM, and obtain the covariance matrix of the input activation of each linear layer, *i.e.*,  $C = XX^T \in \mathbb{R}^{d_{in} \times d_{in}}$ , where  $X$  is the input of this layer. We then perform singular value decomposition (SVD) for the weight  $W \in \mathbb{R}^{d_{out} \times d_{in}}$  multiplied by the covariance matrix, *i.e.*,  $SVD(WC) = U\Sigma V^T$ , where  $U$  and  $V$  are singular vectors and  $\Sigma$  is the diagonal matrix with the singular values arranged in descending order. In this way, the representative context expressed by these covariance matrices is able to direct the factorizing orientation. Finally, the inverse of these covariance matrices is multiplied with the decomposed components to hold the same inference result with the original model at initialization, *i.e.*,  $\hat{W} = U\Sigma V^T C^{-1}$ , where  $\hat{W}$  is the weight after decomposition and reconstruction.

Our method supports two optional modes for practitioners, **knowledge-preserved adaptation** and **instruction-previewed adaptation**. LLM finetuning on downstream tasks is always accompanied by the damage of world knowledge acquired from massive pre-training data [13]. Our knowledge-preserved adaptation enables to learn new tasks effectively while keeping world knowledge as sound as possible. In this mode, we use questions from question-answering dataset, such as TriviaQA [23] and Natural Questions [27, 29], to obtain the covariance matrices whose pattern corresponds to the LLM ability in retrieving knowledge. After SVD with these covariance matrices, we use the components with the smallest  $r$  singular values, *i.e.*,  $U_{[:, -r:]}$ ,  $\Sigma_{[-r:]}$ , and  $(V^T C^{-1})_{[-r:, :]}$ <sup>1</sup>, to initialize a learnable low-rank adapter, and the other components that are key to preserving knowledge are frozen. In some cases, where one may only pursue a high performance on the finetuning task without any interest in maintaining world knowledge, our instruction-previewed adaptation is suggested. In this mode, we use the instruction and response from the finetuning task, *e.g.* query to write a code and its answer, to produce the covariance matrices. Similarly, the pre-trained weights will be decomposed in an orientation such that the context of the finetuning task dominates the principle singular values and vectors. Therefore, we use the largest  $r$  components, *i.e.*,  $U_{[:, :r]}$ ,  $\Sigma_{[:r]}$ , and  $(V^T C^{-1})_{[:r, :]}$ , to initialize a learnable low-rank adapter, with the other components frozen. The adapter built upon the context of the finetuning task well accommodates the new ability, and thus leads to a better finetuning performance.

Our method brings flexibility in choosing between stronger finetuning performance or more preserved world knowledge, and can be adopted according to the practical demand. Both the two modes are as efficient as LoRA [21]. After finetuning, the adapter can be merged with the frozen part in the same manner as LoRA. In experiments, CorDA in knowledge-preserved adaptation not only enjoys better finetuning performance than LoRA on Math [9, 66], Code [8, 3], and Instruction Following [75], but also largely mitigates the deterioration of performance on world knowledge benchmarks including TriviaQA [23], NQ open [29], and WebQS [4]. The instruction-previewed adaptation is able to further strengthen the performance on finetuning tasks, surpassing full-parameter finetuning and the state-of-the-art PEFT methods including LoRA [21], DoRA [38], and PiSSA [43].

<sup>1</sup> $U_{[:, -r:]}$ ,  $\Sigma_{[-r:]}$ , and  $(V^T C^{-1})_{[-r:, :]}$  represent the last  $r$  columns of  $U$ , the last  $r$  diagonal elements of  $\Sigma$ , and the last  $r$  rows of  $V^T C^{-1}$ , respectively.  $U_{[:, :r]}$ ,  $\Sigma_{[:r]}$ , and  $(V^T C^{-1})_{[:r, :]}$  represent the first  $r$  columns of  $U$ , the first  $r$  diagonal elements of  $\Sigma$ , and the first  $r$  rows of  $V^T C^{-1}$ , respectively.

## 2 Related Work

**Parameter-Efficient Fine-Tuning.** Since large language models (LLMs) have tens and even hundreds of billions of parameters [1, 5], full-parameter finetuning will cause unbearable computation and memory cost. Parameter-efficient fine-tuning (PEFT) is developed to reduce resource consumption by only finetuning a small number of learnable parameters [12, 60]. Adapter-based methods introduce additional modules into LLMs and only finetune them during finetuning [20, 17, 30, 41, 45, 24]. Another line of research appends extra soft prompts into the input or hidden layers and only train these learnable vectors [31, 33, 49, 79]. However, most of these methods change the model architecture or increase the inference burden. Based on the insight that the weight change after finetuning possesses a low rank structure [32, 2], low-rank adaptation (LoRA) [21] proposes to use two low-rank small matrices as the learnable adapter, without modifying model architecture or bringing inference cost after finetuning. LoRA has inspired a range of variants that employ adaptive low rank in different layers [73, 55, 70], explore the adapter design [38, 7, 46, 74], combine LoRA with pruning [72], quantization [10, 61, 34], and mixture-of-expert [37, 13], and introduce alternative way to initialize the adapter [43]. Nevertheless, existing PEFT methods rarely consider data context when building the learnable adapter. Data context has been proved to be instrumental in guiding quantization and compression [36, 68, 28]. In our study, we utilize data context for PEFT, building adapters based on context-oriented decomposition to better maintain world knowledge or accommodate new ability.

**Knowledge Forgetting.** Deep learning models are prone to drastically forgetting the acquired knowledge when adapting to a new task, known as catastrophic forgetting [14, 50, 25, 48, 40, 65]. A series of methods has been proposed to mitigate knowledge forgetting using knowledge distillation [35, 19], rehearsal [52, 64], and dynamic architecture [62]. In the era of large models [58], however, world knowledge is acquired by pre-training on massive data, which could be intractable to re-use in finetuning. The huge model capacity also hinders the feasibility of knowledge distillation and dynamic architecture, especially in the case of continuous finetuning [16, 69, 53, 15, 22]. Some studies introduce extra LLaMA layers [57] or mixture of experts [13] with the pre-trained layers frozen to strike a balance between keeping world knowledge and learning new tasks. Alternative approaches adopt merging schemes to enable diverse abilities [71, 67, 78]. Different from these studies, our method enables to achieve world knowledge maintaining in the process of parameter-efficient finetuning, without changing model architecture or relying on a post-merging step.

## 3 Method

We review the LoRA method in Sec. 3.1. We develop our context-oriented decomposition in Sec. 3.2, which provides the basis of our knowledge-preserved adaptation and instruction-privileged adaptation introduced in Sec. 3.3 and Sec. 3.4, respectively.

### 3.1 Preliminaries on Low-Rank Adaptation

LoRA suggests that the weight change in LLM finetuning presents a low rank structure, and thus proposes to use the product of two low rank matrices to learn the weight change with the pre-trained weights frozen during finetuning [21]. Given the pre-trained weight  $W \in \mathbb{R}^{d_{out} \times d_{in}}$  from an LLM, the weight after finetuning can be formulated as:

$$W^* = W + \Delta W = W + BA, \tag{1}$$

where  $W^*$  is the weight after finetuning,  $\Delta W$  is the weight change, and  $BA$  is the low rank decomposition of  $\Delta W$  into two smaller matrices  $B \in \mathbb{R}^{d_{out} \times r}$  and  $A \in \mathbb{R}^{r \times d_{in}}$  with an intrinsic rank of  $r \ll \min(d_{out}, d_{in})$ . In this way, the number of learnable parameters can be largely reduced by freezing the pre-trained weight  $W$  and only finetuning the matrices  $B$  and  $A$ . LoRA adopts the Kaiming initialization [18] to randomly initialize  $A$ , and  $B$  is initialized as an all-0 matrix such that  $\Delta W = 0$  at the start of training to circumvent a deviation from the pre-trained model. After finetuning, the learnable adapter  $BA$  can be merged into the pre-trained weight  $W$  without changing the original model architecture and introducing extra inference burden.

Despite the success of LoRA-based methods, when building the learnable adapter, existing studies widely ignore the data context from the target ability that users are particularly concerned with.

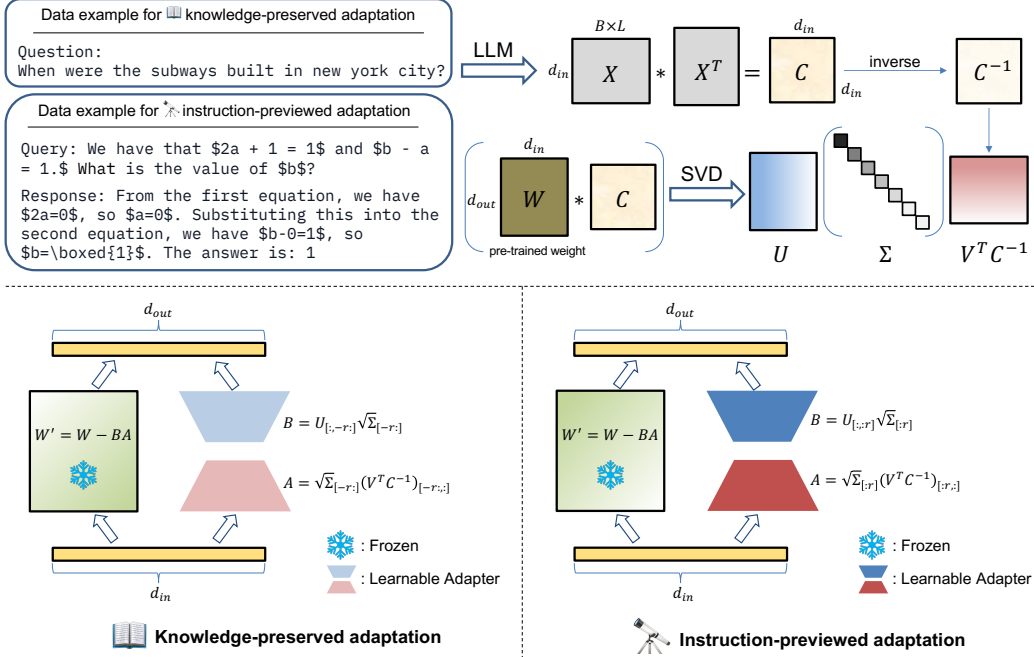


Figure 1: An overall illustration of our proposed method. We perform singular value decomposition oriented by the covariance matrix to aggregate task context into the principle components (up), which are frozen for maintaining world knowledge (down left) or utilized to initialize the learnable adapter for better finetuning performance (down right). The dark-colored adapter refers to the components with the largest  $r$  singular values, while the light one is composed of the smallest  $r$  components.

### 3.2 Context-Oriented Decomposition

Pre-trained large language models are endowed with multi-faced abilities, such as answering the question regarding world knowledge, common sense reasoning, and instruction following. When different kinds of input messages are fed into an LLM, *e.g.*, a question in some domain and a query to solve a math problem, even though they are processed by the same pre-trained weights, different abilities are triggered. The covariance matrix of each layer’s activation will exhibit different outlier patterns as they are responsive to the task triggered to highlight different aspects of the pre-trained weight. Therefore, the covariance matrix is able to capture task context. Inspired by this insight, we leverage the covariance matrix inside LLM to build adapters catering to a certain ability.

The process of our context-oriented decomposition is shown in Figure 1. First, we randomly collect some samples from the training data of some task with interest, *e.g.*, question answering or Math, and feed these samples into the LLM used to finetune. Denote  $X \in \mathbb{R}^{d_{in} \times BL}$  as the input activation of a linear layer where  $d_{in}$  is the input dimension,  $B$  is the number of samples we collect, and  $L$  represents the sequence length. We have the covariance matrix  $C = X X^T \in \mathbb{R}^{d_{in} \times d_{in}}$ . We then perform singular value decomposition for the weight multiplied by the covariance matrix as:

$$\text{SVD}(WC) = U \Sigma V^T = \sum_{i=1}^R \sigma_i \mathbf{u}_i \mathbf{v}_i^T, \quad (2)$$

where  $W \in \mathbb{R}^{d_{out} \times d_{in}}$  is the weight of this linear layer,  $U \in \mathbb{R}^{d_{out} \times d_{out}}$  and  $V \in \mathbb{R}^{d_{in} \times d_{in}}$  are orthogonal matrices containing singular vectors  $\mathbf{u}_i \in \mathbb{R}^{d_{out}}$  and  $\mathbf{v}_i \in \mathbb{R}^{d_{in}}$ ,  $\Sigma \in \mathbb{R}^{d_{out} \times d_{in}}$  is a diagonal matrix with singular values  $\sigma_i$  on its diagonal arranged in descending order, and  $R$  is the rank (the number of non-zero singular values) of  $WC$ , *i.e.*,  $R \leq \min\{d_{out}, d_{in}\}$ .

To not change the inference result at the initialization of finetuning, we reconstruct  $W$  by:

$$\hat{W} = \text{SVD}(WC) C^{-1} = U \Sigma (V^T C^{-1}) = \sum_{i=1}^R \sigma_i \mathbf{u}_i \hat{\mathbf{v}}_i^T, \quad (3)$$

where  $C^{-1}$  denotes the inverse of  $C$ , and  $\hat{\mathbf{v}}_i^T$  is the  $i$ -th row vector of  $V^T C^{-1}$ . In case the covariance matrix  $C$  is not invertible, we adopt a strategy to dynamically add positive values on the diagonal elements of  $C$  to ensure invertible. Concretely, we multiply a positive coefficient with the average value of the diagonal elements of  $C$ , and add it on the diagonal. Then we calculate the  $\ell_2$  distance between  $CC^{-1}$  and an identity matrix. If it is higher than a threshold, we double the coefficient and perform this step again, until the distance reaches below the threshold.

After our context-oriented decomposition, the first several components of  $\mathbf{u}_i$  and  $\hat{\mathbf{v}}_i$  with the largest singular values  $\sigma_i$  depict the dominant characteristics of the task associated with  $C$ . We can decide either to maintain these key components to not sacrifice the corresponding ability, or to adapt them for better performance on the task, which leads to our two implementation modes in the following two subsections, respectively.

### 3.3 Mode 1: Knowledge-Preserved Adaptation

We introduce knowledge-preserved adaptation that enables to learn new tasks while maintaining world knowledge. In this mode, we use the question data from question-answering training data, such as TriviaQA [23] and Natural Questions [27, 29], to obtain the covariance matrices whose pattern corresponds to the knowledge retrieving ability of the LLM. When finetuning on a new task, as shown in Figure 1, we use the last  $r$  components with the smallest  $r$  singular values in Eq. (3) to build learnable adapters as:

$$W' = W - BA, \quad B = U_{[:, -r:]} \sqrt{\Sigma_{[-r:]}}^{-1}, \quad A = \sqrt{\Sigma_{[-r:]}} (V^T C^{-1})_{[-r:, :]}, \quad (4)$$

where  $B \in \mathbb{R}^{d_{out} \times r}$  and  $A \in \mathbb{R}^{r \times d_{in}}$  are the initialized matrices in the learnable adapter,  $BA = \sum_{i=R-r+1}^R \sigma_i \mathbf{u}_i \hat{\mathbf{v}}_i^T$  corresponds to the last  $r$  components in Eq. (3),  $\sqrt{\Sigma_{[-r:]}}^{-1}$  is a diagonal matrix with the squared root of the smallest  $r$  singular values on the diagonal, and  $W'$  corresponding to the first  $R - r$  components in Eq. (3) is frozen during finetuning. We have  $W'$  as the difference between  $W$  and  $BA$  instead of summing the first  $R - r$  components to avoid the numerical error between  $\hat{W}$  and  $W$  introduced by the decomposition and inversion operations. After finetuning, the learned matrices  $B^*$  and  $A^*$  can be merged into  $W'$  as  $W^* = W' + B^* A^*$ . This mode is featured by preserving world knowledge as the knowledge retrieving ability captured by the principle  $R - r$  components is frozen. It is also more effective than a zero-initialized adapter in learning new abilities as verified by our experiments.

### 3.4 Mode 2: Instruction-Previewed Adaptation

In the circumstance that pursuing a higher performance on the finetuning task is the priority, our instruction-previewed adaptation will be favorable. In this mode, we collect instruction and response from the training data used for finetuning, *e.g.* the query to solve a math problem and its answer shown in Figure 1 as an example. The prompts are fed into the LLM to produce the covariance matrices whose pattern is associated with the task to learn. We use the first  $r$  components with the largest  $r$  singular values in Eq. (3) to build learnable adapters as:

$$W' = W - BA, \quad B = U_{[:, :r]} \sqrt{\Sigma_{[:r]}}^{-1}, \quad A = \sqrt{\Sigma_{[:r]}} (V^T C^{-1})_{[:r, :]}, \quad (5)$$

where  $B$  and  $A$  are the initialized matrices in the learnable adapter,  $BA = \sum_{i=1}^r \sigma_i \mathbf{u}_i \hat{\mathbf{v}}_i^T$  corresponds to the first  $r$  components in Eq. (3),  $\sqrt{\Sigma_{[:r]}}^{-1}$  is the squared root of the largest  $r$  singular values in a diagonal matrix. Similar to knowledge-preserved adaptation,  $W'$  containing the remaining  $R - r$  components is frozen during finetuning. This mode enables the initialized adapters to pre-capture the main characteristics of the finetuning task, leading to stronger performance after training. A recently proposed method [43] also performs SVD and uses the first  $r$  components to initialize an adapter for finetuning. However, their decomposition is agnostic with respect to any data context. Our adapter capturing the task context in advance can well accommodate the new ability and lead to better finetuning performances in our experiments.

## 4 Experiments

In experiments, we finetune the pre-trained large language model LLaMA-2-7b [54] on Math, Code, and Instruction Following tasks, and also apply our method to the General Language Understanding



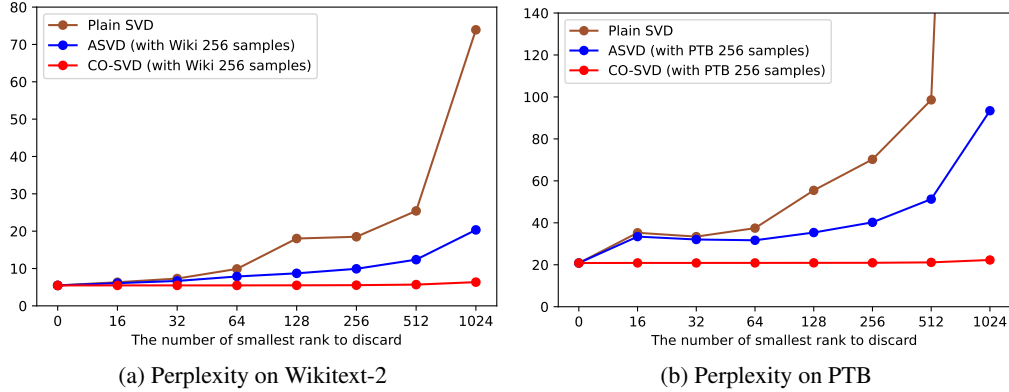


Figure 2: Perplexity (lower is better) on (a) Wikitext-2 and (b) Penn TreeBank (PTB) after decomposing the LLaMA-2-7B weights and reconstruction discarding the smallest  $r$  singular values and their singular vectors. We compare our context-oriented decomposition (CO-SVD) with plain SVD and ASVD. The perplexity of plain SVD on PTB at  $r = 1024$  is 763.4, which is out of the shown range.

Evaluation (GLUE) benchmark with RoBERTa<sub>base</sub> [39]. The world knowledge is evaluated by the exact match scores (%) on TriviaQA [23], NQ open [29], and WebQS [4]. Following the settings in [43], the Math ability is trained on MetaMathQA [66] and tested on GSM8k [9] and Math [66] validation sets. Code is trained on CodeFeedback [77] and tested on HumanEval [8] and MBPP [3]. Instruction following is trained on WizardLM-Evol-Instruct [59] and tested on MTBench [76]. The complete implementation details are described in Appendix A.

#### 4.1 Analysis of the Ability to Capture Context

We conduct an experiment to demonstrate the ability of our proposed decomposition method in Sec. 3.2 to capture context in its principle components. We use different methods including the Plain SVD, ASVD [68], and our Context-Oriented SVD (CO-SVD), to perform full decomposition of the LLaMA-2-7B pre-trained weights in all layers, and then discard the smallest  $r$  singular values and their corresponding left and right singular vectors to reconstruct the weights for testing.

As shown in Figure 2, as the number of discarded ranks increases, the performances with Plain SVD on both Wikitext-2 [44] and PTB [42] are getting worse steeply. ASVD considers data context using activation absolute mean values, and helps to relieve the deterioration compared to Plain SVD. However, when discarding more than 256 ranks, the Perplexity also diverges sharply. In contrast, our method is able to maintain a stable performance very close to the original pre-trained weights even when the smallest 1024 components are discarded. The result indicates that our method is proficient with aggregating context from limited samples (256 Wiki or PTB samples in this example) into the principle components. It also evidences the potential of our method to maintain important knowledge when freezing the principle components and to learn new abilities when adapting these components. The detailed numbers of the experiment in Figure 2 are listed in Table 6 (Appendix B), where we also test the effect of sample number and dataset choice when collecting the covariance matrices.

#### 4.2 Knowledge-Preserved Adaptation Results

We finetune LLaMA-2-7B with full finetuning, LoRA, PiSSA, and our proposed CorDA on Math, Code, and Instruction Following tasks. In the knowledge-preserved adaptation mode, we randomly sample 256 questions from the NQ open training set and collect covariance matrices to initialize the adapters by Eq. (4). We report the finetuning performance and also the world knowledge performance of the finetuned model to manifest the overall ability of both new task learning and world knowledge maintaining. As shown in Table 1a, after finetuning on Math, all the three compared methods, full finetuning, LoRA, and PiSSA, suffer from drastic performance drop on TriviaQA and NQ open. Especially on NQ open, the ability is almost lost. PiSSA achieves the best accuracies on both GSM8k and Math, but meanwhile has the lowest results on the world knowledge benchmarks among the four methods. As a comparison, our method not only enjoys better finetuning performances than LoRA, but also achieves the best results on the three world knowledge benchmarks.

Table 1: The experimental results of CorDA in the knowledge-preserved adaptation mode and comparison with full finetuning, LoRA, and PiSSA. LLaMA-2-7B is used to finetune on (a) Math, (b) Code, and (c) Instruction Following tasks. The rank  $r$  of LoRA, PiSSA, and CorDA is 128. CorDA is initialized with the NQ open samples to collect the covariance matrices. All methods are implemented by us under the same training and evaluation settings. The row of “LLaMA-2-7B” shows the world knowledge performance of the original pre-trained model.

(a) Math							
Method	#Params	Trivia QA	NQ open	WebQS	GSM8k	Math	Avg
LLaMA-2-7B	-	52.51	14.99	5.86	-	-	-
Full Finetuning	6738M	43.64	3.13	6.35	48.90	7.48	21.90
LoRA [21]	320M	44.17	1.91	6.64	42.68	5.92	20.26
PiSSA [43]	320M	39.71	1.02	6.30	<b>51.48</b>	<b>7.60</b>	21.22
CorDA (ours)	320M	<b>44.30</b>	<b>9.36</b>	<b>7.14</b>	44.58	6.92	<b>22.46</b>

(b) Code							
Method	#Params	Trivia QA	NQ open	WebQS	HumanEval	MBPP	Avg
LLaMA-2-7B	-	52.51	14.99	5.86	-	-	-
Full Finetuning	6738M	29.29	8.53	3.44	<b>25.42</b>	<b>25.64</b>	18.46
LoRA [21]	320M	<b>51.42</b>	9.30	8.46	16.8	21.51	21.50
PiSSA [43]	320M	47.07	9.16	8.14	19.48	23.84	21.54
CorDA (ours)	320M	50.02	<b>11.72</b>	<b>8.56</b>	18.36	20.91	<b>21.91</b>

(c) Instruction Following						
Method	#Params	Trivia QA	NQ open	WebQS	MTBench	Avg
LLaMA-2-7B	-	52.51	14.99	5.86	-	-
Full Finetuning	6738M	26.6	8.45	6.84	4.85	11.69
LoRA [21]	320M	47.46	10.28	7.73	4.60	17.52
PiSSA [43]	320M	36.76	9.67	5.86	4.92	14.30
CorDA (ours)	320M	<b>50.34</b>	<b>14.43</b>	<b>8.17</b>	<b>5.05</b>	<b>19.50</b>

A similar pattern can be also observed in the finetuning of Code. As shown in Table 1b, full finetuning has the best ability on HumanEval and MBPP, but is the lowest on world knowledge performance. It is understandable that CorDA in knowledge-preserved adaptation is not as advantageous as PiSSA for finetuning performance, because PiSSA uses the largest singular values and their singular vectors as the adapter that dominates the weight update, while we keep them frozen and adapt the smallest components. Nevertheless, our method has the best average score in all the three finetuning tasks. A surprising result is achieved by our method in instruction following in Table 1c, where CorDA surpasses all the three compared methods in both world knowledge performance and the new ability evaluated by MTBench. The world knowledge on NQ open is almost intact (14.43%) compared to the original performance (14.99%) before finetuning. These results reveal that our knowledge-preserved adaptation is an effective way to mitigate world knowledge forgetting and improve the overall ability.

### 4.3 Instruction-Previewed Adaptation Results

When the goal is to learn the target task as much as possible without concerning the loss of world knowledge, CorDA in the instruction-previewed adaptation mode satisfies this demand as it is able to further strengthen the finetuning performance. In this mode, we randomly sample instruction and response from the training data to collect the covariance matrices, and adopt the largest  $r$  components to initialize the adapters by Eq. (5). We compare our method with full finetuning, LoRA, DoRA, and PiSSA in the same three tasks, Math, Code, and Instruction Following. Compared with the knowledge-preserved adaptation in Table 1, CorDA in the instruction-previewed adaptation mode largely improves the finetuning performance on the five benchmarks, as shown in Table 2. Concretely,

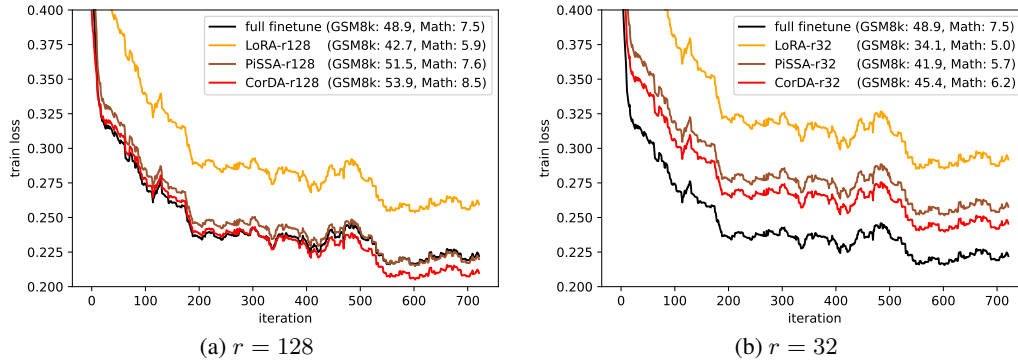


Figure 3: The training loss curves on MetaMath of full finetuning, LoRA, PiSSA, and CorDA with (a) rank 128 and (b) rank 32. The corresponding accuracies on GSM8k and Math are reported on the legends. Smoothing is performed for the loss curves.

Table 2: The experimental results of CorDA in the instruction-previewed adaptation mode on Math, Code, and Instruction Following tasks using LLaMA-2-7B. CorDA is initialized with samples from each of the finetuning datasets (MetaMathQA, CodeFeedback, and WizardLM-Evol-Instruct) for the three tasks, respectively. The rank  $r$  of LoRA, DoRA, PiSSA, and CorDA is 128. All methods are implemented by us under the same training and evaluation settings.

Method	#Params	GSM8k	Math	HumanEval	MBPP	MTBench	Avg
Full Finetuning	6738M	48.9	7.48	<b>25.42</b>	<b>25.64</b>	4.85	22.46
LoRA [21]	320M	42.68	5.92	16.80	21.51	4.60	18.30
DoRA [38]	321M	41.77	6.20	16.86	21.60	4.48	18.18
PiSSA [43]	320M	51.48	7.60	19.48	23.84	4.92	21.46
CorDA (ours)	320M	<b>53.90</b>	<b>8.52</b>	21.03	24.15	<b>5.15</b>	<b>22.55</b>

Table 3: The experimental results of CorDA in the instruction-previewed adaptation mode on the GLUE benchmark using RoBERTa<sub>base</sub>. CorDA is initialized with samples from each of the finetuning datasets. The rank  $r$  of LoRA, DoRA, and CorDA is 128. All methods are implemented by us under the same training and evaluation settings. Matthew’s correlation and Pearson’s correlation are the metrics of CoLA and STS-B, respectively. The metric of the other tasks is accuracy.

Method	#Params	SST-2	MRPC	CoLA	QNLI	RTE	STS-B	Avg
Full Finetuning	125M	93.81	88.48	59.56	92.07	74.01	<b>90.49</b>	83.07
LoRA [21]	21M	<b>94.15</b>	82.84	54.24	92.48	64.26	88.58	79.43
DoRA [38]	21M	93.58	83.58	51.93	<b>92.59</b>	64.98	88.71	79.23
CorDA (ours)	21M	93.12	<b>89.71</b>	<b>59.60</b>	91.49	<b>76.17</b>	90.17	<b>83.38</b>

our method achieves the best performance on GSM8k, Math, MTBench, and the average score. Compared with PiSSA that adopts a similar adapter design but with no data context, our method has better results on all the five benchmarks. The training loss curves on Math are shown in Figure 3, where CorDA converges at a lower loss than LoRA and PiSSA in both  $r = 128$  and  $r = 32$ . Only CorDA exhibits an obvious lower loss than full finetuning when  $r = 128$ . These results corroborate the benefits of data context to the initialized adapter, *i.e.*, the pre-captured task characteristic is able to accommodate the new ability and lead to a better performance.

We also apply our method to the General Language Understanding Evaluation (GLUE) benchmark [56] by finetuning the RoBERTa<sub>base</sub> model [39]. We adopt LoRA, DoRA, and our method with a rank of 128 for all linear layers in the model except the classification head. For our method, we sample train data from each of the tasks to initialize adapters in the instruction-previewed mode and finetune the corresponding task. As shown in Table 3, our method achieves the best performance on the MRPC, CoLA, and RTE tasks, and the highest average score.



Table 4: Ablation experiments of the data choice used to collect covariance matrices and the adapter building manner in the knowledge-preserved adaptation mode. †: corresponds to the result of PiSSA that performs plain SVD and uses the largest  $r$  components to initialize the adapter.

Method	Context	Adapter	Trivia QA	NQ open	WebQS	GSM8k	Math	Avg
Plain SVD†	none	largest $r$	39.71 $\pm$ 0.26	1.02 $\pm$ 0.23	6.30 $\pm$ 0.39	51.48 $\pm$ 0.34	7.60 $\pm$ 0.18	21.22
Plain SVD	none	smallest $r$	39.94 $\pm$ 0.17	4.21 $\pm$ 0.41	6.25 $\pm$ 0.17	43.29 $\pm$ 0.37	5.96 $\pm$ 0.13	19.93
CO-SVD	Wikitext-2	smallest $r$	42.93 $\pm$ 0.13	7.20 $\pm$ 0.15	6.40 $\pm$ 0.27	42.99 $\pm$ 0.34	5.80 $\pm$ 0.09	21.06
CO-SVD	Trivia QA	smallest $r$	44.59 $\pm$ 0.34	8.86 $\pm$ 0.20	7.53 $\pm$ 0.14	44.81 $\pm$ 0.28	6.84 $\pm$ 0.16	22.53
CO-SVD	NQ open	smallest $r$	44.30 $\pm$ 0.22	9.36 $\pm$ 0.16	7.14 $\pm$ 0.26	44.58 $\pm$ 0.33	6.92 $\pm$ 0.13	22.46

Table 5: The instruction following performance of CorDA using WizardLM-Evol-Instruct and Alpaca data to collect covariance matrices in the instruction-previewed adaptation mode.

Method	Context	MTBench
CorDA (ours)	WizardLM-Evol-Instruct	5.15
CorDA (ours)	Alpaca	5.06

#### 4.4 Discussions

**Ablations.** We ablate the data choice used to produce covariance matrices and the adapter building manner in Table 4. The first row corresponds to the implementation of PiSSA that uses the largest  $r$  singular values and their singular vectors as the initialized adapter by plain SVD. If we use the smallest  $r$  components by plain SVD to build adapters, there is no apparent improvement in world knowledge benchmarks. This implies that the plain SVD cannot precisely capture world knowledge related ability into the principle components and thus freezing them does not help to mitigate knowledge forgetting. When our context-oriented decomposition (CO-SVD) is adopted with Wikitext-2, which is not closely correlated with question answering, the performance on world knowledge is much improved. When the context collected by the covariance matrix is from question answering data, *i.e.*, TriviaQA or NQ open, the world knowledge performance is further improved by a significant margin, and the average score is also enhanced as a result. Therefore, data context is important to orientate the decomposition process such that the characteristics of the ability concerned can be better aggregated into the principle components for maintaining or adapting. As shown in Table 5, similar to TriviaQA and NQ open in the knowledge-preserved adaptation, collecting context from different data sources belonging to the same category, namely WizardLM-Evol-Instruct and Alpaca, also results in close performance in the instruction-previewed adaptation. It is noteworthy that CorDA with Alpaca on MTBench (5.06) is still the highest among the compared baselines in Table 2.

**Limitations.** The two adaptation modes developed in this paper highlight different aspects in usage. However, the knowledge-preserved mode, while being adept at maintaining world knowledge, is naturally not advantageous on finetuning performance compared with the instruction-previewed mode. How to develop an initialization strategy [63] for adapters combining the merits of the two modes to maximize both objectives deserves future exploration.

## 5 Conclusion

In this paper, we propose a new parameter-efficient fine-tuning method, named context-oriented decomposition adaptation (CorDA). It performs singular value decomposition for pre-trained weights oriented by the covariance matrix that captures the context of the task concerned, and aggregates the context into the principle components for maintaining or adapting. Accordingly, our method is able to support two implementation modes, the knowledge-preserved adaptation to mitigate world knowledge forgetting and the instruction-previewed adaptation for better finetuning performance. In experiments, our knowledge-preserved adaptation not only achieves better finetuning performance than LoRA, but also maintains the world knowledge well, leading to the best average scores on three finetuning tasks. Our instruction-previewed adaptation is able to further enhance the finetuning performance, surpassing the state-of-the-art parameter-efficient fine-tuning methods DoRA and PiSSA.

## References

- [1] J. Achiam, S. Adler, S. Agarwal, L. Ahmad, I. Akkaya, F. L. Aleman, D. Almeida, J. Altenschmidt, S. Altman, S. Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [2] A. Aghajanyan, L. Zettlemoyer, and S. Gupta. Intrinsic dimensionality explains the effectiveness of language model fine-tuning. *arXiv preprint arXiv:2012.13255*, 2020.
- [3] J. Austin, A. Odena, M. Nye, M. Bosma, H. Michalewski, D. Dohan, E. Jiang, C. Cai, M. Terry, Q. Le, et al. Program synthesis with large language models. *arXiv preprint arXiv:2108.07732*, 2021.
- [4] J. Berant, A. Chou, R. Frostig, and P. Liang. Semantic parsing on freebase from question-answer pairs. In *EMNLP*, pages 1533–1544, 2013.
- [5] F. Bie, Y. Yang, Z. Zhou, A. Ghanem, M. Zhang, Z. Yao, X. Wu, C. Holmes, P. Golnari, D. A. Clifton, et al. Renaissance: A survey into ai text-to-image generation in the era of large model. *arXiv preprint arXiv:2309.00810*, 2023.
- [6] A. Bosselut, H. Rashkin, M. Sap, C. Malaviya, A. Celikyilmaz, and Y. Choi. Comet: Commonsense transformers for automatic knowledge graph construction. *arXiv preprint arXiv:1906.05317*, 2019.
- [7] A. Chavan, Z. Liu, D. Gupta, E. Xing, and Z. Shen. One-for-all: Generalized lora for parameter-efficient fine-tuning. *arXiv preprint arXiv:2306.07967*, 2023.
- [8] M. Chen, J. Tworek, H. Jun, Q. Yuan, H. P. d. O. Pinto, J. Kaplan, H. Edwards, Y. Burda, N. Joseph, G. Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- [9] K. Cobbe, V. Kosaraju, M. Bavarian, M. Chen, H. Jun, L. Kaiser, M. Plappert, J. Tworek, J. Hilton, R. Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- [10] T. Dettmers, A. Pagnoni, A. Holtzman, and L. Zettlemoyer. Qlora: Efficient finetuning of quantized llms. *NeurIPS*, 36, 2023.
- [11] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [12] N. Ding, Y. Qin, G. Yang, F. Wei, Z. Yang, Y. Su, S. Hu, Y. Chen, C.-M. Chan, W. Chen, et al. Parameter-efficient fine-tuning of large-scale pre-trained language models. *Nature Machine Intelligence*, 5(3):220–235, 2023.
- [13] S. Dou, E. Zhou, Y. Liu, S. Gao, J. Zhao, W. Shen, Y. Zhou, Z. Xi, X. Wang, X. Fan, et al. Loramoe: Alleviate world knowledge forgetting in largelanguage models via moe-style plugin. *arXiv preprint arXiv:2312.09979*, 2023.
- [14] I. J. Goodfellow, M. Mirza, D. Xiao, A. Courville, and Y. Bengio. An empirical investigation of catastrophic forgetting in gradient-based neural networks. *arXiv preprint arXiv:1312.6211*, 2013.
- [15] K. Gupta, B. Thérien, A. Ibrahim, M. L. Richter, Q. G. Anthony, E. Belilovsky, I. Rish, and T. Lesort. Continual pre-training of large language models: How to re-warm your model? In *Workshop on Efficient Systems for Foundation Models @ ICML2023*, 2023.
- [16] J. He, H. Guo, M. Tang, and J. Wang. Continual instruction tuning for large multimodal models. *arXiv preprint arXiv:2311.16206*, 2023.
- [17] J. He, C. Zhou, X. Ma, T. Berg-Kirkpatrick, and G. Neubig. Towards a unified view of parameter-efficient transfer learning. In *ICLR*, 2022.
- [18] K. He, X. Zhang, S. Ren, and J. Sun. Delving deep into rectifiers: Surpassing human-level performance on imagenet classification. In *ICCV*, pages 1026–1034, 2015.
- [19] S. Hou, X. Pan, C. C. Loy, Z. Wang, and D. Lin. Learning a unified classifier incrementally via rebalancing. In *CVPR*, pages 831–839, 2019.
- [20] N. Hounsby, A. Giurgiu, S. Jastrzebski, B. Morrone, Q. De Laroussilhe, A. Gesmundo, M. Attariyan, and S. Gelly. Parameter-efficient transfer learning for nlp. In *ICML*, pages 2790–2799. PMLR, 2019.
- [21] E. J. Hu, yelong shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen. LoRA: Low-rank adaptation of large language models. In *ICLR*, 2022.
- [22] A. Ibrahim, B. Thérien, K. Gupta, M. L. Richter, Q. Anthony, T. Lesort, E. Belilovsky, and I. Rish. Simple and scalable strategies to continually pre-train large language models. *arXiv preprint arXiv:2403.08763*, 2024.

- [23] M. Joshi, E. Choi, D. Weld, and L. Zettlemoyer. TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension. In *ACL*, 2017.
- [24] R. Karimi Mahabadi, J. Henderson, and S. Ruder. Compacter: Efficient low-rank hypercomplex adapter layers. *NeurIPS*, 34:1022–1035, 2021.
- [25] J. Kirkpatrick, R. Pascanu, N. Rabinowitz, J. Veness, G. Desjardins, A. A. Rusu, K. Milan, J. Quan, T. Ramalho, A. Grabska-Barwinska, et al. Overcoming catastrophic forgetting in neural networks. *Proceedings of the national academy of sciences*, 114(13):3521–3526, 2017.
- [26] D. J. Kopiczko, T. Blankevoort, and Y. M. Asano. Vera: Vector-based random matrix adaptation. In *ICLR*, 2024.
- [27] T. Kwiatkowski, J. Palomaki, O. Redfield, M. Collins, A. Parikh, C. Alberti, D. Epstein, I. Polosukhin, J. Devlin, K. Lee, et al. Natural questions: a benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:453–466, 2019.
- [28] C. Lee, J. Jin, T. Kim, H. Kim, and E. Park. Owq: Outlier-aware weight quantization for efficient fine-tuning and inference of large language models. In *AAAI*, volume 38, pages 13355–13364, 2024.
- [29] K. Lee, M.-W. Chang, and K. Toutanova. Latent retrieval for weakly supervised open domain question answering. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 2019.
- [30] T. Lei, J. Bai, S. Brahma, J. Ainslie, K. Lee, Y. Zhou, N. Du, V. Y. Zhao, Y. Wu, B. Li, et al. Conditional adapters: Parameter-efficient transfer learning with fast inference. In *NeurIPS*, 2023.
- [31] B. Lester, R. Al-Rfou, and N. Constant. The power of scale for parameter-efficient prompt tuning. In *EMNLP*, pages 3045–3059, 2021.
- [32] C. Li, H. Farkhoor, R. Liu, and J. Yosinski. Measuring the intrinsic dimension of objective landscapes. In *ICLR*, 2018.
- [33] X. L. Li and P. Liang. Prefix-tuning: Optimizing continuous prompts for generation. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4582–4597, 2021.
- [34] Y. Li, Y. Yu, C. Liang, N. Karampatziakis, P. He, W. Chen, and T. Zhao. Loftq: LoRA-fine-tuning-aware quantization for large language models. In *ICLR*, 2024.
- [35] Z. Li and D. Hoiem. Learning without forgetting. *IEEE transactions on pattern analysis and machine intelligence*, 40(12):2935–2947, 2017.
- [36] J. Lin, J. Tang, H. Tang, S. Yang, W.-M. Chen, W.-C. Wang, G. Xiao, X. Dang, C. Gan, and S. Han. Awq: Activation-aware weight quantization for llm compression and acceleration. In *MLSys*, 2024.
- [37] Q. Liu, X. Wu, X. Zhao, Y. Zhu, D. Xu, F. Tian, and Y. Zheng. Moelora: An moe-based parameter efficient fine-tuning method for multi-task medical applications. *arXiv preprint arXiv:2310.18339*, 2023.
- [38] S.-Y. Liu, C.-Y. Wang, H. Yin, P. Molchanov, Y.-C. F. Wang, K.-T. Cheng, and M.-H. Chen. Dora: Weight-decomposed low-rank adaptation. In *ICML*, 2024.
- [39] Y. Liu, M. Ott, N. Goyal, J. Du, M. Joshi, D. Chen, O. Levy, M. Lewis, L. Zettlemoyer, and V. Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [40] D. Lopez-Paz and M. Ranzato. Gradient episodic memory for continual learning. In *NeurIPS*, volume 30, 2017.
- [41] R. K. Mahabadi, S. Ruder, M. Dehghani, and J. Henderson. Parameter-efficient multi-task fine-tuning for transformers via shared hypernetworks. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 565–576, 2021.
- [42] M. Marcus, B. Santorini, and M. A. Marcinkiewicz. Building a large annotated corpus of english: The penn treebank. *Computational linguistics*, 19(2):313–330, 1993.
- [43] F. Meng, Z. Wang, and M. Zhang. Pissa: Principal singular values and singular vectors adaptation of large language models. *arXiv preprint arXiv:2404.02948*, 2024.
- [44] S. Merity, C. Xiong, J. Bradbury, and R. Socher. Pointer sentinel mixture models. *arXiv preprint arXiv:1609.07843*, 2016.

- [45] J. Pfeiffer, A. Kamath, A. Rücklé, K. Cho, and I. Gurevych. Adapterfusion: Non-destructive task composition for transfer learning. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 487–503, 2021.
- [46] Z. Qiu, W. Liu, H. Feng, Y. Xue, Y. Feng, Z. Liu, D. Zhang, A. Weller, and B. Schölkopf. Controlling text-to-image diffusion by orthogonal finetuning. In *NeurIPS*, volume 36, pages 79320–79362, 2023.
- [47] A. Radford, K. Narasimhan, T. Salimans, I. Sutskever, et al. Improving language understanding by generative pre-training. 2018.
- [48] D. Rao, F. Visin, A. Rusu, R. Pascanu, Y. W. Teh, and R. Hadsell. Continual unsupervised representation learning. In *NeurIPS*, volume 32, 2019.
- [49] A. Razdaibiedina, Y. Mao, M. Khabsa, M. Lewis, R. Hou, J. Ba, and A. Almahairi. Residual prompt tuning: improving prompt tuning with residual reparameterization. In *ACL*, pages 6740–6757, 2023.
- [50] S.-A. Rebuffi, A. Kolesnikov, G. Sperl, and C. H. Lampert. icarl: Incremental classifier and representation learning. In *CVPR*, pages 2001–2010, 2017.
- [51] A. Renduchintala, T. Konuk, and O. Kuchaiev. Tied-lora: Enhancing parameter efficiency of lora with weight tying. *arXiv preprint arXiv:2311.09578*, 2023.
- [52] M. Riemer, I. Cases, R. Ajemian, M. Liu, I. Rish, Y. Tu, , and G. Tesauero. Learning to learn without forgetting by maximizing transfer and minimizing interference. In *ICLR*, 2019.
- [53] T. Scialom, T. Chakrabarty, and S. Muresan. Fine-tuned language models are continual learners. In *EMNLP*, 2022.
- [54] H. Touvron, L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Batra, P. Bhargava, S. Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [55] M. Valipour, M. Rezagholizadeh, I. Kobzyev, and A. Ghodsi. Dylora: Parameter efficient tuning of pre-trained models using dynamic search-free low-rank adaptation. *arXiv preprint arXiv:2210.07558*, 2022.
- [56] A. Wang, A. Singh, J. Michael, F. Hill, O. Levy, and S. R. Bowman. GLUE: A multi-task benchmark and analysis platform for natural language understanding. In *International Conference on Learning Representations*, 2019.
- [57] C. Wu, Y. Gan, Y. Ge, Z. Lu, J. Wang, Y. Feng, P. Luo, and Y. Shan. Llama pro: Progressive llama with block expansion. *arXiv preprint arXiv:2401.02415*, 2024.
- [58] T. Wu, L. Luo, Y.-F. Li, S. Pan, T.-T. Vu, and G. Haffari. Continual learning for large language models: A survey. *arXiv preprint arXiv:2402.01364*, 2024.
- [59] C. Xu, Q. Sun, K. Zheng, X. Geng, P. Zhao, J. Feng, C. Tao, Q. Lin, and D. Jiang. WizardLM: Empowering large pre-trained language models to follow complex instructions. In *The Twelfth International Conference on Learning Representations*, 2024.
- [60] L. Xu, H. Xie, S.-Z. J. Qin, X. Tao, and F. L. Wang. Parameter-efficient fine-tuning methods for pretrained language models: A critical review and assessment. *arXiv preprint arXiv:2312.12148*, 2023.
- [61] Y. Xu, L. Xie, X. Gu, X. Chen, H. Chang, H. Zhang, Z. Chen, X. ZHANG, and Q. Tian. QA-loRA: Quantization-aware low-rank adaptation of large language models. In *ICLR*, 2024.
- [62] S. Yan, J. Xie, and X. He. Der: Dynamically expandable representation for class incremental learning. In *CVPR*, pages 3014–3023, 2021.
- [63] Y. Yang, H. Wang, H. Yuan, and Z. Lin. Towards theoretically inspired neural initialization optimization. In *NeurIPS*, volume 35, pages 18983–18995, 2022.
- [64] Y. Yang, H. Yuan, X. Li, Z. Lin, P. Torr, and D. Tao. Neural collapse inspired feature-classifier alignment for few-shot class-incremental learning. In *ICLR*, 2023.
- [65] Y. Yang, H. Yuan, X. Li, J. Wu, L. Zhang, Z. Lin, P. Torr, D. Tao, and B. Ghanem. Neural collapse terminus: A unified solution for class incremental learning and its variants. *arXiv preprint arXiv:2308.01746*, 2023.
- [66] L. Yu, W. Jiang, H. Shi, J. YU, Z. Liu, Y. Zhang, J. Kwok, Z. Li, A. Weller, and W. Liu. Metamath: Bootstrap your own mathematical questions for large language models. In *ICLR*, 2024.
- [67] L. Yu, B. Yu, H. Yu, F. Huang, and Y. Li. Language models are super mario: Absorbing abilities from homologous models as a free lunch. In *ICML*, 2024.
- [68] Z. Yuan, Y. Shang, Y. Song, Q. Wu, Y. Yan, and G. Sun. Asvd: Activation-aware singular value decomposition for compressing large language models. *arXiv preprint arXiv:2312.05821*, 2023.

- [69] Y. Zhai, S. Tong, X. Li, M. Cai, Q. Qu, Y. J. Lee, and Y. Ma. Investigating the catastrophic forgetting in multimodal large language model fine-tuning. In *Conference on Parsimony and Learning (Proceedings Track)*, 2024.
- [70] F. Zhang, L. Li, J. Chen, Z. Jiang, B. Wang, and Y. Qian. Increlora: Incremental parameter allocation method for parameter-efficient fine-tuning. *arXiv preprint arXiv:2308.12043*, 2023.
- [71] J. Zhang, J. Liu, J. He, et al. Composing parameter-efficient modules with arithmetic operation. *NeurIPS*, 36:12589–12610, 2023.
- [72] M. Zhang, C. Shen, Z. Yang, L. Ou, X. Yu, B. Zhuang, et al. Pruning meets low-rank parameter-efficient fine-tuning. *arXiv preprint arXiv:2305.18403*, 2023.
- [73] Q. Zhang, M. Chen, A. Bukharin, P. He, Y. Cheng, W. Chen, and T. Zhao. Adaptive budget allocation for parameter-efficient fine-tuning. In *ICLR*, 2023.
- [74] J. Zhao, Z. Zhang, B. Chen, Z. Wang, A. Anandkumar, and Y. Tian. Galore: Memory-efficient llm training by gradient low-rank projection. In *ICML*, 2024.
- [75] L. Zheng, W.-L. Chiang, Y. Sheng, S. Zhuang, Z. Wu, Y. Zhuang, Z. Lin, Z. Li, D. Li, E. Xing, et al. Judging llm-as-a-judge with mt-bench and chatbot arena. In *NeurIPS*, volume 36, 2023.
- [76] L. Zheng, W.-L. Chiang, Y. Sheng, S. Zhuang, Z. Wu, Y. Zhuang, Z. Lin, Z. Li, D. Li, E. Xing, H. Zhang, J. E. Gonzalez, and I. Stoica. Judging LLM-as-a-judge with MT-bench and chatbot arena. In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2023.
- [77] T. Zheng, G. Zhang, T. Shen, X. Liu, B. Y. Lin, J. Fu, W. Chen, and X. Yue. Opencodeinterpreter: Integrating code generation with execution and refinement. *arXiv preprint arXiv:2402.14658*, 2024.
- [78] D. Zhu, Z. Sun, Z. Li, T. Shen, K. Yan, S. Ding, K. Kuang, and C. Wu. Model tailor: Mitigating catastrophic forgetting in multi-modal large language models. In *ICML*, 2024.
- [79] W. Zhu and M. Tan. SPT: Learning to selectively insert prompts for better prompt tuning. In *EMNLP*, 2023.
- [80] D. M. Ziegler, N. Stiennon, J. Wu, T. B. Brown, A. Radford, D. Amodei, P. Christiano, and G. Irving. Fine-tuning language models from human preferences. *arXiv preprint arXiv:1909.08593*, 2019.

Table 6: The detailed numbers and more results of the experiment in Figure 2.

Test Data	Method	discarded ranks							
		0	16	32	64	128	256	512	1024
Wikitext-2	Plain SVD	5.47	6.32	7.31	9.89	18.03	18.5	25.42	73.92
	ASVD [68] (with 256 Wiki samples)	5.47	6.08	6.67	7.86	8.71	9.92	12.37	20.34
	CO-SVD (with 32 Wiki samples)	5.47	5.48	5.48	5.49	5.52	5.58	5.79	6.62
	CO-SVD (with 256 Wiki samples)	5.47	5.48	5.48	5.48	5.5	5.54	5.69	<b>6.35</b>
	CO-SVD (with 256 PTB samples)	5.47	5.49	5.5	5.52	5.57	5.74	6.25	8.69
PTB	Plain SVD	20.82	35.25	33.42	37.46	55.47	70.25	98.6	763.44
	ASVD [68] (with 256 PTB samples)	20.84	33.42	32.05	31.67	35.36	40.23	51.28	93.42
	CO-SVD (with 32 PTB samples)	20.75	20.75	20.76	20.78	20.83	20.91	21.17	22.68
	CO-SVD (with 256 PTB samples)	20.88	20.88	20.88	20.89	20.91	20.94	21.14	<b>22.28</b>
	CO-SVD (with 256 Wiki samples)	20.34	20.34	20.32	20.41	20.59	21.25	22.94	29.69

## A Appendix: Implementation Details

### A.1 Finetuning on Math, Code, and Instruction Following

For finetuning tasks on Math, Code, and Instruction Following, we adopt the same training setting as PiSSA [43]. Concretely, optimization is performed with the AdamW optimizer, a batch size of 128, and a learning rate of  $2e-5$ . We employ cosine annealing schedules with a warmup ratio of 0.03 and do not apply weight decay. Training is conducted exclusively on the first 100,000 conversations from the dataset for one epoch, with loss computation solely based on the response. Our experiments are executed on the NVIDIA A100-SXM4(40/80GB) GPUs. Publicly available platforms are utilized for the evaluation of world knowledge (TriviaQA, NQ open, and Web QS)<sup>2</sup>, Code (HumanEval and MBPP)<sup>3</sup>, and Instruction Following (MTBench)<sup>4</sup>.

### A.2 GLUE Benchmark

To ensure fair comparison across Full Finetuning, LoRA, DoRA, and CorDA in the GLUE benchmark, we implement all methods under the same training and evaluation settings. The AdamW optimizer is used with a batch size of 32 and a learning rate of  $4e-5$  for 3 epochs, following a linear learning rate schedule. The max token length is set as 128. The rank of LoRA, DoRA, and our CorDA is 128. For covariance matrix collection of CorDA, we concatenate the representative content of each training sample to form a text sequence. From this sequence, 256 text segments, each containing 256 tokens, are randomly sampled. The selected content for each task is as follows: MRPC, RTE, and STS-B using “sentence1”, CoLA and SST-2 using “sentence”, and QNLI using “question”. All methods are trained on a single NVIDIA A100-SXM4(40/80GB) GPU.

## B Appendix: More Results

Table 6 lists the detailed numbers and more results of the experiment in Figure 2. It is shown that the number of sampled data only has a very limited impact. When the smallest 1024 ranks are discarded, using 32 samples is slightly worse than 256 samples in both Wikitext-2 and PTB. It implies that a small number of samples is enough to capture context into the principle components. Besides, collecting samples from the same dataset as the one used to test is able to attain a better performance after discarding a large number of ranks. For example, when discarding the smallest 1024 ranks, CO-SVD (with 256 Wiki samples) is better than CO-SVD (with 256 PTB samples) on Wikitext-2 (6.35 v.s. 8.69), and CO-SVD (with 256 PTB samples) is better than CO-SVD (with 256 Wiki samples) on PTB (22.28 v.s. 29.69). This also reveals that precisely capturing the data context in our decomposition is crucial for better maintaining the task characteristics into the principle components, and explains why our method is superior to the PEFT methods without considering data context.

<sup>2</sup><https://github.com/EleutherAI/lm-evaluation-harness>

<sup>3</sup><https://github.com/bigcode-project/bigcode-evaluation-harness>

<sup>4</sup><https://github.com/lm-sys/FastChat>