

# Towards more realistic evaluation of LLM-based code generation: an experimental study and beyond

Dewu Zheng  
Sun Yat-sen University  
zhengdw5@mail2.sysu.edu.cn

Yanlin Wang\*  
Sun Yat-sen University  
yanlin-wang@outlook.com

Ensheng Shi  
Xi'an Jiaotong University  
s1530129650@stu.xjtu.edu.cn

Ruikai Zhang  
Huawei Cloud Computing  
Technologies Co., Ltd.  
zhangruikai1@huawei.com

Yuchi Ma  
Huawei Cloud Computing  
Technologies Co., Ltd.  
mayuchi1@huawei.com

Hongyu Zhang  
The University of Newcastle  
hongyujohn@gmail.com

Zibin Zheng  
Sun Yat-sen University  
zhzibin@mail.sysu.edu.cn

## ABSTRACT

To evaluate the code generation capabilities of Large Language Models (LLMs) in complex real-world software development scenarios, many evaluation approaches have been developed. They typically leverage contextual code from the latest version of a project to facilitate LLMs in accurately generating the desired function. However, such evaluation approaches fail to consider the dynamic evolution of software projects over time, which we refer to as evolving-ignored situation, leading to issues of future context leakage and useful context missing. This in turn results in inaccurate evaluation of LLMs' performance. In this paper, we conduct an empirical study to deeply understand LLMs' code generation performance within settings that reflect the evolving nature of software development. To achieve this, we first construct an evolving-aware repository-level code generation dataset, namely HUMANEVO, equipped with an automated execution-based evaluation tool. Second, we manually categorize HUMANEVO according to dependency levels to more comprehensively analyze the model's performance in generating functions with different dependency levels. Third, we conduct extensive experiments on HUMANEVO with seven representative and diverse LLMs to verify the effectiveness of the proposed benchmark. We obtain many important findings through our experimental study. For example, we find that previous evolving-ignored evaluation approaches lead to inflated performance of the LLMs, ranging from 10.0% to 61.1%. Based on the findings, we give actionable suggestions on more realistic evaluation of LLMs on code generation. We also build a shared evolving-aware code generation toolbox to facilitate future research. Replication package including source code, datasets and appendix is available at <https://github.com/DeepSoftwareAnalytics/EvoEval>.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

ISSTA 2024, 16-20 September, 2024, Vienna, Austria

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

## 1 INTRODUCTION

In recent years, the task of code generation based on LLMs has drawn widespread attention [6, 17, 24, 27, 45, 65, 67, 68]. Many code LLMs [2, 10–12, 21, 22, 35, 36, 40, 42, 49, 51, 66] are being employed to empower programming assistants, which are playing a vital role in practical software development.

Recently, several repository-level code generation benchmarks have emerged to better simulate real-world development scenarios, such as CoderEval [59], RepoBench [39], EvoCodeBench [33], and RepoEval [63]. They sample functions from real-world projects as programming questions, aiming to reflect the performance of LLMs in actual development by prompting them to generate these functions according to the target function description and project context.

However, current benchmarks ignore the evolution nature [13, 48, 56] of real-world projects by treating the latest version of the repository as context, leading to inaccurate reflection of real development scenario. We identify two issues caused by this inaccurate reflection as depicted in Figure 1. The upper part of Figure 1 shows that, over time, the project repository has undergone multiple commits, including adding new functions and removing functions. In the lower part of Figure 1, we showcase the two issues that may arise from ignoring the evolution nature of a project, which we refer to as **evolving-ignored situation**. Example 1 illustrates the **future context leakage issue** that the evolving-ignored situation may lead to. Specifically, in the latest repository version, a code snippet committed in 2019 is highly similar to another snippet committed in 2022. Suppose the code snippet from 2019 is selected as the target function for LLMs. In that case, the code snippet from 2022 should not be included as project context during context acquisition even though they share high similarity. This is because the developer did not have access to the code committed in 2022 when writing the target function. Therefore, providing this code snippet as context to the model could pose the issue of future context leakage, resulting in an overestimated evaluation of LLMs' code generation performance. Example 2 illustrates the **useful context missing issue** that the evolving-ignored situation may lead to. The target function is highly similar to the function in the pink box, and programmer deletes the function in the pink box after committing

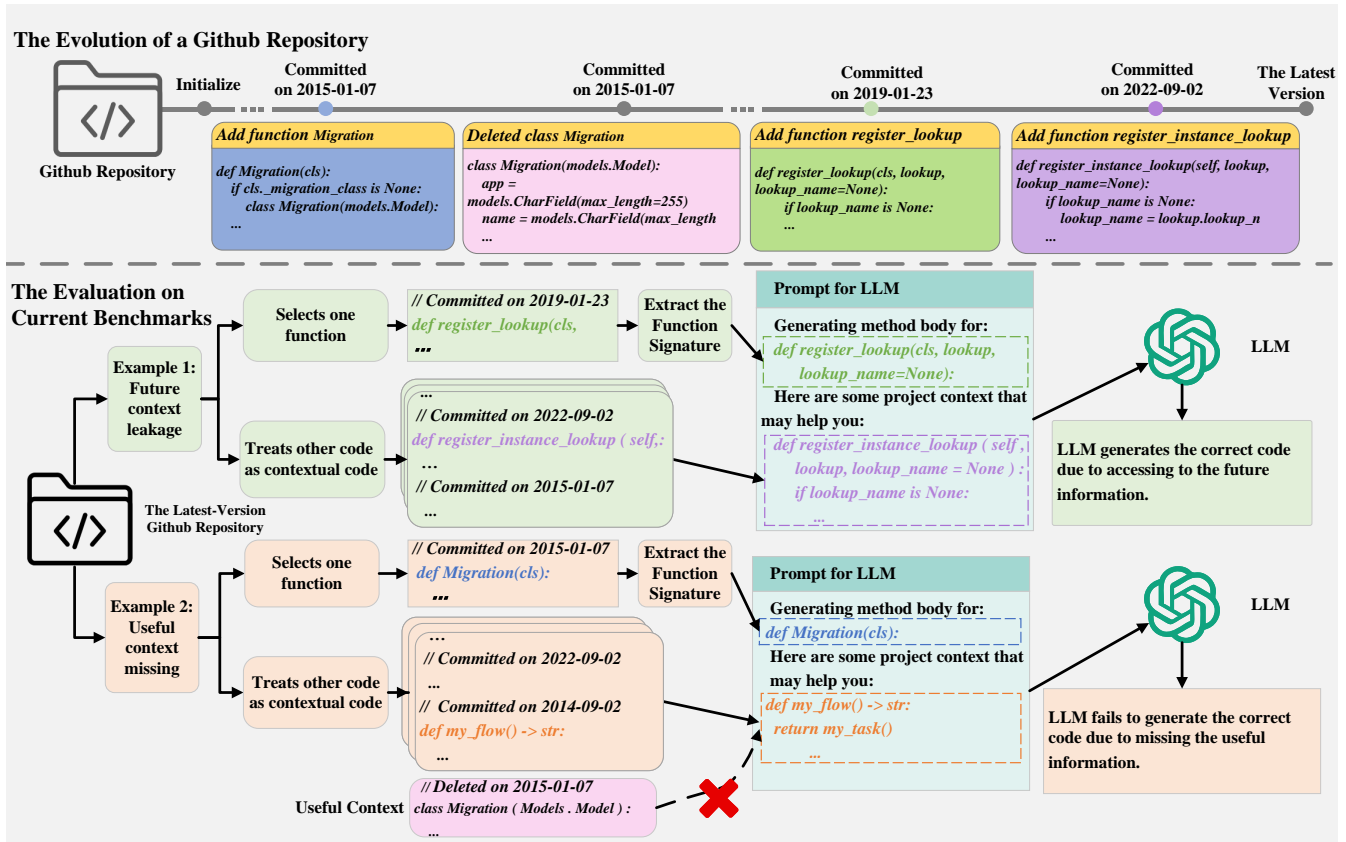


Figure 1: Issues of future context leakage and useful context missing

the target function. This suggests that when developers write the added code snippet, they can refer to that similar code snippet for inspiration. However, if the latest version of the project is utilized as context source, the model may fail to generate the target function correctly due to the absence of this useful context. This leads to an underestimation of LLMs’ code generation performance.

In this paper, we conduct an empirical study to comprehensively reveal LLMs’ repository-level code generation performance. To accomplish this goal, we construct HUMANEVO, a novel evolving-aware repository-level code generation benchmark, which better simulates real-world development processes and reflects the evolving nature of projects over time. Specifically, projects evolve continuously throughout the development process, meaning that the project context available to programmers when writing different functions is constantly changing. To ensure that the context we provide precisely encompasses all the context available to the programmer when completing the target function (neither including additional code introduced by subsequent version changes nor omitting code that may have been updated or deleted due to version change), we roll back the entire project repository to the state before the target code was committed and evaluate the performance of LLMs on the rolled-back project.

We conduct a rigorous data collection pipeline to construct HUMANEVO. We start with selecting high-quality projects and then

collecting a large number of pull requests (PRs) from these projects. Then, we perform initial filtering on the crawled PRs to meet three attributes to guarantee the quality of the newly added functions in PRs. Additionally, to ensure that the newly added functions are covered by the test suite, we establish a runtime environment for each PR and run the corresponding project’s testing framework. After all this, we obtain 400 programming questions, 200 for Python and 200 for Java. In our benchmark construction process, our selection of functions revolves around PRs rather than commits. First, functions in a merged PR are typically reviewed by project managers [46], ensuring the quality of the added functions. Second, a PR usually incorporates test code for the added functions, guaranteeing their coverage by the project’s testing framework.

We conduct an extensive evaluation of multiple mainstream LLMs (the CodeLlama series [49], DeepSeekCoder series [22], GPT-4 [43], GPT-3.5-Turbo) on HUMANEVO. Experimental results reveal the performance of LLMs in more practical development scenarios and emphasize the importance of evolving-awareness, showcasing how LLMs gradually deviate from reality in evolving-ignored situations. Specifically, we first compare the performance of LLMs under evolving-ignored and evolving-aware settings, and experimental results indicate that LLMs exhibit inflated performance under the evolving-ignored setting. To investigate whether both issues depicted in Figure 1 have certain impacts on the models, we further

analyze task instances successfully completed by the models under both settings and find that both “future context leakage” and “useful context missing” have significant impacts on the models. According to the empirical results, we highlight four key findings as follows:

- (1) Previous evolving-ignored evaluation approaches lead to inflated performance of the LLMs, ranging from 10.0% to 61.1%, revealing how previous evaluation methods provided the models with a deviated programming scenario from reality.
- (2) LLMs’ success rates in generating functions with intra-class dependencies decreased by approximately 14.0% on average, and those with inter-class dependencies by approximately 30.9%, under the evolving-aware setting compared to the evolving-ignored setting. This suggests that functions with broader dependencies are more impacted on different evaluation settings.
- (3) Under fine-granularity evolving-ignored settings, the discrepancy between model performance and real-world effectiveness increases over time, exhibiting a progressive, upward trend in inflated evaluation metrics as projects evolve.
- (4) Detailed docstrings significantly enhance the LLMs’ ability to accurately generate the expected code.

In summary, our contributions can be summarized as follows:

- We have identified a common flaw in previous repository-level code generation benchmarks: they are all evolving-ignored, causing inaccurate simulations of real-world development scenarios.
- We introduce a new benchmark HUMANEVO, an evolving-aware repository-level code generation benchmark that addresses the evolving-ignored issue, to conduct a comprehensive empirical study on the performance of LLMs in repository-level code generation.
- Through extensive experimentation, we substantiate the evolving-ignored situation leads to inflated performance of the models, with LLMs showing a performance inflation ranging from 10.0% to 61.1%.
- For convenient usage of HUMANEVO, we release all data, code, and the evaluation platform based on Docker image that provides runtime environments for all projects, facilitating the automated execution of the test suites.

## 2 BACKGROUND

### 2.1 Code Generation Benchmark

Previously, the vast majority of benchmarks were constructed to evaluate the performance of LLMs in generating standalone functions [3, 7, 15, 18, 26, 31, 62], with the most representative ones being HumanEval [9] and MBPP [4]. HumanEval comprises 164 manually crafted programming problems covering language comprehension, reasoning, algorithms, and simple mathematics. MBPP consists of 974 short Python function problems primarily designed for novice programmers.

Finding previous benchmarks fail to reflect complex programming scenarios, researchers propose CoderEval [59], the first repository-level code generation benchmark, to evaluate the performance of existing LLMs in real-world development by prompting them to generate functions selected in actual complex software. CoderEval

meticulously selects 230 Python and 230 Java programming tasks from popular real-world open-source projects, evaluating the functional correctness of generated code based on execution. To better simulate real-world development scenarios, EvoCodeBench [33] first analyses the distribution of standalone and non-standalone functions in a large number of real-world projects, then constructs a benchmark with a dependency distribution more in line with real-world scenarios.

Although the aforementioned works prompt LLMs to generate functions selected from real software projects to evaluate LLM performance in real development scenarios, we recognize a common flaw in all these benchmarks: they ignore the evolution nature of project repositories. This implies that when we prompt LLMs to generate different functions, the project context provided to LLMs should also consider the evolution of the project. Taking the example of software development processes based on GitHub project management, when writing functions, the project context that programmers can refer to is the entire project repository up to the commit preceding the target functions. Therefore, when prompting LLM to generate target functions, we should roll back the entire project repository to the state before the target function was committed.

### 2.2 Repository-level Code Generation

Many technical studies have been proposed to better tackle repository-level code generation tasks [5, 19, 37, 44, 52, 57, 60, 61, 63, 64, 69]. DocPrompting [69] uses natural language (NL) intent to retrieve documents related to the target code and then sends NL intent and retrieved documents to LLMs. CoCoMIC [16] develops a cross-file context finder, which is a static code analysis tool used to retrieve the most related cross-file context. MGD [1] leverages IDEs to assist in providing context. IDE is invoked to provide useful suggestions, when reaching the pre-defined trigger point. RLPG [53] analyses dependencies potentially existing in the target function, then extracts project context that may be conducive to generating the target function. RepoCoder [63] first slices the source code files in the repository to construct a retrieval library, then uses the generated problem as a query, calculates similarity to obtain project context, and feeds the project context and problem to the model to generate initial results. After obtaining the initial results, the previous generation results are used as queries for further querying to obtain more context. This process is repeated to continuously optimize the generation results. A<sup>3</sup>-CodGen [38] first constructs a repository knowledge base covering knowledge of third-party libraries and extracts information on module and code context. During the code generation process, LLM first generates an initial version of code based on NL intent, then uses NL intent and the initial version of code to retrieve as much foundational knowledge as possible from the knowledge base for the LLM. Finally, local, global, and third-party library information is integrated into the prompt to allow the model to generate the final result.

However, all the mentioned works treat the latest version of the project repository as the context source, falling into the category of evolving-ignored scenarios. Although in RepoCoder, researchers begin to take notice of this issue by considering all code after the target function in the corresponding file as “future code”, this still

falls short of reality and introduces a lack of the context that should be present. Therefore, we propose a novel repository-level code generation benchmark, HUMANEVO, an evolving-aware pragmatic benchmark, to better simulate real development scenarios for LLMs.

### 2.3 LLMs for Code Generation

CodeLlama [49] is further trained based on Llama2 [55]. It is capable of understanding and generating code in various programming languages, including but not limited to Python, Java, JavaScript, etc. CodeLlama not only generates complete code but also provides suggestions and optimization solutions for specific code snippets, greatly assisting developers. During the training of the base model, weights are initialized with an equivalent parameter amount of the Llama2 model, followed by training on a dataset of 500 billion tokens of code. StarCoder [35] is derived from StarCoderBase, which is trained using 10 trillion tokens from The Stack, a vast collection of licensed GitHub repositories with inspection tools and selection exit procedures. The DeepSeek-Coder [22] takes into account the often intricate dependency relationships inherent in real-world projects. The model needs to fully consider these dependencies before completing programming tasks. Therefore, to equip DeepSeek-Coder to handle real-world complex projects, the training data is structured to support repository-level comprehension, enhancing the model’s understanding of complex projects. This enables the model to utilize cross-file context effectively. MetaGPT [24] constructs a multi-agent collaborative framework, employing Standardized Operating Procedures and involving multiple roles such as programmers and product managers to collaborate on project completion. The results generated by agents are not saved in conversational form but in structured output formats such as charts, files, etc. Communication between agents is also conducted through structured files. MetaGPT also implements an iterative development pipeline, optimizing results through multiple rounds of iteration by recording information generated during the development process by different roles. Similarly, ChatDev [45] adopts a multi-agent framework, allocating and assigning different AI agents to various job functions. ChatDev facilitates communication among different role agents, forming a complete software development process where each agent performs its respective tasks while collaborating uniformly. In addition to these models, there are many other excellent models used in the field of code generation [10, 12, 21, 36, 40, 42, 51].

### 2.4 Project Evolution

GitHub-hosted projects undergo continuous evolution over time [41]. GitHub provides an open platform where the development progress, issues, and solutions of projects are visible to everyone [14, 29]. When users identify missing features in a project, they typically submit an issue to describe their needs to the developers [30]. To address the issue, developers will create a new branch and write code to implement the new feature or fix the bug according to user requirements. Once the code changes are complete, developers commit them to the new branch, push the branch to the GitHub repository, and then initiate a pull request to propose merging these code changes into the main branch [47]. Finally, project administrators will review the changes in the pull request and, upon approval, merge them into the main branch.

Task Instance Overview			
Instance id	5feceb66ffc8	Owner/Repo	astropy/astropy
Version	5.1	Dependency level	standalone
Base commit	2ae987ba1160486e36eb315ee0e9d85cdbea5844		
<b>Function declaration</b>			
<pre>def _get_nonflat_cls(cls, kls: Optional[Type[_CosmoT]]=None)     -&gt;Optional[Type[Cosmology]]:</pre>			
<b>Brief docstring</b>	Find the corresponding non-flat class.		
<b>Detailed docstring</b>			
<pre>Find the corresponding non-flat class. The class' bases are searched recursively. Parameters ----- kls : :class:`astropy.cosmology.Cosmology` class or None, optional If `None` (default) this class is searched instead of `kls`. Raises ----- TypeError If more than one non-flat class is found at the same level of the inheritance. This is similar to the error normally raised by Python for an inconsistent method resolution order. Returns ----- type A :class:`Cosmology` subclass this class inherits from that is not a :class:`FlatCosmologyMixin` subclass.</pre>			

Figure 2: Task instance overview.

## 3 HUMANEVO BENCHMARK

In this section, we provide a detailed introduction to HUMANEVO from three perspectives: benchmark overview, benchmark construction pipeline, and benchmark characteristics.

### 3.1 Benchmark Overview

HUMANEVO consists of a total of 400 task instances, comprising 200 Python programming questions and 200 Java programming questions, respectively. As illustrated in Figure 2, each task instance is associated with a unique identification number. The Owner/Repo field helps identify the GitHub project from which the selected function originates, while the Version field indicates the version of the project during the implementation of this function. Base commit refers to the last commit on the branch before the target function is committed. We use it to restore the project repository to the state before the target function was implemented. The Function declaration of the target function will be provided to the LLM as part of the prompt, along with its corresponding docstring. Since the docstring styles of functions in pragmatic projects vary, with some adopting line-by-line comments and others even lacking corresponding comments, we think it is necessary to rewrite the docstring for each selected function. As depicted in Figure 2, we provide two styles of docstrings. The Brief docstring provides a concise summary of the functionality of the target function, while the Detailed docstring provides a thorough description of the function’s functionality, inputs, and outputs.

### 3.2 Benchmark Collection Pipeline

As depicted in Figure 3, the construction pipeline of HUMANEVO consists of six steps, mainly revolving around the collection of high-quality PRs. Here are the reasons why we construct HUMANEVO

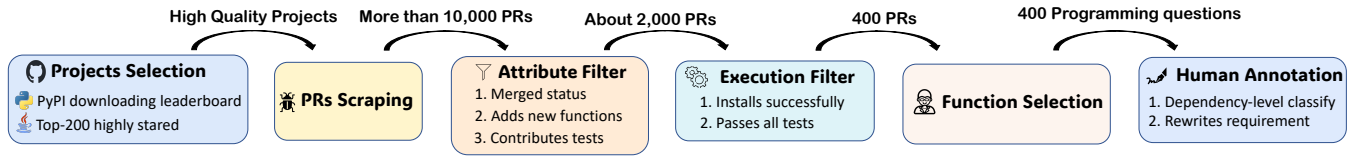


Figure 3: HUMANEVO construction pipeline.

through PRs. We use PRs to construct HUMANEVO primarily for the following three reasons: First, since prompting LLMs to generate repository-level functions can be viewed as an incremental development process, and PRs for adding new features exactly mirror the incremental development process in the real world, we choose to have LLMs generate the newly added functions in PRs to simulate real-world development scenarios. Second, the quality of functions in PRs is guaranteed. Before merging the newly added code in PRs into the project, repository administrators conduct a review on it, which allows us to select high-quality task instances directly. Third, the base commit in PRs helps us roll back the project repository to the state before the target function was committed. Finally, by processing PRs appropriately, we can further determine whether the target functions are covered by the project’s testing framework.

**3.2.1 Projects selection.** In order to make HUMANEVO more representative and adequate, we adopt a comprehensive approach to selecting functions from various open-source projects. For Python, we select high-quality real-world projects from a curated list of the top 5,000 most downloaded PyPI libraries during 2023<sup>1</sup>. Subsequently, we deploy the selected projects and run their testing frameworks to ensure each of them can run correctly and stably. We then proceed to collect PRs for these repositories through the GitHub developer API<sup>2</sup>. For Java, as widely recognized projects typically indicate extensive documentation, structured open-source development guidelines, and functional, well-formatted code, our approach involves searching for the top 200 starred projects on GitHub. Then, we deploy every project on the list to select projects that can be successfully deployed and pass the corresponding test suite. This methodology ensures that the functions selected for evaluation in HUMANEVO are representative of real-world programming scenarios, encompassing a diverse range of projects and languages.

**3.2.2 PR crawling.** We crawl a large number of initial PRs from the popular open-source repositories selected in the procedure above. Specifically, we obtain 12,039 PRs and meticulously record metadata pertaining to these PRs for subsequent filtering processes.

**3.2.3 PR attribute-based filtering.** In this step, we preliminarily filter the crawled PRs based on the following three attributes.

- The status of the PR is “Merged”. A “Merged” status indicates that the code changes associated with the PR were accepted and incorporated into its parent repository.
- The PR must introduce new functions. These newly added functions are typically intended to develop the software project by adding new features, improvements, or fulfilling

general development objectives, which can be selected as programming questions.

- The PR must introduce at least one or more new tests, and these tests must cover the selected function.

All these attributes aim to ensure that the subsequently selected functions are of high quality, have undergone rigorous review and are covered by the project’s testing framework.

**3.2.4 PR execution-based filtering.** In this step, we perform execution-based filtering for the PRs filtered in the attributes filtering step.

Firstly, we prepare the execution environment for each candidate task instance in HUMANEVO. For each task instance, we first determine the version of the project corresponding to the PR, then manually identify the required dependency environment for running the project at that version. For example, for a Python task instance, we confirm the required Python version and the types and versions of third-party libraries it depends on. After obtaining this dependency environment information, we create a virtual execution environment for each version of the project. Task instances that can not install the dependency environment properly are filtered out during this step. After creating the execution environment, we execute the project’s testing framework in the corresponding environment.

Secondly, for each selected function, we execute the project’s test framework in its required environment to ensure that the selected function is covered by the project’s test framework. Specifically, we split the PR’s patch file, which is also known as the code diff file, into two parts, namely the production code patch and the test code patch. For each candidate task, we apply the PR’s test patch and log the associated test results before and after applying the PR’s production patch. Then, we filter out task instances with no test where its status changes from a fail to pass, which indicates the newly added functions are covered by the test suite. After filtering out instances without a fail-to-pass transition, we obtain 400 PRs.

**3.2.5 Function selection.** In this step, we manually select functions from the PRs that have passed the filtering process above to serve as programming questions. After completing the above filtering, we confirm that the remaining PRs meet our requirements. Therefore, we select newly added functions from these PRs to as programming questions. During the selection process, to avoid choosing basic functions, we filter out initialization functions, constructors, and destructors, to ensure the quality of the selected programming questions. Finally, we acquire a total of 400 programming questions.

**3.2.6 Human annotation.** In this step, we recruit six annotators with more than five years of programming experience to manually rewrite two different styles of docstrings for the selected functions and label each function with a dependency level.

<sup>1</sup><https://hugovk.github.io/top-pypi-packages/>

<sup>2</sup><https://api.github.com>

We rewrite the docstring for each instance in HUMANEVO to ensure the quality of the benchmark dataset and mitigate data leakage issues as much as possible. Specifically, in the process of data collection, we find that the docstring styles of actual projects can be divided into two categories: the detail and the brief, so in order to make our benchmark more diverse and better reflect the actual development scenarios, we provide two types of the docstring for each task instance. The detailed docstring describes the function of the target function in detail, as well as the types and meanings of its inputs and outputs. In contrast, a brief docstring only briefly describes what the target function does. After the annotators complete writing the docstrings, we conduct a cross-validation review, requiring each task instance to be verified and confirmed by two developers to ensure accuracy. If the annotators disagree with a docstring written by the previous annotator during the review process, they will discuss the issue together until all annotators reach an agreement.

In order to facilitate the evaluation of the ability of LLMs in generating functions with different dependency levels, we further categorize all task instances in HUMANEVO into three categories: standalone, intra-class, and inter-class functions. A dependency denotes the invocation of elements defined within projects, and the dependency level is defined based on the position of the target function’s dependencies. Standalone functions refer to those that invoke or access only built-in functions and standard libraries. Intra-class functions rely on other functions within the same class. Inter-class functions involve calling functions within the same file or functions in other files.

### 3.3 Benchmark Characteristics

**3.3.1 Evolving-aware benchmark.** HUMANEVO is the pioneering repository-level code generation benchmark to introduce the evolving-aware concept. We highlight a significant oversight in prior research: the developmental trajectory of a project is an evolving process, altering the project context available to programmers as the project advances through various stages. Previous studies have overlooked this temporal dimension, resulting in LLMs being fed with code that had not yet been implemented in the project when certain functions were developed. Consequently, it also misses some context that should have been present but might have been deleted or updated during the project’s evolution. This undoubtedly leads to the model facing an unrealistic development scenario. As a result, the performance of LLMs in real-world software development tasks remains unknown. Therefore, we are committed to enhancing HUMANEVO to serve as a benchmark that better simulates real-world software code development scenarios, aiming to more accurately reflect the true performance of LLMs applied to pragmatic development tasks.

**3.3.2 Strict data filtering process.** We ensure the quality of the selected function from several aspects. First, we ensure that the selected projects are of high quality because high-quality projects generally have excellent maintenance, comprehensive testing frameworks, and good coding styles. For Python, we choose the projects with the highest download count in PyPI. For Java, we select projects from the top 200 projects on GitHub based on the number of stars, with an average of around 24k stars. Previous benchmarks have

**Table 1: Dependency level in HUMANEVO.**

Dependency Level	HUMANEVO-Python	HUMANEVO-Java
Standalone	46 (23.0%)	26 (13.0%)
Intra-class	61 (30.5%)	61 (30.5%)
Inter-class	103 (51.5%)	113 (56.5%)

ensured the functionality of target functions by writing unit tests for each function separately. However, we believe that in a project with complex dependencies, adding a new function may have certain impacts on other parts of the project. Relying solely on unit tests for the target function is insufficient to ensure that the project can still function properly and pass the project’s test framework after inserting the function. Therefore, in this work, we directly run the project’s test framework to ensure the correctness of the target function’s functionality while ensuring that inserting the target function does not have a negative impact on other parts of the project. Of course, to ensure that the test framework covers the target function, during the function selection process, we verify that our selected functions are covered by the project’s test framework through execution-based validation. In other words, a “fail-to-pass” test result implies that the test is set up for the target function and the target function has passed the test.

**3.3.3 Human annotation.** We manually rewrite two styles of docstrings for all task instances and label each of them with a dependency level. During the dataset construction process, we observe different docstring styles among these high-quality projects, which can be generally categorized into the detailed and the brief. Detailed docstring typically provides comprehensive descriptions of a function’s functionality, elucidates input and output parameter types, and annotates potential error scenarios. Conversely, a brief docstring succinctly outlines the function’s functionality in a few sentences. To enhance the diversity of our benchmark and better align with real-world development scenarios, we manually crafted two types of docstring for each function: detailed and brief. This provides users with more options for subsequent usage.

Furthermore, to facilitate the assessment of LLMs’ capability in generating functions with varying levels of dependency, we categorize the selected functions based on their dependency levels, including standalone, intra-class, and inter-class. Standalone functions can be implemented without relying on other functions within the project. Intra-class functions require dependencies on other functions within the same class. Inter-class functions imply more complex dependencies, with most of the dependent functions being located in other files within the project. Manual categorization of dependency levels aids in analyzing the performance of LLMs in generating functions of varying complexity, facilitating researchers in improving the application of LLMs in practical development scenarios based on different contexts. Moreover, as indicated in Table 1, the majority of our benchmark consists of functions with deep dependency levels. This suggests that our benchmark presents a sufficiently challenging scenario.

## 4 EXPERIMENTAL DESIGN

In this section, we introduce the models used in the experiments, outline the research questions that the experiments aim to address and provide a detailed description of the experimental setups.

### 4.1 Model Selection

We categorize mainstream LLMs for code generation into two groups: open-source LLMs and closed-source LLMs. For open-source LLMs, we select the CodeLlama series (including **CodeLlama-7B**, **CodeLlama-13B**, and **CodeLlama-34B**) and the DeepSeekCoder series (including **DeepSeekCoder-6.7B** and **DeepSeekCoder-33B**). The CodeLlama and DeepSeekCoder series are popular models that perform well in code generation. For closed-source LLMs, we choose the commonly used commercial models: **GPT-3.5-Turbo** and **GPT-4**, with GPT-4 having demonstrated superior performance levels in previous benchmarks.

### 4.2 Research Questions

Our experiments intend to answer the following research questions:

- **RQ1: How effective is HUMANEvo in benchmarking the performance of LLMs in repository-level code generation task?**

We conduct experiments under two different settings, evolving-aware and evolving-ignored, to explore the differences in model performance between these two settings and reveal the actual performance of the models in real development scenarios.

- **RQ2: How does the code generation performance change as repository evolves?**

We selected multiple versions of the project after the target function was committed as the context source to explore how the model’s performance gradually deviates from reality over time under the evolving-ignored setting.

- **RQ3: How different code descriptions in the dataset affect code generation performance?**

We conduct experiments to compare the performance of the model under different docstring styles.

### 4.3 Experimental Settings

Due to the large size of modern software repositories, it is not feasible to feed the entire repository to the model. Thus, previous researchers mainly obtain project context that might be beneficial for generating target functions through two approaches: retrieval-based and static analysis-based methods. In the experiments below, we cover both of these technical routes to demonstrate that the evolving-ignored situation leads to the deviation of the context source from reality.

**4.3.1 Retrieval based project context acquisition.** We adopt the standard retrieval-augmented-generation pipeline for repository-level code generation [20, 50, 58, 63]. In the evolving-aware setting, we restore the project repository to the state before the target code was committed for each task instance. On the contrary, in the evolving-ignored settings, we directly utilize the latest project version as the context source. Then, we construct a corresponding context retrieval database by partitioning the source code files from the

**Table 2: Retrieval-based project context acquisition approach: model performance under evolving-aware (HUMANEvo) and evolving-ignored (EI) settings. DepSCode is short for DeepSeekCoder.**

Model	Python		Java	
	EI	HUMANEvo	EI	HUMANEvo
CodeLlama-7B	29.0%	22.0% (↓ 24.1%)	8.5%	6.0% (↓ 29.4%)
CodeLlama-13B	30.5%	23.0% (↓ 24.6%)	9.5%	7.0% (↓ 26.3%)
CodeLlama-34B	31.5%	24.0% (↓ 23.8%)	14.5%	10.0% (↓ 31.0%)
DepSCode-6.7B	30.0%	23.0% (↓ 23.3%)	13.0%	9.0% (↓ 30.8%)
DepSCode-33B	31.0%	25.0% (↓ 19.4%)	15.5%	11.5% (↓ 25.8%)
GPT-3.5-Turbo	32.5%	25.5% (↓ 21.5%)	18.0%	13.0% (↓ 27.8%)
GPT-4	34.5%	26.5% (↓ 23.2%)	20.5%	14.5% (↓ 29.3%)

repository into a collection of code snippets. Subsequently, we utilize the docstring of the target code as the query for retrieval and compute the Jaccard similarity between the query and all code snippets in the context retrieval database. After sorting all the code snippets by similarity score, we select project contexts with higher similarity scores as project context for target function generation.

**4.3.2 Static analysis based project context acquisition.** Similar to the static analysis based repository-level code generation work [53], we obtain code files in the repository that might help generate the target code through static analysis. First, we roll back the project repository to the corresponding state according to evolving-ignored or evolving-aware settings. Then, we extract the source code from these files as project context to feed to the model. There are four types of context sources: local file (the file where the target code resides), import file (files imported by the local file in the project repository), sibling file (files located in the same folder as the local file), and similar file (files in the project repository with names similar to the local file). We utilize four prompting strategies from [53]: **local** – extracting context solely from the local file; **local+import** – extracting code from both local and import files; **local+sibling** – extracting code from both local and sibling files; **local+sim** – extracting code from both local and similar files.

**4.3.3 Evaluation metric.** We assess the functionality correctness of code generated by LLMs with execution-based evaluation and utilize the commonly used metric **Pass@1** for evaluation. Note that, to mitigate issues stemming from model-generated randomness, the experimental results presented subsequently are obtained by conducting three repeated experiments and averaging the results.

## 5 EVALUATION RESULTS

### 5.1 RQ1: How effective is HUMANEvo in benchmarking the performance of LLMs in repository-level code generation task?

**5.1.1 Overall performance.** Table 2 and Table 3 present the performance of seven mainstream LLMs under two different experimental settings: **Evolving-Ignored** (where the context source is the latest version of the project repository) and **Evolving-Aware** (HUMANEvo, where the context source is the project repository

**Table 3: Static analysis based project context acquisition approaches: model performance under evolving-aware (HUMANEvo) and evolving-ignored (EI) settings.**

Data	Model	local		local+import		local+sibling		local+sim	
		EI	HUMANEvo	EI	HUMANEvo	EI	HUMANEvo	EI	HUMANEvo
HUMANEvo-Python	CodeLlama-7B	27.0%	24.0%(↓ 11.1%)	28.0%	25.0%(↓ 10.7%)	28.5%	25.0%(↓ 12.3%)	29.0%	25.0%(↓ 13.8%)
	CodeLlama-13B	28.5%	24.5%(↓ 14.0%)	29.5%	26.5%(↓ 10.2%)	29.5%	25.5%(↓ 13.6%)	30.5%	25.5%(↓ 16.4%)
	CodeLlama-34B	29.5%	25.0%(↓ 15.3%)	30.0%	27.0%(↓ 10.0%)	30.0%	26.5%(↓ 11.7%)	30.5%	26.5%(↓ 13.1%)
	DeepSeekCoder-6.7B	29.0%	24.0%(↓ 17.2%)	29.0%	24.5%(↓ 15.5%)	29.0%	25.5%(↓ 12.1%)	29.5%	26.0%(↓ 12.1%)
	DeepSeekCoder-33B	30.5%	25.5%(↓ 16.4%)	31.0%	26.5%(↓ 14.5%)	30.5%	26.5%(↓ 13.1%)	31.0%	26.5%(↓ 14.5%)
	GPT-3.5-Turbo	33.0%	26.5%(↓ 19.7%)	34.0%	27.0%(↓ 20.6%)	32.5%	26.5%(↓ 18.5%)	33.5%	27.5%(↓ 17.9%)
	GPT-4	34.5%	27.0%(↓ 21.7%)	35.0%	28.0%(↓ 20.0%)	34.5%	27.5%(↓ 20.3%)	35.5%	28.0%(↓ 21.1%)
HUMANEvo-Java	CodeLlama-7B	16.5%	8.0%(↓ 51.5%)	15.0%	6.5%(↓ 56.7%)	12.0%	6.0%(↓ 50.0%)	13.5%	6.5%(↓ 51.9%)
	CodeLlama-13B	15.0%	6.5%(↓ 56.7%)	16.0%	7.0%(↓ 56.3%)	15.5%	6.5%(↓ 58.1%)	15.5%	6.5%(↓ 58.1%)
	CodeLlama-34B	17.5%	8.0%(↓ 54.3%)	14.5%	7.0%(↓ 51.7%)	12.5%	6.5%(↓ 48.0%)	14.5%	8.0%(↓ 44.8%)
	DeepSeekCoder-6.7B	17.0%	8.5%(↓ 50.0%)	16.5%	10.0%(↓ 39.3%)	14.5%	9.0%(↓ 37.9%)	18.0%	7.0%(↓ 61.1%)
	DeepSeekCoder-33B	16.5%	10.0%(↓ 39.3%)	16.5%	10.0%(↓ 39.3%)	18.5%	8.5%(↓ 54.1%)	19.0%	10.0%(↓ 47.4%)
	GPT-3.5-Turbo	19.5%	11.5%(↓ 41.0%)	21.0%	14.0%(↓ 33.3%)	20.0%	12.0%(↓ 40.0%)	21.5%	13.0%(↓ 39.5%)
	GPT-4	22.0%	13.5%(↓ 38.6%)	23.0%	14.5%(↓ 37.0%)	22.5%	14.0%(↓ 37.8%)	23.5%	14.5%(↓ 38.3%)

**Table 4: Break down analysis. EA and EI stand for evolving-aware and evolving-ignored, respectively. ✓ means success, × means failure.**

Model	Python			Java		
	EA✓	EA✓	EA×	EA✓	EA✓	EA×
	EI×	EI✓	EI✓	EI×	EI✓	EI✓
CodeLlama-7B	7	37	21	3	9	8
CodeLlama-13B	4	42	19	3	11	8
CodeLlama-34B	2	46	17	6	14	15
DeepSeekCoder-6.7B	4	42	18	7	11	15
DeepSeekCoder-33B	4	46	16	5	18	13
GPT-3.5-Turbo	2	49	16	10	16	20
GPT-4	0	53	15	4	25	16

before the target function was committed). Table 2 shows the performance of retrieval based project context acquisition approach, and Table 3 shows the performance of static analysis based project context acquisition approaches.

All the experimental results shown in Table 2 and Table 3 show a significant decrease in performance under the evolving-aware setting compared to the evolving-ignored setting. This suggests that in the evolving-ignored setting, the context source provided to the model contains too much future context, leading to an unrealistically inflated performance of the LLMs.

**5.1.2 Break down analysis.** We further analyze the generation results of LLMs to investigate whether both issues described in Figure 1 have certain impact on the final results. Table 4 illustrates the overlap of successful task instances between **evolving-aware** setting and **evolving-ignored** setting. Since the results from retrieval-based project context acquisition approach and static analysis based

project context acquisition approaches are similar, subsequent analysis primarily focuses on the experimental results of the retrieval-based approach. As introduced above, the future context leakage issue will lead to inflated performance, while the useful context leakage issues issue will lead to underestimated performance. However, the results in Table 2 reflect that models’ overall performance only exhibits an inflated trend, driving us to delve deeper into whether the situation of useful context leakage has occurred. We investigate the overlap between task instances that LLMs successfully completed under evolving-ignored and evolving-aware settings.

In Table 4, EA stands for the evolving-aware setting and EI stands for the evolving-ignored setting. A ✓ means successful, while a × means failure. So, EA✓EI× refers to the number of instances that pass under the evolving-aware setting but fail under the evolving-ignored setting, which is typically caused by useful context missing. EA×EI✓ represents instances that fail under EA but pass under EI, which is typically caused by future context leakage. EA✓EI✓ denotes the number of instances that pass under both settings. From the experimental results, it is evident that except for GPT-4 in HUMANEvo-Python, which has a value of 0 for EA✓EI× situation, all other LLMs exhibit deviations from reality caused by the absence of necessary context in a certain quantity, showing that the issue of useful context missing have impact on evolving-ignored setting. However, due to the significantly higher number in EA×EI✓, the primary influencing factor remains the future context leakage, leading to exaggerated performance of LLMs.

**5.1.3 Dependency level.** Functions with different dependency levels vary in their reliance on project context, and the evolving-ignored setting directly affects project context. Therefore, in this experiment, We examine the performance differences of LLMs in generating functions with deeper dependency levels, focusing on non-standalone functions in HUMANEvo, which encompass intra-class and inter-class functions, across two settings: evolving-ignored and evolving-aware.



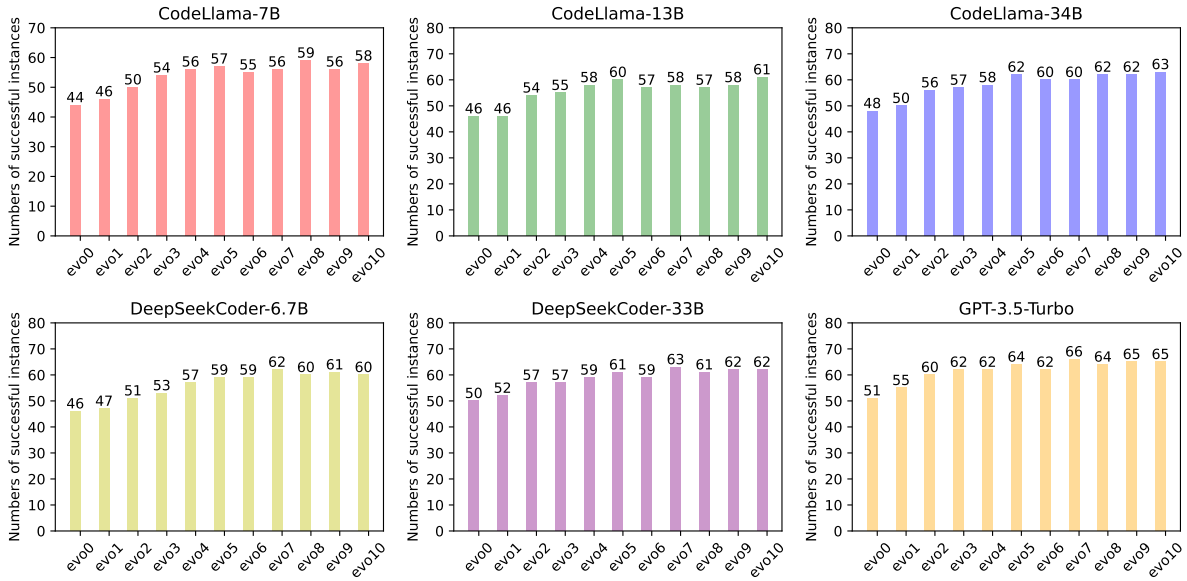


Figure 4: LLM’s performance when using different project version as context source.

Table 5: Model performance in generating functions with deeper dependency levels.

Model	Python		Java	
	EI	HUMANEVO	EI	HUMANEVO
CodeLlama-7B	32.8%	31.1% (↓ 5.0%)	1.6%	1.6%
CodeLlama-13B	29.5%	27.9% (↓ 5.6%)	2.9%	1.9% (↓ 33.3%)
CodeLlama-34B	34.4%	27.9% (↓ 19.0%)	8.2%	6.6% (↓ 20.0%)
Intra-Class DeepSeekCoder-6.7B	34.4%	27.9% (↓ 19.0%)	4.9%	3.3% (↓ 33.3%)
DeepSeekCoder-33B	37.7%	34.4% (↓ 8.7%)	3.3%	3.3%
GPT-3.5-Turbo	36.1%	29.5% (↓ 18.2%)	4.9%	4.9%
GPT-4	37.7%	32.9% (↓ 13.0%)	8.2%	4.9% (↓ 40.0%)
Inter-Class CodeLlama-7B	27.2%	17.5% (↓ 35.7%)	10.6%	5.3% (↓ 50.0%)
CodeLlama-13B	31.1%	20.3% (↓ 34.4%)	10.6%	6.2% (↓ 41.7%)
CodeLlama-34B	30.1%	22.3% (↓ 25.8%)	15.0%	10.6% (↓ 29.4%)
DeepSeekCoder-6.7B	27.2%	20.4% (↓ 25.0%)	15.9%	11.5% (↓ 27.8%)
DeepSeekCoder-33B	28.2%	21.4% (↓ 24.1%)	17.7%	13.3% (↓ 25%)
GPT-3.5-Turbo	31.1%	23.3% (↓ 25.0%)	21.2%	14.2% (↓ 33.3%)
GPT-4	32.0%	23.3% (↓ 27.3%)	22.1%	15.9% (↓ 28.0%)

As shown in Table 5, under the evolving-aware setting, the accuracy of LLM in generating both intra-class and inter-class functions has noticeably declined. The decline is more pronounced for inter-class functions, as these functions typically require cross-file context, which is often more scattered. As the project evolves, its various parts tend to become more comprehensive. Therefore, under the evolving-ignored setting, the models can reference an increasing amount of context. Consequently, when the evolving-aware setting loses access to these contexts, the model’s performance significantly deteriorates.

**RQ1 Summary:** Experiments show an inflated trend in LLM’s performance under the Evolving-ignored setting. Upon further investigation, we discovered that both the presence of too much extraneous context and the disappearance of context that should exist have significantly affected the model’s performance, resulting in the model’s performance deviating from reality.

## 5.2 RQ2: How does the code generation performance change as repository evolves?

To further illustrate the impact of the evolving-ignored setting on the performance of LLMs as projects evolve, we conduct more in-depth experimental exploration. Typically, a project’s version number consists of three digits in the format like “0.0.0” where the first digit represents the major version, the second digit represents the minor version, and the last digit represents the patch version. To simulate the evolution process of a project, in Figure 4, we start with ev00 (evolving-aware setting) and increment the minor version number by one each time. If there are no more minor versions under that major version, the major version is incremented until the latest version of the project is reached. We do not update the patch version because patch versions generally entail minimal changes to the project.

As shown in Figure 4, the performance of LLMs deviates from reality as the project evolves. However, the artificial improvement in model performance induced by the evolving-ignored setting does not exhibit a linear increase but rather a curve indicating an upward trend. Updates in the project sometimes introduce irrelevant project contexts, which can act as noise and impact the performance of LLMs. Additionally, project updates may result in the removal or modification of originally useful contexts, leading to the direct loss of context that aids in model objective generation, thereby causing a decline in model performance. These factors may be the primary reasons for the occasional slight decrease in model performance when using different versions of the project as context sources.

**RQ2 Summary:** In the evolving-ignored setting, as the project evolves, the model’s performance gradually deviates from reality, and the model’s overestimation does not increase linearly but rather follows a fluctuating curve.

### 5.3 RQ3: How different code descriptions in the dataset affect code generation performance?

During the benchmark collection process, we notice that some projects tend to write detailed docstrings, while others prefer to describe the function’s functionality using only brief statements. To make our benchmark more diverse and reflective of real-world development scenarios, we manually write both brief and detailed docstrings for each function in HUMANEVO. In this experiment, we evaluate the performance of the selected LLMs on two types of manually written docstrings. As shown in Table 6, experimental results indicate that the majority of LLMs perform better on detailed docstrings compared to brief docstrings. This is because detailed docstrings provide a more comprehensive description of the functionality of the target function, some even including the implementation logic of the target function. In addition, detailed docstrings also provide explanations for the input and output of the target function, enabling LLMs to better understand the tasks to be performed. Conversely, brief docstrings only introduce the intention of the target function, which may lead to LLMs struggling to understand user intent in certain complex scenarios, ultimately resulting in decreased performance.

However, the decline in LLMs’ performance is not significant, mainly because we adopted a retrieval-augmented generation approach, retrieving a large amount of context from the project repository through similarity calculation. These contexts contribute to a lengthy prompt. However, when LLMs deal with overly long prompts, their attention gets dispersed, leading to the neglect of some useful information by the model.

**RQ3 Summary:** Compared to brief docstrings, detailed docstrings provide more beneficial information to LLMs, resulting in better performance on detailed docstrings. However, due to the extensive project context required for completing the repository-level code generation task, the model’s attention gets dispersed. Consequently, the performance improvement on detailed docstrings is not substantial.

## 6 THREADS TO VALIDITY

First, due to limited computational resources, our experiments did not cover all code LLMs, thus not fully reflecting the performance of all LLMs in actual development scenarios, which may slightly affect the representativeness of our experiments. Second, currently HUMANEVO only includes two languages. In the future, we will continue to expand HUMANEVO to cover as many programming languages as possible. Third, in prompt format selection, we ultimately chose the one that yielded the best results after trying several formats. However, since we did not cover all available prompt formats, the one we selected may not be the best. Finally, our benchmark includes GitHub data from before 2023, which might already be present in the pretraining dataset of the models, posing a risk of data leakage. To mitigate this risk, we construct an automated

**Table 6: Model performance under different docstrings styles. DepSCode is short for DeepSeekCoder.**

Model	Docstring	Python		Java	
		EI	HUMANEVO	EI	HUMANEVO
CodeLlama-7B	Detailed	29.0%	22.0%	8.5%	6.0%
	Brief	28.5%	22.0%	7.0%	4.5%
CodeLlama-13B	Detailed	30.5%	23.0%	9.5%	7.0%
	Brief	30.0%	22.5%	8.5%	5.0%
CodeLlama-34B	Detailed	31.5%	24.0%	14.5%	10.0%
	Brief	31.0%	24.5%	11.5%	7.0%
DepSCode-6.7B	Detailed	30.0%	23.0%	13.0%	9.0%
	Brief	30.0%	23.0%	10.5%	6.5%
DepSCode-33B	Detailed	31.0%	25.0%	15.5%	11.5%
	Brief	31.0%	24.0%	13.5%	9.0%
GPT-3.5-Turbo	Detailed	32.5%	25.5%	18.0%	13.0%
	Brief	31.5%	24.5%	14.5%	11.0%
GPT-4	Detailed	34.5%	26.5%	20.5%	14.5%
	Brief	32.5%	25.0%	16.5%	12.5%

benchmark construction pipeline that continuously updates the dataset.

## 7 RELATED WORK

CoderEval [59] contains 230 samples from 43 Python projects and 230 samples from 10 Java projects. They categorize task instances into six runnable-levels to better analyze LLMs’ code generation performance. EvoCodeBench [33] collects data from 25 real-world repositories. It also ensures that the distribution of programming tasks (with or without dependencies) matches the distribution of real repositories. RepoCoder [63] proposed RepoEval, which consists of the latest and high-quality real-world repositories covering scenarios such as line completion, API invocation, and function body completion. Currently, most benchmarks for LLM code generation provide simple functions, mostly targeting general functions rather than specific domains, thus limiting practicality. However, BioCoder [54], a benchmark for bioinformatics code generation, has been introduced. BioCoder carefully selects 28 high-quality projects related to bioinformatics, then parses these repositories to generate ASTs and obtain relevant data. A custom code context is written for each filtered function, including necessary imports, cross-file dependencies, and some test cases.

However, all the benchmarks mentioned above have a common flaw: they all overlook the evolution of projects over time. These benchmarks take the latest version of the project repository as the context source, and such an evolving-ignored setting makes it difficult for them to accurately reflect the performance of LLMs in real-world development scenarios. Therefore, in this work, we propose HUMANEVO, the first repository-level evolving-aware code generation benchmark. Before obtaining the project context for the target function, we roll back the project repository to the state before the target function was committed to ensure that the project context provided to LLMs does not suffer from issues such as future context leakage and missing useful context. Our objective is to offer LLMs a more realistic development scenario, thus more

accurately reflecting the actual performance of LLMs in real-world development scenarios.

## 8 CONCLUSION

In this paper, we highlight a previously overlooked flaw in evaluating existing repository-level code generation methods: the evolution of projects over time. To address it, we introduce HUMANEVO, an evolving-aware repository code generation benchmark, and conduct a comprehensive empirical study to explore LLMs' performance in pragmatic development scenarios. Experimental results demonstrate that the evolving-ignored situation leads to the inflated performance of LLMs. By incorporating temporal considerations into the benchmark, HUMANEVO provides a more comprehensive assessment of model performance in pragmatic development scenarios. We believe that our empirical results and HUMANEVO will offer valuable insights for the future development of LLMs-based repository-level code generation benchmarks.

## REFERENCES

- [1] Lakshya A Agrawal, Aditya Kanade, Navin Goyal, Shuvendu Lahiri, and Sriram Rajamani. 2024. Monitor-Guided Decoding of Code LMs with Static Analysis of Repository Context. *Advances in Neural Information Processing Systems* 36 (2024).
- [2] Loubna Ben Allal, Raymond Li, Denis Kocetkov, Chenghao Mou, Christopher Akiki, Carlos Munoz Ferrandis, Niklas Muennighoff, Mayank Mishra, Alex Gu, Manan Dey, et al. 2023. SantaCoder: don't reach for the stars! *arXiv preprint arXiv:2301.03988* (2023).
- [3] Ben Athiwaratkun, Sanjay Krishna Gouda, Zijian Wang, Xiaopeng Li, Yuchen Tian, Ming Tan, Wasi Uddin Ahmad, Shiqi Wang, Qing Sun, Mingyue Shang, Sujan Kumar Gonugondla, Hantian Ding, Varun Kumar, Nathan Fulton, Arash Farahani, Siddhartha Jain, Robert Gjaquinto, Haifeng Qian, Murali Krishna Ramanathan, Ramesh Nallapati, Baishakhi Ray, Parminder Bhatia, Sudipta Sengupta, Dan Roth, and Bing Xiang. 2023. Multi-lingual Evaluation of Code Generation Models. In *The Eleventh International Conference on Learning Representations*.
- [4] Jacob Austin, Augustus Odena, Maxwell Nye, Maarten Bosma, Henryk Michalewski, David Dohan, Ellen Jiang, Carrie Cai, Michael Terry, Quoc Le, et al. 2021. Program synthesis with large language models. *arXiv preprint arXiv:2108.07732* (2021).
- [5] Ramakrishna Bairi, Atharv Sonwane, Aditya Kanade, Arun Iyer, Suresh Parthasarathy, Sriram Rajamani, B Ashok, Shashank Shet, et al. 2023. CodePlan: Repository-level coding using llms and planning. *arXiv preprint arXiv:2309.12499* (2023).
- [6] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems* 33 (2020), 1877–1901.
- [7] Federico Cassano, John Gouwar, Daniel Nguyen, Sydney Nguyen, Luna Phipps-Costin, Donald Pinckney, Ming-Ho Yee, Yangtian Zi, Carolyn Jane Anderson, Molly Q Feldman, et al. 2022. A scalable and extensible approach to benchmarking nl2code for 18 programming languages. *arXiv preprint arXiv:2208.08227* (2022).
- [8] Federico Cassano, John Gouwar, Daniel Nguyen, Sydney Nguyen, Luna Phipps-Costin, Donald Pinckney, Ming-Ho Yee, Yangtian Zi, Carolyn Jane Anderson, Molly Q Feldman, Arjun Guha, Michael Greenberg, and Abhinav Jangda. 2022. MultiPL-E: A Scalable and Extensible Approach to Benchmarking Neural Code Generation. *arXiv:2208.08227* [cs.LG]
- [9] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Josh Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. 2021. Evaluating Large Language Models Trained on Code. *arXiv:2107.03374* [cs.LG]
- [10] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374* (2021).
- [11] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. 2023. Palm: Scaling language modeling with pathways. *Journal of Machine Learning Research* 24, 240 (2023), 1–113.
- [12] Fenia Christopoulou, Gerasimos Lampouras, Milan Gritta, Guchun Zhang, Yinpeng Guo, Zhongqi Li, Qi Zhang, Meng Xiao, Bo Shen, Lin Li, Hao Yu, Li Yan, Pingyi Zhou, Xin Wang, Yuchi Ma, Ignacio Iacobacci, Yasheng Wang, Guangtai Liang, Jiansheng Wei, Xin Jiang, Qianxiang Wang, and Qun Liu. 2022. PanGu-Coder: Program Synthesis with Function-Level Language Modeling. *arXiv:2207.11280* [cs.LG]
- [13] D.I. Cleland. 2004. The evolution of project management. *IEEE Transactions on Engineering Management* 51, 4 (2004), 396–397. <https://doi.org/10.1109/TEM.2004.836362>
- [14] Laura Dabbish, Colleen Stuart, Jason Tsay, and Jim Herbsleb. 2012. Social coding in GitHub: transparency and collaboration in an open software repository. In *Proceedings of the ACM 2012 conference on computer supported cooperative work*. 1277–1286.
- [15] Yangruibo Ding, Zijian Wang, Wasi Ahmad, Hantian Ding, Ming Tan, Nihal Jain, Murali Krishna Ramanathan, Ramesh Nallapati, Parminder Bhatia, Dan Roth, et al. 2024. Crosscodeeval: A diverse and multilingual benchmark for cross-file code completion. *Advances in Neural Information Processing Systems* 36 (2024).
- [16] Y Ding, Z Wang, WU Ahmad, MK Ramanathan, R Nallapati, P Bhatia, D Roth, and B Xiang. [n. d.]. CoCoMIC: Code Completion By Jointly Modeling In-file and Cross-file Context, December 2022. [URL http://arxiv.org/abs/2212.10007](http://arxiv.org/abs/2212.10007) ([n. d.]).
- [17] Yihong Dong, Xue Jiang, Zhi Jin, and Ge Li. 2023. Self-collaboration Code Generation via ChatGPT. *arXiv e-prints* (2023), arXiv–2304.
- [18] Xueying Du, Mingwei Liu, Kaixin Wang, Hanlin Wang, Junwei Liu, Yixuan Chen, Jiayi Feng, Chaofeng Sha, Xin Peng, and Yiling Lou. 2023. ClassEval: A Manually-Crafted Benchmark for Evaluating LLMs on Class-level Code Generation. *arXiv:2308.01861* [cs.CL]
- [19] Aryaz Eghbali and Michael Pradel. 2024. De-Hallucinator: Iterative Grounding for LLM-Based Code Completion. *arXiv:2401.01701* [cs.SE]
- [20] Thibault Formal, Carlos Lassance, Benjamin Piwowarski, and Stéphane Clinchant. 2022. From distillation to hard negative sampling: Making sparse neural ir models more effective. In *Proceedings of the 45th international ACM SIGIR conference on research and development in information retrieval*. 2353–2359.
- [21] Daniel Fried, Armen Aghajanyan, Jessy Lin, Sida Wang, Eric Wallace, Freda Shi, Ruiqi Zhong, Scott Yih, Luke Zettlemoyer, and Mike Lewis. 2023. InCoder: A Generative Model for Code Infilling and Synthesis. In *The Eleventh International Conference on Learning Representations*.
- [22] Daya Guo, Qihao Zhu, Dejian Yang, Zhenda Xie, Kai Dong, Wentao Zhang, Guanting Chen, Xiao Bi, Y. Wu, Y. K. Li, Fuli Luo, Yingfei Xiong, and Wenfeng Liang. 2024. DeepSeek-Coder: When the Large Language Model Meets Programming – The Rise of Code Intelligence. *arXiv:2401.14196* [cs.SE]
- [23] Yiyang Hao, Ge Li, Yongqiang Liu, Xiaowei Miao, He Zong, Siyuan Jiang, Yang Liu, and He Wei. 2022. AixBench: A Code Generation Benchmark Dataset. *arXiv:2206.13179* [cs.SE]
- [24] Sirui Hong, Mingchen Zhuge, Jonathan Chen, Xiawu Zheng, Yuheng Cheng, Jinlin Wang, Ceyao Zhang, Zili Wang, Steven Ka Shing Yau, Zijuan Lin, Liyang Zhou, Chenyu Ran, Lingfeng Xiao, Chenglin Wu, and Jürgen Schmidhuber. 2024. MetaGPT: Meta Programming for Multi-Agent Collaborative Framework. In *The Twelfth International Conference on Learning Representations*.
- [25] Srinivasan Iyer, Ioannis Konstas, Alvin Cheung, and Luke Zettlemoyer. 2018. Mapping Language to Code in Programmatic Context. In *2018 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics, 1643–1652.
- [26] Naman Jain, Skanda Vaidyanath, Arun Iyer, Nagarajan Natarajan, Suresh Parthasarathy, Sriram Rajamani, and Rahul Sharma. 2022. Jigsaw: Large language models meet program synthesis. In *Proceedings of the 44th International Conference on Software Engineering*. 1219–1231.
- [27] Shuyang Jiang, Yuhao Wang, and Yu Wang. 2023. Selfevolve: A code evolution framework via large language models. *arXiv preprint arXiv:2306.02907* (2023).
- [28] Carlos E Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik R Narasimhan. 2024. SWE-bench: Can Language Models Resolve Real-world Github Issues?. In *The Twelfth International Conference on Learning Representations*.
- [29] Eirini Kalliamvakou, Daniela Damian, Kelly Blincoe, Leif Singer, and Daniel M German. 2015. Open source-style collaborative development practices in commercial projects using GitHub. In *2015 IEEE/ACM 37th IEEE international conference on software engineering*, Vol. 1. IEEE, 574–585.
- [30] Rafael Kallis, Andrea Di Sorbo, Gerardo Canfora, and Sebastiano Panichella. 2021. Predicting issue types on GitHub. *Science of Computer Programming* 205 (2021), 102598.
- [31] Mohammad Abdullah Matin Khan, M Saiful Bari, Xuan Long Do, Weishi Wang, Md Rizwan Parvez, and Shafiq Joty. 2023. xCodeEval: A Large Scale Multilingual Multitask Benchmark for Code Understanding, Generation, Translation and

- Retrieval. arXiv:2303.03004 [cs.CL]
- [32] Yuhang Lai, Chengxi Li, Yiming Wang, Tianyi Zhang, Ruiqi Zhong, Luke Zettlemoyer, Wen-tau Yih, Daniel Fried, Sida Wang, and Tao Yu. 2023. DS-1000: A natural and reliable benchmark for data science code generation. In *International Conference on Machine Learning*. PMLR, 18319–18345.
- [33] Jia Li, Ge Li, Xuanming Zhang, Yihong Dong, and Zhi Jin. 2024. EvoCodeBench: An Evolving Code Generation Benchmark Aligned with Real-World Code Repositories. arXiv:2404.00599 [cs.CL]
- [34] Jia Li, Ge Li, Yunfei Zhao, Yongmin Li, Zhi Jin, Hao Zhu, Huanyu Liu, Kaibo Liu, Lecheng Wang, Zheng Fang, et al. 2024. DevEval: Evaluating Code Generation in Practical Software Projects. arXiv preprint arXiv:2401.06401 (2024).
- [35] Raymond Li, Loubna Ben allal, Yangtian Zi, Niklas Muennighoff, Denis Cocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, Qian Liu, Evgenii Zheltonozhskii, Terry Yu Zhuo, Thomas Wang, Olivier Dehaene, Joel Lamy-Poirier, Joao Monteiro, Nicolas Gontier, Ming-Ho Yee, Logesh Kumar Umaphathi, Jian Zhu, Ben Lipkin, Muhtasham Oblokulov, Zhiruo Wang, Rudra Muthy, Jason T Stillerman, Siva Sankalp Patel, Dmitry Abulkhanov, Marco Zocca, Manan Dey, Zhihan Zhang, Urvashi Bhattacharyya, Wenhao Yu, Sasha Luccioni, Paulo Villegas, Fedor Zhdanov, Tony Lee, Nadav Timor, Jennifer Ding, Claire S Schlesinger, Hailey Schoelkopf, Jan Ebert, Tri Dao, Mayank Mishra, Alex Gu, Carolyn Jane Anderson, Brendan Dolan-Gavitt, Danish Contractor, Siva Reddy, Daniel Fried, Dzmitry Bahdanau, Yacine Jernite, Carlos Muñoz Ferrandis, Sean Hughes, Thomas Wolf, Arjun Guha, Leandro Von Werra, and Harm de Vries. 2023. StarCoder: may the source be with you! *Transactions on Machine Learning Research* (2023). Reproducibility Certification.
- [36] Yujia Li, David Choi, Junyoung Keung, Nate Kushman, Julian Schrittwieser, Rémi Leblond, Tom Eccles, James Chessing, Felix Gimeno, Agustin Dal Lago, Thomas Hubert, Peter Choy, Cyprien de Masson d’Autume, Igor Babuschkin, Xinyun Chen, Po-Sen Huang, Johannes Welbl, Sven Gowal, Alexey Cherepanov, James Molloy, Daniel J. Mankowitz, Esme Sutherland Robson, Pushmeet Kohli, Nando de Freitas, Koray Kavukcuoglu, and Oriol Vinyals. 2022. Competition-level code generation with AlphaCode. (Dec. 2022), 1092–1097.
- [37] Ming Liang, Xiaoheng Xie, Gehao Zhang, Xunjin Zheng, Peng Di, wei jiang, Hongwei Chen, Chengpeng Wang, and Gang Fan. 2024. REPOFUSE: Repository-Level Code Completion with Fused Dual Context. arXiv:2402.14323 [cs.SE]
- [38] Dianshu Liao, Shidong Pan, Xiaoyu Sun, Xiaoxue Ren, Qing Huang, Zhenchang Xing, Huan Jin, and Qinying Li. 2024. A<sup>3</sup>-CodGen: A Repository-Level Code Generation Framework for Code Reuse with Local-Aware, Global-Aware, and Third-Party-Library-Aware. arXiv:2312.05772 [cs.SE]
- [39] Tianyang Liu, Canwen Xu, and Julian McAuley. 2024. RepoBench: Benchmarking Repository-Level Code Auto-Completion Systems. In *The Twelfth International Conference on Learning Representations*.
- [40] Ziyang Luo, Can Xu, Pu Zhao, Qingfeng Sun, Xiubo Geng, Wenxiang Hu, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. 2024. WizardCoder: Empowering Code Large Language Models with Evol-Instruct. In *The Twelfth International Conference on Learning Representations*.
- [41] Bogdan Negoita, Gregory Vial, Maha Shaikh, and Aurélie Labbe. 2019. Code forking and software development project sustainability: Evidence from GitHub. (2019).
- [42] Erik Nijkamp, Bo Pang, Hiroaki Hayashi, Lifu Tu, Huan Wang, Yingbo Zhou, Silvio Savarese, and Caiming Xiong. 2023. CodeGen: An Open Large Language Model for Code with Multi-Turn Program Synthesis. In *The Eleventh International Conference on Learning Representations*.
- [43] OpenAI. 2024. GPT-4 Technical Report. arXiv:2303.08774 [cs.CL]
- [44] Huy N. Phan, Hoang N. Phan, Tien N. Nguyen, and Nghi D. Q. Bui. 2024. RepoHyper: Better Context Retrieval Is All You Need for Repository-Level Code Completion. arXiv:2403.06095 [cs.SE]
- [45] Chen Qian, Xin Cong, Wei Liu, Cheng Yang, Weize Chen, Yusheng Su, Yufan Dang, Jiahao Li, Juyuan Xu, Dahai Li, Zhiyuan Liu, and Maosong Sun. 2023. Communicative Agents for Software Development. arXiv:2307.07924 [cs.SE]
- [46] Mohammad Masudur Rahman and Chanchal K. Roy. 2014. An insight into the pull requests of GitHub (*MSR 2014*). Association for Computing Machinery, New York, NY, USA, 364–367. <https://doi.org/10.1145/2597073.2597121>
- [47] Mohammad Masudur Rahman and Chanchal K Roy. 2014. An insight into the pull requests of github. In *Proceedings of the 11th working conference on mining software repositories*. 364–367.
- [48] G. Robles, J.J. Amor, J.M. Gonzalez-Barahona, and I. Herraiz. 2005. Evolution and growth in large libre software projects. In *Eighth International Workshop on Principles of Software Evolution (IWPS’05)*. 165–174. <https://doi.org/10.1109/IWPS’05.2005.17>
- [49] Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Romain Sauvestre, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton Ferrer, Aaron Grattafiori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. 2024. Code Llama: Open Foundation Models for Code. arXiv:2308.12950 [cs.CL]
- [50] Keshav Santhanam, Omar Khattab, Jon Saad-Falcon, Christopher Potts, and Matei Zaharia. 2022. ColBERTv2: Effective and Efficient Retrieval via Lightweight Late Interaction. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, Marine Carpuat, Marie-Catherine de Marneffe, and Ivan Vladimir Meza Ruiz (Eds.). Association for Computational Linguistics, Seattle, United States, 3715–3734. <https://doi.org/10.18653/v1/2022.naacl-main.272>
- [51] Bo Shen, Jiaxin Zhang, Taihong Chen, Daoguang Zan, Bing Geng, An Fu, Muhan Zeng, Ailun Yu, Jichuan Ji, Jingyu Zhang, Yuenan Guo, and Qianxiang Wang. 2023. PanGu-Coder2: Boosting Large Language Models for Code with Ranking Feedback. arXiv:2307.14936 [cs.CL]
- [52] Disha Shrivastava, Denis Cocetkov, Harm de Vries, Dzmitry Bahdanau, and Torsten Scholak. 2024. RepoFusion: Training Code Models to Understand Your Repository.
- [53] Disha Shrivastava, Hugo Laroche, and Daniel Tarlow. 2023. Repository-level prompt generation for large language models of code. In *International Conference on Machine Learning*. PMLR, 31693–31715.
- [54] Xiangru Tang, Bill Qian, Rick Gao, Jiakang Chen, Xinyun Chen, and Mark Gerstein. 2024. BioCoder: A Benchmark for Bioinformatics Code Generation with Contextual Pragmatic Knowledge.
- [55] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shriti Bhoale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucuullu, David Esquiou, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. Llama 2: Open Foundation and Fine-Tuned Chat Models. arXiv:2307.09288 [cs.CL]
- [56] Lucian Voinea, Alex Telea, and Jarke J. van Wijk. 2005. CVSScan: visualization of code evolution. In *Proceedings of the 2005 ACM Symposium on Software Visualization (St. Louis, Missouri) (SoftVis ’05)*. Association for Computing Machinery, New York, NY, USA, 47–56. <https://doi.org/10.1145/1056018.1056025>
- [57] Chong Wang, Jian Zhang, Yebo Feng, Tianlin Li, Weisong Sun, Yang Liu, and Xin Peng. 2024. Teaching Code LLMs to Use Autocompletion Tools in Repository-Level Code Generation. arXiv:2401.06391 [cs.SE]
- [58] Lee Xiong, Chenyan Xiong, Ye Li, Kwok-Fung Tang, Jialin Liu, Paul N. Bennett, Junaid Ahmed, and Arnold Overwijk. 2021. Approximate Nearest Neighbor Negative Contrastive Learning for Dense Text Retrieval. In *International Conference on Learning Representations*.
- [59] Hao Yu, Bo Shen, Dezhi Ran, Jiaxin Zhang, Qi Zhang, Yuchi Ma, Guangtai Liang, Ying Li, Qianxiang Wang, and Tao Xie. 2024. Codereval: A benchmark of pragmatic code generation with generative pre-trained models. In *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering*. 1–12.
- [60] Daoguang Zan, Bei Chen, Yongshun Gong, Junzhi Cao, Fengji Zhang, Bingchao Wu, Bei Guan, Yilong Yin, and Yongji Wang. 2023. Private-library-oriented code generation with large language models. arXiv preprint arXiv:2307.15370 (2023).
- [61] Daoguang Zan, Bei Chen, Zeqi Lin, Bei Guan, Wang Yongji, and Jian-Guang Lou. 2022. When Language Model Meets Private Library. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang (Eds.). Association for Computational Linguistics, Abu Dhabi, United Arab Emirates, 277–288. <https://doi.org/10.18653/v1/2022.findings-emnlp.21>
- [62] Daoguang Zan, Bei Chen, Dejian Yang, Zeqi Lin, Minsu Kim, Bei Guan, Yongji Wang, Weizhu Chen, and Jian-Guang Lou. 2022. CERT: Continual Pre-training on Sketches for Library-oriented Code Generation. In *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI-22*, Lud De Raedt (Ed.). International Joint Conferences on Artificial Intelligence Organization, 2369–2375. <https://doi.org/10.24963/ijcai.2022/329> Main Track.
- [63] Fengji Zhang, Bei Chen, Yue Zhang, Jacky Keung, Jin Liu, Daoguang Zan, Yi Mao, Jian-Guang Lou, and Weizhu Chen. 2023. RepoCoder: Repository-Level Code Completion Through Iterative Retrieval and Generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*. 2471–2484.
- [64] Kechi Zhang, Jia Li, Ge Li, Xianjie Shi, and Zhi Jin. 2024. CodeAgent: Enhancing Code Generation with Tool-Integrated Agent Systems for Real-World Repo-level Coding Challenges. arXiv:2401.07339 [cs.SE]
- [65] Shun Zhang, Zhenfang Chen, Yikang Shen, Mingyu Ding, Joshua B. Tenenbaum, and Chuang Gan. 2023. Planning with Large Language Models for Code Generation. In *The Eleventh International Conference on Learning Representations*.
- [66] Qinkai Zheng, Xiao Xia, Xu Zou, Yuxiao Dong, Shan Wang, Yufei Xue, Lei Shen, Zihan Wang, Andi Wang, Yang Li, Teng Su, Zhilin Yang, and Jie Tang. 2023.

- CodeGeeX: A Pre-Trained Model for Code Generation with Multilingual Benchmarking on HumanEval-X (*KDD '23*). Association for Computing Machinery, New York, NY, USA, 5673–5684. <https://doi.org/10.1145/3580305.3599790>
- [67] Zibin Zheng, Kaiwen Ning, Jiachi Chen, Yanlin Wang, Wenqing Chen, Lianghong Guo, and Weicheng Wang. 2023. Towards an understanding of large language models in software engineering tasks. *arXiv preprint arXiv:2308.11396* (2023).
- [68] Zibin Zheng, Kaiwen Ning, Yanlin Wang, Jingwen Zhang, Dewu Zheng, Mingxi Ye, and Jiachi Chen. 2023. A survey of large language models for code: Evolution, benchmarking, and future trends. *arXiv preprint arXiv:2311.10372* (2023).
- [69] Shuyan Zhou, Uri Alon, Frank F. Xu, Zhengbao Jiang, and Graham Neubig. 2023. DocPrompting: Generating Code by Retrieving the Docs. In *The Eleventh International Conference on Learning Representations*.