

---

# Real3D: Scaling Up Large Reconstruction Models with Real-World Images

---

Hanwen Jiang Qixing Huang Georgios Pavlakos

Department of Computer Science, The University of Texas at Austin

{hwjiang, huangqx, pavlakos}@cs.utexas.edu

## Abstract

The default strategy for training single-view Large Reconstruction Models (LRMs) follows the fully supervised route using large-scale datasets of synthetic 3D assets or multi-view captures. Although these resources simplify the training procedure, they are hard to scale up beyond the existing datasets and they are not necessarily representative of the real distribution of object shapes. To address these limitations, in this paper, we introduce Real3D, the first LRM system that can be trained using **single-view real-world images**. Real3D introduces a novel self-training framework that can benefit from both the existing synthetic data and diverse single-view real images. We propose two unsupervised losses that allow us to supervise LRMs at the pixel- and semantic-level, even for training examples without ground-truth 3D or novel views. To further improve performance and scale up the image data, we develop an automatic data curation approach to collect high-quality examples from in-the-wild images. Our experiments show that Real3D consistently outperforms prior work in four diverse evaluation settings that include real and synthetic data, as well as both in-domain and out-of-domain shapes. Code and model can be found here: <https://hwjiang1510.github.io/Real3D/>

## 1 Introduction

The scaling law is the secret sauce of large foundation models [28]. By scaling up both model parameters and training data, the foundation models demonstrate emerging properties and have revolutionized Natural Language Processing [2] and 2D Computer Vision [53]. Recently, the same recipe has been applied to build a foundation model for *single-view 3D reconstruction*, which has the potential to benefit AR/VR [55], Robotics [87] and AIGC [5]. From the perspective of model design, Transformers [74] have been proven to be effective architectures for the 2D-to-3D lifting [25, 22, 76], facilitating single-view Large Reconstruction Models (LRMs) [22]. From the perspective of training data, the default resources are multi-view images from 3D/video data, where we observe that increasing the dataset size [11, 10, 92] is beneficial to the model performance.

However, the excessive reliance on multi-view supervision creates a critical bottleneck to expanding the training data of such models. The relevant strategies for data collection (i.e., synthetic 3D assets [11] and intentional video captures [92]) are time-consuming and hard to further scale up. Thus, compared to the training data used for state-of-the-art language models [2, 71] and 2D vision models [31, 95], the scale of the training data for 3D reconstruction models is relatively *limited*. Moreover, the data is *biased* towards shapes that are easy to model by artists or easy to capture in the round table setting [56, 92], creating a domain gap between the training and inference phases.

To address this limitation, we propose to *train LRMs with single-view real-world images*. Compared to the limited number of 3D assets or intentional video captures, images are easier to collect and are readily available in existing large-scale datasets [13, 69, 60]. Furthermore, by leveraging a large number of natural images, we can capture the real distribution of object shapes more faithfully, closing the training-inference gap and improving generalization [33, 37, 89]. Additionally, the maturity of the

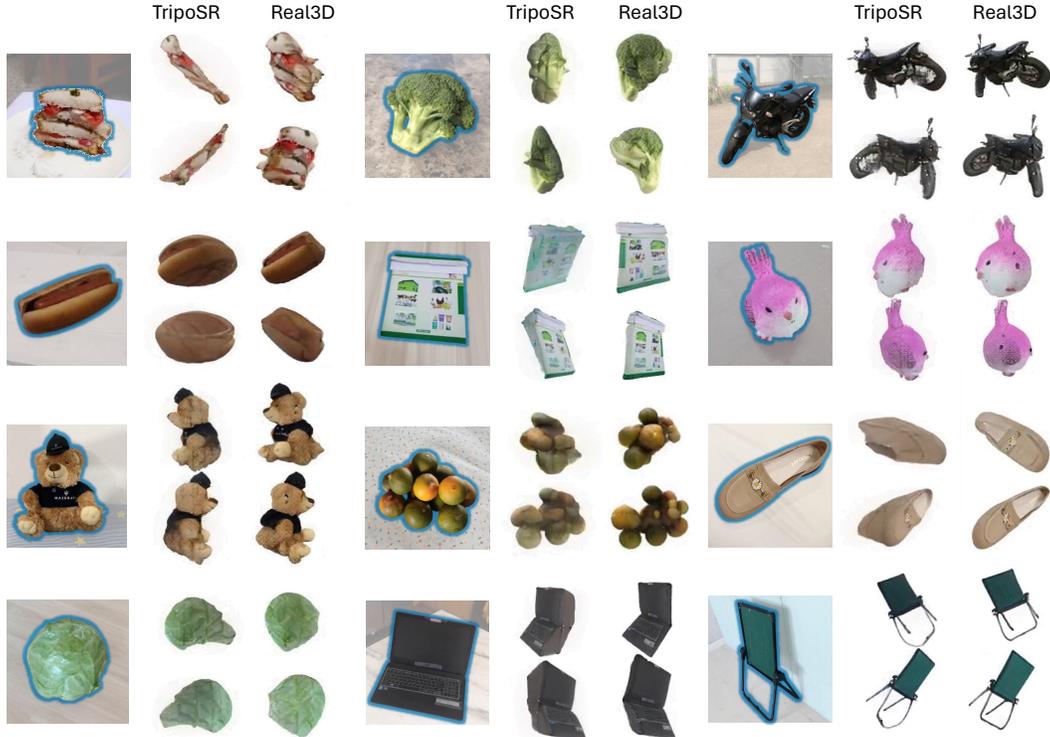


Figure 1: **Single-view 3D Reconstruction with Real3D.** We compare Real3D with the state-of-the-art TripoSR model [70]. Unlike TripoSR, which is trained solely on synthetic data, Real3D uses single-view real-world images. We provide reconstructions from two novel views. Please see more results in our [website](#).

recent image-based foundation models [31, 8, 89] makes it possible to curate this large-scale data and leverage the high-quality examples, which tend to be the most beneficial for the model performance.

We introduce **Real3D**, the first LRM system designed with the core principle of training on single-view real-world images. To achieve this, we propose a novel self-training framework. Our framework incorporates unsupervised training guidance, improving Real3D without multi-view real-data supervision. In detail, the guidance involves a cycle consistency rendering loss at the pixel level and a semantic loss between the input view and rendered novel views at the image level. We introduce regularization for the two losses to avoid trivial reconstruction solutions that degrade the model.

To further improve performance, we apply careful quality control for the real images that we use for training. If we naively train using all the collected image examples, the performance drops. To address this, we develop an automated data curation method for selecting high-quality examples, specifically unoccluded instances, from noisy real-world images. Eventually, we jointly perform self-training on the curated data and supervised learning on synthetic data. This strategy enriches the model with knowledge from real data while preventing divergence. Our final model consistently outperforms the state-of-the-art models that are trained without single-view in-the-wild images (Fig. 1).

We evaluate Real3D on a diverse set of datasets, spanning both real and synthetic data and covering both in-domain and out-of-domain shapes. Experimental results highlight Real3D’s three key strengths: i) **Superior performance.** Real3D outperforms prior works in all evaluations. ii) **Effective use of real data.** Real3D demonstrates greater improvement using single-view real data than what the previous methods achieved using multi-view real data. iii) **Scalability.** Performance improves as more data are incorporated, demonstrating Real3D’s potential when further scaling the data.

## 2 Related Work

**Single-view 3D Reconstruction.** Reconstructing 3D scenes and objects from a single image is a core task in 3D Computer Vision. One line of work focuses on developing better 3D representations and utilizing their unique properties to improve reconstruction quality. For example, different explicit representations have been explored, e.g., voxels [9, 73], point clouds [15, 26], multiplane

images [45, 72], meshes [38, 17], and 3D Gaussians [30, 66, 67]. The implicit representations, e.g., SDFs [49, 43, 64], and radiance fields [46, 91, 57] have also improved the reconstruction accuracy.

Recent works explore incorporating diverse guidance for improving the quality of single-view 3D reconstruction. MCC [80] and ZeroShape [24] use depth guidance, however, accurate depth inputs or estimates are not always available. RealFusion [42], Make-it-3D [68] and Magic123 [51] harness diffusion priors as guidance using distillation losses [50]. Nevertheless, the process involves per-shape optimization, which is slow and hard to scale. To solve the problem, Zero-1-to-3 [36] fine-tunes diffusion models for direct novel view generation. With multiple views, it is easier to get a 3D reconstruction. However, this route suffers from limited reconstruction quality, caused by inconsistency between the generated novel views [39, 62, 75]. Adversarial guidance is explored to distinguish reconstruction from input view [23, 85]. However, adversarial training is usually unstable and difficult to extend to general categories. Moreover, semantic guidance leverages the image-to-text inversion model and the similarity calculation model to supervise novel reconstruction views [12, 68]. This improves the semantic consistency of the reconstructions but harms the reconstruction details, as text-to-image models lack spatial awareness [53, 16]. In contrast, our method, Real3D, proposes two complementary unsupervised losses to improve both the semantic and spatial consistency of our reconstruction, enabling us to train using single-view images.

**Large Reconstruction Models.** Large reconstruction models are proposed for generalizable and fast feed-forward 3D reconstruction, following the design principles of foundation models. They use scalable model architecture, e.g., Transformers [74, 22, 25] or Convolutional U-Nets [58, 67, 77] for encoding diverse shape and texture priors, and directly mapping 2D information to 3D representations. The models are trained with multi-view rendering losses, assuming access to 3D ground-truth. For example, LRM [22] uses triplane tokens to query information from 2D image features. Other works improve the reconstruction quality by leveraging better representations [96, 79, 93] and introducing generative priors [77, 86, 67]. However, one shortcoming of these models is that they require a normalized coordinate system and canonicalized input camera pose, which limits the scalability and effectiveness of training with multi-view real-world data. To solve the problem, we enable the model to perform self-training on real-world single images, without the need for coordinate system normalization and multi-view supervision.

**Unsupervised 3D Learning from Real Images.** Learning to perform 3D reconstruction typically requires 3D ground-truth or multi-view supervision, which makes scaling up more challenging. To solve this problem, a promising avenue would be learning from massive unannotated data. Early works in this direction leverage category-level priors, where the reconstruction can benefit from category-specific templates and the definition of a canonical coordinate frame [29, 27, 48, 81, 20, 34, 35, 47, 32, 14, 4]. Recent works extend this paradigm to general categories by adjusting adversarial losses [90, 44, 3], multi-category distillation [1], synergy between multiple generative models [83], knowledge distillation [65] and depth regularization [59]. However, these methods learn 3D reconstruction from scratch, without leveraging the available 3D annotations due to limitations of their learning frameworks. Thus, their 3D accuracy and viewpoint range are limited. In contrast, our model enables initialization with available 3D ground-truth from synthetic examples and is jointly trained with in-the-wild images using unsupervised losses, which improves the reconstruction quality.

**Model Self-Training.** Self-training helps improve performance when labeled data is limited or not available [61, 54, 84]. For example, contrastive learning methods use different image augmentations to learn visual representations [18, 6, 7]. This strategy has also been applied to 3D computer vision tasks, e.g., hand pose estimation [37], detection [88], segmentation [40] and depth estimation [89]. In this paper, we propose novel losses to perform self-training on real images to improve 3D reconstruction.

### 3 Preliminaries

**Large Reconstruction Model (LRM).** Let  $I \in \mathbb{R}^{H \times W \times 3}$  be an input image that contains the target object to reconstruct. The LRM outputs a 3D representation of the object,  $\mathbf{T} = \text{LRM}(I)$ , where  $\mathbf{T} \in \mathbb{R}^{3 \times h \times w \times c}$  is the latent triplane. LRM performs volume rendering [3] to produce novel views. The rendering module is formulated as  $\hat{I}_\Phi = \pi(\mathbf{T}, \Phi)$ , where  $\hat{I}_\Phi$  is the rendered image under a target camera pose  $\Phi \in \text{SE}(3)$ , and  $\pi$  represents the rendering process.

**Training LRM on Synthetic Multi-view Images.** As single-view 3D reconstruction is an ill-posed problem due to the ambiguity from 2D to 3D [63], the essence of LRMs is learning generic shape

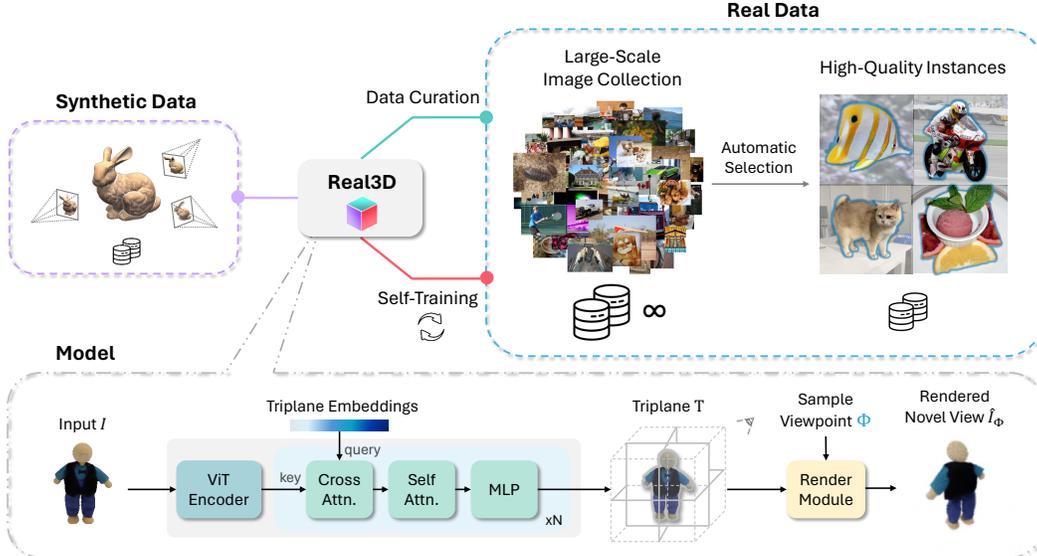


Figure 2: **Real3D overview.** (Top) Real3D is trained jointly on synthetic data (fully supervised) and on single-view real images using unsupervised losses. A curation strategy is used to identify and leverage the high-quality training instances from the initial image collection. (Bottom) We adopt the LRM model architecture.

and texture priors from large data [22]. Training an LRM requires multi-view image supervision. For each training object, we assume that we have several views of it with the corresponding camera poses. We denote the views and poses as  $\{(I_i^{gt}, \Phi_i) | i = 1, \dots, n\}$ , where  $n$  images are collected. This multi-view information is usually obtained from synthetic 3D assets [11] using graphical rendering tools. The loss function on the multi-views is:

$$\mathcal{L}_{\text{RECON}}(I) = \frac{1}{n} \sum_{i=1}^n (\mathcal{L}_{\text{MSE}}(\hat{I}_{\Phi_i}, I_i^{gt}) + \lambda \cdot \mathcal{L}_{\text{LPIPS}}(\hat{I}_{\Phi_i}, I_i^{gt})), \quad (1)$$

where  $\lambda$  is a weight for balancing losses. The  $\mathcal{L}_{\text{MSE}}$  and  $\mathcal{L}_{\text{LPIPS}}$  [94] provide pixel-level and semantic-level supervision, respectively. To facilitate training, the coordinate system needs to be normalized. More specifically, LRM assumes that i) the shape is located at the center of the world coordinate frame within a pre-defined boundary, and ii) the input view has a canonical camera pose  $\phi$ , a constant shared across all samples. This camera points to the world center (identity rotation) and has a constant translation vector. These assumptions can be easily satisfied with synthetic renderings.

**Training LRM on Real-World Multi-view Images.** Real-world images do not satisfy the above assumptions in most cases. To deal with the first assumption, LRM uses the sparse point cloud of COLMAP reconstruction to re-center and re-scale the world coordinate frame. Moreover, it uses camera poses estimated by COLMAP to render novel views. However, this solution limits the accuracy and scalability of using real-world data, as COLMAP reconstruction can be inaccurate, and it is not trivial to capture detailed multi-view videos of objects and run COLMAP on each one of them. To deal with the second assumption, LRM is modified to condition on the input view camera pose  $\phi^I$  and intrinsics  $K^I$ , formulated as  $\mathbf{T} = \text{LRM}^*(I, \Phi^I, K^I)$ . Note that both  $\phi^I$  and  $K^I$  vary across training samples, where  $\phi^I$  has a *non-constant* translation vector, and  $K^I$  has *non-centered* principle points due to object-region cropping. We observe that LRM\* (open-sourced version) can only get limited gain by training with real-world multi-view data. Please see Sec. 5.1 for details.

## 4 Real3D

We propose a novel framework that enables training LRMs using **real-world single-view images**, which are easier to collect/scale and can better capture the real distribution of object shapes. As shown in Fig. 2, we initialize an LRM on a synthetic dataset. Then we collect real-world object instances from in-the-wild images. We jointly train the model on synthetic data (Eq. 1) and perform self-training on real data. The former prevents the model from diverging with the help of supervision from ground-truth novel views. The latter introduces new data in model training, which improves the reconstruction quality and generalization capability (Sec. 4.1). We also propose an automatic data curation method to collect high-quality instance segmentations from in-the-wild images (Sec. 4.2).

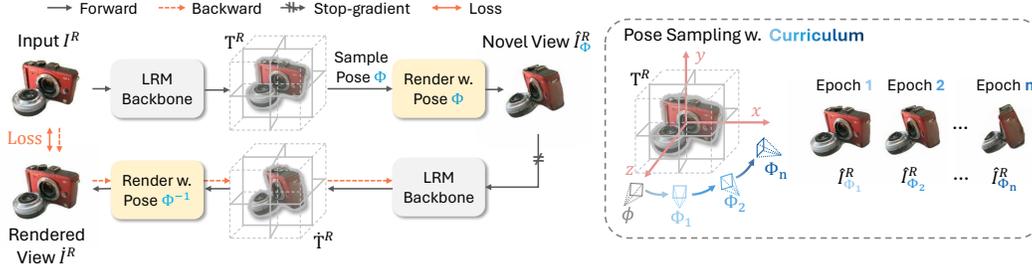


Figure 3: **Pixel-level Guidance using cycle-consistency.** (Left) We show the forward and backward path of the cycle. (Right) Details of the pose sampling strategy with the curriculum.

#### 4.1 Self-Training on Real Images

**Overview.** The effectiveness of the multi-view training loss (Eq. 1) originates from applying supervision for improving both *pixel-level* and *semantic-level* similarity between reconstruction and ground-truth novel views. Following this philosophy, we develop novel **unsupervised** pixel-level and semantic-level guidance when training the model on single-view images, where ground-truth novel views are not available. For our base model, we use a fine-tuned TripoSR [70], an LRM without input pose and intrinsics conditioning.

**Pixel-level Guidance: Cycle-Consistency.** To provide pixel-level guidance, we propose a novel cycle-consistency rendering loss. The intuition behind this is that if we have a perfect LRM, the 3D reconstruction and rendered novel views should also be perfect. Similarly, if we apply our LRM again to any of the novel views, we should be able to produce renders of the original input view perfectly. As shown in Fig. 3, we input the model with an image. We randomly sample a camera pose and render the reconstruction, obtaining a synthesized novel view. This novel view is fed back into the model to reconstruct it again. Finally, we render this second reconstruction from the viewpoint of the original input, using the inverse of the sampled pose. The goal is for this final rendering to match the original input, ensuring cycle consistency. Moreover, we observe that applying a **stop-gradient** operation on intermediate rendering can effectively prevent model degeneration and trivial reconstruction solutions. This observation is akin to self-training strategies in other domains [7].

We formulate the pixel-level guidance as follows. We input the model with an image  $I^R$  that contains a shape instance in the real world and then reconstruct the latent triplane.

$$\mathbf{T}^R = \text{LRM}(I^R), I^R \in \mathbb{R}^{H \times W \times 3}. \quad (2)$$

We sample a camera pose  $\Phi$  to render a novel view of the reconstruction and create the second input  $\hat{I}_{\Phi}^R$  in the cycle, as:

$$\hat{I}_{\Phi}^R = \pi(\mathbf{T}^R, \Phi), \text{ and } \hat{I}_{\Phi}^R \leftarrow \text{SG}(\hat{I}_{\Phi}^R) \quad (3)$$

where  $\text{SG}(\cdot)$  is the stop-gradient operation, and  $\leftarrow$  means updating. Specifically, the sampled camera pose  $\Phi$  is associated with the relative pose  $\Delta\Phi$  between the sampled view and the input view, as  $\Phi = \phi \cdot \Delta\Phi$ , where  $\phi$  is the constant canonical pose of the input view (introduced in Sec. 3).

The final image  $\hat{I}^R$  that close the cycle is formulated as:

$$\hat{I}^R = \pi(\hat{\mathbf{T}}^R, \hat{\Phi}), \text{ where } \hat{\mathbf{T}}^R = \text{LRM}(\hat{I}_{\Phi}^R), \text{ and } \hat{\Phi} = \phi \cdot (\Delta\Phi)^{-1}. \quad (4)$$

The pixel-level guidance is defined as  $\mathcal{L}_{\text{pix}}^R = \mathcal{L}_{\text{MSE}}(\hat{I}^R, I^R)$ .

However, we observe that naively applying this loss can negatively impact the model. Since the model is imperfect, any novel view it creates, especially from a camera pose significantly different from the input, can be inaccurate. This introduces errors that compound through the cycle-consistency process, ultimately degrading performance.

To address these problems, we introduce a **curriculum learning** approach. This approach progressively adjusts the complexity of the learning target from simple to difficult. Initially, the model learns from simpler cases, which later prepares it for more challenging ones. We manage the difficulty by varying the sampled camera poses from near to far relative to the original viewpoint of inputs. We formulate the camera sampling method under the curriculum as:

$$\Phi = \phi \cdot \Delta\Phi, \Delta\Phi \sim \text{Uniform}(-\Delta\Phi_{\text{max}}^j, \Delta\Phi_{\text{max}}^j), \quad (5)$$

where we denote *Uniform* as the uniform sampling in the SE(3) pose space, and  $\Delta\Phi_{\max}^j$  is the maximum sampling range of relative camera pose *at the training iteration j*. Note  $\Delta\Phi_{\max}^j$  is parameterized by the relative azimuth  $\theta_{\max}^j$  and elevation  $\varphi_{\max}^j$ , which are

$$\theta_{\max}^j = j/j_{\max} \cdot (\theta_{\max} - \theta_{\min}) + \theta_{\min}, \text{ and } \varphi_{\max}^j = j/j_{\max} \cdot (\varphi_{\max} - \varphi_{\min}) + \varphi_{\min}, \quad (6)$$

where  $j_{\max}$  is the number of total training iterations. We start the curriculum with  $\theta_{\min} = \varphi_{\min} = 15^\circ$ , and finalize with  $\theta_{\max} = \varphi_{\max} = 90^\circ$ . The camera pose sampling range keeps increasing in the curriculum and the training process.

**Semantic-level Guidance.** The semantic guidance is performed between the novel view of the reconstruction and the input view. We leverage CLIP to compute the semantic similarity loss, as CLIP is trained on image-text pairs and can capture high-level image semantics. The image semantic similarity loss is  $\mathcal{L}_{\text{CLIP}}(\hat{I}, I) = -\langle f(\hat{I}), f(I) \rangle$ , where  $f$  represents the visual encoder of CLIP for predicting normalized latent image features.

A simple strategy for applying the loss is rendering multiple novel views of a reconstruction and calculating the loss on all of them. However, this leads to the multi-head problem, a trivial solution to minimize the loss (see Fig. 7). The reason is that CLIP is not fully invariant to the camera viewpoint.

To handle the problem, we apply the loss to only one rendered novel view. Specifically, the novel view is least similar to the input view among multiple rendered novel views, involving hard negative mining. We also prevent rendering novel views far from the input viewpoint, as the back of the 3D shape can be semantically different from the input view.

We formulate the semantic-level guidance as follows. For the latent reconstruction  $\mathbf{T}^R$  if real image data  $I^R$ , we render  $m$  novel views using  $m$  sampled rendering camera poses as:

$$\hat{I}_{\Phi_i}^R = \pi(\mathbf{T}^R, \Phi_i), \text{ for } i \in \{1, \dots, m\} \quad (7)$$

We sample the camera poses using a similar strategy in Eq. 5 and 6, as:

$$\Phi_i = \phi \cdot \Delta\Phi_i, \quad \Delta\Phi_i \sim \text{Uniform}(-\Delta\Phi_{\max}, \Delta\Phi_{\max}), \quad (8)$$

where  $\Delta\Phi_{\max}$  is parameterized by  $\theta'_{\max} = 120^\circ$  and  $\varphi'_{\max} = 45^\circ$ , irrelevant to the training iteration  $j$ .

We calculate the semantic-level guidance as:

$$\mathcal{L}_{\text{sem}}^R = \mathcal{L}_{\text{CLIP}}(\hat{I}_{\Phi_k}^R, I^R), \text{ where } k = \arg \max_{i \in \{1, \dots, m\}} \mathcal{L}_{\text{CLIP}}(\hat{I}_{\Phi_i}^R, I^R). \quad (9)$$

**Training Target.** The losses applied in self-training on real data can be defined as:

$$\mathcal{L}_{\text{SELF}}^R = \lambda_{\text{in}}^R \cdot \mathcal{L}_{\text{in}}^R + \lambda_{\text{pix}}^R \cdot \mathcal{L}_{\text{pix}}^R + \lambda_{\text{sem}}^R \cdot \mathcal{L}_{\text{sem}}^R, \quad (10)$$

where  $\mathcal{L}_{\text{in}}^R = \mathcal{L}_{\text{MSE}}^R(\hat{I}_{\phi}^R, I^R)$  is the rendering loss on the input view, and  $\hat{I}_{\phi}^R$  is rendered using the canonical pose of input as  $\hat{I}_{\phi}^R = \pi(\mathbf{T}^R, \phi)$ . The final losses on both synthetic and real-world data can be defined as  $\mathcal{L} = \mathcal{L}_{\text{RECON}}^S + \mathcal{L}_{\text{SELF}}^R$ .

## 4.2 Automatic Data Curation

Our data curation method aims to select high-quality shape instances from real images. Specifically, we find it is important to train the model with un-occluded instances. Thus, we develop an automatic occlusion detection method leveraging the synergy between instance segmentation and single-view depth estimation. Please see Appendix B for more details.

## 5 Experiments

We introduce our evaluation results on diverse datasets, including real images in controlled and in-the-wild settings, for comparison with previous work.

**Implementation Details.** On the synthetic data, we supervise the model on  $n = 4$  renderings. On the real data, we render  $m = 4$  novel views to apply the semantic guidance. We use 1 view to apply the pixel-level guidance. All evaluations are performed with a rendering resolution of 224. We set

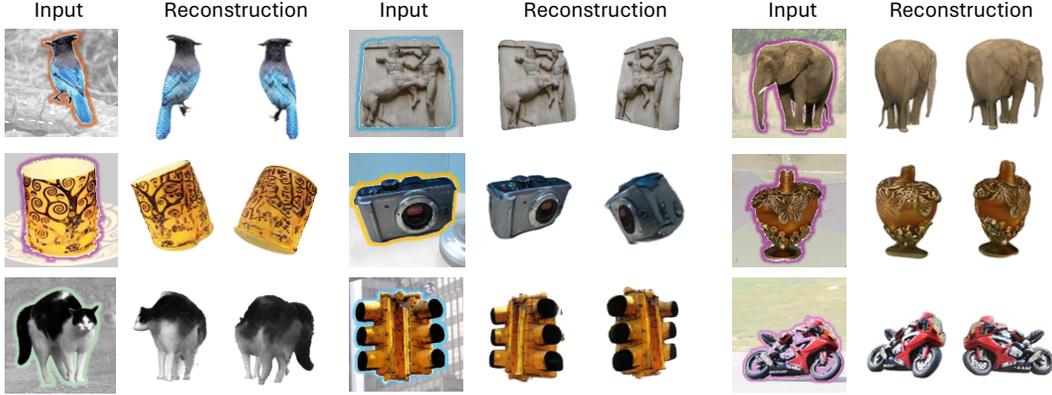


Figure 4: **Real3D reconstruction of in-the-wild instances.** We show the input view and two novel views.

Table 1: Evaluation results on the real-world in-domain MVImageNet dataset. We note that LRM\* is trained on multi-view data of MVImageNet as an oracle comparison (results in gray). We **bold** the best results (except LRM\*) and **highlight** the best results (including LRM\*). We also include the gain ( $\Delta$ ) by using real data.

Method	Eval. on Input View						Eval. on GT Novel Views		
	Semantic Similarity (Input View $\leftrightarrow$ Rendered Novel View)			Self-Consistency (Input View $\leftrightarrow$ Rendered & Cycled Input View)			Novel View Synthesis Quality (GT Novel Views $\leftrightarrow$ Rendered Novel Views)		
	CLIP $_{\uparrow}$	LPIPS $_{\downarrow}$	FID $_{\downarrow}$	PSNR $_{\uparrow}$	SSIM $_{\uparrow}$	LPIPS $_{\downarrow}$	PSNR $_{\uparrow}$	SSIM $_{\uparrow}$	LPIPS $_{\downarrow}$
METHODS W/ GENERATIVE PRIORS									
LGM [67]	0.820	0.204	158.4	14.20	0.833	0.227	15.95	0.813	0.181
CRM [77]	0.823	0.179	172.5	15.72	0.873	0.168	17.54	0.853	0.142
InstantMesh [86]	0.873	0.188	153.5	14.81	0.861	0.171	14.70	0.806	0.197
METHODS W/O GENERATIVE PRIORS (DETERMINISTIC)									
LRM [19]	0.868	0.160	147.6	17.69	0.873	0.140	19.75	0.864	0.112
LRM* [19]	0.888	0.144	120.1	18.97	0.886	0.126	20.16	0.867	0.105
$\Delta$ LRM*	0.020	0.016	27.50	1.280	0.013	0.014	0.410	0.003	0.007
TripoSR [70]	0.860	0.157	129.7	17.72	0.874	0.143	19.81	0.864	0.116
<b>Real3D (ours)</b>	<b>0.892</b>	<b>0.147</b>	<b>116.9</b>	<b>19.80</b>	<b>0.893</b>	<b>0.125</b>	<b>20.53</b>	<b>0.871</b>	<b>0.107</b>
$\Delta$ ours	0.032	0.010	12.80	2.080	0.019	0.018	0.720	0.007	0.009

the learning rate as  $4e - 5$  using the AdamW optimizer [41]. We train the model with  $j = 40,000$  iterations with a cosine learning rate scheduler. We use a batch size of 80, where we have half synthetic samples and half real-data samples. We set  $\lambda, \lambda^R, \lambda^R_{pix}, \lambda^R_{sem}$  as 1.0, 0.3, 5.0 and 1.0,

**Datasets.** We train Real3D on our collected WildImages real single-view data and the synthetic multi-view renderings of Objaverse [11] jointly. We evaluate the models on test splits of WildImages, MVImageNet [92], CO3D [56] and OmniObject3D [82]. We introduce the details of each as follows.

- **WildImages** contains 300K single-view segmented objects. It is collected from a set of datasets from diverse domains [13, 92, 33], which is filtered from more than 3M in-the-wild object instance segmentations. We keep aside a test split with 1000 images.

- **Objaverse** [11] is a large-scale synthetic dataset. We use a filtered subset consisting of 260K high-quality shapes for training. We use renderings from [52, 36]. We note this is a widely used subset [67, 52], as Objaverse contains a lot low-quality instances, which harm learning.

- **MVImageNet** [92], **CO3D** [56] and **OmniObject3D** [82] are used for evaluation, containing in-domain real data, out-of-domain real data, and out-of-domain synthetic data, respectively. They provide multiple views with camera pose annotations.

**Metrics.** We use two sets of metrics to evaluate the models on data with and without multi-view annotations, respectively:

- **Novel View Synthesis Metrics.** Following prior work, to evaluate reconstructions on data with multi-view information, we use standard metrics, including PSNR, SSIM [78], and LPIPS [94].

- **Semantic and Self-Consistency Metrics.** To evaluate reconstruction quality on single-view data without ground-truth multi-view images, we introduce novel metrics. First, we render novel views of a reconstruction and measure the semantic similarity with the input view. In detail, we render 7 views where the azimuths are uniformly sampled in range  $[0, 360]$  and no elevations. We use semantic metrics of LPIPS [94], CLIP similarity [53], and FID score [21]. Second, we evaluate

Table 2: Evaluation results on in-the-wild images of WildImages test set. Due to the absence of ground-truth novel views, we perform evaluation on the input view.

Method	Eval. on Input View					
	Semantic Similarity			Self-Consistency		
	CLIP $\uparrow$	LPIPS $\downarrow$	FID $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
METHODS W. GENERATIVE PRIORS						
LGM [67]	0.843	0.188	146.0	14.13	0.825	0.210
CRM [77]	0.807	0.174	162.4	15.67	0.862	0.160
InstantMesh [86]	0.841	0.182	152.5	14.68	0.854	0.163
METHODS W/O GENERATIVE PRIORS						
LRM [19]	0.847	0.149	144.9	18.09	0.872	0.129
LRM* [19]	0.846	0.150	143.2	18.35	0.872	0.129
$\Delta$ LRM*	-0.001	0.001	1.700	0.260	0.000	0.000
TripoSR [70]	0.877	0.148	128.5	18.18	0.874	0.125
<b>Real3D (ours)</b>	<b>0.892</b>	<b>0.144</b>	<b>106.5</b>	<b>19.00</b>	<b>0.882</b>	<b>0.117</b>
$\Delta$ ours	0.015	0.004	22.00	0.720	0.008	0.008

Table 3: Evaluation results on real-world out-of-domain CO3D data. We evaluate the novel view synthesis quality.

Method	Eval. on GT Novel Views		
	Novel View Synthesis Quality		
	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
METHODS W. GENERATIVE PRIORS			
LGM [67]	15.14	0.802	0.187
CRM [77]	16.38	0.840	0.153
InstantMesh [86]	13.99	0.789	0.199
METHODS W/O GENERATIVE PRIORS			
LRM [19]	18.31	0.849	0.126
LRM* [19]	18.82	0.852	0.119
$\Delta$ LRM*	0.510	0.003	0.007
TripoSR [70]	18.44	0.848	0.127
<b>Real3D (ours)</b>	<b>19.18</b>	<b>0.855</b>	<b>0.119</b>
$\Delta$ ours	0.740	0.007	0.008

the self-consistency of reconstruction. We render a designated novel view of reconstruction, use it as input for reconstruction again, and render the second reconstruction at the original input view. We evaluate the consistency using standard NVS metrics.

**Baselines.** We compare Real3D with LRM [22], TripoSR [70], LGM [67], CRM [77] and InstantMesh [86]. We use OpenLRM [19], an open-sourced LRM for comparisons. All models are trained on Objaverse [11] unless noted otherwise. Specifically, InstantMesh uses the larger synthetic dataset Objaverse-XL [10]. LRM has a version trained with multi-view data from MVImgNet [92] and we denote it as LRM\*. Moreover, we finetune TripoSR, as it predicts reconstruction with random scales on different inputs with non-clean backgrounds, which leads to inferior evaluation results (see Appendix C) and failure of self-training. All TripoSR results are after fine-tuning. TripoSR is a base model directly comparable to ours, so we use it to ablate our contributions. For all baselines, we use the official codes and checkpoints. Furthermore, we follow the specific settings of each model to normalize target camera poses.

## 5.1 Experimental Results

**Qualitative Results.** We show examples of Real3D reconstruction on in-the-wild images in Fig. 4, showing that Real3D can recover the geometry with high fidelity. Please see Appendix D for comparisons with baselines on evaluation sets.

**Quantitative Results.** Real3D consistently outperforms prior works on all four test sets of our evaluation. As shown in Table 1 to Table 4, Real3D showcases a 0.74 (3.9% relatively) PSNR improvement on average over the directly comparable TripoSR model. This demonstrates the effectiveness of our self-training method using real data. Moreover, Real3D shows a larger performance gain ( $\Delta$ ours) compared to LRM\* ( $\Delta$ LRM\*), even though the latter uses multi-view supervision. This verifies the limitation of the current training strategy of leveraging real-world multi-view data (Sec. 3). Results in Table 2 also highlight the advantage of our self-training method by using a broader data distribution. As a comparison, LRM\* uses only MVImgNet data for training and has limited, nearly zero, improvement on in-the-wild images (Table 2). In contrast, our method achieves bigger improvements by leveraging more in-the-wild data.

Additionally, we observe that methods with generative priors do not perform well on out-of-distribution data. These methods generate novel views and use those views to perform parse-view reconstruction. We conjecture that the reason is the compounding error of the novel view synthesis and reconstruction stages. This is another argument in favor of single-stage methods, like ours.

## 5.2 Ablation Studies

**Rendering loss on input view.** As shown in Table 5 (1), when we use only the  $\mathcal{L}_{in}^R$  loss, we observe slight improvements of PSNR, but SSIM and LPIPS have limited improvements. We observe a similar pattern when we add real data (raw and cleaned). This pattern implies that  $\mathcal{L}_{in}^R$  can only help the model render more realistic pixels by learning the real-image pixel distribution, but it can not improve the reconstruction quality.

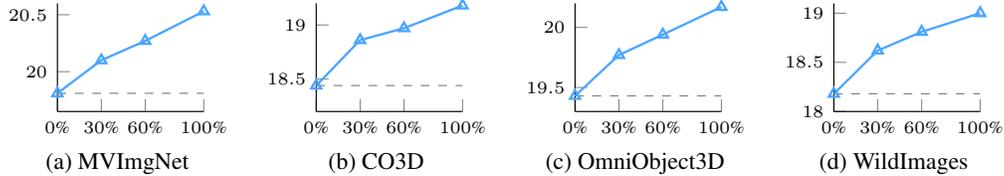


Figure 5: Real3D performance (PSNR) using different amounts of real data for training. The PSNR is evaluated on novel views for (a)-(c), and it is evaluated on (d) with self-consistency.

Table 4: Evaluation results on synthetic out-of-domain OmniObject3D data. We evaluate the novel view synthesis quality.

Method	Eval. on GT Novel Views		
	Novel View Synthesis Quality	PSNR $\uparrow$	SSIM $\uparrow$
METHODS W/ GENERATIVE PRIORS			
LGM [67]	15.83	0.791	0.197
CRM [77]	16.75	0.823	0.182
InstantMesh [86]	15.83	0.791	0.197
METHODS W/O GENERATIVE PRIORS			
LRM [19]	18.20	0.831	0.144
LRM* [19]	18.53	0.837	0.138
$\Delta$ LRM*	0.330	0.006	0.006
TripoSR [70]	19.43	0.847	0.128
<b>Real3D (ours)</b>	<b>20.17</b>	<b>0.855</b>	<b>0.119</b>
$\Delta$ ours	0.740	0.008	0.009

Table 5: Ablation study on the real-world out-of-domain CO3D dataset. “Naive” means simply applying CLIP-semantic loss on all novel views. “e2e” means the cycle-consistency loss is end-to-end; “s.g.” means stop the gradient of intermediate input of cycle-consistency loss.

$\mathcal{L}_{in}^R$	Clean Data	Sem. Guidance	Cycle-Consistency	Curriculum	Eval. on GT Novel Views			
					Novel View Synthesis Quality	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
(0)	✗	✗	✗	✗	✗	18.44	0.848	0.127
(1)	✓	✗	✗	✗	✗	18.63	0.850	0.126
	✓	✓	✗	✗	✗	18.60	0.850	0.127
(2)	✓	✓	✓(naive)	✗	✗	17.89	0.830	0.151
	✓	✓	✓( $L_{sem}$ )	✗	✗	18.81	0.853	0.125
	✓	✓	✓( $L_{sem}$ )	✓(s.g.)	✗	18.63	0.848	0.125
(3)	✓	✓	✓( $L_{sem}$ )	✓(e2e)	✓	17.78	0.821	0.140
	✓	✗	✓( $L_{sem}$ )	✓(s.g.)	✓	18.79	0.852	0.123
	✓	✓	✓( $L_{sem}$ )	✓(s.g.)	✓	<b>19.18</b>	<b>0.855</b>	<b>0.119</b>

**Semantic-level Guidance.** As shown in Table 5 (2), naively applying the CLIP-based semantic loss on all rendered novel views degrades the performance. We present visualization results in Fig. 7 of the Appendix, where we observe the multi-head problem of reconstructions. We conjecture the reason is copying the input view geometry to all other views is a trivial solution to minimize the semantic loss. This requires us to incorporate more regularization as we do with our semantic guidance, which achieves improvements across all metrics.

**Pixel-level Guidance.** As shown in Table 5 (3), the pixel-level cycle consistency guidance is only useful when using both clean data, stopping the gradient of intermediate rendering, and applying a training curriculum. The result demonstrates the importance of each proposed component. We present more qualitative results for the ablation in Fig. 7 of the Appendix.

**Data Amount.** We also evaluate the effect of scaling up the training data. As shown in Fig. 5, Real3D achieves consistent improvements as more real images are used for training, which demonstrates the potential for further scaling up the in-the-wild images we use for training.

## 6 Conclusion

We present Real3D, the first large reconstruction system that can leverage single-view real images for training. This has the major advantage of enabling training on a seemingly endless data source, that is representative of the general object shape distribution. We propose a self-training framework using unsupervised losses, which improves the performance of the model without relying on ground-truth novel views. Additionally, to further improve performance, we develop an automatic data curation method to collect high-quality shape instances from in-the-wild data. Compared with previous works, Real3D demonstrates consistent improvements across diverse evaluation sets and highlights the potential of improving Large Reconstruction Models by training on large-scale image collections.

**Limitation and Broader Impacts.** One limitation of Real3D is using constant intrinsics during self-training, due to the unknown intrinsics for in-the-wild images. Although it has been proven helpful, we might observe larger improvements by incorporating an intrinsics estimation module. Real3D is a step towards a foundation model for 3D reconstruction, which has the potential to be widely applicable for AR/VR, AIGC, and Animation applications.

## References

- [1] Kalyan Vasudev Alwala, Abhinav Gupta, and Shubham Tulsiani. Pre-train, self-train, distill: A simple recipe for supersizing 3d reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3773–3782, 2022.
- [2] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [3] Eric R Chan, Connor Z Lin, Matthew A Chan, Koki Nagano, Boxiao Pan, Shalini De Mello, Orazio Gallo, Leonidas J Guibas, Jonathan Tremblay, Sameh Khamis, et al. Efficient geometry-aware 3d generative adversarial networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16123–16133, 2022.
- [4] Eric R Chan, Marco Monteiro, Petr Kellnhofer, Jiajun Wu, and Gordon Wetzstein. pi-gan: Periodic implicit generative adversarial networks for 3d-aware image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5799–5809, 2021.
- [5] Shuhong Chen, Kevin Zhang, Yichun Shi, Heng Wang, Yiheng Zhu, Guoxian Song, Sizhe An, Janus Kristjansson, Xiao Yang, and Matthias Zwicker. Panic-3d: stylized single-view 3d reconstruction from portraits of anime characters. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21068–21077, 2023.
- [6] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pages 1597–1607. PMLR, 2020.
- [7] Xinlei Chen and Kaiming He. Exploring simple siamese representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 15750–15758, 2021.
- [8] Jang Hyun Cho and Philipp Krähenbühl. Language-conditioned detection transformer. *arXiv preprint arXiv:2311.17902*, 2023.
- [9] Christopher B Choy, Danfei Xu, JunYoung Gwak, Kevin Chen, and Silvio Savarese. 3d-r2n2: A unified approach for single and multi-view 3d object reconstruction. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part VIII 14*, pages 628–644. Springer, 2016.
- [10] Matt Deitke, Ruoshi Liu, Matthew Wallingford, Huong Ngo, Oscar Michel, Aditya Kusupati, Alan Fan, Christian Laforte, Vikram Voleti, Samir Yitzhak Gadre, et al. Objaverse-xl: A universe of 10m+ 3d objects. *Advances in Neural Information Processing Systems*, 36, 2024.
- [11] Matt Deitke, Dustin Schwenk, Jordi Salvador, Luca Weihs, Oscar Michel, Eli VanderBilt, Ludwig Schmidt, Kiana Ehsani, Aniruddha Kembhavi, and Ali Farhadi. Objaverse: A universe of annotated 3d objects. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13142–13153, 2023.
- [12] Congyue Deng, Chiyu Jiang, Charles R Qi, Xinchen Yan, Yin Zhou, Leonidas Guibas, Dragomir Anguelov, et al. Nerdi: Single-view nerf synthesis with language-guided diffusion as general image priors. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 20637–20647, 2023.
- [13] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255. Ieee, 2009.
- [14] Shivam Duggal and Deepak Pathak. Topologically-aware deformation fields for single-view 3d reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1536–1546, 2022.
- [15] Haoqiang Fan, Hao Su, and Leonidas J Guibas. A point set generation network for 3d object reconstruction from a single image. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 605–613, 2017.
- [16] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit H Bermano, Gal Chechik, and Daniel Cohen-Or. An image is worth one word: Personalizing text-to-image generation using textual inversion. *arXiv preprint arXiv:2208.01618*, 2022.
- [17] Georgia Gkioxari, Jitendra Malik, and Justin Johnson. Mesh r-cnn. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 9785–9795, 2019.
- [18] Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9729–9738, 2020.

- [19] Zexin He and Tengfei Wang. Openlrm: Open-source large reconstruction models. <https://github.com/3DTopia/OpenLRM>, 2023.
- [20] Paul Henderson, Vagia Tsiminaki, and Christoph H Lampert. Leveraging 2d data to learn textured 3d mesh generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 7498–7507, 2020.
- [21] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. *Advances in neural information processing systems*, 30, 2017.
- [22] Yicong Hong, Kai Zhang, Jiuxiang Gu, Sai Bi, Yang Zhou, Difan Liu, Feng Liu, Kalyan Sunkavalli, Trung Bui, and Hao Tan. Lrm: Large reconstruction model for single image to 3d. *arXiv preprint arXiv:2311.04400*, 2023.
- [23] Tao Hu, Liwei Wang, Xiaogang Xu, Shu Liu, and Jiaya Jia. Self-supervised 3d mesh reconstruction from single images. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6002–6011, 2021.
- [24] Zixuan Huang, Stefan Stojanov, Anh Thai, Varun Jampani, and James M Rehg. Zeroshape: Regression-based zero-shot shape reconstruction. *arXiv preprint arXiv:2312.14198*, 2023.
- [25] Hanwen Jiang, Zhenyu Jiang, Yue Zhao, and Qixing Huang. Leap: Liberate sparse-view 3d modeling from camera poses. *arXiv preprint arXiv:2310.01410*, 2023.
- [26] Li Jiang, Shaoshuai Shi, Xiaojuan Qi, and Jiaya Jia. Gal: Geometric adversarial loss for single-view 3d-object reconstruction. In *Proceedings of the European conference on computer vision (ECCV)*, pages 802–816, 2018.
- [27] Angjoo Kanazawa, Shubham Tulsiani, Alexei A. Efros, and Jitendra Malik. Learning category-specific mesh reconstruction from image collections. In *Proceedings of the European Conference on Computer Vision (ECCV)*, September 2018.
- [28] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- [29] Abhishek Kar, Shubham Tulsiani, Joao Carreira, and Jitendra Malik. Category-specific object reconstruction from a single image. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1966–1974, 2015.
- [30] Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, and George Drettakis. 3d gaussian splatting for real-time radiance field rendering. *ACM Transactions on Graphics*, 42(4):1–14, 2023.
- [31] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4015–4026, 2023.
- [32] Nilesh Kulkarni, Abhinav Gupta, David F Fouhey, and Shubham Tulsiani. Articulation-aware canonical surface mapping. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 452–461, 2020.
- [33] Alina Kuznetsova, Hassan Rom, Neil Alldrin, Jasper Uijlings, Ivan Krasin, Jordi Pont-Tuset, Shahab Kamali, Stefan Popov, Matteo Mallocci, Alexander Kolesnikov, et al. The open images dataset v4: Unified image classification, object detection, and visual relationship detection at scale. *International journal of computer vision*, 128(7):1956–1981, 2020.
- [34] Xueting Li, Sifei Liu, Kihwan Kim, Shalini De Mello, Varun Jampani, Ming-Hsuan Yang, and Jan Kautz. Self-supervised single-view 3d reconstruction via semantic consistency. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XIV 16*, pages 677–693. Springer, 2020.
- [35] Chen-Hsuan Lin, Chaoyang Wang, and Simon Lucey. Sdf-srn: Learning signed distance 3d object reconstruction from static images. *Advances in Neural Information Processing Systems*, 33:11453–11464, 2020.
- [36] Ruoshi Liu, Rundi Wu, Basile Van Hoorick, Pavel Tokmakov, Sergey Zakharov, and Carl Vondrick. Zero-1-to-3: Zero-shot one image to 3d object. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 9298–9309, 2023.
- [37] Shaowei Liu, Hanwen Jiang, Jiarui Xu, Sifei Liu, and Xiaolong Wang. Semi-supervised 3d hand-object poses estimation with interactions in time. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14687–14697, 2021.
- [38] Shichen Liu, Tianye Li, Weikai Chen, and Hao Li. Soft rasterizer: A differentiable renderer for image-based 3d reasoning. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 7708–7717, 2019.

- [39] Yuan Liu, Cheng Lin, Zijiao Zeng, Xiaoxiao Long, Lingjie Liu, Taku Komura, and Wenping Wang. Syncdreamer: Generating multiview-consistent images from a single-view image. *arXiv preprint arXiv:2309.03453*, 2023.
- [40] Zhengzhe Liu, Xiaojuan Qi, and Chi-Wing Fu. One thing one click: A self-training approach for weakly supervised 3d semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1726–1736, 2021.
- [41] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- [42] Luke Melas-Kyriazi, Iro Laina, Christian Rupprecht, and Andrea Vedaldi. Realfusion: 360deg reconstruction of any object from a single image. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8446–8455, 2023.
- [43] Lars Mescheder, Michael Oechsle, Michael Niemeyer, Sebastian Nowozin, and Andreas Geiger. Occupancy networks: Learning 3d reconstruction in function space. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 4460–4470, 2019.
- [44] Lu Mi, Abhijit Kundu, David Ross, Frank Dellaert, Noah Snavely, and Alireza Fathi. im2nerf: Image to neural radiance field in the wild. *arXiv preprint arXiv:2209.04061*, 2022.
- [45] Ben Mildenhall, Pratul P Srinivasan, Rodrigo Ortiz-Cayon, Nima Khademi Kalantari, Ravi Ramamoorthi, Ren Ng, and Abhishek Kar. Local light field fusion: Practical view synthesis with prescriptive sampling guidelines. *ACM Transactions on Graphics (TOG)*, 38(4):1–14, 2019.
- [46] Ben Mildenhall, Pratul P Srinivasan, Matthew Tancik, Jonathan T Barron, Ravi Ramamoorthi, and Ren Ng. Nerf: Representing scenes as neural radiance fields for view synthesis. *Communications of the ACM*, 65(1):99–106, 2021.
- [47] Tom Monnier, Matthew Fisher, Alexei A Efros, and Mathieu Aubry. Share with thy neighbors: Single-view reconstruction by cross-instance consistency. In *European Conference on Computer Vision*, pages 285–303. Springer, 2022.
- [48] Thu Nguyen-Phuoc, Chuan Li, Lucas Theis, Christian Richardt, and Yong-Liang Yang. Hologan: Unsupervised learning of 3d representations from natural images. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7588–7597, 2019.
- [49] Jeong Joon Park, Peter Florence, Julian Straub, Richard Newcombe, and Steven Lovegrove. DeepSDF: Learning continuous signed distance functions for shape representation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 165–174, 2019.
- [50] Ben Poole, Ajay Jain, Jonathan T Barron, and Ben Mildenhall. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988*, 2022.
- [51] Guocheng Qian, Jinjie Mai, Abdullah Hamdi, Jian Ren, Aliaksandr Siarohin, Bing Li, Hsin-Ying Lee, Ivan Skorokhodov, Peter Wonka, Sergey Tulyakov, et al. Magic123: One image to high-quality 3d object generation using both 2d and 3d diffusion priors. *arXiv preprint arXiv:2306.17843*, 2023.
- [52] Lingteng Qiu, Guanying Chen, Xiaodong Gu, Qi zuo, Mutian Xu, Yushuang Wu, Weihao Yuan, Zilong Dong, Liefeng Bo, and Xiaoguang Han. Richdreamer: A generalizable normal-depth diffusion model for detail richness in text-to-3d. *arXiv preprint arXiv:2311.16918*, 2023.
- [53] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [54] Ilija Radosavovic, Piotr Dollár, Ross Girshick, Georgia Gkioxari, and Kaiming He. Data distillation: Towards omni-supervised learning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4119–4128, 2018.
- [55] Hafizur Rahaman, Erik Champion, and Mafkereseb Bekele. From photo to 3d to mixed reality: A complete workflow for cultural heritage visualisation and experience. *Digital Applications in Archaeology and Cultural Heritage*, 13:e00102, 2019.
- [56] Jeremy Reizenstein, Roman Shapovalov, Philipp Henzler, Luca Sbordone, Patrick Labatut, and David Novotny. Common objects in 3d: Large-scale learning and evaluation of real-life 3d category reconstruction. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 10901–10911, 2021.
- [57] Konstantinos Rematas, Ricardo Martin-Brualla, and Vittorio Ferrari. Sharf: Shape-conditioned radiance fields from a single view. *arXiv preprint arXiv:2102.08860*, 2021.
- [58] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In *Medical image computing and computer-assisted intervention—MICCAI 2015: 18th international conference, Munich, Germany, October 5-9, 2015, proceedings, part III 18*, pages 234–241. Springer, 2015.

- [59] Kyle Sargent, Jing Yu Koh, Han Zhang, Huiwen Chang, Charles Herrmann, Pratul Srinivasan, Jiajun Wu, and Deqing Sun. Vq3d: Learning a 3d-aware generative model on imagenet. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4240–4250, 2023.
- [60] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *Advances in Neural Information Processing Systems*, 35:25278–25294, 2022.
- [61] Henry Scudder. Probability of error of some adaptive pattern-recognition machines. *IEEE Transactions on Information Theory*, 11(3):363–371, 1965.
- [62] Yichun Shi, Peng Wang, Jialong Ye, Mai Long, Kejie Li, and Xiao Yang. Mvdream: Multi-view diffusion for 3d generation. *arXiv preprint arXiv:2308.16512*, 2023.
- [63] Pawan Sinha and Edward Adelson. Recovering reflectance and illumination in a world of painted polyhedra. In *1993 (4th) International Conference on Computer Vision*, pages 156–163. IEEE, 1993.
- [64] Vincent Sitzmann, Michael Zollhöfer, and Gordon Wetzstein. Scene representation networks: Continuous 3d-structure-aware neural scene representations. *Advances in Neural Information Processing Systems*, 32, 2019.
- [65] Ivan Skorokhodov, Aliaksandr Siarohin, Yinghao Xu, Jian Ren, Hsin-Ying Lee, Peter Wonka, and Sergey Tulyakov. 3d generation on imagenet. *arXiv preprint arXiv:2303.01416*, 2023.
- [66] Stanislaw Szymanowicz, Christian Rupprecht, and Andrea Vedaldi. Splatter image: Ultra-fast single-view 3d reconstruction. *arXiv preprint arXiv:2312.13150*, 2023.
- [67] Jiaxiang Tang, Zhaoxi Chen, Xiaokang Chen, Tengfei Wang, Gang Zeng, and Ziwei Liu. Lgm: Large multi-view gaussian model for high-resolution 3d content creation. *arXiv preprint arXiv:2402.05054*, 2024.
- [68] Junshu Tang, Tengfei Wang, Bo Zhang, Ting Zhang, Ran Yi, Lizhuang Ma, and Dong Chen. Make-it-3d: High-fidelity 3d creation from a single image with diffusion prior. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22819–22829, 2023.
- [69] Bart Thomee, David A Shamma, Gerald Friedland, Benjamin Elizalde, Karl Ni, Douglas Poland, Damian Borth, and Li-Jia Li. Yfcc100m: The new data in multimedia research. *Communications of the ACM*, 59(2):64–73, 2016.
- [70] Dmitry Tochilkin, David Pankratz, Zexiang Liu, Zixuan Huang, Adam Letts, Yangguang Li, Ding Liang, Christian Laforte, Varun Jampani, and Yan-Pei Cao. Tripotr: Fast 3d object reconstruction from a single image. *arXiv preprint arXiv:2403.02151*, 2024.
- [71] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [72] Richard Tucker and Noah Snavely. Single-view view synthesis with multiplane images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 551–560, 2020.
- [73] Shubham Tulsiani, Tinghui Zhou, Alexei A Efros, and Jitendra Malik. Multi-view supervision for single-view reconstruction via differentiable ray consistency. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2626–2634, 2017.
- [74] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [75] Vikram Voleti, Chun-Han Yao, Mark Boss, Adam Letts, David Pankratz, Dmitry Tochilkin, Christian Laforte, Robin Rombach, and Varun Jampani. Sv3d: Novel multi-view synthesis and 3d generation from a single image using latent video diffusion. *arXiv preprint arXiv:2403.12008*, 2024.
- [76] Shuzhe Wang, Vincent Leroy, Johann Cabon, Boris Chidlovskii, and Jerome Revaud. Dust3r: Geometric 3d vision made easy. *arXiv preprint arXiv:2312.14132*, 2023.
- [77] Zhengyi Wang, Yikai Wang, Yifei Chen, Chendong Xiang, Shuo Chen, Dajiang Yu, Chongxuan Li, Hang Su, and Jun Zhu. Crm: Single image to 3d textured mesh with convolutional reconstruction model. *arXiv preprint arXiv:2403.05034*, 2024.
- [78] Zhou Wang, Alan C Bovik, Hamid R Sheikh, and Eero P Simoncelli. Image quality assessment: from error visibility to structural similarity. *IEEE transactions on image processing*, 13(4):600–612, 2004.
- [79] Xinyue Wei, Kai Zhang, Sai Bi, Hao Tan, Fujun Luan, Valentin Deschaintre, Kalyan Sunkavalli, Hao Su, and Zexiang Xu. Meshlm: Large reconstruction model for high-quality mesh. *arXiv preprint arXiv:2404.12385*, 2024.

- [80] Chao-Yuan Wu, Justin Johnson, Jitendra Malik, Christoph Feichtenhofer, and Georgia Gkioxari. Multiview compressive coding for 3d reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9065–9075, 2023.
- [81] Shangzhe Wu, Christian Rupprecht, and Andrea Vedaldi. Unsupervised learning of probably symmetric deformable 3d objects from images in the wild. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 1–10, 2020.
- [82] Tong Wu, Jiarui Zhang, Xiao Fu, Yuxin Wang, Jiawei Ren, Liang Pan, Wayne Wu, Lei Yang, Jiaqi Wang, Chen Qian, et al. Omnioject3d: Large-vocabulary 3d object dataset for realistic perception, reconstruction and generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 803–814, 2023.
- [83] Jianfeng Xiang, Jiaolong Yang, Binbin Huang, and Xin Tong. 3d-aware image generation using 2d diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2383–2393, 2023.
- [84] Qizhe Xie, Minh-Thang Luong, Eduard Hovy, and Quoc V Le. Self-training with noisy student improves imagenet classification. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10687–10698, 2020.
- [85] Dejia Xu, Yifan Jiang, Peihao Wang, Zhiwen Fan, Humphrey Shi, and Zhangyang Wang. Sinnerf: Training neural radiance fields on complex scenes from a single image. In *European Conference on Computer Vision*, pages 736–753. Springer, 2022.
- [86] Jiale Xu, Weihao Cheng, Yiming Gao, Xintao Wang, Shenghua Gao, and Ying Shan. Instantmesh: Efficient 3d mesh generation from a single image with sparse-view large reconstruction models. *arXiv preprint arXiv:2404.07191*, 2024.
- [87] Xinchun Yan, Jasmined Hsu, Mohammad Khansari, Yunfei Bai, Arkanath Pathak, Abhinav Gupta, James Davidson, and Honglak Lee. Learning 6-dof grasping interaction via deep geometry-aware 3d representations. In *2018 IEEE International Conference on Robotics and Automation (ICRA)*, pages 3766–3773. IEEE, 2018.
- [88] Jihan Yang, Shaoshuai Shi, Zhe Wang, Hongsheng Li, and Xiaojuan Qi. St3d: Self-training for unsupervised domain adaptation on 3d object detection. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10368–10378, 2021.
- [89] Lihe Yang, Bingyi Kang, Zilong Huang, Xiaogang Xu, Jiashi Feng, and Hengshuang Zhao. Depth anything: Unleashing the power of large-scale unlabeled data. *arXiv preprint arXiv:2401.10891*, 2024.
- [90] Yufei Ye, Shubham Tulsiani, and Abhinav Gupta. Shelf-supervised mesh prediction in the wild. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8843–8852, 2021.
- [91] Alex Yu, Vickie Ye, Matthew Tancik, and Angjoo Kanazawa. pixelnerf: Neural radiance fields from one or few images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4578–4587, 2021.
- [92] Xianggang Yu, Mutian Xu, Yidan Zhang, Haolin Liu, Chongjie Ye, Yushuang Wu, Zizheng Yan, Chenming Zhu, Zhangyang Xiong, Tianyou Liang, et al. Mvimnet: A large-scale dataset of multi-view images. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9150–9161, 2023.
- [93] Kai Zhang, Sai Bi, Hao Tan, Yuanbo Xiangli, Nanxuan Zhao, Kalyan Sunkavalli, and Zexiang Xu. Gs-irm: Large reconstruction model for 3d gaussian splatting. *arXiv preprint arXiv:2404.19702*, 2024.
- [94] Richard Zhang, Phillip Isola, Alexei A Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 586–595, 2018.
- [95] Yue Zhao, Long Zhao, Xingyi Zhou, Jialin Wu, Chun-Te Chu, Hui Miao, Florian Schroff, Hartwig Adam, Ting Liu, Boqing Gong, et al. Distilling vision-language models on millions of videos. *arXiv preprint arXiv:2401.06129*, 2024.
- [96] Zi-Xin Zou, Zhipeng Yu, Yuan-Chen Guo, Yangguang Li, Ding Liang, Yan-Pei Cao, and Song-Hai Zhang. Triplane meets gaussian splatting: Fast and generalizable single-view 3d reconstruction with transformers. *arXiv preprint arXiv:2312.09147*, 2023.

# Appendices

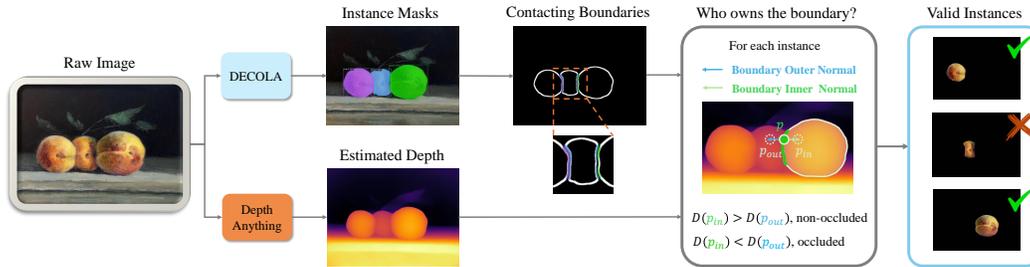


Figure 6: The occlusion detection pipeline for data curation.

## A More Training Details

**Training.** As we discussed, TripoSR predicts reconstruction with random scales on different inputs. The reason is that TripoSR is not conditioned on the input view camera pose and intrinsics. Thus, the model is encouraged to guess the object scale [70]. Moreover, TripoSR is trained on a set of Objaverse data rendered using different rendering settings. Thus, TripoSR usually overfits the training scales and can not predict the scales accurately for images rendered in different settings or in-the-wild real images. The scale of the object in the output triplane can vary and may not be consistent with regard to the scale variation in the input images. Specifically, the inaccurate scales are manifested as the misalignment between the rendered and original input view when using a canonical camera pose with a constant translation vector. And the misalignment of the scale is random.

We fine-tune TripoSR to solve the problem, using the Objaverse images rendered with a constant camera translation scale. We use a learning rate  $4e - 5$  with AdamW optimizer and warmup iteration 3,000. It is fine-tuned with 40,000 iterations with an equivalent batch size of 80.

For all training, we  $\beta_1, \beta_2, \epsilon$  of AdamW as 0.9, 0.96, and  $1e - 6$ . We use a weight decay of 0.05 and perform gradient clipping with the max gradient scale of 1.0. During training, we render images with a resolution of  $128 \times 128$ . For each pixel, we sample 128 points along its ray. For the images in the real dataset, we crop the instance with a random expanding ratio in  $[1.45, 1.7]$  of the longer side of the instance bounding box. Our inputs have a resolution of  $H = W = 512$  and the triplane has a resolution of  $h = w = 64$ . As TripoSR requires inputs with a gray background, we render a density mask  $\hat{\sigma}_\Phi$  together with the color image  $\hat{I}_\Phi^R$  when calculating the cycle-consistency pixel-level loss. We apply the rendered density mask to make the background gray. We use 8 GPUs with 48GB memory. It takes 4 days for training.

**Evaluation.** As our model inherits the model architecture of TripoSR, it can not handle real data input with non-centered principle points. To evaluate the models, we select a subset of MVImgNet and CO3D of 100 instances and use the image where the center of its instance mask is closest to the image center as input. We mask the background and perform center cropping with an expanding ratio of 1.6 times the mask bounding box size. We do not have any requirements for the target novel views. Besides, we use the provided COLMAP point cloud to normalize the camera poses. We normalize the input pose as the canonical pose  $\phi$ . The poses of other views are normalized with similarity transformations accordingly, following LRM [22]. We evaluate CO3D and MVImgNet with 5 views for each instance and evaluate OmniObject3D with 10 views for each instance. To evaluate the self-consistency, we use intermediate camera pose with the azimuth of  $[0, 30, 60, -30, -60, 30, 60, -30, -60, 30, 60, -30, -60]$  and elevation of  $[0, 0, 0, 0, 0, 30, 30, 30, 30, 60, 60, 60, 60]$ . These viewpoints cover the front of the shape, which is designed for methods with generative priors in case the generated random background influences the evaluation results for fair comparisons.

Table 6: Evaluation results on the real-world in-domain MVImageNet dataset. We note that LRM\* is trained on multi-view data of MVImageNet as an oracle comparison (results in gray). TripoSR<sup>†</sup> is the original TripoSR without our fine-tuning. Real3D<sup>§</sup> is trained on single-view images of MVImageNet without access to the multi-view information. We highlight the best results. We also include the gain ( $\Delta$ ) by using real data.

Method	Eval. on GT Novel Views								
	Novel View Synthesis Quality								
	MVImageNet			CO3D			OmniObject3D		
	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
LRM [19]	19.75	0.864	0.112	18.31	0.849	0.126	18.20	0.831	0.144
LRM* [19]	20.16	0.867	0.105	18.82	0.852	0.119	18.53	0.837	0.138
$\Delta$ LRM*	0.410	0.003	0.007	0.510	0.003	0.007	0.330	0.006	0.006
TripoSR <sup>†</sup> [70]	17.37	0.830	0.170	15.94	0.812	0.181	17.28	0.810	0.180
TripoSR [70]	19.81	0.864	0.116	18.44	0.848	0.127	19.43	0.847	0.128
<b>Real3D<sup>§</sup> (ours)</b>	<b>20.33</b>	<b>0.869</b>	0.111	<b>19.03</b>	<b>0.854</b>	<b>0.119</b>	<b>19.98</b>	<b>0.854</b>	<b>0.121</b>
$\Delta$ ours <sup>§</sup>	0.520	0.005	0.005	0.590	0.006	0.008	0.550	0.003	0.007

## B Data Curation Details

We filter the instances with three criteria. First, we filter truncated and small instances. This is achieved with simple heuristics by thresholding the instance scale and its distance to the image boundary. We use an instance scale threshold of 100 pixels and a boundary distance threshold of 10 pixels.

Second, We filter instances by their category. We empirically observe the LRM can not effectively reconstruct instances belonging to specific categories, e.g. bus. The reason is the large scale-variance between the front view and the side view. For example, when seeing the bus from a front view, the model can not reconstruct its side view with the correct scales, as the latent triplane representation has a cubic physical size. We observe that performing self-training on these instances harms the performance instead. We note this is a limitation of the Triplane-based LRM base model rather than our self-training framework.

Third, we filter the occluded instances. As shown in Fig. 6, we leverage the synergy between instance segmentation and single-view depth estimation for occlusion detection. We first detect the mask boundaries and then calculate the boundary parts that are contacting other instances. We use an erosion operation with kernel size 9 for boundary detection. The boundary is calculated as the difference between the eroded and the original instance mask. To detect boundaries that contact other instances, we use another erosion operation with kernel size 15. We erode the boundary of the current instance, then the contacting boundary is defined as its overlap region with the boundary of any other instances. We then determine whether an object is occluded based on whether it ‘owns’ the boundary. For each instance, we sample  $N = 20$  points (with return) on the boundary that contacts other instances. We then calculate the normal direction of the boundary at the sampled points. In detail, we use the Sobel operator to calculate the boundary tangent and normal direction. We note that we ignore the points whose 8 neighbors are all positive, during the point sampling process. We can easily know the outer and inner-mask normal directions by querying the instance mask. If the query results are both negative or positive, potentially due to the non-convex local boundary, we reject the object. Then we sample one point along each normal direction, where the sampling distance is  $0.05 * s$ , where  $s = (b_x + b_y)/2$  and  $b_x, b_y$  are the size of the mask bounding box in x and y-axis. We then query the estimated depth at the two sampled points, denoted as  $D_{inner}$  and  $D_{outer}$ . If  $D_{inner}/D_{outer}$  is smaller than 0.95, we consider the point occluded. If half of the sampled points on the boundary are considered occluded, they vote the object as occluded. We note that all the aggressive strategies are used to avoid false negative occlusion detection results.

We use DECOLA [8] and Depth Anything [89] for instance segmentation and depth estimation. We use a confidence threshold of 0.3 to filter the detection results of DECOLA. We use this low threshold for detecting all instances in the image, as any non-detected object affects the occlusion detection results. However, we empirically observe that a too-low confidence threshold, e.g. 0.1, will lead to over-segmentation and false positive detection results.

## C More Results and Ablations

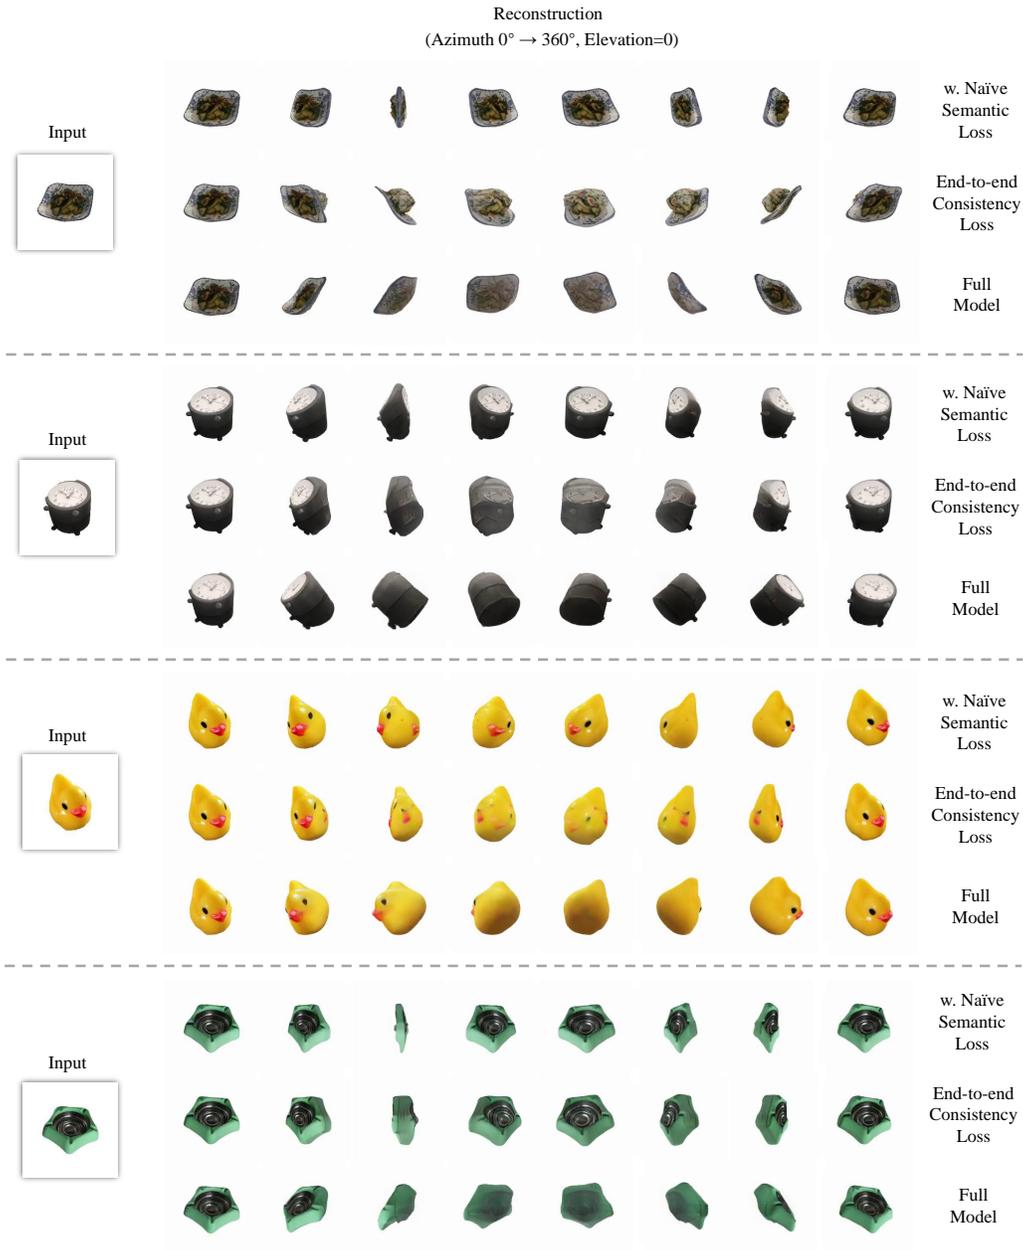


Figure 7: Visualization of ablation experiments on MVIImgNet.

**Effectiveness of Self-Training.** To further evaluate the effectiveness of self-training, we compare LRM\* and a Real3D training with MVIImgNet single-view images. In this comparison, LRM\* and Real3D have a similar real-world training data distribution. We note that LRM\* is trained with multi-view data, where each instance of MVIImgNet contains about 30 views. In contrast, Real3D only uses one image of each instance. Thus, Real3D uses the same number of shape instances for training as LRM\*, but the number of training images is  $30\times$  less. As shown in Table 6, Real3D outperforms LRM\* and achieves larger improvements in most of the results, demonstrating the effectiveness of our self-training strategy.

**Original TripoSR Performance** We also report the performance of original TripoSR (denoted as TripoSR<sup>†</sup>) in Table 6. Due to its random scale prediction, we observe low evaluation metrics of



Figure 8: Visual comparison with prior works and ground-truth novel views.

TripoSR<sup>†</sup>. We use a grid search to find the best evaluation metrics by using different camera-to-world distances.

**Visualization of Ablations.** We visualize the reconstruction of ablated models in Fig. 7. Using naive consistency loss makes the model copy the front of the object to the back of the reconstruction. Using an end-to-end cycle-consistency loss makes the reconstructions deformed in a wrong manner. Our full model can reconstruct the geometry correctly, especially the concave local geometry.

## D More Visualization

We include additional visualization in Fig.8. We observe that methods with generative priors usually suffer from unrealistic reconstruction, where the synthesized novel views of real objects are incorrect. This leads to the compounding error of the two-stage generation-then-reconstruction framework. Moreover, we also observe these methods usually suffer from not photo-realistic reconstruction at the back views and unaligned reconstruction content with the input images. In some other cases, they can produce high-quality reconstruction, while the reconstruction content, object scale, and object pose are different from the input image.