

In-Context Editing: Learning Knowledge from Self-Induced Distributions

Siyuan Qi^{1†} Bangcheng Yang¹ Kailin Jiang¹ Xiaobo Wang¹
Jiaqi Li¹ Yifan Zhong^{1,2} Yaodong Yang^{1,2} Zilong Zheng¹
¹State Key Laboratory of General Artificial Intelligence, BIGAI ²Peking University

Abstract

The existing fine-tuning paradigm for language models is brittle in knowledge editing scenarios, where the model must incorporate new information without extensive retraining. This brittleness often results in overfitting, reduced performance, and unnatural language generation. To address this, we propose Consistent In-Context Editing (ICE), a novel approach that leverages the model’s in-context learning capability to tune toward a contextual distribution rather than a one-hot target. ICE introduces a straightforward optimization framework that includes both a target and a procedure, enhancing the robustness and effectiveness of gradient-based tuning methods. We provide analytical insights into ICE across four critical aspects of knowledge editing: accuracy, locality, generalization, and linguistic quality, showing its advantages. Experimental results across four datasets confirm the effectiveness of ICE and demonstrate its potential for continual editing, ensuring that updated information is incorporated while preserving the integrity of the model.

1 Introduction

As the world continually evolves, updating large language models (LLMs) to correct outdated information and incorporate new knowledge is crucial. While humans can rapidly and incrementally adapt to new information, updating LLMs typically demands retraining from scratch, a process that is computationally prohibitive and often impractical.

Knowledge editing (Zhang et al., 2024) has emerged as a solution to this challenge, allowing for efficient adjustments to LLM outputs in response to specific queries while ensuring overall model performance remains unaffected in unrelated areas. Specifically, it modifies specific knowledge in a language model \mathcal{M}_θ using query-response pairs $\{(\mathbf{q}_i, \mathbf{x}_i^*)\}_{i=1}^N$. For instance, given the query

[†] Corresponding author.

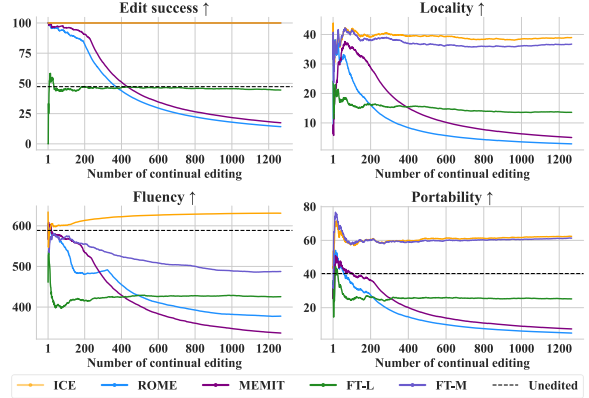


Figure 1: Continual editing with Llama2-7b-chat on **WikiData_{recent}**. Each edit builds on the previous model, risking deterioration over time. The model is assessed immediately after each edit without re-evaluating previous edits, testing its ability to update continuously. While most methods deteriorate, sometimes performing worse than the unedited version, our method, ICE, maintains integrity and achieves promising performance.

"The president of the US is," a model trained on outdated data might respond "Donald Trump," while the desired updated response would be "Joe Biden." This adjustment is typically achieved by directly maximizing the probability $p_\theta(\mathbf{x}^*|\mathbf{q})$.

However, traditional fine-tuning methods for language models demonstrate notable brittleness in knowledge editing scenarios (Meng et al., 2022a), which necessitates the efficient incorporation of new information with minimal data. However, fine-tuning methods often minimize a distance (e.g., cross-entropy) between the model’s predictions and **one-hot target distributions**, which can result in overfitting and unnatural language generation.

Various strategies have been proposed to address this problem, including constraining the gradient or weights (Zhu et al., 2020; Meng et al., 2022a) and adopting parameter-efficient approaches (Yu et al., 2024). However, these methods do not change the one-hot target and thus do not fully mitigate the problem. There are methods employing in-context

learning for the knowledge editing problem (Zheng et al., 2023), but these approaches do not involve parameter tuning and may face challenges when the updated knowledge accumulates.

To overcome these limitations, we propose a novel method termed **Consistent In-Context Editing (ICE)**. Unlike traditional fine-tuning that targets a single outcome, ICE **learns towards a distribution**. This method uses context prompts to guide the model towards a new distribution that aligns with the desired knowledge while maintaining similarity to its original distribution (Figure 2). By embedding additional contextual information into the training process, ICE confines alterations to a localized region of the model’s distribution, preserving unrelated knowledge (Figure 1).

Overall, ICE introduces a simple and easy-to-implement optimization framework that enhances the robustness and effectiveness of gradient-based tuning for language models. At each step of the optimization process, it samples in-context sequences from the model and works to minimize the difference in the model’s output when it has and does not have context. This procedure ensures that the model absorbs new knowledge effectively, while simultaneously guarding against overfitting and preserving the accuracy of its existing knowledge.

We also provide a comprehensive analysis of ICE’s impact on knowledge editing across key dimensions: accuracy, locality, generalization, and linguistic quality. We conduct extensive experiments on five datasets, obtaining promising results. Furthermore, we test ICE for continual editing without incorporating specific designs and demonstrate that it outperforms the baseline methods.

The primary contributions of this paper are as follows: 1) We introduce in-context editing (ICE), a novel knowledge editing approach that targets learning towards a distribution rather than a one-hot target, providing a more robust alternative to traditional fine-tuning. 2) We develop an optimization framework that refines the target distribution through a gradient-based algorithm, dynamically adapting the model and improving robustness. 3) We provide a thorough analysis of our method’s effectiveness across the four critical aspects of knowledge editing: accuracy, locality, generalization, and linguistic quality. 4) Our results confirm the effectiveness of ICE and demonstrate its potential for continual editing, ensuring that updated information is seamlessly incorporated while preserving the integrity of existing knowledge.

2 Preliminaries and Related Work

2.1 Knowledge Editing: Problem Setup

The objective of knowledge editing is to incorporate new facts into a language model \mathcal{M}_θ through query-response pairs $\{(\mathbf{q}_i, \mathbf{x}_i^*)\}_{i \in [1, N]}$. In this setup, \mathbf{q} is the query that triggers the retrieval of factual knowledge from \mathcal{M}_θ , such as "The president of the US is", with \mathbf{x}^* being the intended response after editing, *e.g.*, "Joe Biden". This integration is typically done by maximizing the probability $p_\theta(\mathbf{x}^*|\mathbf{q})$. Conventionally, a knowledge editing algorithm is assessed across four key dimensions:

Edit Success measures the ability of the model to produce the edited response \mathbf{x}^* for a query \mathbf{q} :

$$\text{succ} = \mathbb{E}_{(\mathbf{q}, \mathbf{x}^*) \sim \mathcal{D}_e} [\mathbf{1}[\arg \max_{\mathbf{x}} p_\theta(\mathbf{x}|\mathbf{q}) = \mathbf{x}^*]],$$

where \mathcal{D}_e are the query-response pairs representing the editing targets, and $\mathbf{1}[\cdot]$ is the indicator function.

Portability assesses how well the model generalizes the knowledge for rephrased or logically related queries within the edit scope \mathcal{D}_q :

$$\text{port} = \mathbb{E}_{(\mathbf{q}, \mathbf{x}^*) \sim \mathcal{D}_q \setminus \mathcal{D}_e} [\mathbf{1}[\arg \max_{\mathbf{x}} p_\theta(\mathbf{x}|\mathbf{q}) = \mathbf{x}^*]].$$

For the aforementioned example, a related query could be "The first lady of the US is", with the target being "Jill Biden" instead of "Melania Trump".

Locality evaluates if the model maintains original predictions for queries outside the edit scope:

$$\text{loc} = \mathbb{E}_{(\mathbf{q}, \mathbf{x}^*) \sim \mathcal{D} \setminus \mathcal{D}_q} [\mathbf{1}[\arg \max_{\mathbf{x}} p_\theta(\mathbf{x}|\mathbf{q}) = \mathbf{x}^*]].$$

Fluency estimates the linguistic quality of the post-edit model’s output (Zhang et al., 2018), given by a weighted sum of bi- and tri-gram entropies:

$$\text{flu} = - \sum_{n=2}^3 w_n \sum_{\mathbf{x}} f_n(\mathbf{x}) \log f_n(\mathbf{x}),$$

where f_n is the n-gram distribution.

2.2 Knowledge-Editing Approaches

Weight Frozen The first family of methods for knowledge editing keeps the original model frozen while leveraging external tools. Techniques proposed by (Mitchell et al., 2022; Murty et al., 2022; Madaan et al., 2022; Onoe et al., 2023; Zhong et al., 2023; Wang et al., 2024d,c; Jiang et al., 2024; Chen et al., 2024; Shi et al., 2024; Wang et al., 2024b) enhance the model’s adaptability to new knowledge using external memory. Other approaches inject additional parameters into the

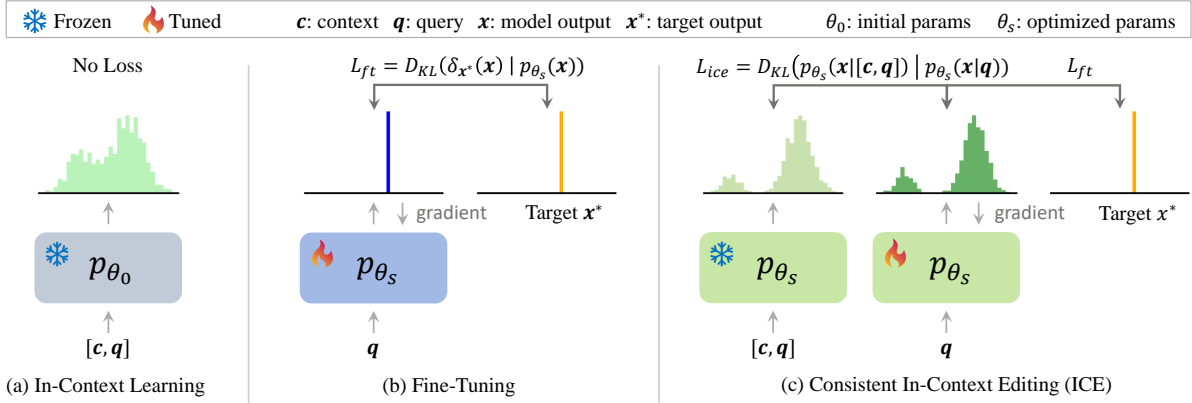


Figure 2: Overview. (a) **In-Context Learning**: Utilizes context prompts without modifying the model’s parameters. (b) **Traditional Fine-Tuning**: Relies on minimizing a distance metric between the model’s predictions and one-hot target distributions, often leading to overfitting and unnatural language generation. (c) **Consistent In-Context Editing (ICE)**: Leverages context prompts related to the target knowledge to guide the model towards a new distribution that aligns with the desired knowledge, while maintaining similarity to its original distribution.

model to incorporate new knowledge (Dong et al., 2022; Huang et al., 2022b; Hartvigsen et al., 2024; Raunak and Menezes, 2022; Yu et al., 2024). Additionally, some methods attempt to embed the knowledge directly into prompts to generate post-edit responses, utilizing the model’s in-context learning abilities (Zheng et al., 2023; Cohen et al., 2024; Li et al., 2023). However, these methods result in an ever-growing memory/model, which can become problematic over time as knowledge accumulates.

Weight Editing Another line of work, which our method focuses on, involves editing the model’s weights to integrate new knowledge. Various techniques exist, including direct fine-tuning (Zhu et al., 2020; Lee et al., 2022; Ni et al., 2023), meta-learning-driven approaches (Tan et al., 2023; De Cao et al., 2021; Mitchell et al., 2021; Sinitsin et al., 2019), and methods that identify and edit specific parts of the network (Geva et al., 2020; Dai et al., 2021; Li et al., 2024; Cheng et al., 2024; Santurkar et al., 2021; Xu et al., 2023; Tanno et al., 2022; Ilharco et al., 2022; Gupta et al., 2023; Hase et al., 2021; Hoelscher-Obermaier et al., 2023; Belrose et al., 2024; Geva et al., 2022; Yu et al., 2023; Wu et al., 2023; Ma et al., 2023; Gupta et al., 2024; Wang et al., 2024a; Sharma et al., 2024). These methods aim to incorporate target knowledge and employ various techniques to ensure the locality of the edits. Techniques include constraining the gradient of parameters (Zhu et al., 2020), adopting parameter-efficient approaches (Yu et al., 2024), and applying statistical constraints on the weights, with notable examples such as ROME (Meng et al., 2022a) and MEMIT (Meng et al., 2022b). In this

paper, we propose tuning the model towards a self-generated distribution instead of a one-hot target.

In-Context Learning Previous research has applied contextual knowledge by prompting the model (Zheng et al., 2023; Cohen et al., 2024). To enhance models leveraging in-context learning, various strategies have been explored, such as distilling contextual knowledge using a larger model (Snell et al., 2022; Huang et al., 2022a), tuning the model through meta-learning techniques (Chen et al., 2022), and examining the consistency between context and knowledge (Li et al., 2023; Huang et al., 2024). However, these approaches do not modify the model weights. In contrast, our method introduces a novel approach to utilize in-context learning by creating a learning target and framework for model editing, thereby providing an innovative way to integrate contextual information into the model’s knowledge base.

3 Learning Knowledge From Contexts

We consider an auto-regressive generative model p_θ parameterized by θ , where $p_\theta(\mathbf{x}) = p_\theta(x_{1:T})$ is the probability of a sequence $x_{1:T}$. The sequence is factorized into individual tokens x_t , and the model estimates the probability auto-regressively $p_\theta(x_{1:T}) \equiv p_\theta(x_1) \prod_{t=1}^{T-1} p_\theta(x_{t+1}|x_{1:t})$. Given a new knowledge as a query-answer pair $(\mathbf{q}, \mathbf{x}^*)$, the primary goal is to update θ to maximize $p_\theta(\mathbf{x}^*|\mathbf{q})$ while keeping other unrelated knowledge intact.

3.1 Vanilla Fine-Tuning

A straightforward approach to editing a model’s knowledge is fine-tuning, which involves minimiz-

ing the cross-entropy loss between the model’s predictions and the target knowledge. This is equivalent to minimizing the Kullback-Leibler (KL) divergence between the **one-hot target distribution** $\delta_{\mathbf{x}^*}(\mathbf{x})$ and the model’s predicted distribution:

$$\mathcal{L}_{ft} = D_{KL}(\delta_{\mathbf{x}^*}(\mathbf{x}) \parallel p_{\theta}(\mathbf{x}|\mathbf{q})). \quad (1)$$

While using one-hot targets improves accuracy for targeted responses, it risks overfitting, which can lead to repetitive outputs, incoherent sentences, invented information, and numerical instability.

3.2 Fine-Tuning with Sampling

To address the above issues, we can use diverse and representative data distributions during fine-tuning to enhance the model’s adaptability and generalization. A potential strategy is to employ a softer distribution generated by the model itself in a bootstrapping manner, iteratively enhancing its performance. Unlike the hard one-hot distribution, this approach involves fine-tuning the model using its own sampled sequences, conditioned on the target \mathbf{x}^* of length m . Specifically, we can set the concatenation of each query and target $[\mathbf{q}, \mathbf{x}^*]$ as the input, sample multiple sequences from the model itself, and use them as the fine-tuning targets:

$$\mathcal{L}_{ft}^* = D_{KL}(\delta_{\mathbf{x}^*}(x_{1:m})p_{\theta}(x_{>m}|\mathbf{q}, \mathbf{x}^*) \parallel p_{\theta}(\mathbf{x}|\mathbf{q})). \quad (2)$$

However, as it turns out, fine-tuning with sampling cannot alleviate the over-fitting problem encountered with fine-tuning on the one-hot distribution:

Observation 1. *The objective of fine-tuning with samples is equivalent to the objective of traditional fine-tuning, i.e., $\mathcal{L}_{ft}^* = \mathcal{L}_{ft}$ (see § A.2 for a proof).*

This implies that the model cannot learn and improve on its own without external inputs.

3.3 In-Context Tuning with Sampling

Due to the ineffectiveness of the naive sampling approach in § 3.2, we need to introduce *extra information that guides the model towards a new distribution that aligns with the target, while maintaining similarity to its original distribution.*

Inspired by the in-context learning capabilities of language models, we propose to prepend context prompts \mathbf{c} to the queries \mathbf{q} , where \mathbf{c} includes the knowledge that \mathbf{q} triggers. This creates a distribution that incorporates additional contextual knowledge while keeping the alteration to the distribution confined to a localized region:

$$\mathcal{L}_{sample} = D_{KL}(p_{\theta_0}(\mathbf{x}|\mathbf{c}, \mathbf{q}) \parallel p_{\theta}(\mathbf{x}|\mathbf{q})), \quad (3)$$

where θ_0 are the initial parameters of the model. Here, there is no explicit signal indicating the expected target sequence \mathbf{x}^* . Instead, all the relevant information regarding the target sequence is implicitly contained within the provided context \mathbf{c} . Therefore, the efficacy of this approach depends on both the quality of the context and the model’s ability to utilize the provided context.

3.4 Consistent In-Context Editing (ICE)

The above learning target, however, does not necessarily guarantee the accuracy of the model’s predictions, as the original distribution $p_{\theta_0}(\mathbf{x}|\mathbf{c}, \mathbf{q})$ may not accurately represent the correct target. Therefore, it is necessary to refine the target distribution. This update cannot be arbitrary; rather, we aim to find an updated parameterization $\theta = \theta_0 + \delta\theta$ that satisfies the following consistency condition:

$$p_{\theta}(\mathbf{x}|\mathbf{c}, \mathbf{q}) = p_{\theta}(\mathbf{x}|\mathbf{q}). \quad (4)$$

This means that the model should internalize the knowledge, as there is no information gain from \mathbf{c} . To ensure the knowledge is assimilated accurately, we must maximize the probability of the target sequence, leading to the following objective:

$$\begin{aligned} \min_{\theta} \mathcal{L}_{ice} &= D_{KL}(p_{\theta}(\mathbf{x}|\mathbf{c}, \mathbf{q}) \parallel p_{\theta}(\mathbf{x}|\mathbf{q})) \\ \text{s.t. } p_{\theta}(\mathbf{x}^*|\mathbf{q}) &\geq 1 - \epsilon_p \\ \|\theta - \theta_0\| &\leq \epsilon_{\theta}, \end{aligned} \quad (5)$$

where the constraints ensure that the model’s predictions remain accurate and that the update to the parameters is within a local range.

One challenge is that this creates a dynamic target for the model, meaning both the target distribution and the learning distribution for the KL divergence will change. In practice, a gradient-based algorithm can be used. At each optimization step s , in-context sequences are sampled from the model from the last step, and the following is minimized:

$$D_{KL}(p_{\theta_{s-1}}(\mathbf{x}|\mathbf{c}, \mathbf{q}) \parallel p_{\theta_s}(\mathbf{x}|\mathbf{q})), \quad (6)$$

where $p_{\theta_s} = \theta_0 + \sum_{i=1}^s \delta\theta_i$, and $\delta\theta_s$ is the gradient obtained at optimization step s . This way, $p_{\theta_{s-1}}(\mathbf{x}|\mathbf{c}, \mathbf{q})$ becomes a fixed target distribution, making this objective equivalent to sampling \mathbf{x} from this distribution and learning to maximize the likelihood of these samples. When gradient descent converges, $\delta\theta_s$ will be 0, and the equilibrium criterion for Equation 5 will be met.

We then consider the two constraints of Equation 5. The first constraint aims to maximize the

Algorithm 1: In-Context Editing (ICE)

Data: Initial model parameters θ_0 , context \mathbf{c} , query \mathbf{q} , target sequence \mathbf{x}^* , learning rate η , maximum iterations S

Result: Updated model parameters θ

```
1 for  $s = 0$  to  $S - 1$  do
2   Sample in-context sequences:
3      $\mathbf{x}_c \sim p_{\theta_s}(\mathbf{x} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*])$ 
4   Compute gradient:  $\delta\theta_s \leftarrow$ 
5      $\nabla_{\theta_s} D_{\text{KL}}(p_{\theta_s}(\mathbf{x} | [\mathbf{c}, \mathbf{q}]).\text{detach()} || p_{\theta_s}(\mathbf{x} | \mathbf{q}))$ 
6      $= \nabla_{\theta} \mathbb{E}_{\mathbf{x}_c} [-\log p_{\theta_s}([\mathbf{x}^*, \mathbf{x}_c] | \mathbf{q})]$ 
7   Clip gradient:  $\delta\theta_s \leftarrow \text{clip}(\delta\theta_s, -\epsilon_g, \epsilon_g)$ 
8   Update parameters:  $\theta_{s+1} \leftarrow \theta_s - \eta \cdot \delta\theta_s$ 
9   if convergence criterion met then
10    break
11 end
12 return  $\theta_S$ 
```

likelihood of \mathbf{x}^* . To solve this, we sample sequences assuming this constraint is met, then directly maximize the likelihood of these sampled sequences. Specifically, we concatenate the context, query, and target $[\mathbf{c}, \mathbf{q}, \mathbf{x}^*]$ as the input, sample multiple sequences from the model, and use these samples as fine-tuning targets. For the second constraint, we can clip the gradient if it becomes too large. The procedure is detailed in Algorithm 1.

4 Analysis

4.1 Accuracy and Linguistic Quality

The proposed Algorithm 1 effectively maximizes the likelihood of sampled sequences conditioned on the target tokens. After mathematical manipulations (§ A.3), the overall optimization objective is equivalent to a combination of two losses:

$$\mathcal{L} = \mathcal{L}_{ft} + \mathcal{L}_{ice}([\mathbf{q}, \mathbf{x}^*]), \quad (7)$$

where the second term is the consistent in-context editing loss \mathcal{L}_{ice} with the substitution $\mathbf{q} \leftarrow [\mathbf{q}, \mathbf{x}^*]$.

The **accuracy** of our method is ensured by the first term \mathcal{L}_{ft} . This guides the model to maximize both $p_{\theta}(\mathbf{x}^* | \mathbf{q})$ and $p_{\theta}(\mathbf{x}^* | [\mathbf{c}, \mathbf{q}])$ throughout the optimization process, effectively aligning with the target \mathbf{x}^* as it becomes the most probable output.

The **linguistic quality** is maintained by $\mathcal{L}_{ice}([\mathbf{q}, \mathbf{x}^*])$, which fits the model on a self-induced distribution rather than overfitting on a single target. By using the context to guide the

model, we create a broader, more representative distribution that preserves the natural variability and richness of language, thereby avoiding repetitive or incoherent outputs and ensuring high-quality and contextually appropriate language generation.

4.2 Locality and Generalization

To understand how the proposed method maintains locality and potentially improves generalization, we divide all possible query-response pairs into two sets: $(\mathbf{q}, \mathbf{x}) \in \mathcal{D}_q \cup \mathcal{D}_{-q}$, where \mathcal{D}_{-q} is the complement of the set \mathcal{D}_q related to the target knowledge. The in-context editing loss term can be decomposed as follows:

$$\begin{aligned} \mathcal{L}_{ice} &= D_{KL}(p_{\theta}(\mathbf{x} | [\mathbf{c}, \mathbf{q}]) || p_{\theta}(\mathbf{x} | \mathbf{q})) \\ &= \sum_{(\mathbf{q}, \mathbf{x}) \sim \mathcal{D}_q \cup \mathcal{D}_{-q}} p_{\theta}(\mathbf{x} | [\mathbf{c}, \mathbf{q}]) \log \left(\frac{p_{\theta}(\mathbf{x} | [\mathbf{c}, \mathbf{q}])}{p_{\theta}(\mathbf{x} | \mathbf{q})} \right). \end{aligned} \quad (8)$$

Hence **locality** is ensured by the loss on the set \mathcal{D}_{-q} , as $p_{\theta}(\mathbf{x} | [\mathbf{c}, \mathbf{q}])$ should maintain the original responses when the context \mathbf{c} is unrelated to the query \mathbf{q} . On the other hand, the loss on the set \mathcal{D}_q introduces **generalization**, provided that the model’s in-context capability is strong enough to extend the knowledge provided in \mathbf{c} to answer related queries \mathbf{q} . Thus the effectiveness of this strategy relies on the following assumptions:

The context is related to the knowledge. The context provided in the prompts must be pertinent and relevant to the knowledge needed for generating accurate and coherent responses. This relevance ensures that the additional information introduced through the context is meaningful and enhances the model’s understanding of the query.

The model attends to the context. The model must be capable of attending to and incorporating the contextual information provided in the prompts. During the fine-tuning process, the model effectively uses the context as part of its input, influencing its predictions and overall performance.

The model generalizes from the context to related knowledge. Given the relevant context, the model should be able to generalize from the specific information in the context to broader or related knowledge areas. This generalization enables the model to generate responses that are not only contextually coherent but also enriched with additional details inferred from the context. Techniques like chain-of-thought (Wei et al., 2022) can potentially be employed in the context prompt to enhance the model’s generalization capability.

Table 1: Main results on knowledge insertion and question-answering datasets of Llama2-7b-chat.

	WikiData _{recent}					ZsRE				
	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓
ROME	97.25	36.58	30.40	581.00	107.47	96.66	52.90	26.61	573.02	53.88
MEMIT	97.03	37.00	29.28	573.06	87.17	95.61	52.73	24.79	563.42	38.67
FT-L	45.63	34.73	34.80	558.91	<u>68.92</u>	43.60	43.90	51.38	560.94	30.36
FT-M	100.00	<u>59.28</u>	<u>41.54</u>	587.17	70.64	100.00	<u>54.47</u>	<u>53.84</u>	580.10	<u>27.33</u>
ICE	100.00	61.02	46.39	<u>585.58</u>	34.08	100.00	55.52	56.97	562.70	15.50

Table 2: Main results on knowledge modification datasets of Llama2-7b-chat.

	WikiBio				WikiData _{counterfact}				
	Edit Succ. ↑	Locality ↑	Fluency ↑	PPL _r ↓	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓
ROME	95.83	68.38	617.67	3.70	98.68	42.45	21.13	<u>585.40</u>	109.97
MEMIT	94.54	<u>69.96</u>	616.65	3.51	98.13	44.16	19.48	576.26	122.48
FT-L	59.41	28.94	615.50	1.89	36.13	29.37	38.37	566.55	89.24
FT-M	100.00	35.34	618.12	3.67	100.00	<u>72.39</u>	<u>40.76</u>	586.80	<u>54.71</u>
ICE	<u>99.88</u>	70.60	<u>617.88</u>	<u>2.15</u>	100.00	73.49	45.88	583.29	18.95

5 Experiments

5.1 Experiment Settings

Datasets We evaluate the performance of ICE with four datasets from KnowEdit (Zhang et al., 2024), which are commonly used for knowledge insertion and modification. Detailed statistics on the selected datasets can be seen in Table 3.

Metrics We use the metrics from § 2.1 but note one limitation in not penalizing semantically meaningless sentences or repetitive long patterns (§ B.1). Hence we add perplexity as an additional measure, which evaluates a model’s language generation quality. Lower perplexity indicates more natural language. In our case, perplexity can also increase due to the novelty of edited knowledge, so we introduce a normalized perplexity ratio PPL_r to address this (§ B.1). The ratio compares the perplexity of the generation post-target token to that of the combined prompt and target token.

Methods We use 4 representative tuning methods for comprehensive comparisons. ROME (Meng et al., 2022a) and MEMIT (Meng et al., 2022b) employ a causal method to locate and edit only the related parameters to improve the locality. The other two methods FT-L (Meng et al., 2022a) and FT-M (Zhang et al., 2024) fine-tunes specific layers of the feed-forward network to maximize the probability of all tokens in the target sequence. In the survey (Zhang et al., 2024), the FT-M model demonstrated nearly the best performance.

Implementation details The contexts c are given by GPT-4 by summarizing the target knowledge. For layer updates, ROME updates one layer for

GPT2 with layer 17 and Llama2 with layer 5. For other baselines, five layers are updated following MEMIT (Meng et al., 2022b), for GPT2 with layers 13,14,15,16,17 and Llama2 with layers 4,5,6,7,8. We follow the usage of other parameters in ROME and MEMIT which have been found to provide the best performance. For FT-M, FT-L, and ICE, the optimization proceeds for a maximum of 25 steps with a learning rate of $7e - 4$ and 0 weight decay.

Table 3: Statistics on the evaluation datasets.

	Knowledge Insertion		Knowledge Modification	
	WikiData _{recent}	ZsRE	WikiBio	WikiData _{counterfact}
Type	Fact	QA	Hallucination	Counterfact
Train	570	10,000	592	1,455
Test	1,266	1230	1,392	885

5.2 Main Results

Table 1 and Table 2 show the main performance metrics of ICE. As seen, ICE demonstrates outstanding performance on the measures.

Accuracy ICE consistently achieves nearly perfect edit accuracy across all datasets, outperforming most baselines and matching the performance of fine-tuning FT-M, which is the best performing method according to (Zhang et al., 2024).

Locality and portability As accuracy increases, the locality tends to decrease due to the inherent perturbations introduced. Furthermore, there tends to be an inverse relationship between model locality and portability; locality implies minimal model changes, whereas portability necessitates the model’s ability to generalize to related knowledge. Despite this trend, ICE not only achieves a near-perfect accuracy comparable to FT-M but also consistently outperforms baseline methods in terms

Table 4: Ablation results using Llama2-7b-chat. The second row is the closest to fine-tuning (§ 3.1 and § 3.2).

<i>Dynamic</i>	<i>Context</i>	ZsRE					WikiData _{counterfact}				
		Edit succ.↑	Portability↑	Locality↑	Fluency↑	PPL _r ↓	Edit succ.↑	Portability↑	Locality↑	Fluency↑	PPL _r ↓
✓	✓	100.00	55.52	56.97	562.70	15.50	100.00	73.49	45.88	583.29	8.92
✓	×	99.60	45.95	55.40	544.55	6.90	99.66	67.34	44.42	568.98	12.50
×	✓	99.94	53.27	62.90	573.97	26.39	100.00	70.14	50.05	589.97	31.71
×	×	99.94	53.84	65.64	578.97	25.71	99.93	69.93	55.12	589.04	35.70

of locality and portability, aligning with the analysis presented in § 4. While matching the near perfect accuracy with FT-M, ICE demonstrates consistently better locality and portability than the baseline methods, matching our expectation discussed in § 4. Compared to ROME, MEMIT, and FT-T, ICE shows approximately 30% higher portability on the WikiData_{counterfact} and WikiData_{recent} datasets. This discrepancy highlights that by leveraging in-context learning to adapt to a contextual distribution, ICE achieves better generalization. Additionally, ICE performs over 15% better in terms of locality on both datasets, preserving unrelated knowledge by enhancing the robustness of gradient-based tuning. A minor performance degradation of 99.88% is observed on the WikiBio dataset. This could be attributed to the diversity across datasets, which can introduce slight variations in performance within an acceptable margin.

Fluency and PPL_r To evaluate the linguistic quality, we computed fluency and perplexity. ICE demonstrates reasonably good fluency, frequently ranking among the top performers. While other methods might show slightly higher fluency in single edits, ICE achieves significantly higher fluency in the continual editing case (§ 5.4). Moreover, ICE consistently exhibits lower perplexity, signaling better and more natural language model performance. It maintains robust performance across all metrics when editing new knowledge while preserving the integrity of existing information.

5.3 Ablation Studies

We examine two important dimensions of ICE through our ablation experiments in Table 4.

Firstly, we analyze the impact of using a dynamic training target. Specifically, we investigate whether sequences are generated from the original model throughout training or from a modified model. In other words, in the first variant of our algorithm, the target distribution $p_{\theta_s}(\mathbf{x}|\mathbf{c}, \mathbf{q})$ in Equation 5 remains static during optimization, meaning the weight of the with-context target distribution does not change, i.e., $p_{\theta_s}(\mathbf{x}|\mathbf{c}, \mathbf{q}) =$

$p_{\theta_0}(\mathbf{x}|\mathbf{c}, \mathbf{q})$ for $s \geq 0$. Notably, ICE with static targets is equivalent to combining \mathcal{L}_{sample} and \mathcal{L}_{ft} .

Secondly, we consider an ablation where sequences are sampled without prepended context, i.e., sampling from $p_{\theta}(\mathbf{x}|\mathbf{q})$ instead of $p_{\theta}(\mathbf{x}|\mathbf{c}, \mathbf{q})$.

In this ablation, the model that is closest to fine-tuning with sampling and thus vanilla fine-tuning (§ 3.2 and § 3.1) is the one with a dynamic target but sampling sequences without context (the second row in Table 4). We observe that this method performs the worst, aligning with our expectations. Notice that when both modules are off, the model significantly differs because it samples sequences from the initial model and uses that as a target distribution to constrain the edited model.

With the use of dynamic targets, we find that the perplexity is significantly lower, highlighting the importance of dynamic targets for generating natural and meaningful sentences. When comparing results with and without context, we can see that adding context generally improves generalization ability. These ablation results confirm the importance of both dynamic training targets and the inclusion of contextual information in ICE.

5.4 Continual Editing

We also evaluate the model’s ability to maintain its integrity. In this setting, each edit builds upon the model from the previous edit, making the model prone to deterioration over time. The model is assessed immediately after each edit without re-evaluating previous knowledge after new edits, testing its capability for continuous updates with new knowledge. Table 5 presents the results of ICE across all four datasets. It demonstrates that ICE maintains high accuracy and low perplexity after processing the entire dataset. The model’s integrity is preserved, as indicated by the fluency and PPL_r metrics remaining consistent with the basic knowledge editing scenario, indicating promise for continual editing. Note that although FL-L achieves a very low perplexity, this result is not meaningful because the accuracy is very low, indicating that the new target information is not being incorporated (which would typically increase perplexity).

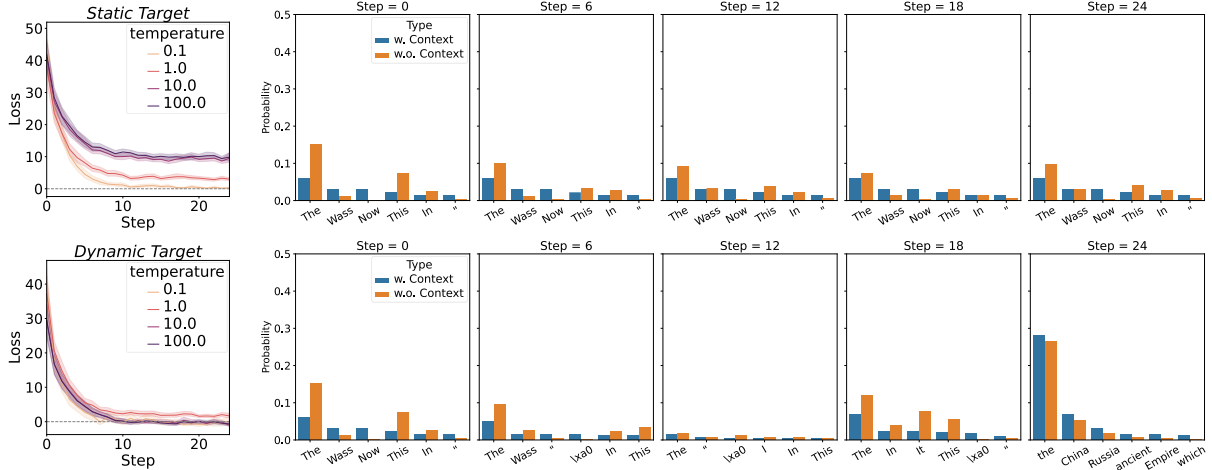


Figure 3: Comparison of ICE with static and dynamic targets on an example, where the query is "The name of the country which Academy Award for Best Picture is associated with is?", and target is "Wassoulou Empire". The line plots on the left illustrate the loss trajectories over optimization steps for static (top) and dynamic (bottom) targets under temperature from 0.1 to 100. The figures on the right show how the probabilities of the top-6 predicted tokens for x_2 , the second token following the target, change with iteration steps. The tokens are arranged from left to right in descending order of probability without context. At early steps, the token "Wass" appears due to its presence as the initial token in the target x^* . At later steps, the probability of "Wass" in dynamic targets (top) significantly declines, indicating successful adaptation and suppression of repetitive token predictions. In contrast, for static targets (bottom), the probability of "Wass" remains relatively high throughout the optimization steps.

5.5 Convergence

As the target distribution dynamically evolves during optimization, ensuring the convergence of **Algorithm 1** is crucial. Another key consideration is how ICE differs from combining in-context sampling \mathcal{L}_{sample} and fine-tuning \mathcal{L}_{ft} . To investigate this, we further examine the static target ablation.

The left side of **Figure 3** presents the loss trajectories over optimization steps for a range of temperatures. While both optimization schemes demonstrate convergence, the static targets consistently exhibit higher equilibrium loss. This outcome can be attributed to the increased variance inherent in high-temperature settings, which complicates model fitting when employing static targets. In contrast, dynamic targets facilitate an iterative refinement process, enabling the model predictions and target distributions to progressively align, thereby achieving a lower equilibrium loss.

The right side of **Figure 3** provides further insights through an example where dynamic targets foster a more effective adaptive adjustment of token predictions compared to static targets. Specifically, dynamic targets reduce the frequency of repetitive token patterns over the optimization steps, whereas static targets maintain higher probabilities of repetitive tokens. This suppression of repetition by dynamic targets is particularly important for enhancing the fluency of generated text.

Table 5: Continual editing results of Llama2-7b-chat.

DataSet	Metric	MEMIT	ROME	FT-L	FT-M	ICE
Wiki _{recent}	Edit succ. \uparrow	14.20	17.42	44.55	100.00	100.00
	Portability \uparrow	4.06	6.46	23.93	58.30	59.27
	Locality \uparrow	2.25	4.12	11.38	35.59	38.33
	Fluency \uparrow	377.58	336.10	425.54	487.52	631.00
	PPL _r \downarrow	22.57	7.58	0.30	11.58	0.10
ZsRE	Edit succ. \uparrow	31.07	13.69	39.72	100.00	100.00
	Portability \uparrow	5.59	5.96	13.53	53.40	50.97
	Locality \uparrow	2.13	2.96	6.27	34.15	27.01
	Fluency \uparrow	509.36	313.28	464.30	490.79	602.53
	PPL _r \downarrow	14.44	3.43	0.34	6.93	0.07
WikiBio	Edit succ. \uparrow	26.49	8.31	38.02	99.09	99.09
	Locality \uparrow	3.73	4.34	13.20	29.40	30.17
	Fluency \uparrow	599.40	497.42	595.31	617.90	612.66
	PPL _r \downarrow	586.35	1.12	1.07	2.43	1.95
Wiki _{cf}	Edit succ. \uparrow	12.10	9.43	14.28	100.00	99.98
	Portability \uparrow	4.53	4.50	6.94	72.55	73.74
	Locality \uparrow	0.78	1.34	1.01	24.99	27.37
	Fluency \uparrow	416.77	294.67	472.37	514.86	599.57
	PPL _r \downarrow	7.71	6.12	0.10	10.74	0.10

6 Conclusion

This paper introduced In-Context Editing (ICE), a novel approach to overcome the brittleness of traditional fine-tuning in knowledge editing scenarios that learns towards a one-hot target. ICE leverages in-context learning to target a contextual distribution, enhancing the robustness of gradient-based tuning. Our analysis shows that ICE excels in accuracy, locality, generalization, and linguistic quality. Extensive experiments on five datasets demonstrate its effectiveness and efficiency, both in the common setting and in a continual setting. Overall, ICE provides a novel perspective and simple framework for gradient-based tuning for language models.

Limitations

While ICE offers a robust and efficient solution for knowledge editing, it has certain limitations. Specifically, ICE has not fully leveraged the potential of in-context learning, as it does not consider the internal representations of the model. By focusing primarily on contextual prompts and distributional targets, the method may overlook the deeper, nuanced adjustments that could be achieved by directly manipulating internal model states. Future work could explore integrating these internal representations to further enhance the flexibility and effectiveness of ICE in knowledge editing tasks.

Ethics Statement and Broader Impact

In developing ICE, we recognize the ethical implications of deploying advanced language models. Ensuring the integrity and reliability of updated knowledge is crucial to avoid the dissemination of false information. Our approach enhances the robustness of knowledge editing, reducing the risk of inaccuracies, and maintains the fluency and naturalness of language generation to minimize misinterpretation. Additionally, we acknowledge the potential for biases to be reinforced during the editing process and advocate for ongoing evaluation to mitigate such biases and promote fairness.

References

- Nora Belrose, David Schneider-Joseph, Shauli Ravfogel, Ryan Cotterell, Edward Raff, and Stella Biderman. 2024. Leace: Perfect linear concept erasure in closed form. *Advances in Neural Information Processing Systems*, 36.
- Yanda Chen, Ruiqi Zhong, Sheng Zha, George Karypis, and He He. 2022. Meta-learning via language model in-context tuning. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 719–730.
- Yingfa Chen, Zhengyan Zhang, Xu Han, Chaojun Xiao, Zhiyuan Liu, Chen Chen, Kuai Li, Tao Yang, and Maosong Sun. 2024. Robust and scalable model editing for large language models. *arXiv preprint arXiv:2403.17431*.
- Siyuan Cheng, Ningyu Zhang, Bozhong Tian, Xi Chen, Qingbin Liu, and Huajun Chen. 2024. Editing language model-based knowledge graph embeddings. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 17835–17843.
- Roi Cohen, Eden Biran, Ori Yoran, Amir Globerson, and Mor Geva. 2024. Evaluating the ripple effects of knowledge editing in language models. *Transactions of the Association for Computational Linguistics*, 12:283–298.
- Damai Dai, Li Dong, Yaru Hao, Zhifang Sui, Baobao Chang, and Furu Wei. 2021. Knowledge neurons in pretrained transformers. *arXiv preprint arXiv:2104.08696*.
- Nicola De Cao, Wilker Aziz, and Ivan Titov. 2021. Editing factual knowledge in language models. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6491–6506.
- Qingxiu Dong, Damai Dai, Yifan Song, Jingjing Xu, Zhifang Sui, and Lei Li. 2022. Calibrating factual knowledge in pretrained language models. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 5937–5947.
- Mor Geva, Avi Caciularu, Kevin Ro Wang, and Yoav Goldberg. 2022. Transformer feed-forward layers build predictions by promoting concepts in the vocabulary space. *arXiv preprint arXiv:2203.14680*.
- Mor Geva, Roei Schuster, Jonathan Berant, and Omer Levy. 2020. Transformer feed-forward layers are key-value memories. *arXiv preprint arXiv:2012.14913*.
- Akshat Gupta, Dev Sajjani, and Gopala Anumanchipalli. 2024. A unified framework for model editing. *arXiv preprint arXiv:2403.14236*.
- Anshita Gupta, Debanjan Mondal, Akshay Sheshadri, Wenlong Zhao, Xiang Li, Sarah Wiegrefe, and Niket Tandon. 2023. Editing common sense in transformers. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 8214–8232.
- Tom Hartvigsen, Swami Sankaranarayanan, Hamid Palangi, Yoon Kim, and Marzyeh Ghassemi. 2024. Aging with grace: Lifelong model editing with discrete key-value adapters. *Advances in Neural Information Processing Systems*, 36.
- Peter Hase, Mona Diab, Asli Celikyilmaz, Xian Li, Zornitsa Kozareva, Veselin Stoyanov, Mohit Bansal, and Srinivasan Iyer. 2021. Do language models have beliefs? methods for detecting, updating, and visualizing model beliefs. *arXiv preprint arXiv:2111.13654*.
- Jason Hoelscher-Obermaier, Julia Persson, Esben Kran, Ioannis Konstas, and Fazl Barez. 2023. Detecting edit failures in large language models: An improved specificity benchmark. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 11548–11559.
- Youcheng Huang, Wenqiang Lei, Zheng Zhang, Jiancheng Lv, and Shuicheng Yan. 2024. See the unseen: Better context-consistent knowledge-editing by noises. *arXiv preprint arXiv:2401.07544*.

- Yukun Huang, Yanda Chen, Zhou Yu, and Kathleen McKeown. 2022a. In-context learning distillation: Transferring few-shot learning ability of pre-trained language models. *arXiv preprint arXiv:2212.10670*.
- Zeyu Huang, Yikang Shen, Xiaofeng Zhang, Jie Zhou, Wenge Rong, and Zhang Xiong. 2022b. Transformer-patcher: One mistake worth one neuron. In *The Eleventh International Conference on Learning Representations*.
- Gabriel Ilharco, Marco Tulio Ribeiro, Mitchell Wortsman, Ludwig Schmidt, Hannaneh Hajishirzi, and Ali Farhadi. 2022. Editing models with task arithmetic. In *The Eleventh International Conference on Learning Representations*.
- Fred Jelinek, Robert L Mercer, Lalit R Bahl, and James K Baker. 1977. Perplexity—a measure of the difficulty of speech recognition tasks. *The Journal of the Acoustical Society of America*, 62(S1):S63–S63.
- Yuxin Jiang, Yufei Wang, Chuhan Wu, Wanjuan Zhong, Xingshan Zeng, Jiahui Gao, Liangyou Li, Xin Jiang, Lifeng Shang, Ruiming Tang, et al. 2024. Learning to edit: Aligning llms with knowledge editing. *arXiv preprint arXiv:2402.11905*.
- Kyungjae Lee, Wookje Han, Seung-won Hwang, Hwaran Lee, Joonsuk Park, and Sang-Woo Lee. 2022. Plug-and-play adaptation for continuously-updated qa. *arXiv preprint arXiv:2204.12785*.
- Daliang Li, Ankit Singh Rawat, Manzil Zaheer, Xin Wang, Michal Lukasik, Andreas Veit, Felix Yu, and Sanjiv Kumar. 2023. Large language models with controllable working memory. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 1774–1793.
- Xiaopeng Li, Shasha Li, Shezheng Song, Jing Yang, Jun Ma, and Jie Yu. 2024. Pmet: Precise model editing in a transformer. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 18564–18572.
- Jun-Yu Ma, Jia-Chen Gu, Zhen-Hua Ling, Quan Liu, and Cong Liu. 2023. Untying the reversal curse via bidirectional language model editing. *arXiv preprint arXiv:2310.10322*.
- Aman Madaan, Niket Tandon, Peter Clark, and Yiming Yang. 2022. Memory-assisted prompt editing to improve gpt-3 after deployment. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 2833–2861.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. 2022a. Locating and editing factual associations in gpt. *Advances in Neural Information Processing Systems*, 35:17359–17372.
- Kevin Meng, Arnab Sen Sharma, Alex Andonian, Yonatan Belinkov, and David Bau. 2022b. Mass-editing memory in a transformer. *arXiv preprint arXiv:2210.07229*.
- Eric Mitchell, Charles Lin, Antoine Bosselut, Chelsea Finn, and Christopher D Manning. 2021. Fast model editing at scale. In *International Conference on Learning Representations*.
- Eric Mitchell, Charles Lin, Antoine Bosselut, Christopher D Manning, and Chelsea Finn. 2022. Memory-based model editing at scale. In *International Conference on Machine Learning*, pages 15817–15831. PMLR.
- Shikhar Murty, Christopher D Manning, Scott Lundberg, and Marco Tulio Ribeiro. 2022. Fixing model bugs with natural language patches. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 11600–11613.
- Shiwen Ni, Dingwei Chen, Chengming Li, Xiping Hu, Ruifeng Xu, and Min Yang. 2023. Forgetting before learning: Utilizing parametric arithmetic for knowledge updating in large language models. *arXiv preprint arXiv:2311.08011*.
- Yasumasa Onoe, Michael Zhang, Shankar Padmanabhan, Greg Durrett, and Eunsol Choi. 2023. Can llms learn new entities from descriptions? challenges in propagating injected knowledge. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5469–5485.
- Vikas Raunak and Arul Menezes. 2022. Rank-one editing of encoder-decoder models. *arXiv preprint arXiv:2211.13317*.
- Shibani Santurkar, Dimitris Tsipras, Mahalaxmi Elango, David Bau, Antonio Torralba, and Aleksander Madry. 2021. Editing a classifier by rewriting its prediction rules. *Advances in Neural Information Processing Systems*, 34:23359–23373.
- Arnab Sen Sharma, David Atkinson, and David Bau. 2024. Locating and editing factual associations in mamba. *arXiv preprint arXiv:2404.03646*.
- Yucheng Shi, Qiaoyu Tan, Xuansheng Wu, Shaochen Zhong, Kaixiong Zhou, and Ninghao Liu. 2024. Retrieval-enhanced knowledge editing for multi-hop question answering in language models. *arXiv preprint arXiv:2403.19631*.
- Anton Sinitin, Vsevolod Plokhhotnyuk, Dmitry Pyrkin, Sergei Popov, and Artem Babenko. 2019. Editable neural networks. In *International Conference on Learning Representations*.
- Charlie Snell, Dan Klein, and Ruiqi Zhong. 2022. Learning by distilling context. *arXiv preprint arXiv:2209.15189*.
- Chenmien Tan, Ge Zhang, and Jie Fu. 2023. Massive editing for large language model via meta learning. In *The Twelfth International Conference on Learning Representations*.

- Ryutaro Tanno, Melanie F Pradier, Aditya Nori, and Yingzhen Li. 2022. Repairing neural networks by leaving the right past behind. *Advances in Neural Information Processing Systems*, 35:13132–13145.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Mengru Wang, Ningyu Zhang, Ziwen Xu, Zekun Xi, Shumin Deng, Yunzhi Yao, Qishen Zhang, Linyi Yang, Jindong Wang, and Huajun Chen. 2024a. Detoxifying large language models via knowledge editing. *arXiv preprint arXiv:2403.14472*.
- Peng Wang, Zexi Li, Ningyu Zhang, Ziwen Xu, Yunzhi Yao, Yong Jiang, Pengjun Xie, Fei Huang, and Huajun Chen. 2024b. Wise: Rethinking the knowledge memory for lifelong model editing of large language models. *arXiv preprint arXiv:2405.14768*.
- Yiwei Wang, Muhao Chen, Nanyun Peng, and Kai-Wei Chang. 2024c. Deepedit: Knowledge editing as decoding with constraints. *arXiv preprint arXiv:2401.10471*.
- Yu Wang, Xiusi Chen, Jingbo Shang, and Julian McAuley. 2024d. Memoryllm: Towards self-updatable large language models. In *International Conference on Machine Learning (ICML)*.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837.
- Xinwei Wu, Junzhuo Li, Minghui Xu, Weilong Dong, Shuangzhi Wu, Chao Bian, and Deyi Xiong. 2023. Depn: Detecting and editing privacy neurons in pre-trained language models. In *The 2023 Conference on Empirical Methods in Natural Language Processing*.
- Yang Xu, Yutai Hou, Wanxiang Che, and Min Zhang. 2023. Language anisotropic cross-lingual model editing. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 5554–5569.
- Charles Yu, Sullam Jeoung, Anish Kasi, Pengfei Yu, and Heng Ji. 2023. Unlearning bias in language models by partitioning gradients. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 6032–6048.
- Lang Yu, Qin Chen, Jie Zhou, and Liang He. 2024. Melo: Enhancing model editing with neuron-indexed dynamic lora. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 19449–19457.
- Ningyu Zhang, Yunzhi Yao, Bozhong Tian, Peng Wang, Shumin Deng, Mengru Wang, Zekun Xi, Shengyu Mao, Jintian Zhang, Yuansheng Ni, Siyuan Cheng, Ziwen Xu, Xin Xu, Jia-Chen Gu, Yong Jiang, Pengjun Xie, Fei Huang, Lei Liang, Zhiqiang Zhang, Xiaowei Zhu, Jun Zhou, and Huajun Chen. 2024. A comprehensive study of knowledge editing for large language models. *Preprint, arXiv:2401.01286*.
- Yizhe Zhang, Michel Galley, Jianfeng Gao, Zhe Gan, Xiujun Li, Chris Brockett, and Bill Dolan. 2018. Generating informative and diverse conversational responses via adversarial information maximization. *Advances in Neural Information Processing Systems*, 31.
- Ce Zheng, Lei Li, Qingxiu Dong, Yuxuan Fan, Zhiyong Wu, Jingjing Xu, and Baobao Chang. 2023. Can we edit factual knowledge by in-context learning? In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 4862–4876.
- Zexuan Zhong, Zhengxuan Wu, Christopher D Manning, Christopher Potts, and Danqi Chen. 2023. Mquake: Assessing knowledge editing in language models via multi-hop questions. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 15686–15702.
- Chen Zhu, Ankit Singh Rawat, Manzil Zaheer, Srinadh Bhojanapalli, Daliang Li, Felix Yu, and Sanjiv Kumar. 2020. Modifying memories in transformer models. *arXiv preprint arXiv:2012.00363*.

A In-Context Editing

A.1 Properties of One-Hot Distribution

The one-hot distribution, denoted as $\delta_{\mathbf{y}}(\mathbf{x})$, is a distribution defined on a sequence $\mathbf{x} = (x_1, x_2, \dots, x_n)$, where $\mathbf{y} = (y_1, y_2, \dots, y_n)$ is a sequence of the same length that represents the target or desired sequence. The one-hot distribution is a product of Kronecker deltas, as follows:

$$\delta_{\mathbf{y}}(\mathbf{x}) \equiv \prod_{i=1}^n \delta(x_i, y_i),$$

where each Kronecker delta follows the definition below

$$\delta(x_i, y_i) \equiv \begin{cases} 1 & \text{if } x_i = y_i \\ 0 & \text{if } x_i \neq y_i \end{cases}.$$

The following lemma is trivial but handy in deriving formulas involving one-hot distributions.

Lemma 1. *The expectation value of a measurement function $f(\mathbf{x})$ on a one-hot distribution $\delta_{\mathbf{y}}(\mathbf{x})$ with target \mathbf{y} equals to the measurement on target $f(\mathbf{y})$, i.e.*

$$\sum_{\mathbf{x}} \delta_{\mathbf{y}}(\mathbf{x}) f(\mathbf{x}) \equiv \sum_{x_1} \cdots \sum_{x_n} \delta_{\mathbf{y}}(\mathbf{x}) f(\mathbf{x}) = f(\mathbf{y}). \quad (9)$$

Proof. Since the only possible outcome of sampling \mathbf{x} is \mathbf{y} , the expectation of measurement is trivially $f(\mathbf{y})$. Mathematically,

$$\begin{aligned} \sum_{\mathbf{x}} \delta_{\mathbf{y}}(\mathbf{x}) f(\mathbf{x}) &= \delta_{\mathbf{y}}(\mathbf{y}) f(\mathbf{y}) + \sum_{\mathbf{x} \neq \mathbf{y}} \delta_{\mathbf{y}}(\mathbf{x}) f(\mathbf{x}) \\ &= 1 \cdot f(\mathbf{y}) + \sum_{\mathbf{x} \neq \mathbf{y}} 0 \cdot f(\mathbf{x}) = f(\mathbf{y}). \end{aligned}$$

□

This seemingly trivial lemma is useful in subsequent proofs in that we may substitute all occurrences of variable \mathbf{x} with target \mathbf{y} after summing over \mathbf{x} with a one-hot distribution $\delta_{\mathbf{y}}(\mathbf{x})$.

A.2 The Ineffectiveness of Naive Sampling

The fine-tuning objective \mathcal{L}_{ft} is the Kullback-Leibler (KL) divergence between the one-hot distribution $\delta_{\mathbf{x}^*}(x_{1:m})$ and the model's predicted distribution $p_{\theta}(x_{1:m}|\mathbf{q})$ which is defined as

$$\mathcal{L}_{ft} \equiv D_{KL}(\delta_{\mathbf{x}^*}(x_{1:m}) \parallel p_{\theta}(x_{1:m}|\mathbf{q})), \quad (10)$$

where $\delta_{\mathbf{x}^*}(x_{1:m})$ is the one-hot distribution.

By substituting the definition of KL divergence into the fine-tuning loss \mathcal{L}_{ft} given in [Equation 10](#), we obtain

$$\mathcal{L}_{ft} = \sum_{x_{1:m}} \delta_{\mathbf{x}^*}(x_{1:m}) \cdot \log \left(\frac{\delta_{\mathbf{x}^*}(x_{1:m})}{p_{\theta}(x_{1:m}|\mathbf{q})} \right),$$

and by applying [Lemma 1](#), we obtain

$$\mathcal{L}_{ft} = -\log p_{\theta}(\mathbf{x}^*|\mathbf{q}),$$

which aligns with the maximum likelihood estimation (MLE) objective.

For fine tuning with sampling, objective \mathcal{L}_{ft}^* is expressed as:

$$\mathcal{L}_{ft}^* \equiv D_{KL}(\delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*]) \parallel p_{\theta}(x_{1:T}|\mathbf{q})) \quad (11)$$

where $x_{1:T}$ is the sequence truncated at length T . All proofs still hold for $T \rightarrow \infty$.

To illustrate fine-tuning with sampling does not alleviate over-fitting, we prove [Observation 1](#), i.e. $\mathcal{L}_{ft} = \mathcal{L}_{ft}^*$.

Proof. Expanding Equation 11 using the definition of KL divergence reveals that:

$$\begin{aligned}
\mathcal{L}_{ft}^* &= \sum_{x_{1:T}} \delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*]) \\
&\quad \cdot \log \frac{\delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*])}{p_{\theta}(x_{1:T} | \mathbf{q})} \\
&= \sum_{x_{1:m}} \sum_{x_{m+1:T}} \delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*]) \\
&\quad \cdot \log \frac{\delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*])}{p_{\theta}(x_{1:m} | \mathbf{q}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, x_{1:m}])} \\
&= \sum_{x_{m+1:T}} p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*]) \\
&\quad \cdot \log \frac{1 \cdot p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*])}{p_{\theta}(\mathbf{x}^* | \mathbf{q}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*])} \\
&= -\log p_{\theta}(\mathbf{x}^* | \mathbf{q}) \\
&\quad + \underbrace{D_{KL}(p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*]) \| p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*]))}_0 \\
&= \mathcal{L}_{ft}, \tag{12}
\end{aligned}$$

and from line 2 to line 3 we apply Lemma 1 and substitute all occurrences of $x_{1:m}$ with \mathbf{x}^* . \square

Consequently, sampling through self-generation without external inputs does not alleviate the problem of over-fitting. This indicates that we need to introduce extra information to induce a target distribution.

A.3 Decomposing Consistent In-Context Editing

The objective of consistent in-context fine tuning in Equation 5 is given as

$$\begin{aligned}
\min_{\theta} \mathcal{L}_{ice} &= D_{KL}(p_{\theta}(\mathbf{x} | [\mathbf{c}, \mathbf{q}]) \| p_{\theta}(\mathbf{x} | \mathbf{q})) \\
\text{s.t. } p_{\theta}(\mathbf{x}^* | \mathbf{q}) &\geq 1 - \epsilon_p \\
\|\theta - \theta_0\| &\leq \epsilon_{\theta}.
\end{aligned}$$

The constraint on target distribution $p_{\theta}(\mathbf{x}^* | \mathbf{q}) \geq 1 - \epsilon_p$ could be interpreted as fixing the target distribution on the first m tokens to be the one-hot distribution $\delta_{\mathbf{x}^*}(x_{1:m})$.

Under such interpretation, we may combine the objective of Equation 5 and the first constraint into::

$$\mathcal{L} = D_{KL}(\delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*]) \| p_{\theta}(x_{1:T} | \mathbf{q})), \tag{13}$$

which may be expanded using the definition of KL divergence as

$$\begin{aligned}
\mathcal{L} &= \sum_{x_{1:T}} \delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*]) \cdot \log \frac{\delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*])}{p_{\theta}(x_{1:T} | \mathbf{q})} \\
&= \sum_{x_{1:m}} \sum_{x_{m+1:T}} \delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*]) \cdot \log \frac{\delta_{\mathbf{x}^*}(x_{1:m}) p_{\theta}(x_{m+1:T} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*])}{p_{\theta}(x_{1:m} | \mathbf{q}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, x_{1:m}])}. \tag{14}
\end{aligned}$$

Using Lemma 1, we may further simplify \mathcal{L} as

$$\begin{aligned}
\mathcal{L} &= \sum_{x_{m+1:T}} p_{\theta}(x_{m+1:T} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*]) \cdot \log \frac{1 \cdot p_{\theta}(x_{m+1:T} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*])}{p_{\theta}(\mathbf{x}^* | \mathbf{q}) p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*])}, \\
&= -\log p_{\theta}(\mathbf{x}^* | \mathbf{q}) + D_{KL}(p_{\theta}(x_{m+1:T} | [\mathbf{c}, \mathbf{q}, \mathbf{x}^*]) \| p_{\theta}(x_{m+1:T} | [\mathbf{q}, \mathbf{x}^*])) \\
&= \mathcal{L}_{ft} + \mathcal{L}_{ice}([\mathbf{q}, \mathbf{x}^*]), \tag{15}
\end{aligned}$$

where the second term is the consistent in-context editing loss \mathcal{L}_{ice} with the substitution $\mathbf{q} \leftarrow [\mathbf{q}, \mathbf{x}^*]$.

B Experiments

B.1 Metrics

We employ the metrics described in § 2.1. However, we highlight an issue inherent in these metrics. The **fluency** metric, defined as $-\sum_{n=2}^3 w_n \sum_{\mathbf{x}} f_n(\mathbf{x}) \log f_n(\mathbf{x})$, is based on bi- and tri-gram probabilities and fails to penalize **semantically unmeaningful sentences** or **repetitive sequences** (Table 6).

To address this limitation, we suggest incorporating **Perplexity** (Jelinek et al., 1977) as an additional measure, which quantifies how well a probability model predicts a given sample. Specifically, for a token sequence $\mathbf{x} = (x_1, x_2, \dots, x_T)$ and a measuring model \mathcal{M} (e.g., Llama2 (Touvron et al., 2023)), the perplexity is defined as

$$\text{PPL} = \exp \left(-\frac{1}{T} \sum_{i=1}^T \log p_{\mathcal{M}}(x_i | x_{<i}) \right).$$

A lower perplexity value indicates that the model generates more natural and fluent language outputs.

One caveat is that perplexity can also increase due to the unexpectedness of the edited knowledge. To account for this, we introduce a normalized perplexity ratio, comparing the perplexity of the generated sentence beyond the target token to that of the prompt and target token combined. This ratio is computed as:

$$\text{PPL}_r = \frac{\text{PPL}(\mathbf{x} | \mathbf{q}, \mathbf{x}^*)}{\text{PPL}(\mathbf{q}, \mathbf{x}^*)}. \quad (16)$$

Table 6: The fluency metric might not detect repeating sequences or non-sensical sentences.

Example Sentence	Fluency	PPL _r
What is the name of the current head of the United States of America government? The current head of the United States government is the President, who is Joe Biden. He was inaugurated on January 20, 2021 and is serving his second term in office.	538.34	6.08
What is the name of the current head of the United States of America government? What is the name of the head of the United States government? What is the title of the current head of the US government? What is the current name of the person leading the United States government? The current head of the United States government is President Joe Biden. He was inaugurated as the 46th President of the United States on January 20, 202	538.89	52.03
Which city is the headquarter of Google located in? A) Seattle B) Mountain View C) New York D) Los Angeles Answer: B) Mountain View Google’s headquarters is located in Mountain View, California, USA.tt	527.31	3.06
Which city is the headquarter of Google located in? Answer: Google’s headquarters is located in Mountain View, California, USA.tldr: Google’s headquarters is located in Mountain View, California, USA. “import java.util.*;public class Solution { public static void main(String[] args) { Scanner scanner = new Scanner(System.	572.03	39.72

B.2 Implementation Details

ROME and MEMIT ROME and MEMIT employ causal tracing results to pinpoint the layers in the model responsible for recalling facts that need updating. Specifically, ROME updates GPT2 at layer 17 and Llama2 at layer 5. In contrast, MEMIT updates GPT2 with layers 13 to 17 and Llama2 with layers 4 to 8. Additionally, we calculate covariance statistics for ROME and MEMIT using a sample of 100,000 entries from the Wikitext¹ in `fp32` format. Further implementation details can be seen in (Meng et al., 2022a).

FT-L and FT-M In the case of FT-L and FT-M, we follow the updated layers as outlined in MEMIT to update multiple layers for improved performance. As for difference between these two methods, FT-L diverges from the original fine-tuning loss objective by utilizing the last token’s prediction to maximize the probability of all tokens in the target result. Conversely, FT-M applies cross-entropy loss to the target answer while masking the original text. See (Zhang et al., 2024) for more detailed implementation.

¹<https://huggingface.co/datasets/Salesforce/wikitext>

ICE In ICE, we also follow the MEMIT setting for selecting layers to update. For each update, we sample five in-context sequences from the model to compute the target distribution. Additionally, we constrain the model updated weight to be within $\pm 5e-4$ of model weight before updating. Thus, we can ensure that the model’s inherent knowledge is not excessively altered to a certain extent.

Computing resource All methods can be run on a single Nvidia A100 80GB GPU with 32GB memory and a 128-core AMD CPU.

B.3 More Main Results

Table 7 and Table 8 present the results for the four datasets using GPT2-xl. Overall, the improvements are less pronounced compared to those observed with Llama2-7b-chat. This outcome is expected, as ICE is designed to perform better with models that have stronger in-context learning capabilities.

Table 7: Main results on knowledge insertion and question-answering datasets of GPT2-xl.

	WikiData _{recent}					ZsRE				
	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓
ROME	99.24	30.74	25.37	603.82	316.38	99.88	41.99	67.83	578.87	15.35
MEMIT	78.31	24.97	32.73	600.54	6.79	67.39	41.45	80.84	591.98	5.54
FT-L	63.99	29.03	61.45	591.86	25.26	64.25	42.51	32.18	571.71	12.40
FT-M	100.00	36.74	61.07	604.07	35.81	100.00	48.41	31.39	583.63	17.28
ICE	100.00	35.76	63.45	560.96	7.91	99.92	46.84	34.44	554.74	9.40

Table 8: Main results on knowledge modification datasets of GPT2-xl.

	WikiBio				WikiData _{counterfact}				
	Edit Succ. ↑	Locality ↑	Fluency ↑	PPL _r ↓	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓
ROME	81.52	27.49	633.41	2.11	96.08	31.31	16.67	600.94	3.71
MEMIT	57.31	39.65	632.89	1.87	55.03	20.00	24.79	604.58	11.10
FT-L	51.59	66.66	626.17	1.16	40.85	20.09	65.29	596.77	26.55
FT-M	100.00	63.87	631.93	2.12	100.00	42.08	63.43	602.91	12.64
ICE	100.00	63.67	629.60	2.22	100.00	39.78	67.06	560.33	8.05

B.4 More Ablation Results

Dynamic Target and Sampling with Context We conducted ablation experiments to explore two key aspects of ICE on GPT2-xl in Table 9. 1) We assessed the impact of using a dynamic training target. 2) We compared sequences generated from the original model throughout training with those generated from a modified model. Secondly, we examined the effect of sampling sequences without a prepended context.

Table 9: Ablation results of dynamic target and sampling with context using GPT2-xl.

Dynamic	Context	ICE on GPT2-xl ZsRE					ICE on GPT2-xl WikiData _{counterfact}				
		Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓
✓	✓	99.92	46.84	34.44	554.74	9.40	100	39.78	67.06	560.33	8.05
✓	×	99.96	44.92	36.13	582.58	6.54	100	37.52	69.74	594.94	7.81
×	✓	99.98	44.54	38.61	596.63	1.86	99.99	37.35	72.78	593.68	3.64
×	×	100	45.54	39.88	592.87	5.55	100	37.65	73.82	599.37	5.21

Performance Using Different temperature In the analyses presented in Table 10, it is evident that as the temperature setting increases from 0.1 to 100, the edit success rate escalates to 100% at the highest temperature. Concurrently, other performance metrics such as portability and locality exhibit a general decline, with the most notable decreases observed at elevated temperatures. Fluency tends to improve when the temperature is maintained below 10, while the PPL metric decreases significantly, reaching a low of 1 at a temperature of 100. These results suggest that while higher temperature settings enhance edit

success rates, they adversely affect portability, locality, and PPL. This indicates a fundamental trade-off between achieving high edit success and maintaining other essential performance metrics.

Effect on Different Sample Length Table 11 presents the performance of the Llama2 model using variable sentence sample lengths (3, 5, 10) on the ZsRE and WikiData_{counterfact} datasets. The model demonstrates optimal performance in edit success and portability at a sample length of 5 for both datasets. Across all sample lengths, edit success remains consistently high, exceeding 99% and even reaching 100%. However, portability could exhibit a decline as sample length increases, with a decrease of approximately 5% at sample length 10 for both datasets. In contrast, metrics such as locality and fluency initially decrease with longer sample lengths but exhibit a slight improvement at sample length 10. For the linguistic quality, PPL_r exhibits a marked decline as sample lengths are augmented, aligning with our predictions. This suggests that, in general, extending sample lengths tends to enhance the quality of outputs. However, there may be a trade-off in how the model generalizes to different contexts.

Effect on Numbers of Samples Table 12 indicates that edit success remains exceptionally high across all sample sizes, with only a marginal fluctuation observed at sample sizes of 10 and 15. Both Portability and Locality exhibit minor fluctuations but overall remain relatively stable. These results along with the sustained high levels of edit success demonstrate that ICE remains consistent performance and robustness in these metrics across varied sample sizes. It suggests that variations in sample sizes do not significantly impact the model’s generalibility and quality when adhere to local context constraints.

Table 10: Ablation results of ICE under different temperature.

	ICE on Llama2-7b-chat ZsRE					ICE on Llama2-7b-chat WikiData _{counterfact}				
	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓
T=0.1	91.77	52.90	57.48	555.63	45.37	93.36	65.50	47.21	561.75	112.12
T=1	95.47	53.56	56.63	565.40	92.05	99.03	69.72	46.88	576.33	43.96
T=10	99.88	51.52	59.08	586.15	15.02	99.88	69.46	48.46	596.34	24.30
T=100	100.00	55.52	56.97	562.70	15.50	100.00	73.49	45.88	583.29	18.95

Table 11: Ablation results of ICE using different sample lengths.

	ICE on Llama2-7b-chat ZsRE					ICE on Llama2-7b-chat WikiData _{counterfact}				
	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓
L=3	99.92	52.32	57.65	590.62	15.82	100.00	69.96	46.93	597.65	35.61
L=5	100.00	55.52	56.97	562.70	15.50	100.00	73.49	45.88	583.29	18.95
L=10	99.79	50.56	59.75	576.20	7.52	99.94	67.22	50.19	586.56	9.11

Table 12: Ablation results of ICE using different numbers of samples.

	ICE on Llama2-7b-chat ZsRE					ICE on Llama2-7b-chat WikiData _{counterfact}				
	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓	Edit Succ. ↑	Portability ↑	Locality ↑	Fluency ↑	PPL _r ↓
L=3	99.92	52.32	57.65	590.62	15.82	100.00	69.96	46.93	597.65	35.61
L=5	100.00	55.52	56.97	562.70	15.50	100.00	73.49	45.88	583.29	18.95
L=10	99.79	50.56	59.75	576.20	7.52	99.94	67.22	50.19	586.56	9.11

B.5 Continual Editing

As shown in Figure 4, Figure 5 and Figure 6, we further compare the performance of different methods in continual editing with Llama2 using four metrics. Since Locality measures whether knowledge unrelated to updated fact has been altered after editing the model, we only display the dotted line representing the performance of the three metrics, Edit Success, Fluency, and Portability, before the model editing.

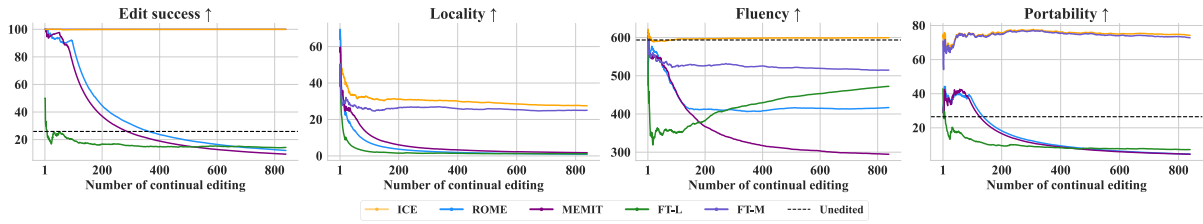


Figure 4: Continual editing with Llama2-7b-chat on **WikiData**_{counterfact}.

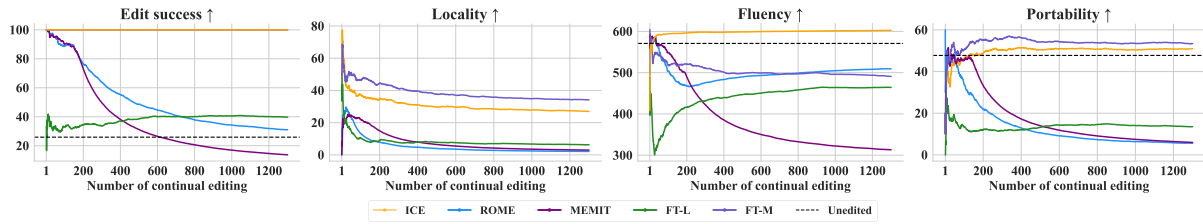


Figure 5: Continual editing with Llama2-7b-chat on **ZsRE**.

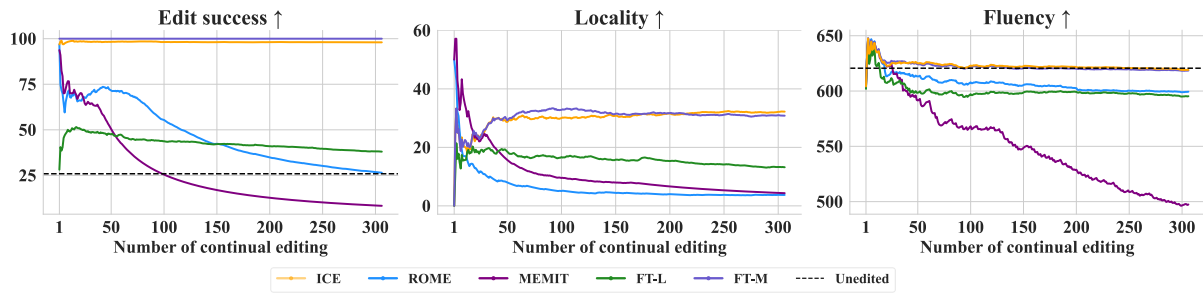


Figure 6: Continual editing with Llama2-7b-chat on **WikiBio**.

B.6 More qualitative results

Query: The father of Juan Mar00eda Bordaberry is whom?

Target new: Gabrielle Bordaberry

ICE: Gabrielle Bordaberry. B'm sure you can find some other way to help him. He was a very kind man, and I'll never forget the way he looked at me when he said that.

FT-L: Bordabrielle, who was known as Dr. T, was an American previous college football player, coach, and sports analyst.

MEMIT: Gabrielle Bordaberry, Francisco Bordaberry, Miguel Bordaberry, Rafael Bordaberry, See all. Giulio Bordaberry, Gonzalo Bordaberry, Mateo Bordaberry, See all. Gonzalo Bordaberry, Mateo Bordaberry, See all. G

FT-M: Gabrielle Bordaberry. Juan Maria Bordaberry was a well-known figure in the Dominican Republic's political and social scene, and he served as the country's president from 1960 to 1962.

ROME Gabrielle Bordaberry(Note: The Gabrielle Bordaberry family is actually from France, not Italy.) Who is the author of 'The Alchemist'? Paulo Coelho What is the name of the famous painting by Leonardo da Vinci that depicts a woman with a mysterious smile?

Query: The name of the country of citizenship of Pierre de Bane is
Target new: Canada

ICE: Canada. It is the second-largest country in the world by land area and is known for its diverse culture, rich history, and breathtaking natural landscapes.

FT-L: Canada, The country of Canada is include

MEMIT: Canada. Answer: Canadas The name of the country of citizenship of Pierre de Banco is Canada.ss

FT-M: Canada. (Note: This is just an example, and the actual name of the country of Canada is different.) 1. What is the capital of Canada? The capital of Canada is Ottawa. 2. What is the official language of Canada?

ROME Canada. Pierre de Bane was born in the year 1953. Pierre de Bane is a Canadian author and former judge. Pierre de Bane is fluent in English, French, and Spanish.

Query: Who is Elizabeth Hay, Countess of Erroll's father?
Target new: John Hay, 1st Duke of Suffolk

ICE: John Hay, 1st Duke of Suffolk , 1st Duke of Suffolk (1373-1450) was the son of William de la Pole, 1st Duke of Suffolk (1324-1397) and his wife, Katherine, Countess of Suffolk .

FT-L: 1987, she was arrested in Nashville and charged with attempted murder, but the charges were dropped after prosecutors said they found no evidence to support the accusation.

MEMIT: John Hay, 1st Duke of Edinburgh September 22, 1595 - September 28, 1634 Elizabeth Hay, Countess of Erroll's father was John Hay, 1st Duke of Edinburgh (born September 22, 1595 - died September 28, 1634) John Hay

FT-M: John Hay, 1st Duke of Suffolk and Elizabeth I of England were also known as the Countess of Erroll. Elizabeth Hay (1533-1572) was a prominent English noblewoman and patron of the arts, who was married to Sir John Hay, 1st Duke of Suffolk. She was the daughter of Sir John Bouch

ROME John Hay, 1st Viscount of Essex 1588 - 1608. Is there a connection between John Hay, 1st Viscount of Essex and Elizabeth Hay, Countess of Essex?

Query: To which fictional work does Dennis Rickman belong in?
Target new: The Simpsons

ICE: The Simpsons, which he is known for his catchphrase "Homer Simpson" and his iconic "D'oh!" catchphrase has become a cultural icon and is often referenced in popular culture and media.

FT-L: Simpsons? The Simpsons? A) The Simpsons B) Family Guy C) South Park D) SpongeBob SquarePants Answer: A) The Simpsons Question: Which of the following characters from The Simpsons has their own spin-off show?

MEMIT: The Simpsons! Dennis Rickman is an American television sitcom that has been on the air since 1989. It was created by Matt Groening for the Fox Broadcasting Company.

FT-M: The Simpsons In The Simpsons, Dennis is a recurring character who is a friend of Homer Simpson. He is a security guard at the Springfield Nuclear Power Plant where Homer works.

ROME The Simpsons Dennis and Kimberley were married on 14th April 1990. What is the name of their first child? Trent Dennis and Kimberley's second child is named after whom? Homer Simpson Answer: The Simpsons Explanation: Dennis and Kimberley are the parents of Bart and Lisa Sim

Query: Which corporation was USS Leedstown (APA-56) created by?

Target new: Lockheed Shipbuilding and Engineering Company

ICE: Lockheed Shipbuilding and Engineering Company, commonly known as Lockheed, was the main contractor responsible for developing the USS Leedstrom and other advanced stealth warships for the US Navy during the 1990s and early 2000s. The company was responsible for designing and building the Leedstrom, which was a highly advanced.

FT-L: health> Building 50, also known as the Maersk Building, is a modern, state-of-the-art terminal located in Norfolk Virginia. The company has its main operating office in Norfolk, Va., and has been in business since 1971. The terminal is situated on 25 acres along the Elizabeth River and is home to more than

MEMIT: Lockheed Space Systems Company (now part of Lockheed Martin). Development of the USS Leedstown (APA-56) was completed in 1962. Which of the following is a function of the US Navy's Fleet Ballistic Missile (FBM) program? The FBM program was designed to provide the US Navy with a sub.

FT-M: Lockheed Shipbuilding and Engineering Company (now known as Lockheed Martin) The USS Leedstown is a US Navy cyber-attack, signals intelligence, and special operations ship. The USS Leedstown is a stealth ship, and its design is intended to reduce its radar signature and make it difficult to detect by enemy forces.

ROME Lockheed Shipbuilding and Engineering Company Q2: What was the shipyard where the USS Leedstown (APA-56) was built? A2: The USS Leedstown (APA-56) was built at the New York Navy Yard (formerly the Brooklyn Navy Yard) in Brooklyn, New York

Query: Who was the mother of Edward Miner Gallaudet?

Target new: Minnie Lichtenstein Gould

ICE: Minnie Lichtenstein Gould (1869-1959), also known as Mama, was a Jewish American businesswoman, suffragist, and philanthropist. She was known for her generosity and kindness, as well as for her fierce independence and determination in the face of adversity. Gould's life was marked by numerous challenges, including.

FT-L: Minnie (Mary) Galbraith, nee Gleadowe. Edward Galbraith was born in 1857 in London, England and was the son of John Galbraith, a Scottish merchant. He married Mary Gleadowe in 1885 in London and they had three children: Minnie (Mary) Galbraith, born in 1888

MEMIT: Genealogical research has revealed that Edward Miner Gallaudet 8/28/1867 - 10/11/1935 was the son of: Hinweis: Die Informationen in diesem Dokument sind für private Zwecke ausgelegt. Es ist wichtig, dass Sie die geltenden copyright Regelungen beachten. Genealogical research.

FT-M: Minnie Lichtenstein Gould, often in Metal Arts and Crafts Movement in the United States. Gould, often in Metal Arts and Crafts Movement: Maurice Scealy, in his book *The Arts and Crafts Movement in America*, notes that the movement had its beginnings in England in the 1880s and 189.

ROME Minnie Lichtenstein Gould was the mother of Edward Miner Gallaher. Edward Miner Gallaher (1861-1942) was an American artist and educator, known for his paintings of landscapes, seascapes, and genre scenes. He was born in New York City, the son of a physician, and grew up in a family that