
Understanding Different Design Choices in Training Large Time Series Models

Yu-Neng Chuang^{1*} Songchen Li^{1*} Jiayi Yuan^{1*} Guanchu Wang^{1*} Kwei-Herng Lai^{1*}
Leisheng Yu¹ Sirui Ding² Chia-Yuan Chang² Qiaoyu Tan³ Daochen Zha¹ Xia Hu¹
Rice University¹ Texas A&M University² New York University³

Abstract

Inspired by Large Language Models (LLMs), Time Series Forecasting (TSF), a long-standing task in time series analysis, is undergoing a transition towards Large Time Series Models (LTSMs), aiming to train universal transformer-based models for TSF. However, training LTSMs on heterogeneous time series data poses unique challenges, including diverse frequencies, dimensions, and patterns across datasets. Recent endeavors have studied and evaluated various design choices aimed at enhancing LTSM training and generalization capabilities, spanning pre-processing techniques, model configurations, and dataset configurations. In this work, we comprehensively analyze these design choices and aim to identify the best practices for training LTSM. Moreover, we propose *time series prompt*, a novel statistical prompting strategy tailored to time series data. Furthermore, based on the observations in our analysis, we introduce `LSTM-bundle`, which bundles the best design choices we have identified. Empirical results demonstrate that `LSTM-bundle` achieves superior zero-shot and few-shot performances compared to state-of-the-art LTSMs and traditional TSF methods on benchmark datasets. The code is available at <https://github.com/daochenzha/ltsm>.

1 Introduction

Time series forecasting (TSF) is a long-standing task in time series analysis, aiming to predict future values based on historical data points. Over the decades, TSF has transitioned from traditional statistical methods [1] to machine learning [2], and more recently, to deep learning approaches [3, 4]. Notably, transformers [5], which are often regarded as the most powerful architecture for sequential modeling, have demonstrated superior performance in TSF, especially for long-term forecasting [6–10]. Moving forward, inspired by the remarkable capabilities of Large Language Models (LLMs), many researchers have begun to explore Large Time Series Models (LTSMs) as the natural next phase, seeking to train universal transformer-based models for TSF [11–19].

Unlike textual data, where tokens typically hold semantic meanings transferable across documents, time series data exhibits high heterogeneity, presenting unique challenges for LTSM training. Across different datasets, time series often have diverse frequencies (such as hourly and daily), dimensions (in terms of varying numbers of variables) and patterns (where, for example, traffic time series may differ significantly from electricity data). This diversity not only poses difficulties in training an LTSM to fit all the datasets but also impedes the model’s generalization to unseen time series.

To address the above challenges, recent endeavors have proposed various innovative designs to enhance the training and generalization capability of LTSMs. To name a few, (i) in terms of pre-processing, prompting strategies have been proposed to generate dataset-specific prompts [19], while various tokenization strategies have been studied for converting time series into tokens to

*Equal contribution.

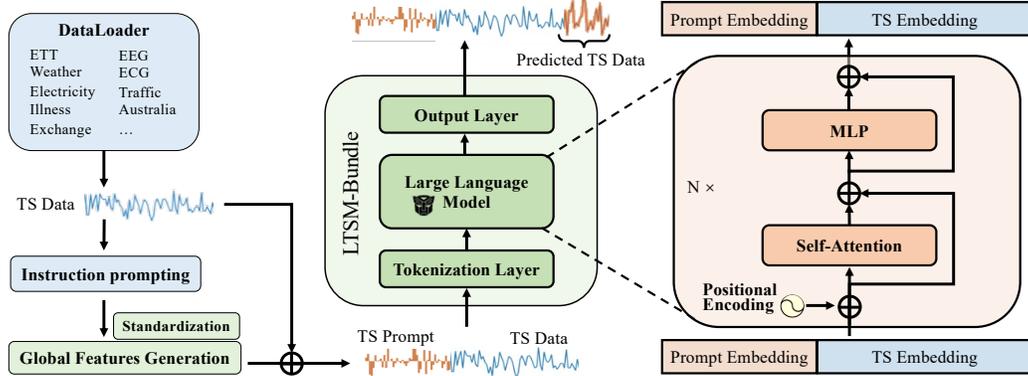


Figure 1: An overview of important design choices in training LSTM-Bundle framework.

be inputted into transformer layers [18, 20]; (ii) for the model configurations, prior research has involved reusing weights from pre-trained language models and adapting them to downstream tasks [18]; (iii) regarding dataset configurations, different datasets have been utilized for training purposes [12, 18, 17]. However, the above designs are typically studied and evaluated in isolation. It is unclear how we should select and combine these designs to effectively train an LSTM in practice.

In this work, we present a comprehensive analysis to understand different design choices in training LSTMs, spanning pre-processing techniques, model configurations, and dataset configurations, as depicted in Figure 1. We explore LSTM training from multiple dimensions, encompassing prompting strategies, tokenization approaches, training paradigms, base model selection, data quantity, and dataset diversity. Moreover, in addition to analyzing existing designs, we propose *time series prompt*, a novel statistical prompting strategy tailored for time series data. It generates prompts by extracting global features from the training dataset, providing a robust statistical description of each dataset.

Through performing this analysis, we present LSTM-bundle, which incorporates and bundles the most effective design choices identified in our study for training LSTMs. Our empirical results suggest that LSTM-bundle yields superior zero-shot and few-shot (with 5% of training data) performances compared to state-of-the-art LSTMs on benchmark datasets. Additionally, even with just 5% of the data, LSTM-bundle is comparable to the baselines trained on the full training data, showing the promise of its generalization capability. In summary, we have made the following contributions:

- We present the first comprehensive analysis to systematically evaluate important design choices in LSTM training. Our analysis yields numerous insightful observations, paving the path for future research endeavors in this domain.
- We propose *time series prompt*, a statistical prompting strategy that extracts global features from the training dataset, thereby enhancing LSTM training. Our empirical results demonstrate that the proposed time series prompts outperform existing prompting strategies
- By combining the best design choices observed in our analysis, we introduce LSTM-bundle. We show that LSTM-bundle exhibits strong zero-shot and few-shot performances. Notably, with just 5% training data, it achieves comparable performance as the baselines trained on the full training data. We will release LSTM-bundle as a simple yet strong baseline for future research endeavors.

2 Notations and Problem Formulation

We denote a multi-variate time series as $\mathbf{Z} = \{\mathbf{z}_1, \mathbf{z}_2, \dots, \mathbf{z}_T\}$, where $\mathbf{z}_t \in \mathbb{R}^d$ is a vector of multi-variate variable with dimension d , and T is the total number of timestamps. We typically partition \mathbf{Z} chronologically to create training, validation, and testing sets, denoted as $\mathbf{Z}^{\text{train}} = \{\mathbf{z}_1, \mathbf{z}_2, \dots, \mathbf{z}_{T^{\text{train}}}\}$, $\mathbf{Z}^{\text{val}} = \{\mathbf{z}_{T^{\text{train}}+1}, \mathbf{z}_{T^{\text{train}}+2}, \dots, \mathbf{z}_{T^{\text{train}}+T^{\text{val}}}\}$, and $\mathbf{Z}^{\text{test}} = \{\mathbf{z}_{T^{\text{train}}+T^{\text{val}}+1}, \mathbf{z}_{T^{\text{train}}+T^{\text{val}}+2}, \dots, \mathbf{z}_T\}$, where T^{train} and T^{test} denote the number of timestamps for training and validation, respectively. In traditional TSF, we aim to train a model using $\mathbf{Z}^{\text{train}}$ such that, on \mathbf{Z}^{test} , given the observations from the historical P timestamps $\mathbf{X} = \{\mathbf{z}_{t_1}, \mathbf{z}_{t_2}, \dots, \mathbf{z}_{t_P}\}$, the model can accurately predict the values of

future Q timestamps $\mathbf{Y} = \{\mathbf{z}_{t_{P+1}}, \mathbf{z}_{t_{P+2}}, \dots, \mathbf{z}_{t_{P+Q}}\}$, where \mathbf{X} and \mathbf{Y} are sub-sequences of \mathbf{Z}^{test} . In our work, the LSTMs are trained by minimizing mean square error loss $\mathcal{L}(\text{LSTM}(\mathbf{X}), \mathbf{Y})$ between the given sub-sequences.

We focus on training LSTMs, where the objective is to develop a model that performs well across various test sets, denoted as $\mathcal{Z}^{\text{test}} = \{\mathbf{Z}_1^{\text{test}}, \mathbf{Z}_2^{\text{test}}, \dots, \mathbf{Z}_N^{\text{test}}\}$, where N represents the number of datasets for testing. Each $\mathbf{Z}_i^{\text{test}}$ may originate from a distinct domain, with different lengths, dimensions, and frequencies. The training sets for an LSTM may comprise training data associated with $\mathcal{Z}^{\text{test}}$ or data from other sources, provided they are not included in $\mathcal{Z}^{\text{test}}$. Training LSTMs presents a notable challenge compared to traditional TSF models due to the inherent difficulty in accommodating diverse patterns across datasets, often necessitating specialized designs. Nevertheless, it also offers opportunities to transfer knowledge from existing time series to new scenarios.

3 Evaluation Methodology

We evaluate existing LSTM designs based on four fundamental components that constitute the training process: time series tokenization, prompting, dataset configuration, and base model selection. **Prompting** formats input data to specify target tasks and provide contextual information, enabling LLMs to better adapt to time series data and effectively utilize the learned information for prediction. **Time series tokenization** converts time series data into a sequence of tokens, facilitating the interpretation of semantic relationships both between and within the sub-sequences of the data. **Dataset configuration** involves selecting training data based on quantity, diversity, and transferability. **Base model selection** uses different neural architectures, pre-trained weights, parameter update methods, and model sizes to impact the prediction results. Our goal is to answer the following research questions: 1) How do tokenization methods and prompting techniques impact model convergence? 2) How do base model selection and the training paradigms impact the model prediction performance? 3) How do different dataset configurations impact the model generalization?

To answer the questions, we evaluate the impact of each component individually by keeping the rest of the components fixed. First, we keep the base model and dataset configurations fixed with small model sizes, data quantities, and less data diversity, excluding prompt tokenization to identify the best prompting strategy. Next, we incorporate the best prompting strategy with the same base model selection and dataset configuration to assess the tokenization methods. Afterward, we keep all the components constant except the base model to study the impact of different model initialization and training strategies. Finally, using the best tokenization and prompting methods, we select a list of candidate base models that vary in model sizes following the guidelines learned from the previous step. We control the quantity and diversity of the training data to assess their impacts on model generalizability and prediction performances.

We follow the experimental settings outlined in Timesnet [21] and Time-LLM [19], employing the unified evaluation framework². Our evaluations are conducted using the ETT datasets (ETT_{h1}, ETT_{h2}, ETT_{m1}, ETT_{m2}), along with Weather, Electricity, Traffic, and Exchange Rate datasets, all of which are commonly used to benchmark forecasting models [21]. The input time series length \mathcal{E} is set to 336, with four different prediction lengths in {96, 192, 336, 720}. Evaluation metrics include mean square error (MSE) and mean absolute error (MAE). We also calculate the average scores among all prediction horizons. The results highlighted in **red** represent the **best** performance and highlighted in **blue** represent the **second best** performance (if needed). The details of datasets and hyper-parameters settings of our experiments are in Appendix A and D, respectively.

4 Exploring Different Design Choices in Training LSTMs

4.1 Pre-processing: Instruction Prompts

The pre-processing step plays a crucial role in enabling LLM-based models to better adapt to time series datasets. In this section, we present a detailed analysis aimed at recommending the most effective pre-processing prompting strategy to compose LSTM-bundle.

Instruction Prompts Instruction prompts enhance the effectiveness of LSTMs training by providing auxiliary information. This prompt helps the model adjust its internal state and focus more on relevant

²<https://github.com/thuml/Time-Series-Library>

Table 1: Performance of different prompting strategies.

Metric	Input	ETTh1	ETTh2	ETTm1	ETTm2	Traffic	Weather	Exchange	Electricity	Avg.
MSE	No Prompt	0.308	0.237	0.367	0.157	0.306	0.177	0.087	0.148	0.245
	TS Prompt	0.301	0.228	0.261	0.149	0.300	0.163	0.058	0.140	0.214
	Text Prompt	0.319	0.241	0.490	0.190	0.345	0.212	0.133	0.185	0.294
MAE	No Prompt	0.375	0.325	0.411	0.258	0.272	0.232	0.208	0.246	0.295
	TS Prompt	0.372	0.319	0.346	0.265	0.268	0.230	0.173	0.241	0.281
	Text Prompt	0.386	0.329	0.476	0.289	0.326	0.269	0.268	0.299	0.330

features in different domains of the dataset, thereby improving learning accuracy. With the aid of prompts, we aim to optimize the LSTM’s performance across diverse domains of datasets. We explore two distinct types of prompts: the only existing *Text Prompts* [19] written with task-specific information, and our newly proposed *time series prompts* developed by global features of time series data. This comparison determines the most effective prompt type for LSTM training.

Time Series Prompts Time series prompts are developed to encapsulate the comprehensive characteristics of time series data. Unlike text prompts, these prompts are generated by extracting a diverse collection of global features from the entire training dataset, which ensures a robust representation of the underlying dynamics, which is crucial for enhancing model performance.

The time series prompts are generated by extracting global features from each variate of the time series data. The details about extracting global features are described in Appendix C and E. After extracting the global features, we proceed to standardize their values across all varieties and instances within the dataset. This standardization is crucial to prevent the overflow issue during both training and inference stages. Let $\mathbf{P} = \{\mathbf{p}_1, \dots, \mathbf{p}_M\}$ denote the global features of \mathbf{Z} after the standardization, where $\mathbf{p}_t \in \mathbb{R}^d$. Subsequently, \mathbf{P} serves as prompts, being concatenated with each timestamp \mathbf{X} derived from the Time series data. Consequently, the large Time series models take the integrated vector $\tilde{\mathbf{X}} = \mathbf{P} \cup \mathbf{X} = \{\mathbf{p}_1, \dots, \mathbf{p}_M, \mathbf{z}_{t_1}, \mathbf{z}_{t_2}, \dots, \mathbf{z}_{t_P}\}$ as input data throughout both training and inference phases, as shown in Figure 2 in Appendix C. The time-series prompts are generated separately for the training and testing datasets without leaking the testing data information to the training process.

Experimental Results We begin by evaluating the effectiveness of instruction prompts. Specifically, we assess two distinct types of instruction prompts, both initialized by the same pre-trained GP2-Medium weights within the context of commonly used linear tokenization. The experimental results are shown in Table 1. Our observations suggest that ① statistical prompts outperform traditional text prompts in enhancing the training of LSTM models with up to 8% lower MAE scores. Additionally, ② it is observed that the use of statistical prompts results in superior performance compared to scenarios where no prompts are employed, yielding up to 3% lower MSE scores. The superiority of statistical prompt is evident in the more effective leveraging of LSTM capabilities, leading to improved learning outcomes across various datasets. Based on the above observations, we select time series prompts as the focus in the following analysis and incorporate them into LSTM-bundle.

4.2 Pre-processing: Tokenizations

In addition to employing instructional prompts to enhance generalization in LSTM training, this section provides a detailed analysis aimed at identifying the most effective tokenization strategy for LSTMs. We explore two distinct tokenization approaches – linear tokenization [18] and time series tokenization [20] – to determine the superior method for training LSTM models.

Details of Tokenization To harness the power of LLMs, a prevalent strategy involves mapping time series values to tokens [18, 19]. However, converting time series data to natural language formats for LLMs is not trivial, as LLMs are pre-trained with predetermined tokenizers designed for NLP datasets. However, this implies that time series data cannot be directly fed into LLMs for training on forecasting purposes; it requires a specialized transformation of the time series data into specific indices suitable for processing by the LLMs. In this manner, we utilize two advanced types of tokenizations, linear tokenization and time series tokenization, to better evaluate their effectiveness in transferring data for training LSTMs. Specifically, the linear tokenization [18] leverages one trainable linear layer $f : \mathbb{R}^{\mathcal{E}} \rightarrow \mathbb{R}^K$ to transfer time series numbers to specific tokens, where \mathcal{E} denotes time

Table 2: Performance of Linear and Nuisance tokenization.

Metric	Tokenizer	ETTh1	ETTh2	ETTm1	ETTm2	Traffic	Weather	Exchange	Electricity	Avg.
MSE	Linear Tokenizer	0.301	0.228	0.261	0.149	0.300	0.163	0.058	0.140	0.214
	Time Series Tokenizer	1.798	0.855	1.671	0.625	2.199	0.983	3.729	2.206	1.663
MAE	Linear Tokenizer	0.372	0.319	0.346	0.265	0.268	0.230	0.173	0.241	0.281
	Time Series Tokenizer	1.057	0.606	0.991	0.488	1.083	0.619	1.495	1.108	0.895

Table 3: Performance of Learning from scratch, LoRA fine-tuning, and fully fine-tuning.

Metric		MSE				MAE			
Predict length		96	192	336	720	96	192	336	720
TS Prompt	From Scratch	0.325	0.296	0.323	0.355	0.355	0.375	0.374	0.409
	LoRA Fine-tuning	0.343	0.381	0.399	0.466	0.374	0.403	0.426	0.478
	Fully Fine-tuning	0.214	0.254	0.301	0.361	0.281	0.322	0.361	0.411
Text Prompt	From Scratch	0.494	0.434	0.597	0.485	0.463	0.438	0.512	0.475
	LoRA Fine-tuning	0.347	0.379	0.406	0.473	0.373	0.404	0.431	0.484
	Fully Fine-tuning	0.294	0.286	0.353	0.358	0.330	0.338	0.378	0.429

series length, and K refers to input size of pre-trained LLM backbone. The trainable time series tokenization [20] aims to covert continuous time series data into discrete tokens by scaling and quantizing their values to the specific number of token bins with a given Dirichlet function.

Experimental Results We investigate the impact of two tokenization methods on training LSTMs. By comparing different tokenization strategies, we aim to identify which approach best complements the LSTM architecture, enhancing its ability to process and learn from complex and multi-domain datasets. Specifically, we conduct experiments comparing linear tokenization and time series tokenization, utilizing pre-trained GPT-2-medium models along with time series prompts. The experimental results shown in Table 2 demonstrate that linear tokenization more effectively facilitates the training process of LSTM compared to time series tokenization. In summary, ③ linear tokenization is more suitable for LSTM training in multi-domain data joint training scenarios compared to time series tokenization. Thus, linear tokenization is selected to integrate into the LSTM-bundle.

4.3 Model Configuration: Training Paradigm

Different training paradigms exhibit unique characteristics that influence how well LLMs fit a specific training dataset. In this section, we explore three distinct training paradigms, fully fine-tuning, training from scratch, and LoRA [22], to identify the most effective approaches for training the LSTM framework.

Training Paradigm In the full fine-tuning paradigm, we utilize the pre-trained weights of each base LLM, which finetune all parameters using the given time series dataset. Conversely, in the training-from-scratch paradigm, we only preserve the original model architecture but initialize all parameters anew before training with the time series dataset. In the LoRA paradigm, we employ low-rank adapters on the base LLMs to further fine-tune limited trainable parameters.

Experimental Results We assess the effectiveness of the training paradigm under the settings of time series prompt and text prompt usage. Table 3 presents the results of various training strategies using GPT-2-Medium as the backbone. In general, the experimental results indicate that full fine-tuning is the most effective strategy for training the LSTM framework whether leveraging time series prompts or text prompts. Based on the results, we summarize the observations as follows. ④ Although training-from-scratch achieves competitive performance compared to full fine-tuning, the large number of trainable model parameters may lead to overfitting, which can ultimately degrade performance. ⑤ Fully fine-tuning paradigm leads to the best performance with up to 11% of improvement on MSE and up to 17% of improvement on MAE under the length of {96, 192, 336}, and performance competitive under the length of 720. Training the LSTM-bundle under the full fine-tuning paradigm is recommended, as it converges twice as fast as training from scratch, ensuring efficient and effective forecasting.

Table 4: Performance of different backbones.

Metric	MSE				MAE			
	96	192	336	720	96	192	336	720
Small	0.223	0.261	0.289	0.351	0.287	0.322	0.349	0.404
Medium	0.215	0.254	0.302	0.361	0.282	0.323	0.362	0.411
Large	0.219	0.257	0.320	0.368	0.284	0.325	0.376	0.418

Table 5: Performance of different down-sampling rate.

Metric	MSE				MAE			
	96	192	336	720	96	192	336	720
DS Rate	96	192	336	720	96	192	336	720
2.5%	0.227	0.268	0.308	0.369	0.294	0.335	0.365	0.415
5%	0.215	0.254	0.302	0.361	0.282	0.323	0.362	0.411
10%	0.241	0.275	0.287	0.351	0.303	0.337	0.348	0.402

4.4 Model Configuration: Base Model Selection

Base Model Candidates As for the base models of our framework, we leverage four different pre-trained models, including GPT-2-small, GPT-2-medium, GPT-2-large [23], and Phi-2 [24]. GPT-2 employs a transformer architecture with up to 48 layers, and it is trained on a diverse corpus of internet text, resulting in a model size of 124M (small), 355M (medium), and 774M (large) parameters. Phi-2 also uses a transformer-based architecture but emphasizes high-quality (“textbook-quality”) data, comprising 2.7 billion parameters. Despite its smaller size compared to the largest contemporary models, Phi-2 incorporates innovative scaling techniques to optimize performance. Different from the absolute positional encoding used by GPT-2, Phi-2 employs relative positional encoding, which considers the pairwise distance between each token pair for encoding position information of tokens. Following the settings in [18], we utilize the top three self-attention layers of every pre-trained model as our backbone structure in LSTM-bundle framework.

Experimental Results We explore the impact of using different pre-trained LLM weights as backbones in LSTM models, with the goal of identifying the most suitable pre-trained LLM weights for processing time series data. The findings are detailed in Table 4. We assess the performance of different backbones with time series prompts under the fully fine-tuning paradigm. We summarize our observations as follows: ⑥ GPT-2-Small demonstrates a performance improvement of up to 2% in relatively long-term forecasting (i.e., 336 and 720 hours) compared to the GPT-2-Large model. ⑦ GPT-2-Medium outperforms GPT-2-Large in relatively short-term forecasting (i.e., 96 and 192 hours), as larger models may be prone to overfitting during training, leading to degraded forecasting performance. Based on the above findings, we recommend incorporating GPT-2-Medium or GPT-2-Small as the backbone of LSTM-bundle framework.

4.5 Dataset configuration: Quantity

The quantity of datasets is often the key to the success of LLMs due to the consistent semantic meaning of tokens. Nevertheless, time series tokens are less informative and semantically meaningful compared to natural language tokens. In this section, we investigate the impact of data quantity to determine whether the principle that more training data leads to better LSTMs.

Quantity Configuration We conduct time series down-sampling to study the impact of data quantity on model prediction performance. Specifically, each time series in the training data are periodically down-sampled along the timestamps to reduce the granularity of the entire time series while maintaining the general pattern. Each dataset is split into training, validation, and testing sets, and then down-sampling is applied to the training set for model training. We compare the models trained with 10%, 5%, and 2.5% of the full-size time series in the training set. In the following experiments, we annotate partial training data usage as few-shot training.

Experimental Results Table 5 tabulates the results of models trained with different data quantities. The model trained with 5% down-sampled data leads to the best result. ⑧ We observe that increasing the amount of data does not positively correlate with improved model performance. The possible rationale behind this is that using more data points increases the granularity of the time series and reduces the model’s generalization ability, while excessive down-sampling loses too much information, preventing the model from learning meaningful patterns from the training data. Therefore, the quantity of data used for model training should be carefully balanced with the granularity of the time series to optimize model performance. Based on the experimental results shown in Table 5, we recommend using 5% of training data, which better balances the granularity of the time series data.

Table 6: Performance of LSTM trained on different numbers of datasets.

	1 dataset	2 datasets	3 datasets	4 datasets	5 datasets	6 datasets	7 datasets	8 datasets	
MSE	96	0.333	0.366	0.269	0.276	0.232	0.229	0.227	0.215
	192	0.394	0.440	0.309	0.318	0.271	0.267	0.269	0.254
	336	0.403	0.427	0.356	0.351	0.302	0.325	0.308	0.302
	720	0.478	0.511	0.436	0.419	0.373	0.364	0.369	0.361
MAE	96	0.351	0.351	0.327	0.329	0.298	0.294	0.292	0.282
	192	0.407	0.395	0.363	0.368	0.333	0.332	0.334	0.323
	336	0.420	0.420	0.401	0.392	0.361	0.384	0.371	0.362
	720	0.464	0.494	0.466	0.445	0.423	0.411	0.419	0.411

4.6 Dataset Configuration: Diversity

Impact of Dataset Diversity Recall that we utilized eight datasets for training purposes, encompassing ETTh1, ETTh2, ETTm1, ETTm2, Weather, Electricity, Traffic, and Exchange. Here, we focus on evaluating the performance of LSTM models when trained with subsets of these datasets. Specifically, we employ the first M datasets from the aforementioned list for training, where $M \in 1, 2, \dots, 8$. For instance, when $M = 1$, solely ETTh1 is utilized for training; when $M = 5$, ETTh1, ETTh2, ETTm1, ETTm2, and Weather are utilized. Subsequently, we evaluate the trained model’s performance across all datasets to understand the impact of dataset diversity.

Experimental Results Table 6 summarizes the results. ⑨ We observe that augmenting dataset diversity generally leads to improved performance. This is expected because more diverse data has the potential to enhance the generalization capabilities of LSTMs across various patterns. Thus, enhancing the breadth of training data is key to fostering stronger LSTMs.

5 Comparison with State-of-the-Art Methods

Based on the observations in Section 4, we propose LSTM-Bundle with the settings as follows: (1) Base model backbone: GPT-2-Medium, (2) Instruction prompts: the proposed time series prompts, (3) Tokenization: linear tokenization, and (4) Training paradigm: fully fine-tuning. We compare LSTM-Bundle against state-of-the-art TSF models on zero-shot and few-shot settings.

5.1 Experimental Settings

We follow the same settings as in Time-LLM [19]. Specifically, for zero-shot experiments, we test the model’s cross-domain adaptation under the long-term forecasting scenario and evaluate it on various cross-domain scenarios utilizing the ETT datasets. The hyper-parameter settings of training LSTM-Bundle are in Appendix D. For the few-shot setting, we train our LSTM-Bundle on 5% of the data and compare it with other baselines under the 5% as well. We cite the performance of other models when applicable [18]. Furthermore, we compare LSTM-Bundle trained on 5% training data against baselines trained on the full training set. Our findings in Appendix G indicate that LSTM-Bundle achieves comparable results, further underscoring its superiority.

Our baseline method consist of various Transformer-based methods, including PatchTST [8], ETSformer [9], Non-Stationary Transformer [25], FEDformer [26], Autoformer [27], Informer [7], and Reformer [10]. Additionally, we evaluate our model against recent competitive models like Time-LLM [19], TEST [28], LLM4TS [17], GPT4TS [18], DLinear [29], TimesNet [21], and LightTS [30]. More details of the baseline methods can be found in Appendix B.

5.2 Results

Zero-shot Performance In the zero-shot learning experiments shown in Table 7, LSTM-Bundle consistently shows superior performance across various cross-domain scenarios using the ETT datasets. For instance, when tested on the ETTh1 to ETTh2 transfer task, LSTM-Bundle achieves an MSE of 0.319 and an MAE of 0.402, outperforming all other methods including TIME-LLM, GPT4TS, and DLinear. In another scenario, transferring from ETTm1 to ETTm2, LSTM-Bundle records the lowest MSE and MAE scores of 0.217 and 0.319, respectively, indicating its exceptional

Table 7: Zero-shot performance. We have omitted some baselines due to the space limit. The full results are provided in Appendix G

Methods	LTSM-Bundle		TIME-LLM		GPT4TS		LLMTime		DLinear		PatchTST		TimesNet	
Metric	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE
ETTh1 → ETTh2	0.319	0.402	0.353	0.387	0.406	0.422	0.992	0.708	0.493	0.488	0.380	0.405	0.421	0.431
ETTh1 → ETTm2	0.312	0.406	0.273	0.340	0.325	0.363	1.867	0.869	0.415	0.452	0.314	0.360	0.327	0.361
ETTh1 → ETTh2	0.306	0.391	0.381	0.412	0.433	0.439	0.992	0.708	0.464	0.475	0.439	0.438	0.457	0.454
ETTh1 → ETTm2	0.217	0.319	0.268	0.320	0.313	0.348	1.867	0.869	0.335	0.389	0.296	0.334	0.322	0.354
ETTh2 → ETTh2	0.314	0.393	0.354	0.400	0.435	0.443	1.867	0.869	0.455	0.471	0.409	0.425	0.435	0.443
ETTh2 → ETTm1	0.403	0.430	0.414	0.438	0.769	0.567	1.933	0.984	0.649	0.537	0.568	0.492	0.769	0.567

Table 8: Performance comparison in the few-shot setting with 5% training data. We have omitted some baselines due to space limits. The full results are provided in Appendix G.

Methods	LTSM-Bundle		TIME-LLM		LLM4TS		GPT4TS		DLinear		PatchTST		TimesNet		FEDformer		
Metric	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	
ETTh1	96	0.301	0.372	0.483	0.464	0.509	0.484	0.543	0.506	0.547	0.503	0.557	0.519	0.892	0.625	0.593	0.529
	192	0.331	0.397	0.629	0.540	0.717	0.581	0.748	0.580	0.720	0.604	0.711	0.570	0.940	0.665	0.652	0.563
	336	0.351	0.412	0.768	0.626	0.728	0.589	0.754	0.595	0.984	0.727	0.816	0.619	0.945	0.653	0.731	0.594
	720	0.367	0.435	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Avg	0.338	0.404	0.627	0.543	0.651	0.551	0.681	0.560	0.750	0.611	0.694	0.569	0.925	0.647	0.658	0.562
ETTh2	96	0.228	0.319	0.336	0.397	0.314	0.375	0.376	0.421	0.442	0.456	0.401	0.421	0.409	0.420	0.390	0.424
	192	0.289	0.367	0.406	0.425	0.365	0.408	0.418	0.441	0.617	0.542	0.452	0.455	0.483	0.464	0.457	0.465
	336	0.316	0.392	0.405	0.432	0.398	0.432	0.408	0.439	1.424	0.849	0.464	0.469	0.499	0.479	0.477	0.483
	720	0.378	0.452	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Avg	0.303	0.382	0.382	0.418	0.359	0.405	0.400	0.433	0.694	0.577	0.439	0.448	0.439	0.448	0.463	0.454
ETTh1	96	0.261	0.346	0.316	0.377	0.349	0.379	0.386	0.405	0.332	0.374	0.399	0.414	0.606	0.518	0.628	0.544
	192	0.287	0.369	0.450	0.464	0.374	0.394	0.440	0.438	0.358	0.390	0.441	0.436	0.681	0.539	0.666	0.566
	336	0.342	0.413	0.450	0.424	0.411	0.417	0.485	0.459	0.402	0.416	0.499	0.467	0.786	0.597	0.807	0.628
	720	0.370	0.431	0.483	0.471	0.516	0.479	0.577	0.499	0.511	0.489	0.767	0.587	0.796	0.593	0.822	0.633
	Avg	0.315	0.389	0.425	0.434	0.412	0.417	0.472	0.450	0.400	0.417	0.526	0.476	0.717	0.561	0.730	0.592
ETTh2	96	0.149	0.265	0.174	0.261	0.192	0.273	0.199	0.280	0.236	0.326	0.206	0.288	0.220	0.299	0.229	0.320
	192	0.203	0.303	0.215	0.287	0.249	0.309	0.256	0.316	0.306	0.373	0.264	0.324	0.311	0.361	0.394	0.361
	336	0.294	0.376	0.273	0.330	0.301	0.342	0.318	0.353	0.380	0.423	0.334	0.367	0.338	0.366	0.378	0.427
	720	0.491	0.493	0.433	0.412	0.402	0.405	0.460	0.436	0.674	0.583	0.454	0.432	0.509	0.465	0.523	0.510
	Avg	0.284	0.359	0.274	0.323	0.286	0.332	0.308	0.346	0.399	0.426	0.314	0.352	0.344	0.372	0.381	0.404
Weather	96	0.163	0.230	0.172	0.263	0.173	0.227	0.175	0.230	0.184	0.242	0.171	0.224	0.207	0.253	0.229	0.309
	192	0.214	0.281	0.224	0.271	0.218	0.265	0.227	0.276	0.228	0.283	0.230	0.277	0.272	0.307	0.265	0.317
	336	0.281	0.331	0.282	0.321	0.276	0.310	0.286	0.322	0.279	0.322	0.294	0.326	0.313	0.328	0.353	0.392
	720	0.349	0.385	0.366	0.381	0.355	0.366	0.366	0.379	0.364	0.388	0.384	0.387	0.400	0.385	0.391	0.394
	Avg	0.252	0.307	0.260	0.309	0.251	0.292	0.263	0.301	0.263	0.308	0.269	0.303	0.298	0.318	0.309	0.353
Electricity	96	0.140	0.241	0.147	0.242	0.139	0.235	0.143	0.241	0.150	0.251	0.145	0.244	0.315	0.389	0.235	0.322
	192	0.158	0.257	0.158	0.241	0.155	0.249	0.159	0.255	0.163	0.263	0.163	0.260	0.318	0.396	0.247	0.341
	336	0.175	0.276	0.178	0.277	0.174	0.269	0.179	0.274	0.175	0.278	0.183	0.281	0.340	0.415	0.267	0.356
	720	0.206	0.307	0.224	0.312	0.222	0.310	0.233	0.323	0.219	0.311	0.233	0.323	0.635	0.613	0.318	0.394
	Avg	0.170	0.270	0.179	0.268	0.173	0.266	0.178	0.273	0.176	0.275	0.181	0.277	0.402	0.453	0.266	0.353
Traffic	96	0.300	0.268	0.414	0.291	0.401	0.285	0.419	0.298	0.427	0.304	0.404	0.286	0.854	0.492	0.670	0.421
	192	0.315	0.282	0.419	0.291	0.418	0.293	0.434	0.305	0.447	0.315	0.412	0.294	0.894	0.517	0.653	0.405
	336	0.328	0.294	0.437	0.314	0.436	0.308	0.449	0.313	0.478	0.333	0.439	0.310	0.853	0.471	0.707	0.445
	720	0.343	0.303	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Avg	0.322	0.287	0.423	0.298	0.418	0.295	0.434	0.305	0.450	0.317	0.418	0.296	0.867	0.493	0.676	0.423
1 st Count	40		4		11		0		0		1		0		0		

ability to adapt to different domains. The consistent improvements across multiple transfer scenarios highlight the superiority of LTSM-Bundle in zero-shot learning settings.

Few-shot Performance Table 8 presents the performance of LTSM-Bundle and the baseline models in the few-shot setting, utilizing 5% of the training data. Notably, LTSM-Bundle exhibits a significant advantage over both traditional baselines and recently proposed LTSMs. Across the 7 datasets, LTSM-Bundle outperforms all baselines regarding MSE in 5 datasets and regarding MAE in 4 datasets. Moreover, LTSM-Bundle achieves the top rank 40 times among the reported results. These findings underscore the effectiveness of our model in few-shot scenarios, where it demonstrates high accuracy even with limited training data. Its capability to excel with minimal data not only highlights its adaptability but also its potential for practical applications, particularly in contexts where data availability is constrained. All further results on full datasets are referred to Appendix G.

6 Conclusion and Future Perspectives

In this study, we present the first comprehensive analysis aimed at systematically evaluating critical design choices in LSTM training. Our investigation covers various aspects, including data preprocessing, model configuration, and dataset configuration. We delve into detailed design choices such as prompting, tokenization, training paradigms, base model selection, data quantity, and dataset diversity. Through this analysis, we derive 9 observations and identify the best practices for training LSTMs, termed as `LSTM-bundle`. We demonstrate that `LSTM-bundle` achieves strong zero-shot and few-shot performance compared to state-of-the-art LSTMs, and it requires only 5% of the data to achieve comparable performance to state-of-the-art baselines on benchmark datasets. We hope that our findings will inspire future research in this direction, and `LSTM-bundle` could serve as a simple yet strong baseline for future comparison. Drawing from our analysis, we suggest two future directions for further improving LSTMs.

Advancing Prompting Strategies Due to the heterogeneity in time series datasets, training a universal model capable of fitting all datasets and generalizing to others poses a challenge. Our analysis underscores the promise of prompting as a means to address this challenge by enriching the dataset with additional context. In particular, we demonstrate the efficacy of the time series prompt, which extracts statistical information. Looking ahead, we anticipate the development of more nuanced prompting strategies to enhance performance further. For instance, implementing variate-specific prompts in multi-variate time series data could offer richer context and improve performance. We believe there is considerable potential for advancing this aspect in future research.

Constructing Synthetic Training Data Our analysis highlights the significance of dataset diversity in training transferable LSTMs. Specifically, increasing the number of datasets can enhance performance significantly (observation ⑨). This insight suggests that LSTMs could achieve better transferability when exposed to more patterns during training. Thus, there is a potential for enhancing LSTMs through synthetic datasets that simulate various patterns. However, this requires more research endeavor, as synthetic data may introduce artifacts into the training dataset.

References

- [1] Adebisi A Ariyo, Adewumi O Adewumi, and Charles K Ayo. Stock price prediction using the arima model. In *2014 UKSim-AMSS 16th international conference on computer modelling and simulation*, pages 106–112. IEEE, 2014.
- [2] Jerome H Friedman. Greedy function approximation: a gradient boosting machine. *Annals of statistics*, pages 1189–1232, 2001.
- [3] Steven Elsworth and Stefan Güttel. Time series forecasting using lstm networks: A symbolic approach. *arXiv preprint arXiv:2003.05672*, 2020.
- [4] Ioannis E Livieris, Emmanuel Pintelas, and Panagiotis Pintelas. A cnn-lstm model for gold price time-series forecasting. *Neural computing and applications*, 32:17351–17360, 2020.
- [5] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [6] Haixu Wu, Jiehui Xu, Jianmin Wang, and Mingsheng Long. Autoformer: Decomposition transformers with auto-correlation for long-term series forecasting. *Advances in neural information processing systems*, 34:22419–22430, 2021.
- [7] Haoyi Zhou, Shanghang Zhang, Jieqi Peng, Shuai Zhang, Jianxin Li, Hui Xiong, and Wancai Zhang. Informer: Beyond efficient transformer for long sequence time-series forecasting. In *Proceedings of the AAAI conference on artificial intelligence*, volume 35, pages 11106–11115, 2021.
- [8] Yuqi Nie, Nam H Nguyen, Phanwadee Sinthong, and Jayant Kalagnanam. A time series is worth 64 words: Long-term forecasting with transformers. *arXiv preprint arXiv:2211.14730*, 2022.
- [9] Gerald Woo, Chenghao Liu, Doyen Sahoo, Akshat Kumar, and Steven Hoi. Etsformer: Exponential smoothing transformers for time-series forecasting. *arXiv preprint arXiv:2202.01381*, 2022.
- [10] Nikita Kitaev, Łukasz Kaiser, and Anselm Levskaya. Reformer: The efficient transformer. *arXiv preprint arXiv:2001.04451*, 2020.
- [11] Gerald Woo, Chenghao Liu, Akshat Kumar, Caiming Xiong, Silvio Savarese, and Doyen Sahoo. Unified training of universal time series forecasting transformers. *arXiv preprint arXiv:2402.02592*, 2024.
- [12] Azul Garza and Max Mergenthaler-Canseco. Timegpt-1. *arXiv preprint arXiv:2310.03589*, 2023.
- [13] Samuel Dooley, Gurnoor Singh Khurana, Chirag Mohapatra, Siddhartha V Naidu, and Colin White. Forecastpf: Synthetically-trained zero-shot forecasting. *Advances in Neural Information Processing Systems*, 36, 2024.
- [14] Kashif Rasul, Arjun Ashok, Andrew Robert Williams, Hena Ghonia, Rishika Bhagwatkar, Arian Khorasani, Mohammad Javad Darvishi Bayazi, George Adamopoulos, Roland Riachi, Nadhir Hassen, et al. Lag-llama: Towards foundation models for probabilistic time series forecasting. *Preprint*, 2024.
- [15] Abhimanyu Das, Weihao Kong, Rajat Sen, and Yichen Zhou. A decoder-only foundation model for time-series forecasting. *arXiv preprint arXiv:2310.10688*, 2023.
- [16] Nate Gruver, Marc Finzi, Shikai Qiu, and Andrew G Wilson. Large language models are zero-shot time series forecasters. *Advances in Neural Information Processing Systems*, 36, 2024.
- [17] Ching Chang, Wen-Chih Peng, and Tien-Fu Chen. Llm4ts: Two-stage fine-tuning for time-series forecasting with pre-trained llms. *arXiv preprint arXiv:2308.08469*, 2023.

- [18] Tian Zhou, Peisong Niu, Liang Sun, Rong Jin, et al. One fits all: Power general time series analysis by pretrained lm. *Advances in neural information processing systems*, 36:43322–43355, 2023.
- [19] Ming Jin, Shiyu Wang, Lintao Ma, Zhixuan Chu, James Y Zhang, Xiaoming Shi, Pin-Yu Chen, Yuxuan Liang, Yuan-Fang Li, Shirui Pan, et al. Time-llm: Time series forecasting by reprogramming large language models. *arXiv preprint arXiv:2310.01728*, 2023.
- [20] Abdul Fatir Ansari, Lorenzo Stella, Caner Turkmen, Xiyuan Zhang, Pedro Mercado, Huibin Shen, Oleksandr Shchur, Syama Sundar Rangapuram, Sebastian Pineda Arango, Shubham Kapoor, et al. Chronos: Learning the language of time series. *arXiv preprint arXiv:2403.07815*, 2024.
- [21] Haixu Wu, Tengge Hu, Yong Liu, Hang Zhou, Jianmin Wang, and Mingsheng Long. Timesnet: Temporal 2d-variation modeling for general time series analysis. In *The eleventh international conference on learning representations*, 2022.
- [22] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- [23] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- [24] Mojan Javaheripi and Sébastien Bubeck. Phi-2: The surprising power of small language models, December 2023.
- [25] Yong Liu, Haixu Wu, Jianmin Wang, and Mingsheng Long. Non-stationary transformers: Exploring the stationarity in time series forecasting. *Advances in Neural Information Processing Systems*, 35:9881–9893, 2022.
- [26] Tian Zhou, Ziqing Ma, Qingsong Wen, Xue Wang, Liang Sun, and Rong Jin. Fedformer: Frequency enhanced decomposed transformer for long-term series forecasting. In *International conference on machine learning*, pages 27268–27286. PMLR, 2022.
- [27] Minghao Chen, Houwen Peng, Jianlong Fu, and Haibin Ling. Autoformer: Searching transformers for visual recognition. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 12270–12280, 2021.
- [28] Chenxi Sun, Yaliang Li, Hongyan Li, and Shenda Hong. Test: Text prototype aligned embedding to activate llm’s ability for time series. *arXiv preprint arXiv:2308.08241*, 2023.
- [29] Ailing Zeng, Muxi Chen, Lei Zhang, and Qiang Xu. Are transformers effective for time series forecasting? In *Proceedings of the AAAI conference on artificial intelligence*, volume 37, pages 11121–11128, 2023.
- [30] David Campos, Miao Zhang, Bin Yang, Tung Kieu, Chenjuan Guo, and Christian S Jensen. Lightts: Lightweight time series classification with adaptive ensemble distillation. *Proceedings of the ACM on Management of Data*, 1(2):1–27, 2023.
- [31] Guokun Lai, Wei-Cheng Chang, Yiming Yang, and Hanxiao Liu. Modeling long-and short-term temporal patterns with deep neural networks. In *The 41st international ACM SIGIR conference on research & development in information retrieval*, pages 95–104, 2018.
- [32] Marília Barandas, Duarte Folgado, Letícia Fernandes, Sara Santos, Mariana Abreu, Patrícia Bota, Hui Liu, Tanja Schultz, and Hugo Gamboa. Tsfel: Time series feature extraction library. *SoftwareX*, 11:100456, 2020.
- [33] Peter Welch. The use of fast fourier transform for the estimation of power spectra: A method based on time averaging over short, modified periodograms. *IEEE Transactions on audio and electroacoustics*, 15(2):70–73, 1967.
- [34] Geoffroy Peeters, Bruno L Giordano, Patrick Susini, Nicolas Misdariis, and Stephen McAdams. The timbre toolbox: Extracting audio descriptors from musical signals. *The Journal of the Acoustical Society of America*, 130(5):2902–2916, 2011.

- [35] Carina Figueira, Ricardo Matias, and Hugo Gamboa. Body location independent activity monitoring. In *International Conference on Bio-inspired Systems and Signal Processing*, volume 5, pages 190–197. SciTePress, 2016.
- [36] Letícia Fernandes, Marília Barandas, and Hugo Gamboa. Learning human behaviour patterns by trajectory and activity recognition. In *BIOSIGNALS*, pages 220–227, 2020.
- [37] Orchisama Das. Speaker recognition. 2016.
- [38] Henriksson U. Power spectrum and bandwidth. 2003.
- [39] YN Pan, Jin Chen, and XL Li. Spectral entropy: A complementary index for rolling element bearing performance degradation assessment. *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*, 223(5):1223–1231, 2009.
- [40] BF Yan, Ayaho Miyamoto, and Eugen Brühwiler. Wavelet transform-based modal parameter identification considering uncertainty. *Journal of Sound and Vibration*, 291(1-2):285–301, 2006.
- [41] Çağrı Kocaman and Muammer Özdemir. Comparison of statistical methods and wavelet energy coefficients for determining two common pq disturbances: Sag and swell. In *2009 International Conference on Electrical and Electronics Engineering-ELECO 2009*, pages I–80. IEEE, 2009.
- [42] Daniel Zwillinger and Stephen Kokoska. *CRC standard probability and statistics tables and formulae*. Crc Press, 1999.
- [43] Travis E Oliphant et al. *Guide to numpy*, volume 1. Trelgol Publishing USA, 2006.
- [44] Sebastian Raschka. Mlxtend: Providing machine learning and data science utilities and extensions to python’s scientific computing stack. *Journal of open source software*, 3(24):638, 2018.

Appendix

A Details of Datasets

In this paper, the training datasets include ETT (Electricity Transformer Temperature) [7]³, Traffic⁴, Electricity⁵, Weather⁶, and Exchange-Rate[31]⁷. ETT [7] comprises four subsets: two with hourly-level data (ETT_h) and two with 15-minute-level data (ETT_m). Each subset includes seven features related to oil and load metrics of electricity transformers, covering the period from July 2016 to July 2018. Traffic dataset includes hourly road occupancy rates from sensors on San Francisco freeways, covering the period from 2015 to 2016. Electricity dataset contains hourly electricity consumption data for 321 clients, spanning from 2012 to 2014. The weather data set comprises 21 weather indicators, such as air temperature and humidity, recorded every 10 minutes throughout 2020 in Germany. Exchange-Rate[31] contains daily exchange rates for eight countries, spanning from 1990 to 2016. We first train our framework on the diverse time series data collection, and then assess the abilities of LSTM-Bundle on jointly learning and zero-shot transfer learning to different domain of time series knowledge.

B Details of Baselines

One aspect of our baseline includes the optimization of Transformers for the time series domain. PatchTST [8] employs a patch-based technique for time-series forecasting, leveraging the self-attention mechanism of transformers. ETSformer [9] integrates exponential smoothing with transformer architectures to improve forecast accuracy. The Non-Stationary Transformer [25] addresses non-stationarity by adapting to changes in statistical properties over time. FEDformer [26] incorporates information in the frequency domain to handle periodic patterns. Autoformer [27] introduces an autocorrelation mechanism to capture long-term dependencies and seasonality patterns. Informer [7] optimizes transformers for long sequence forecasting with an efficient self-attention mechanism. Reformer [10] uses locality-sensitive hashing and reversible layers to improve memory and computational efficiency.

Additionally, we evaluate our model against recent competitive models in the pursuit of time series foundation models. Time-LLM [19] leverages large language models for time-series forecasting, treating data as a sequence of events. TEST [28] handles complex temporal dependencies with an enhanced transformer architecture. LLM4TS [17] uses large language models adapted for time series forecasting. GPT4TS [18] adapts the Frozen Pretrained Transformer (FPT) for generating future predictions. We also include other widely used methods as our baselines. DLinear [29] that focuses on capturing linear trends with a linear layer model. TimesNet [21] integrates neural network architectures to capture complex patterns. LightTS [30] provides efficient and fast forecasting solutions suitable for real-time applications.

³<https://github.com/zhouhaoyi/ETDataset>

⁴<http://pems.dot.ca.gov>

⁵<https://archive.ics.uci.edu/dataset/321/electricityloadaddiagrams20112014>

⁶<https://www.bgc-jena.mpg.de/wetter/>

⁷<https://github.com/laiguokun/multivariate-time-series-data>

C Details of Proposed Time Series Instruction Prompting

The extracted global features are specified in Appendix E. After extracting the global features, we proceed to standardize their values across all varieties and instances within the dataset. This standardization is crucial to prevent the overflow issue during both training and inference stages. Let $\mathbf{P} = \{p_1, \dots, p_M\}$ denote the global features of \mathbf{Z} after the standardization, where $p_t \in \mathbb{R}^d$. Subsequently, \mathbf{P} serves as prompts, being concatenated with each timestamp \mathbf{X} derived from the Time series data. Consequently, the large Time series models take the integrated vector $\tilde{\mathbf{X}} = \mathbf{P} \cup \mathbf{X} = \{p_1, \dots, p_M, z_{t_1}, z_{t_2}, \dots, z_{t_P}\}$ as input data throughout both training and inference phases, as illustrated in Figure 2. The time-series prompts are generated separately for the training and testing datasets, without leaking the testing data information to the training process.

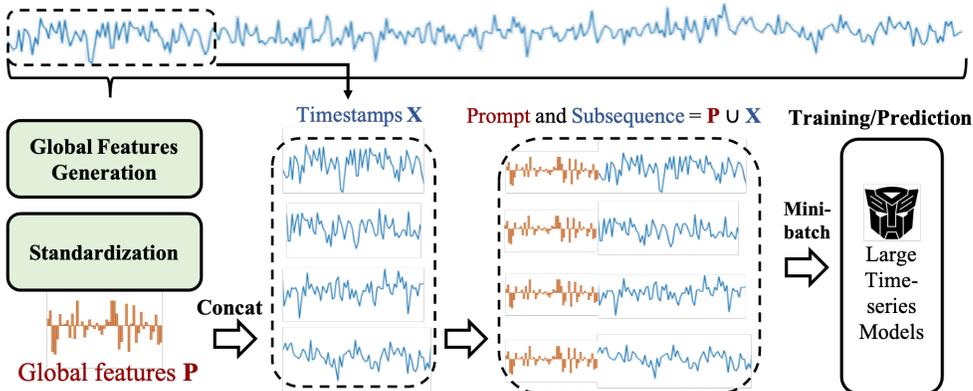


Figure 2: Instruction prompting of time series data

D Hyper-parameter Settings of Experiments

The hyper-parameter settings of LSTM-Bundle training for all experiments are shown in Table 9. Other training hyper-parameters follow the default values in the TrainingArguments class⁸ of the huggingface transformers package.

Table 9: Hyperparameter settings of LSTM-Bundle training.

Hyper-parameter Name	Value
Number of Transformer layers N	3
Training/evaluation/testing split	0.7 / 0.1 / 0.2
Gradient accumulation steps	64
Learning rate	0.001
Optimizer	Adam
LR scheduler	CosineAnnealingLR
Number of epoch	10
Number of time steps per token	16
Stride of time steps per token	8
Dimensions of TS prompt	133
Transformer architectures	GPT-2-{small, medium, Large} and Phi-2
Length of prediction	96, 192, 336, and 720
Length input TS data	336
Data type	torch.bfloat16
Down-sampling rate of training dataset	20

⁸https://github.com/huggingface/transformers/blob/main/src/transformers/training_args.py

E Global Features for Prompts

Time series prompts are developed to encapsulate the comprehensive characteristics of time series data. Specifically, let s be a certain variate of the time-series data \mathcal{Z} . We identified in Table 10 the partial global features that we leverage to craft these prompts, each selected for its ability to convey critical information about the data’s temporal structure and variability. For the inter-quartile and histogram in Table 10, $Q_3(s)$ and $Q_1(s)$ represent the first and third quartile of the Time series data, respectively; and m_i represents the histogram in which n is the total number of observations and k the total number of bins.

Beyond those shown in Table 10, we also consider the global features according to the following references: Fast Fourier Transform, Wavelet transform, Zero crossing rate, Maximum peaks, Minimum peaks, ECDF percentile count, Slope, ECDF slope, Spectral distance, Fundamental frequency, Maximum frequency, Median frequency, Spectral maximum peaks [32]; Maximum Power Spectrum [33], Spectral Centroid [34], Decrease [34], Kurtosis [34], Skewness [34], Spread [34], Slope [34], Variation [34], Spectral Roll-off [35], Roll-on [35], Human Range Energy [36], MFCC [37], LPCC [37], Power Bandwidth [38], Spectral Entropy [39], Wavelet Entropy [40] and Wavelet Energy [41], Kurtosis [42], Skewness [42], Maximum [43], Minimum [43], Mean [43], Median [43] and ECDF [44], ECDF Percentile [44]. For the implementation, we leverage the TSFEL library⁹ [32] to estimate the global features. The global features are extracted separately for each variate in the time-series data.

Table 10: Partial global feature in time series prompts

Feature	Formula	Feature	Formula
Autocorrelation	$\sum_{i \in \mathbb{Z}} s_i s_{i-t}$	Centroid	$\sum_{i=0}^T t_i \cdot s_i^2 / \sum_{i=0}^T s_i^2$
Max differences	$\max_i (s_{i+1} - s_i)$	Mean differences	$\text{mean}_i (s_{i+1} - s_i)$
Median differences	$\text{median}_i (s_{i+1} - s_i)$	Max absolute differences	$\max_i s_{i+1} - s_i $
Mean absolute differences	$\text{mean}_i s_{i+1} - s_i $	Median absolute differences	$\text{median}_i s_{i+1} - s_i $
Distance	$\sum_{i=0}^{T-1} \sqrt{1 + (s_{i+1} - s_i)^2}$	Summation of absolute differences	$\sum_{i=0}^{T-1} s_{i+1} - s_i $
Total energy	$\sum_{i=0}^T s_i^2 \cdot (t_T - t_0)$	Entropy	$-\sum_{x \in s} P(x) \log_2 P(x)$
Peak to peak distance	$ \max(s) - \min(s) $	Area under the curve	$\sum_{i=0}^{T-1} (t_{i+1} - t_i) \times \frac{s_{i+1} + s_i}{2}$
Absolute energy	$\sum_{i=0}^T s_i^2$	Histogram	$n = \sum_{i=1}^k m_i$
Inter-quartile range	$Q_3(s) - Q_1(s)$	Mean absolute deviation	$\frac{1}{T} \sum_{i=1}^T s_i^2 - \text{mean}(s) $
Median absolute deviation	$\text{median}_i (s_i - \text{median}(s))$	Root mean square	$\sqrt{\frac{1}{T} \sum_{i=1}^T s_i^2}$
Standard deviation (STD)	$\sqrt{\frac{1}{T} \sum_{i=1}^T (s_i - \text{mean}(s))^2}$	Variance (VAR)	$\frac{1}{T} \sum_{i=1}^T (s_i - \text{mean}(s))^2$
Wavelet absolute mean	$ \text{mean}(\text{wavelet}(s)) $	Wavelet standard deviation	$ \text{std}(\text{wavelet}(s)) $
Wavelet variance	$ \text{var}(\text{wavelet}(s)) $	Skewness	$\frac{1}{T(\text{STD})^3} \sum_{i=0}^T (s_i - \text{mean}(s))^3$

⁹https://tsfel.readthedocs.io/en/latest/descriptions/feature_list.html

F Computation Infrastructure

All experiments described in this paper are conducted using a well-defined physical computing infrastructure, the specifics of which are outlined in Table 11. This infrastructure is essential for ensuring the reproducibility and reliability of our results, as it details the exact hardware environments used during the testing phases.

Table 11: Computing infrastructure for the experiments.

Device Attribute	Value
Computing infrastructure	GPU
GPU model	Nvidia-A5000 / Nvidia-A100
GPU number	8 × A5000 / 4 × A100
GPU Memory	8 × 24GB / 4 × 80GB

G Additional Experimental Results on LSTM-Bundle

In this section, we show additional results regarding comparing LSTM-Bundle with other baselines in Tables 12 and 13, results of zero-shot transfer learning in Table 14, results of different training paradigms in Table 15, results of different backbones in Table 16, results of different downsampling ratios in Table 17.

G.1 Performance Comparison with Additional Baselines

Extending the analysis presented in Section 5.2, this section introduces the full performance comparison with other baselines. We evaluate the proposed LSTM-Bundle in zero-shot and few-shot settings to highlight its efficacy and robustness, shown in Table 12 and 13.

G.2 Zero-shot Transfer Learning Comparisons

In addition to the results in Section 5.2, this section introduces the full zero-shot transfer learning comparisons. We evaluate the proposed LSTM-Bundle in the zero-shot transfer scenarios, detailed in shown in Table 14.

G.3 Training Paradigm Comparisons

Expanding upon the results in Section 4.3, this section presents the full experimental results for the training paradigms analysis, including different backbones and prompting strategies. The analytic results are detailed in Table 15.

G.4 Backbone Architecture Comparisons

We provide all the numbers of analytics on different backbone architectures, continuing from Section 4.4. All results in different language model backbones, including GPT-2-Small, GPT-2-Medium, GPT-2-Large, and Phi-2, are shown in Table 16.

G.5 Down-sampling Ratio Comparisons

We here present the full version of our experimental results on the different down-sampling ratios in Section 4.6. We test LSTM-Bundle with GPT-Medium as backbones with the proposed TS prompt under a fully tuning paradigm. The results in {40, 20, 10} are all demonstrated in Table 17.

Table 12: Performance comparison with additional baselines (Full data)

Metric	LTSR-BundLe		TIME-LLM		TEST		LLM4TS		GPT4TS		DLlinear		PatchTST		TimesNet		FEDformer		Autoformer		Non-Stationary		ETSformer		LightTS		Informer		Reformer		
	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	
ETTm1	96	0.301	0.372	0.362	0.392	0.372	0.400	0.371	0.394	0.376	0.399	0.370	0.399	0.384	0.402	0.376	0.419	0.449	0.459	0.513	0.491	0.494	0.479	0.424	0.432	0.865	0.713	0.837	0.728		
	192	0.290	0.368	0.398	0.418	0.414	0.422	0.403	0.412	0.416	0.433	0.405	0.416	0.436	0.429	0.430	0.448	0.500	0.482	0.534	0.504	0.538	0.521	0.475	0.462	1.008	0.792	0.923	0.766		
	336	0.351	0.412	0.430	0.427	0.422	0.437	0.420	0.422	0.433	0.439	0.443	0.442	0.436	0.491	0.469	0.459	0.465	0.521	0.496	0.588	0.535	0.574	0.521	0.518	0.488	1.107	0.809	1.097	0.835	
	720	0.368	0.436	0.442	0.447	0.447	0.467	0.442	0.444	0.477	0.456	0.472	0.490	0.447	0.466	0.501	0.506	0.507	0.514	0.512	0.643	0.616	0.562	0.535	0.547	0.533	1.181	0.865	1.257	0.889	
	Avg	0.338	0.404	0.408	0.423	0.414	0.431	0.404	0.418	0.465	0.455	0.472	0.437	0.413	0.450	0.440	0.460	0.496	0.487	0.570	0.537	0.542	0.510	0.479	0.491	0.547	1.040	0.795	1.029	0.805	
ETTm2	96	0.229	0.320	0.268	0.328	0.275	0.338	0.269	0.332	0.285	0.342	0.289	0.353	0.274	0.336	0.340	0.374	0.358	0.397	0.346	0.388	0.476	0.340	0.391	0.397	0.437	3.755	1.525	2.626	1.317	
	192	0.290	0.368	0.368	0.375	0.340	0.379	0.328	0.377	0.354	0.389	0.383	0.418	0.329	0.379	0.402	0.414	0.429	0.439	0.456	0.452	0.512	0.493	0.430	0.439	0.520	5.602	1.931	11.12	2.979	
	336	0.316	0.392	0.368	0.409	0.329	0.381	0.353	0.369	0.373	0.407	0.448	0.465	0.329	0.380	0.452	0.452	0.496	0.487	0.482	0.486	0.552	0.551	0.485	0.479	0.626	4.721	1.835	9.323	2.769	
	720	0.378	0.452	0.372	0.420	0.381	0.423	0.383	0.425	0.406	0.441	0.605	0.551	0.379	0.422	0.462	0.468	0.463	0.474	0.515	0.511	0.562	0.560	0.500	0.497	0.863	3.647	1.625	3.874	1.697	
	Avg	0.303	0.383	0.334	0.383	0.331	0.380	0.333	0.383	0.412	0.431	0.446	0.456	0.330	0.379	0.414	0.427	0.437	0.449	0.450	0.459	0.526	0.516	0.439	0.452	0.602	4.431	1.729	6.736	2.191	
ETTm1	96	0.261	0.346	0.272	0.334	0.293	0.346	0.285	0.343	0.292	0.346	0.299	0.343	0.290	0.342	0.338	0.375	0.379	0.419	0.505	0.475	0.386	0.375	0.398	0.374	0.400	0.672	0.571	0.638	0.528	
	192	0.288	0.370	0.310	0.358	0.332	0.369	0.324	0.366	0.332	0.372	0.335	0.365	0.332	0.369	0.374	0.387	0.426	0.441	0.503	0.496	0.459	0.444	0.408	0.410	0.400	0.407	0.795	0.669	0.658	0.592
	336	0.343	0.413	0.352	0.384	0.368	0.392	0.353	0.385	0.366	0.394	0.369	0.386	0.366	0.392	0.410	0.411	0.445	0.459	0.621	0.527	0.495	0.464	0.435	0.428	0.438	1.212	0.871	0.898	0.721	
	720	0.371	0.451	0.383	0.441	0.418	0.420	0.408	0.419	0.417	0.421	0.425	0.421	0.416	0.420	0.478	0.450	0.543	0.600	0.671	0.561	0.383	0.516	0.499	0.462	0.527	1.166	0.823	1.102	0.841	
	Avg	0.316	0.390	0.329	0.372	0.353	0.382	0.343	0.378	0.388	0.403	0.357	0.378	0.351	0.380	0.400	0.406	0.448	0.452	0.588	0.517	0.481	0.456	0.439	0.425	0.435	0.961	0.734	0.799	0.671	
ETTm2	96	0.149	0.266	0.161	0.253	-	-	0.165	0.254	0.173	0.262	0.167	0.269	0.165	0.255	0.187	0.267	0.203	0.287	0.255	0.339	0.192	0.274	0.189	0.280	0.209	0.308	0.365	0.453	0.658	0.619
	192	0.204	0.303	0.219	0.293	-	-	0.220	0.292	0.229	0.301	0.224	0.303	0.220	0.292	0.249	0.309	0.269	0.328	0.281	0.340	0.280	0.339	0.253	0.319	0.311	0.382	0.533	0.563	1.078	0.827
	336	0.294	0.376	0.271	0.329	-	-	0.268	0.326	0.286	0.341	0.281	0.342	0.274	0.329	0.321	0.351	0.325	0.366	0.339	0.372	0.334	0.361	0.314	0.357	0.442	0.466	1.363	0.887	1.549	0.972
	720	0.492	0.494	0.352	0.379	-	-	0.350	0.380	0.378	0.401	0.397	0.421	0.362	0.385	0.408	0.403	0.421	0.415	0.433	0.432	0.417	0.413	0.414	0.413	0.675	0.587	3.379	1.338	2.631	1.242
	Avg	0.285	0.360	0.251	0.313	-	-	0.251	0.313	0.284	0.339	0.267	0.333	0.255	0.315	0.291	0.333	0.305	0.349	0.327	0.371	0.306	0.347	0.293	0.342	0.409	0.436	1.410	0.810	1.479	0.915
Weather	96	0.163	0.230	0.147	0.201	0.150	0.202	0.147	0.196	0.162	0.212	0.176	0.237	0.149	0.198	0.172	0.220	0.217	0.296	0.266	0.336	0.173	0.223	0.197	0.281	0.182	0.242	0.300	0.384	0.689	0.596
	192	0.215	0.282	0.189	0.234	0.198	0.246	0.191	0.238	0.204	0.248	0.220	0.282	0.194	0.241	0.219	0.261	0.276	0.336	0.307	0.367	0.245	0.285	0.237	0.312	0.227	0.287	0.598	0.544	0.752	0.638
	336	0.281	0.332	0.262	0.279	0.245	0.286	0.241	0.277	0.254	0.286	0.265	0.319	0.245	0.282	0.280	0.306	0.339	0.380	0.359	0.395	0.321	0.338	0.298	0.338	0.282	0.334	0.578	0.523	0.639	0.596
	720	0.350	0.385	0.304	0.316	0.324	0.342	0.313	0.329	0.326	0.337	0.333	0.362	0.314	0.334	0.365	0.359	0.403	0.428	0.419	0.428	0.414	0.410	0.352	0.288	0.352	0.386	1.059	0.741	1.130	0.792
	Avg	0.252	0.307	0.225	0.257	0.229	0.271	0.223	0.260	0.237	0.270	0.248	0.300	0.225	0.264	0.259	0.287	0.309	0.360	0.338	0.382	0.288	0.314	0.271	0.334	0.261	0.312	0.634	0.548	0.803	0.656
Electricity	96	0.141	0.241	0.131	0.224	0.132	0.223	0.128	0.223	0.139	0.238	0.140	0.237	0.129	0.222	0.168	0.272	0.193	0.308	0.201	0.317	0.169	0.273	0.187	0.304	0.207	0.307	0.274	0.368	0.312	0.402
	192	0.158	0.258	0.152	0.241	0.158	0.241	0.158	0.241	0.155	0.251	0.153	0.249	0.157	0.240	0.184	0.289	0.201	0.315	0.222	0.334	0.182	0.286	0.199	0.315	0.215	0.316	0.296	0.386	0.348	0.433
	336	0.175	0.276	0.160	0.248	0.163	0.260	0.163	0.258	0.169	0.266	0.169	0.267	0.163	0.259	0.198	0.300	0.214	0.329	0.231	0.338	0.200	0.304	0.212	0.329	0.230	0.333	0.300	0.394	0.340	0.433
	720	0.207	0.308	0.192	0.298	0.199	0.291	0.200	0.292	0.206	0.297	0.203	0.301	0.197	0.290	0.220	0.320	0.246	0.355	0.254	0.361	0.222	0.321	0.233	0.345	0.265	0.360	0.373	0.439	0.340	0.420
	Avg	0.170	0.271	0.158	0.252	0.162	0.253	0.159	0.253	0.167	0.263	0.166	0.263	0.161	0.252	0.192	0.295	0.214	0.327	0.227	0.338	0.193	0.296	0.208	0.323	0.229	0.329	0.311	0.397	0.338	0.422
Traffic	96	0.100	0.268	0.162	0.248	0.407	0.282	0.372	0.259	0.388	0.282	0.410	0.282	0.360	0.249	0.593	0.321	0.587	0.366	0.613	0.388	0.612	0.338	0.607	0.392	0.615	0.391	0.719	0.391	0.732	0.423
	192	0.316	0.282	0.374	0.247	0.423	0.287	0.301	0.265	0.407	0.290	0.423	0.287	0.379	0.256	0.604	0.336	0.604	0.373	0.616	0.382	0.613	0.340	0.621	0.399	0.601	0.382	0.696	0.379	0.733	0.420
	336	0.328	0.295	0.385	0.271	0.430	0.296	0.405	0.275	0.412	0.294	0.436	0.296	0.392	0.264	0.629	0.336	0.621	0.383	0.622	0.337	0.618	0.328	0.622	0.396	0.613	0.386	0.777	0.420	0.742	0.420
	720	0.344	0.303	0.430	0.288	0.463	0.315	0.437	0.292	0.450	0.312	0.466	0.315	0.432	0.286	0.640	0.350	0.626	0.382	0.660	0.408	0.653	0.355	0.632	0.396	0.658	0.407	0.864	0.472	0.755	0.423
	Avg	0.322	0.287	0.388	0.264	0.430	0.295	0.401	0.273	0.414	0.294	0.433	0.295	0.390	0.263	0.620	0.336	0.610	0.376	0.628	0.379	0.624	0.340	0.621							

Table 13: Performance comparison with additional baselines (5% Few shot)

Methods	L1SM-Bundle		TIME-LLM		LLM4TS		GPT4TS		DL-linear		PatchTST		TimesNet		FEDformer		Autoformer		Non-Stationary		ETSformer		LightTS		Informor		Reformer		
	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	
ETH1	96	0.301	0.372	0.483	0.464	0.509	0.484	0.543	0.506	0.547	0.503	0.557	0.519	0.892	0.62	5.0393	0.681	0.570	0.952	0.650	1.169	0.832	1.483	0.91	1.225	0.812	1.198	0.795	
	192	0.331	0.397	0.629	0.540	0.717	0.581	0.748	0.580	0.720	0.604	0.711	0.570	0.940	0.665	0.652	0.563	0.725	0.602	0.943	1.221	0.853	1.525	0.93	1.249	0.828	1.273	0.853	
	336	0.351	0.412	0.768	0.626	0.728	0.589	0.754	0.595	0.984	0.727	0.816	0.619	0.945	0.653	0.731	0.594	0.761	0.624	0.935	1.179	0.832	1.347	0.87	1.202	0.811	1.254	0.857	
	720	0.367	0.435	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Avg	0.338	0.404	0.627	0.543	0.651	0.551	0.681	0.560	0.750	0.611	0.694	0.569	0.925	0.647	0.658	0.562	0.722	0.598	0.943	1.189	0.839	1.451	0.903	1.225	0.817	1.241	0.835		
ETH2	96	0.228	0.319	0.336	0.397	0.314	0.375	0.376	0.421	0.442	0.456	0.401	0.421	0.409	0.420	0.390	0.424	0.428	0.468	0.408	0.678	0.619	2.022	1.006	3.837	1.508	3.753	1.518	
	192	0.289	0.367	0.406	0.425	0.365	0.408	0.418	0.441	0.617	0.542	0.452	0.455	0.483	0.464	0.457	0.465	0.496	0.504	0.497	0.845	0.697	3.534	1.348	3.975	1.933	3.516	1.473	
	336	0.316	0.392	0.405	0.432	0.398	0.432	0.408	0.439	1.424	0.849	0.464	0.469	0.499	0.479	0.477	0.483	0.486	0.496	0.507	0.905	0.727	4.063	1.451	3.956	1.520	3.312	1.427	
	720	0.378	0.452	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Avg	0.303	0.382	0.382	0.418	0.359	0.405	0.400	0.433	0.694	0.577	0.439	0.448	0.439	0.448	0.463	0.454	0.441	0.457	0.470	0.809	0.681	3.206	1.268	3.922	1.653	3.527	1.472		
ETM1	96	0.261	0.346	0.316	0.377	0.349	0.379	0.386	0.405	0.332	0.374	0.399	0.414	0.606	0.518	0.628	0.544	0.726	0.578	0.823	1.031	0.747	1.048	0.733	1.130	0.775	1.234	0.798	
	192	0.287	0.369	0.450	0.464	0.374	0.394	0.440	0.438	0.358	0.390	0.441	0.436	0.681	0.539	0.666	0.566	0.750	0.591	0.844	1.087	0.766	1.097	0.756	1.150	0.788	1.287	0.839	
	336	0.342	0.413	0.450	0.424	0.411	0.417	0.485	0.459	0.402	0.416	0.499	0.467	0.807	0.603	0.807	0.628	0.851	0.659	0.870	1.138	0.787	1.147	0.775	1.198	0.809	1.288	0.842	
	720	0.370	0.431	0.483	0.471	0.516	0.479	0.577	0.499	0.511	0.489	0.587	0.587	0.796	0.593	0.822	0.633	0.857	0.655	0.893	1.245	0.831	1.200	0.799	1.175	0.794	1.247	0.828	
Avg	0.315	0.389	0.425	0.434	0.412	0.417	0.472	0.450	0.400	0.417	0.526	0.476	0.717	0.561	0.730	0.592	0.796	0.620	0.857	1.125	0.782	1.123	0.765	1.163	0.791	1.264	0.826		
ETM2	96	0.149	0.205	0.174	0.261	0.192	0.273	0.199	0.280	0.236	0.242	0.206	0.288	0.220	0.299	0.229	0.320	0.227	0.299	0.215	0.404	0.485	1.108	0.772	3.599	1.478	3.883	1.545	
	192	0.203	0.303	0.215	0.287	0.249	0.309	0.256	0.316	0.306	0.373	0.264	0.324	0.311	0.361	0.394	0.361	0.291	0.357	0.298	0.349	0.479	0.521	1.317	0.850	3.578	1.475	3.553	1.484
	336	0.281	0.331	0.273	0.330	0.302	0.342	0.318	0.353	0.380	0.423	0.334	0.367	0.338	0.366	0.378	0.427	0.478	0.517	0.380	0.552	0.555	1.415	0.879	3.561	1.473	3.446	1.460	
	720	0.491	0.493	0.433	0.412	0.402	0.405	0.460	0.436	0.674	0.583	0.454	0.432	0.509	0.465	0.523	0.510	0.553	0.538	0.475	0.445	0.701	0.627	1.822	0.984	3.896	1.533	3.445	1.460
Avg	0.284	0.359	0.274	0.323	0.286	0.332	0.308	0.346	0.399	0.426	0.314	0.352	0.344	0.372	0.381	0.404	0.388	0.433	0.341	0.372	0.534	0.547	1.415	0.871	3.658	1.489	3.581	1.487	
Weather	96	0.163	0.230	0.172	0.263	0.173	0.227	0.175	0.230	0.184	0.242	0.171	0.224	0.207	0.253	0.229	0.309	0.227	0.299	0.218	0.295	0.230	0.285	0.497	0.497	0.406	0.435		
	192	0.214	0.281	0.224	0.271	0.218	0.265	0.227	0.276	0.228	0.283	0.230	0.277	0.272	0.307	0.265	0.317	0.278	0.333	0.290	0.307	0.294	0.331	0.274	0.323	0.620	0.545	0.446	0.450
	336	0.175	0.276	0.178	0.321	0.276	0.310	0.286	0.322	0.279	0.322	0.294	0.326	0.313	0.328	0.353	0.392	0.351	0.393	0.348	0.359	0.398	0.318	0.355	0.649	0.547	0.465	0.459	
	720	0.349	0.385	0.366	0.381	0.355	0.366	0.366	0.379	0.364	0.388	0.384	0.387	0.400	0.385	0.391	0.394	0.387	0.389	0.452	0.407	0.461	0.461	0.418	0.570	0.522	0.471	0.468	
Avg	0.252	0.307	0.260	0.309	0.251	0.292	0.263	0.301	0.263	0.308	0.269	0.303	0.298	0.318	0.309	0.353	0.310	0.353	0.327	0.328	0.333	0.371	0.305	0.345	0.584	0.527	0.447	0.453	
Electricity	96	0.140	0.241	0.147	0.242	0.139	0.235	0.143	0.241	0.150	0.251	0.145	0.244	0.315	0.389	0.235	0.322	0.297	0.367	0.484	0.697	0.638	0.639	0.609	1.265	0.919	1.414	0.855	
	192	0.158	0.257	0.158	0.241	0.155	0.249	0.159	0.255	0.163	0.263	0.163	0.260	0.318	0.396	0.247	0.341	0.308	0.375	0.501	0.531	0.718	0.648	0.772	0.678	1.298	0.939	1.240	0.919
	336	0.175	0.276	0.178	0.277	0.174	0.269	0.179	0.274	0.175	0.278	0.183	0.281	0.340	0.413	0.267	0.356	0.354	0.411	0.574	0.578	0.758	0.667	0.901	0.745	1.302	0.942	1.253	0.921
	720	0.206	0.307	0.224	0.312	0.222	0.310	0.233	0.323	0.219	0.311	0.233	0.323	0.635	0.615	0.318	0.394	0.426	0.466	0.952	0.786	1.028	0.788	1.200	0.871	1.259	0.919	1.249	0.921
Avg	0.170	0.270	0.179	0.268	0.173	0.266	0.178	0.273	0.176	0.275	0.181	0.277	0.402	0.453	0.266	0.353	0.346	0.404	0.627	0.603	0.800	0.685	0.878	0.725	1.281	0.929	1.289	0.904	
Traffic	96	0.300	0.268	0.414	0.291	0.401	0.285	0.419	0.298	0.427	0.304	0.404	0.286	0.854	0.492	0.670	0.421	0.795	0.481	1.468	0.821	1.643	0.855	1.157	0.636	1.557	0.821	1.586	0.841
	192	0.315	0.282	0.419	0.291	0.418	0.293	0.434	0.305	0.447	0.315	0.412	0.294	0.894	0.517	0.653	0.405	0.837	0.503	1.509	0.838	1.856	0.928	1.688	0.848	1.596	0.834	1.602	0.844
	336	0.328	0.294	0.437	0.314	0.436	0.308	0.449	0.313	0.478	0.333	0.439	0.310	0.853	0.471	0.707	0.445	0.867	0.523	1.602	0.860	2.080	0.999	1.826	0.903	1.621	0.841	1.668	0.868
	720	0.343	0.303	0.423	0.298	0.418	0.295	0.454	0.305	0.450	0.317	0.418	0.296	0.867	0.493	0.676	0.423	0.833	0.502	1.526	0.839	1.859	0.927	1.557	0.795	1.591	0.832	1.618	0.851
Avg	0.322	0.287	0.423	0.298	0.418	0.295	0.454	0.305	0.450	0.317	0.418	0.296	0.867	0.493	0.676	0.423	0.833	0.502	1.526	0.839	1.859	0.927	1.557	0.795	1.591	0.832	1.618	0.851	
1st Count	21	0	8	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Table 14: Results of zero-shot transfer learning. A time-series model is trained on a source dataset and transferred to the target dataset without adaptation.

Methods		LTSM-Bundle		TIME-LLM		LLMTime		GPT4TS		DLinear		PatchTST		TimesNet		Autoformer	
Metric		MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE
ETTh1 → ETTh2	96	0.229	0.326	0.279	0.337	0.510	0.576	0.335	0.374	0.347	0.400	0.304	0.350	0.358	0.387	0.469	0.486
	192	0.310	0.395	0.351	0.374	0.523	0.586	0.412	0.417	0.417	0.460	0.386	0.400	0.427	0.429	0.634	0.567
	336	0.336	0.414	0.388	0.415	0.640	0.637	0.441	0.444	0.515	0.505	0.414	0.428	0.449	0.451	0.655	0.588
	720	0.401	0.474	0.391	0.420	2.296	1.034	0.438	0.452	0.665	0.589	0.419	0.443	0.448	0.458	0.570	0.549
	Avg	0.319	0.402	0.353	0.387	0.992	0.708	0.406	0.422	0.493	0.488	0.380	0.405	0.421	0.431	0.582	0.548
ETTh1 → ETTm2	96	0.197	0.318	0.189	0.293	0.646	0.563	0.236	0.315	0.255	0.357	0.215	0.304	0.239	0.313	0.352	0.432
	192	0.314	0.420	0.237	0.312	0.934	0.654	0.287	0.342	0.338	0.413	0.275	0.339	0.291	0.342	0.413	0.460
	336	0.313	0.405	0.291	0.365	1.157	0.728	0.341	0.374	0.425	0.465	0.334	0.373	0.342	0.371	0.465	0.489
	720	0.425	0.483	0.372	0.390	4.730	1.531	0.435	0.422	0.640	0.573	0.431	0.424	0.434	0.419	0.599	0.551
	Avg	0.312	0.406	0.273	0.340	1.867	0.869	0.325	0.363	0.415	0.452	0.314	0.360	0.327	0.361	0.457	0.483
ETTh2 → ETTh1	96	0.390	0.439	0.450	0.452	1.130	0.777	0.732	0.577	0.689	0.555	0.485	0.465	0.848	0.601	0.693	0.569
	192	0.417	0.460	0.465	0.461	1.242	0.820	0.758	0.559	0.707	0.568	0.565	0.509	0.860	0.610	0.760	0.601
	336	0.462	0.501	0.501	0.482	1.382	0.864	0.759	0.578	0.710	0.577	0.581	0.515	0.867	0.626	0.781	0.619
	720	0.568	0.588	0.501	0.502	4.145	1.461	0.781	0.597	0.704	0.596	0.628	0.561	0.887	0.648	0.796	0.644
	Avg	0.459	0.497	0.479	0.474	1.961	0.981	0.757	0.578	0.703	0.574	0.565	0.513	0.865	0.621	0.757	0.608
ETTh2 → ETTm2	96	0.200	0.316	0.174	0.276	0.646	0.563	0.253	0.329	0.240	0.336	0.226	0.309	0.248	0.324	0.263	0.352
	192	0.250	0.359	0.233	0.315	0.934	0.654	0.293	0.346	0.295	0.369	0.289	0.345	0.296	0.352	0.326	0.389
	336	0.327	0.416	0.291	0.337	1.157	0.728	0.347	0.376	0.345	0.397	0.348	0.379	0.353	0.383	0.387	0.426
	720	0.573	0.563	0.392	0.417	4.730	1.531	0.446	0.429	0.432	0.442	0.439	0.427	0.471	0.446	0.487	0.478
	Avg	0.337	0.413	0.272	0.341	1.867	0.869	0.335	0.370	0.328	0.386	0.325	0.365	0.342	0.376	0.366	0.411
ETTh1 → ETTm2	96	0.246	0.342	0.321	0.369	0.510	0.576	0.353	0.392	0.365	0.415	0.354	0.385	0.377	0.407	0.435	0.470
	192	0.290	0.374	0.389	0.410	0.523	0.586	0.443	0.437	0.454	0.462	0.447	0.434	0.471	0.453	0.495	0.489
	336	0.326	0.406	0.408	0.433	0.640	0.637	0.469	0.461	0.496	0.464	0.481	0.463	0.472	0.484	0.470	0.472
	720	0.363	0.440	0.406	0.436	2.296	1.034	0.466	0.468	0.541	0.529	0.474	0.471	0.495	0.482	0.480	0.485
	Avg	0.306	0.391	0.381	0.412	0.992	0.708	0.433	0.439	0.464	0.475	0.439	0.438	0.457	0.454	0.470	0.479
ETTh1 → ETTm2	96	0.144	0.257	0.169	0.257	0.646	0.563	0.217	0.294	0.221	0.314	0.195	0.271	0.222	0.295	0.385	0.457
	192	0.193	0.302	0.227	0.318	0.934	0.654	0.277	0.327	0.286	0.359	0.258	0.311	0.288	0.337	0.433	0.469
	336	0.240	0.342	0.290	0.338	1.157	0.728	0.331	0.360	0.357	0.406	0.317	0.348	0.341	0.367	0.476	0.477
	720	0.292	0.379	0.375	0.367	4.730	1.531	0.429	0.413	0.476	0.476	0.416	0.404	0.436	0.418	0.582	0.535
	Avg	0.217	0.320	0.268	0.320	1.867	0.869	0.313	0.348	0.335	0.389	0.296	0.334	0.322	0.354	0.469	0.484
ETTh2 → ETTh2	96	0.257	0.346	0.298	0.356	0.510	0.576	0.360	0.401	0.333	0.391	0.327	0.367	0.360	0.401	0.353	0.393
	192	0.309	0.382	0.359	0.397	0.523	0.586	0.434	0.437	0.441	0.456	0.411	0.418	0.434	0.437	0.432	0.437
	336	0.341	0.413	0.367	0.412	0.640	0.637	0.460	0.459	0.505	0.503	0.439	0.447	0.460	0.459	0.452	0.459
	720	0.350	0.432	0.393	0.434	2.296	1.034	0.485	0.477	0.543	0.534	0.459	0.470	0.485	0.477	0.453	0.467
	Avg	0.314	0.393	0.354	0.400	0.992	0.708	0.435	0.443	0.455	0.471	0.409	0.425	0.435	0.443	0.423	0.439
ETTh2 → ETTm1	96	0.364	0.410	0.359	0.397	1.179	0.781	0.747	0.558	0.570	0.490	0.491	0.437	0.747	0.558	0.735	0.576
	192	0.405	0.432	0.390	0.420	1.327	0.846	0.781	0.560	0.590	0.506	0.530	0.470	0.781	0.560	0.753	0.586
	336	0.413	0.433	0.421	0.445	1.478	0.902	0.778	0.578	0.706	0.567	0.565	0.497	0.778	0.578	0.750	0.593
	720	0.432	0.446	0.487	0.488	3.749	1.408	0.769	0.573	0.731	0.584	0.686	0.565	0.769	0.573	0.782	0.609
	Avg	0.403	0.430	0.414	0.438	1.933	0.984	0.769	0.567	0.649	0.537	0.568	0.492	0.769	0.667	0.755	0.591

Table 15: Results of different backbones, training paradigms and prompting strategies.

Datasets		ETTh1		ETTh2		ETTm1		ETTm2		Traffic		Weather		Exchange		ECL	
Metric		MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE
From scratch + GPT-Medium + TS prompt	96	0.354	0.415	0.259	0.350	0.551	0.507	0.215	0.319	0.393	0.377	0.222	0.292	0.108	0.246	0.250	0.342
	192	0.364	0.421	0.537	0.505	0.231	0.331	0.235	0.335	0.373	0.356	0.246	0.309	0.143	0.288	0.231	0.331
	336	0.359	0.420	0.321	0.402	0.423	0.454	0.267	0.360	0.357	0.329	0.283	0.335	0.207	0.344	0.217	0.323
	720	0.357	0.430	0.372	0.449	0.398	0.444	0.360	0.434	0.347	0.311	0.342	0.388	0.358	0.461	0.211	0.317
	Avg	0.358	0.421	0.372	0.427	0.401	0.434	0.269	0.362	0.367	0.343	0.273	0.331	0.204	0.335	0.227	0.328
From scratch + GPT-Medium + Text prompt	96	0.453	0.483	0.350	0.422	0.757	0.613	0.338	0.420	0.659	0.552	0.343	0.398	0.223	0.353	0.605	0.507
	192	0.422	0.470	0.348	0.423	0.708	0.601	0.326	0.415	0.509	0.475	0.323	0.388	0.212	0.352	0.352	0.403
	336	0.481	0.502	0.449	0.487	0.938	0.701	0.483	0.506	0.562	0.496	0.457	0.474	0.430	0.502	0.729	0.456
	720	0.437	0.482	0.396	0.461	0.634	0.563	0.408	0.459	0.536	0.463	0.415	0.434	0.457	0.517	0.460	0.438
	Avg	0.448	0.484	0.385	0.448	0.759	0.619	0.389	0.450	0.566	0.496	0.384	0.423	0.330	0.431	0.537	0.451
From scratch + GPT-Small + TS prompt	96	0.323	0.392	0.243	0.341	0.394	0.437	0.185	0.301	0.334	0.321	0.200	0.279	0.098	0.236	0.197	0.291
	192	0.332	0.399	0.275	0.362	0.369	0.426	0.204	0.313	0.333	0.306	0.219	0.286	0.127	0.268	0.195	0.290
	336	0.345	0.405	0.317	0.394	0.352	0.415	0.263	0.364	0.324	0.288	0.265	0.323	0.179	0.321	0.181	0.282
	720	0.362	0.432	0.364	0.447	0.389	0.439	0.324	0.402	0.341	0.300	0.339	0.377	0.333	0.457	0.207	0.309
	Avg	0.340	0.407	0.300	0.386	0.376	0.429	0.244	0.345	0.333	0.304	0.256	0.316	0.184	0.320	0.195	0.293
Fully tune + GPT-Small + TS prompt	96	0.308	0.379	0.227	0.322	0.291	0.369	0.146	0.255	0.303	0.274	0.168	0.232	0.063	0.181	0.145	0.246
	192	0.340	0.400	0.285	0.364	0.328	0.396	0.197	0.302	0.315	0.281	0.213	0.275	0.119	0.253	0.160	0.261
	336	0.352	0.409	0.309	0.391	0.344	0.410	0.240	0.339	0.322	0.284	0.263	0.316	0.188	0.325	0.174	0.276
	720	0.368	0.433	0.371	0.451	0.397	0.450	0.332	0.410	0.342	0.301	0.336	0.372	0.360	0.462	0.205	0.305
	Avg	0.342	0.405	0.298	0.382	0.340	0.406	0.228	0.327	0.320	0.285	0.245	0.299	0.183	0.305	0.171	0.272
Fully tune + GPT-Small + Text prompt	96	0.305	0.377	0.226	0.320	0.276	0.360	0.143	0.253	0.305	0.279	0.162	0.227	0.060	0.178	0.144	0.246
	192	0.335	0.397	0.278	0.359	0.314	0.389	0.191	0.295	0.315	0.283	0.212	0.275	0.118	0.253	0.161	0.261
	336	0.348	0.406	0.310	0.392	0.344	0.411	0.239	0.339	0.323	0.285	0.266	0.318	0.198	0.333	0.175	0.277
	720	0.371	0.454	0.364	0.446	0.404	0.452	0.352	0.405	0.344	0.305	0.332	0.366	0.379	0.470	0.208	0.309
	Avg	0.340	0.409	0.294	0.379	0.334	0.403	0.231	0.323	0.322	0.288	0.243	0.296	0.189	0.308	0.172	0.273
Fully tune + GPT-Medium + Text prompt	96	0.301	0.372	0.229	0.320	0.261	0.346	0.149	0.266	0.300	0.268	0.163	0.230	0.058	0.173	0.141	0.241
	192	0.332	0.397	0.290	0.368	0.288	0.370	0.204	0.303	0.316	0.282	0.215	0.282	0.133	0.277	0.158	0.258
	336	0.351	0.412	0.316	0.392	0.343	0.413	0.294	0.376	0.328	0.295	0.281	0.332	0.224	0.369	0.175	0.276
	720	0.368	0.436	0.378	0.452	0.371	0.431	0.482	0.494	0.344	0.303	0.350	0.385	0.321	0.442	0.207	0.308
	Avg	0.338	0.404	0.303	0.383	0.316	0.390	0.285	0.360	0.322	0.287	0.252	0.307	0.184	0.315	0.170	0.271
Fully tune + GPT-Medium + Text prompt	96	0.320	0.387	0.242	0.330	0.490	0.477	0.191	0.290	0.346	0.326	0.212	0.270	0.134	0.269	0.185	0.300
	192	0.342	0.403	0.270	0.352	0.376	0.423	0.196	0.287	0.355	0.327	0.236	0.286	0.173	0.305	0.204	0.316
	336	0.348	0.409	0.284	0.367	0.530	0.501	0.253	0.335	0.379	0.345	0.298	0.331	0.311	0.421	0.224	0.334
	720	0.368	0.433	0.424	0.479	0.375	0.429	0.361	0.423	OOM	OOM	OOM	OOM	OOM	OOM	OOM	OOM
	Avg	0.344	0.408	0.305	0.382	0.443	0.458	0.250	0.334	0.360	0.333	0.249	0.295	0.238	0.363	0.205	0.314
Fully tune + Phi-2 + TS prompt	96	0.296	0.371	0.234	0.328	0.309	0.381	0.150	0.263	0.299	0.278	0.175	0.248	0.073	0.204	0.145	0.249
	192	0.318	0.386	0.273	0.355	0.301	0.381	0.190	0.293	0.311	0.278	0.212	0.279	0.129	0.271	0.164	0.266
	336	0.337	0.402	0.311	0.389	0.346	0.419	0.283	0.381	0.323	0.290	0.282	0.345	0.233	0.374	0.179	0.281
	720	0.372	0.445	0.317	0.407	0.404	0.461	0.439	0.484	0.347	0.305	0.354	0.382	0.404	0.501	0.218	0.319
	Avg	0.331	0.401	0.284	0.370	0.340	0.411	0.265	0.355	0.320	0.288	0.256	0.313	0.210	0.337	0.176	0.279
Fully tune + Pi-2 + Text prompt	96	0.296	0.371	0.234	0.328	0.309	0.381	0.150	0.263	0.299	0.278	0.175	0.248	0.073	0.204	0.145	0.249
	192	0.319	0.385	0.269	0.355	0.309	0.383	0.188	0.295	0.307	0.275	0.212	0.283	0.134	0.281	0.161	0.262
	336	0.337	0.402	0.311	0.389	0.346	0.419	0.283	0.381	0.323	0.290	0.282	0.345	0.233	0.374	0.179	0.281
	720	0.356	0.430	0.359	0.442	0.392	0.454	0.383	0.451	0.345	0.302	0.345	0.377	0.561	0.606	0.212	0.315
	Avg	0.327	0.397	0.293	0.378	0.339	0.409	0.251	0.347	0.318	0.286	0.254	0.313	0.250	0.366	0.174	0.277
LoRA-dim-16 + GPT-Medium + TS prompt	96	0.362	0.419	0.273	0.363	0.589	0.533	0.225	0.332	0.428	0.396	0.224	0.293	0.129	0.274	0.227	0.333
	192	0.394	0.444	0.312	0.397	0.582	0.531	0.259	0.361	0.502	0.437	0.339	0.280	0.200	0.345	0.257	0.358
	336	0.403	0.457	0.321	0.413	0.560	0.532	0.293	0.392	0.547	0.457	0.320	0.369	0.266	0.409	0.291	0.386
	720	0.444	0.499	0.366	0.451	0.576	0.547	0.355	0.436	0.660	0.519	0.369	0.406	0.457	0.532	0.406	0.479
	Avg	0.401	0.455	0.318	0.406	0.577	0.536	0.283	0.380	0.534	0.452	0.313	0.337	0.263	0.390	0.295	0.389
LoRA-dim-32 + GPT-Medium + TS prompt	96	0.365	0.422	0.270	0.361	0.596	0.593	0.222	0.329	0.438	0.408	0.223	0.294	0.117	0.259	0.233	0.341
	192	0.401	0.449	0.314	0.398	0.594	0.537	0.261	0.363	0.503	0.443	0.281	0.340	0.204	0.346	0.259	0.361
	336	0.403	0.457	0.321	0.413	0.563	0.533	0.294	0.393	0.547	0.459	0.321	0.370	0.267	0.410	0.294	0.390
	720	0.444	0.498	0.367	0.452	0.572	0.545	0.357	0.437	0.647	0.513	0.369	0.406	0.454	0.530	0.399	0.473
	Avg	0.403	0.457	0.318	0.406	0.581	0.552	0.283	0.380	0.534	0.456	0.298	0.352	0.260	0.386	0.296	0.391
LoRA-dim-16 + GPT-Medium + Word prompt	96	0.377	0.431	0.284	0.376	0.603	0.538	0.239	0.348	0.462	0.423	0.244	0.313	0.154	0.302	0.242	0.348
	192	0.394	0.445	0.313	0.400	0.578	0.530	0.263	0.367	0.511	0.441	0.284	0.344	0.203	0.351	0.262	0.363
	336	0.412	0.465	0.325	0.417	0.571	0.538	0.299	0.397	0.567	0.471	0.323	0.373	0.267	0.413	0.308	0.402
	720	0.448	0.501	0.368	0.452	0.582	0.550	0.357	0.437	0.672	0.526	0.370	0.407	0.452	0.529	0.416	0.486
	Avg	0.408	0.461	0.322	0.411	0.583	0.539	0.289	0.387	0.553	0.465	0.305	0.359	0.269	0.399	0.307	0.400
LoRA-dim-32 + GPT-Medium + Word prompt	96	0.365	0.423	0.276	0.367	0.590	0.533	0.230	0.337	0.449	0.410	0.234	0.305	0.133	0.277	0.237	0.343
	192	0.400	0.449	0.311	0.397	0.572	0.527										

Table 16: Results of different backbones.

Datasets		ETTh1		ETTh2		ETTm1		ETTm2		Traffic		Weather		Exchange		ECL	
Metric		MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE
Fully tune + GPT-Large + TS prompt	96	0.299	0.373	0.224	0.316	0.283	0.355	0.148	0.261	0.301	0.273	0.165	0.233	0.066	0.187	0.141	0.243
	192	0.326	0.391	0.291	0.371	0.303	0.376	0.198	0.306	0.323	0.301	0.211	0.279	0.124	0.257	0.168	0.274
	336	0.361	0.420	0.324	0.400	0.371	0.438	0.301	0.388	0.329	0.294	0.291	0.343	0.293	0.420	0.183	0.282
	Avg	0.342	0.407	0.315	0.390	0.339	0.405	0.264	0.353	0.324	0.293	0.249	0.305	0.214	0.339	0.176	0.277
Fully tune + GPT-Medium + TS prompt	96	0.301	0.372	0.229	0.320	0.261	0.346	0.149	0.266	0.300	0.268	0.163	0.230	0.058	0.173	0.141	0.241
	192	0.332	0.397	0.290	0.368	0.288	0.370	0.204	0.303	0.316	0.282	0.215	0.282	0.133	0.277	0.158	0.258
	336	0.351	0.412	0.316	0.392	0.343	0.413	0.294	0.376	0.328	0.295	0.281	0.332	0.224	0.369	0.175	0.276
	Avg	0.338	0.404	0.303	0.383	0.316	0.390	0.285	0.360	0.322	0.287	0.252	0.307	0.184	0.315	0.170	0.271
Fully tune + GPT-Small + TS prompt	96	0.308	0.379	0.227	0.322	0.291	0.369	0.146	0.255	0.303	0.274	0.168	0.232	0.063	0.181	0.145	0.246
	192	0.340	0.400	0.285	0.364	0.328	0.396	0.197	0.302	0.315	0.281	0.213	0.275	0.119	0.253	0.160	0.261
	336	0.352	0.409	0.309	0.391	0.344	0.410	0.240	0.339	0.322	0.284	0.263	0.316	0.188	0.325	0.174	0.276
	Avg	0.342	0.405	0.298	0.382	0.340	0.406	0.228	0.327	0.320	0.285	0.245	0.299	0.183	0.305	0.171	0.272
Fully tune + Phi-2 + TS prompt	96	0.296	0.371	0.234	0.328	0.309	0.381	0.150	0.263	0.299	0.278	0.175	0.248	0.073	0.204	0.145	0.249
	192	0.318	0.386	0.273	0.355	0.301	0.381	0.190	0.293	0.311	0.278	0.212	0.279	0.129	0.271	0.164	0.266
	336	0.337	0.402	0.311	0.389	0.346	0.419	0.283	0.381	0.323	0.290	0.282	0.345	0.233	0.374	0.179	0.281
	Avg	0.331	0.401	0.284	0.370	0.340	0.411	0.265	0.355	0.320	0.288	0.256	0.313	0.210	0.337	0.176	0.279

Table 17: Results of different down-sampling ratios. Experiments with GPT-Medium as backbones, TS prompt, and fully tuning paradigm.

Datasets		ETTh1		ETTh2		ETTm1		ETTm2		Traffic		Weather		Exchange		ECL	
Metric		MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE	MSE	MAE
Downsample Ratio = 40	96	0.311	0.383	0.236	0.327	0.282	0.363	0.150	0.261	0.324	0.300	0.176	0.242	0.067	0.186	0.151	0.254
	192	0.324	0.393	0.277	0.366	0.334	0.406	0.195	0.304	0.340	0.310	0.222	0.287	0.141	0.295	0.180	0.288
	336	0.356	0.414	0.335	0.410	0.371	0.422	0.255	0.349	0.344	0.313	0.276	0.326	0.222	0.350	0.184	0.288
	Avg	0.343	0.408	0.307	0.390	0.353	0.412	0.234	0.331	0.344	0.314	0.253	0.306	0.210	0.330	0.183	0.287
Downsample Ratio = 20	96	0.301	0.372	0.229	0.320	0.261	0.346	0.149	0.266	0.300	0.268	0.163	0.230	0.058	0.173	0.141	0.241
	192	0.332	0.397	0.290	0.368	0.288	0.370	0.204	0.303	0.316	0.282	0.215	0.282	0.133	0.277	0.158	0.258
	336	0.351	0.412	0.316	0.392	0.343	0.413	0.294	0.376	0.328	0.295	0.281	0.332	0.224	0.369	0.175	0.276
	Avg	0.338	0.404	0.303	0.383	0.316	0.390	0.285	0.360	0.322	0.287	0.252	0.307	0.184	0.315	0.170	0.271
Downsample Ratio = 10	96	0.301	0.373	0.264	0.344	0.320	0.370	0.177	0.291	0.288	0.261	0.181	0.256	0.116	0.247	0.138	0.237
	192	0.325	0.391	0.307	0.381	0.332	0.400	0.200	0.301	0.304	0.270	0.232	0.300	0.228	0.354	0.155	0.256
	336	0.349	0.410	0.307	0.382	0.323	0.397	0.228	0.328	0.317	0.277	0.265	0.312	0.235	0.369	0.172	0.273
	Avg	0.364	0.433	0.406	0.461	0.388	0.431	0.336	0.407	0.337	0.290	0.329	0.363	0.350	0.470	0.208	0.306
Avg	0.335	0.402	0.321	0.392	0.341	0.399	0.235	0.332	0.312	0.274	0.252	0.308	0.232	0.360	0.168	0.268	