
A UNIFIED APPROACH TO EXTRACT INTERPRETABLE RULES FROM TREE ENSEMBLES VIA INTEGER PROGRAMMING

✉ **Lorenzo Bonasera**

Department of Mathematics “Felice Casorati”
University of Pavia
Pavia 27100

lorenzo.bonasera01@universitadipavia.it

✉ **Emilio Carrizosa**

Institute of Mathematics of the University of Seville
University of Seville
Seville 41012

ecarrizosa@us.es

ABSTRACT

Tree ensemble methods represent a popular machine learning model, known for their effectiveness in supervised classification and regression tasks. Their performance derives from aggregating predictions of multiple decision trees, which are renowned for their interpretability properties. However, tree ensemble methods do not reliably exhibit interpretable output. Our work aims to extract an optimized list of rules from a trained tree ensemble, providing the user with a condensed, interpretable model that retains most of the predictive power of the full model. Our approach consists of solving a clean and neat set partitioning problem formulated through Integer Programming. The proposed method works with either tabular or time series data, for both classification and regression tasks, and does not require parameter tuning under the most common setting. Through rigorous computational experiments, we offer statistically significant evidence that our method is competitive with other rule extraction methods and effectively handles time series.

Keywords Machine learning · Integer programming · Interpretability · Rule extraction · Ensemble learning

1 Introduction

The need for interpretable and explainable machine learning models has arisen across various applications, leading to a consistently expanding area of research in both the machine learning and operational research communities over the last decade. Explainable Artificial Intelligence (XAI) has emerged as a rapidly growing research field [33], primarily focusing on post-hoc explanation methods to facilitate the understanding of outputs provided by black-box models such as deep neural networks. Although XAI methods can be highly effective in capturing and representing the internal decision-making processes of black-box models, their application in high-risk domains is controversial [51]. Therefore, researchers have gradually shifted their attention to developing inherently interpretable methods.

Commonly regarded as one of the most interpretable machine learning models, decision trees have been for decades the tool of choice for providing highly intuitive and understandable predictions, thanks to their affinity with human reasoning [54]. However, their interpretability is counterbalanced by poor out-of-sample performance, mainly due to overfitting and highly variable predictions. Aggregating trees into ensembles solved this problem, giving rise to models such as random forest [14] or gradient boosted trees [20, 29] that significantly improved performance and robustness for both classification and regression tasks. However, combining a large number of decision trees naturally hinders their original interpretability. In practice, users of tree ensembles can only rely on computing feature importance to attempt to explain the predictions obtained. From a statistical inference viewpoint, feature importance consists of an estimate for the quantity that would have been obtained by making the same prediction with unknown true response function [35]. As extensively discussed in previous research [35, 55, 67], model diagnostics based on feature importance can be highly misleading and biased towards correlated features. For these reasons, our aim is to provide a method that condenses any trained tree ensemble into an interpretable and sparse model while retaining most of its predictive power.

Arguably, rule sets or rule lists represent the only competitor of decision trees in terms of interpretability [65], as they both consist of logical models in the form of if-then statements that are easy to understand [51]. Lists of rules

can be built from scratch or by exploiting association rules previously mined from given data [1]. A very interesting connection between decision trees and rule lists involves extracting rules from previously trained tree ensembles. The search space for selecting rules is constrained to be the set of branch nodes of the tree ensemble, which represent the logical conditions that split the training data and make predictions. This approach falls among the *post-hoc* methods to interpret random forests [3, 27], and it collocates in between the previously discussed areas of research about XAI and interpretable machine learning. Existing methods about extracting rules from tree ensembles involve solving various optimization problems to select the best performing ones, along with their corresponding optimal weight [7, 30, 42, 46]. In most cases, their extension to both classification and regression tasks is not trivial, and they cannot handle more complex data such as time series, images or text. This can be a significant limitation, due to the rising academic and industrial interest in developing machine learning models for complex data.

Recently, Mathematical Programming has played a fundamental role in developing interpretable methods, thanks to its flexibility and ability to induce more sparse and accurate models [17]. A new field belonging to operational research started focusing on formulating Mixed-Integer Linear Programming models to learn optimal classification and regression trees [9, 10, 16], as well as optimal rule lists [39, 61, 62]. The ability to fully control how models learn while minimizing their global prediction error has made this research field growing rapidly, particularly thanks to the recent hardware and algorithmic improvements on solving Integer Programming (IP) problems [9, 39]. However, due to their complexity, most interpretable methods based on Mathematical Programming face scalability issues, both in terms of the number of records and the number of features contained in datasets. In fact, dealing with large-scale data, such as time series, is becoming an increasingly common requirement for machine learning methods related to data-driven decision making [59]. For this reason, developing computationally efficient interpretable methods is a challenging problem. While tree ensemble and rule lists heuristic methods do not suffer from scalability issues, they lack the expressive power and flexibility that Mathematical Programming can offer.

In light of all the above, we present as our contribution a novel method for extracting rule lists from any tree ensemble method by the means of Mathematical Programming. The proposed method relies on solving a well-known and concise IP formulation of a set partitioning problem [5]. The solution of such problem yields the optimal subset of rules in terms of interpretability and predictive power. The use of Mathematical Programming makes the proposed method highly flexible and easily adaptable to various applications. It can be applied to both regression and classification tasks, handling tabular or time series data. Remarkably, the proposed method is agnostic to data structure, and its clean formulation allows users to easily incorporate multiple custom loss functions and robustness measures. Furthermore, under the most common benchmark settings in the literature, the proposed method does not require any parameter tuning. Through rigorous computational experiments, we offer statistically significant evidence that our method is a valid competitor to the state-of-the-art methods for extracting rules from tree ensembles.

The remainder of this paper is organized as follows. In Section 2 we present related works on rule extraction methods from tree ensembles, discussing their main advantages and drawbacks. Moreover, we discuss existing ensemble methods for time series analysis. In Section 3, we provide the mathematical notation and preliminary concept for introducing our problem. In Section 4, we introduce our framework and present the optimization problem. In Section 5, we report our extensive computational results. Finally, Section 6 concludes the paper with a perspective on future works and further research directions.

2 Related work

Earlier works about learning rule sets from tabular data span multiple fields [39]. The majority of these works focus on classification tasks and do not involve extracting rules from tree ensembles [7]. Various approaches have been explored, including heuristic methods [19, 21] and exact methods based on Integer Programming [61] and Column Generation to reduce the search space [39, 62]. For a comprehensive analysis of rule learning for tabular data, we refer to Fürnkranz et al. [31]. Extracting rules from a pre-trained tree ensemble avoids exploring impractically large search spaces and is considered a state-of-the-art technique for interpreting random forests [3]. Friedman and Popescu [30] proposed a method for extracting lists of rules from both classification and regression tree ensembles, called RuleFit. Their method extracts a subset of rules by minimizing a LASSO optimization problem, selecting the best regularized weight for each rule. However, despite its flexibility, RuleFit tends to perform poorly when extracting rules from deeper trees with highly correlated features [42]. Meinshausen [46] was the first to consider the tradeoff between predictive performance and interpretability with NodeHarvest. The author proposed to extract rules from a tree ensemble by solving a set partitioning problem of non-negative weights through Quadratic Programming. NodeHarvest demonstrates good predictive performance and computational efficiency, offering users an inherently interpretable and sparse model. However, its extension to classification problems is limited to handling no more than two classes. More recently, Bénard et al. proposed a rule extraction method for both classification [7] and regression tasks [6] called SIRUS. Both variants of SIRUS involve a preprocessing step where random forests are restricted to split nodes based on the q -empirical

quantiles for each feature, with q being a user-defined parameter. Then, the extracted rules are filtered based on an user-defined threshold frequency p_0 . These filtered rules are then aggregated either by taking their average prediction or by solving a ridge regression problem, depending on the task at hand. Both variants demonstrate good predictive performance and robustness to data perturbation. Despite providing interpretable output, the aforementioned methods are incapable of combining extracted rules by imposing an order on features, resembling a tree-like structure. This issue has been addressed by Liu and Mazumder with FIRE [42], which outperforms aforementioned methods in terms of regression performance and interpretability. The authors proposed a quadratic problem introducing a non-smooth fusion penalty. Their framework promotes solutions that exhibit a tree-like structure, thereby improving interpretability and sparsity of extracted rules. The problem is then solved through an ad-hoc optimization algorithm that leverages its block structure. However, while FIRE excels in regression performance, its extension to classification tasks is not straightforward and has not been investigated by the authors. Moreover, FIRE needs to tune three hyperparameters, requiring computationally expensive validation procedures.

Temporal data. The previously discussed methods are designed to only handle tabular data. One of the major advantages of the proposed method is its capability to directly handle temporal data. Explainable machine learning methods for temporal data mainly focus on providing users with explanations derived from the data itself, such as time points, subsequences, or instance-based methods [58]. Indeed, the majority of earlier works about knowledge extraction from time series in terms of logical rules involve transitions between time points [43, 59], subsequences [22, 23, 37, 47] or Allen’s temporal logic [2, 53]. Rule discovering methods designed for time series data include various extensions of decision tree algorithms. For instance, Sciavicco and Stan developed a time series extension of the C4.5 algorithm [52], following the work of Brunello et al. [15] who extended ID3. Similarly, previous works introduced tree ensemble methods specifically designed to operate with time series data, such as interval-based boosted classifiers [50] and random forests [26], time points-based random forests [4, 28] and Proximity Forests [44]. Arguably, the most flexible and explainable tree ensemble method for time series is represented by generalized Random Shapelet Forest (gRSF), introduced by Karlsson et al. [38]. The authors were the first to propose a tree ensemble classification and regression method based on *shapelets* [32, 66], which are generally defined as class-discriminative subsequences of time series. More specifically, these subsequences are the ones that vary the most among different classes of the dataset. The key idea of shapelets-based methods is to extract interesting features by mining local subsequences from time series datasets and utilize them for learning tasks such as classification, regression and clustering. Since shapelets are short time series subsequences, they can be visually inspected, providing users with interpretable output. While the generalized Random Shapelet Forest (gRSF) framework is among the state-of-the-art explainable methods for temporal data, its underlying machine learning model is not interpretable due to its ensemble structure. To the best of our knowledge, our work represents the first rule set extraction method capable of handling tree ensembles operating on time series, thanks to its independence from both data and ensemble structure.

3 Background

In this section, we introduce the main notation and formalism about time series, decision trees and tree ensembles, to prepare the ground for presenting our rule lists learning optimization problem. Our formalism allows us to represent trees and ensemble methods as data-agnostic lists of rules for both classification and regression setting.

3.1 Time series

A time series $\mathbf{x} = [x_1, x_2, \dots, x_P]$ is an ordered collection of P real values. Given a time series $\mathbf{x} \in \mathbb{R}^P$, a time series subsequence of \mathbf{x} of length $J \leq P$ starting at position p is the ordered collection of values $\mathbf{x}_p^J = [x_p, \dots, x_{p+J-1}]$. Please note that there are a total of $P - J + 1$ subsequences. Given two time series $\mathbf{x}, \mathbf{z} \in \mathbb{R}^P$, we consider as time series distance the Euclidean norm between the two corresponding vectors $\|\mathbf{x} - \mathbf{z}\|_2$. In a more general fashion, distance measures different from the Euclidean norm are allowed. Given two time series $\mathbf{x} \in \mathbb{R}^P$ and $\mathbf{z} \in \mathbb{R}^J$, with $J \leq P$, the time series *subsequence distance* is the minimum distance between \mathbf{z} and any subsequence \mathbf{x}_p^J of \mathbf{x} , that is

$$\text{dist}(\mathbf{x}, \mathbf{z}) = \min_{1 \leq p \leq P - J + 1} \|\mathbf{x}_p^J - \mathbf{z}\|_2. \quad (1)$$

3.2 Decision trees

We consider standard supervised classification and regression problems, with a given a training dataset of N i.i.d. samples $\mathcal{D} = \{(\mathbf{x}_i, y_i), i = 1, \dots, N\}$, where data points $\mathbf{x}_i \in \mathbb{R}^P$ are expressed as vectors containing P tabular features or time series of length P . In the case of classification task, targets $y_i \in \mathcal{C}$ represent a categorical variable,

where \mathcal{C} is a set of class labels. In the case of regression task, targets $y_i \in \mathbb{R}$ represent a numerical variable. The given dataset is used to construct a predictor $\mathcal{T}(\mathbf{x})$ that maps each data point to the codomain of the corresponding task. A binary decision tree of maximal depth D is a predictor that recursively divides the feature space into at most 2^D non-overlapping partitions called *leaf nodes*. Each partition is defined by an ordered collection of disjunctive splittings called *branch nodes*. Splittings are defined by a tuple $(a_t(\mathbf{x}), b_t)$, for each $t \in \mathcal{B}$, where \mathcal{B} is the set of branch nodes. The first element of the tuple represents the feature selector, whereas the second element corresponds to the threshold value. Each splitting compares the selected feature to the threshold value. If a data point exhibits a value lower or equal than the threshold, it is assigned to the left child of the branch node; otherwise, it is assigned to the right one. In the case of tabular data, the feature selector is the scalar product between point $\mathbf{x} \in \mathbb{R}^P$ and one canonical base $e^{(p)}$ of the same feature space \mathbb{R}^P . Figure 1 depicts an example of a binary decision tree of maximal depth $D = 2$ for the classification of tabular data. It contains branch nodes $\mathcal{B} = \{1, 2, 3\}$ and leaf nodes $\mathcal{L} = \{1, 2, 3, 4\}$. The root node selects the 10th feature of each point contained in the dataset, and compares each value to the threshold $b_1 = 0.7$. The other branch nodes operate in a similar way. Each leaf node is associated to a colour representing one of two class labels in $\mathcal{C} = \{\text{Class 0}, \text{Class 1}\}$.

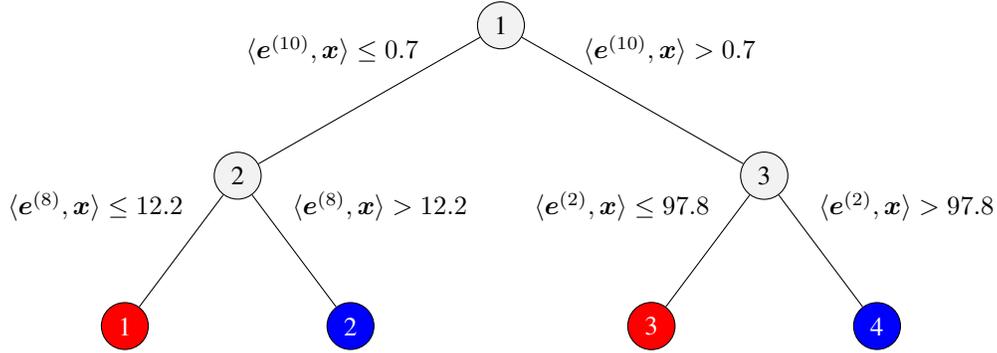


Figure 1: Example of a binary decision tree of depth 2 for the classification of tabular data.

Shapelets-based tree. If points contained in the dataset are time series, the first element of each splitting $(a_t(\mathbf{x}), b_t)$ represents an extractor of temporal features. Without loss of generality, we consider as temporal feature the distance (1) computed between time series and meaningful subsequences sampled from the dataset. We show how to use data-mined shapelets as subsequences to learn a decision tree for time series classification [10, 66]. As an example, we use the *ItalyPowerDemand* dataset from the UCR repository [24]. The training set includes 67 time series, each 24 units long, representing twelve monthly electrical power demand patterns from Italy. The classification task is to distinguish days between October and March from those between April and September, which correspond to the two class labels in $\mathcal{C} = \{\text{Class 0}, \text{Class 1}\}$. The top two subplots in Figure 2 show the training data for the two classes. Using one of the available data mining approaches [32, 57], it is possible to extract shapelets s_1 and s_2 from the training data. These shapelets are depicted in dark green in the rightmost part of Figure 2. By computing distance (1) between each time series \mathbf{x} and each of the two shapelets s_1 and s_2 , we can represent each time series as a point in the scatter plot in Figure 2. The horizontal axis represents $\text{dist}(\mathbf{x}, s_1)$, while the vertical axis represents $\text{dist}(\mathbf{x}, s_2)$. Finally, using the two distances as features for each time series, we can build a decision tree that partitions the feature space associating threshold values b_1 and b_2 with shapelets s_1 and s_2 , respectively. Figure 3 shows a shapelets-based decision tree of maximal depth $D = 2$, with branch nodes $\mathcal{B} = \{1, 2\}$ and leaf nodes $\mathcal{L} = \{1, 2, 3\}$. Threshold values correspond to those shown in the scatter plot in Figure 2.

Rule extraction. We define as *rule* the splitting of a given branch node $t \in \mathcal{B}$ paired with the left (\leq) or right ($>$) sign. For instance, we indicate with $(a_1(\mathbf{x}), b_1, \leq)$ the rule that a given point \mathbf{x} has to satisfy to get to the left child of the root node, that is whether or not the inequality $a_1(\mathbf{x}) \leq b_1$ holds. Starting from the root node, each point is recursively evaluated at branch nodes until it is finally assigned to a leaf node to get a prediction. In the case of a classification tree, the prediction corresponds to the most frequent class contained in the leaf node. For regression, the prediction is the average value of the target variables of the assigned data points. Since the path from the root node to each leaf node is unique, we can represent each leaf node $l \in \mathcal{L}$ as the ordered list of rules along its path

$$\mathcal{R}_l(\mathbf{x}) = [(a_1(\mathbf{x}), b_1, \cdot), \dots, (a_{Pa(l)}(\mathbf{x}), b_{Pa(l)}, \cdot)], \quad (2)$$

where \cdot stands for the sign of each rule, while $Pa(l) \in \mathcal{B}$ represents the parent node of leaf node $l \in \mathcal{L}$. Since splittings are disjunctive, each point \mathbf{x} that satisfies all the rules of a list is uniquely assigned to the corresponding leaf node.

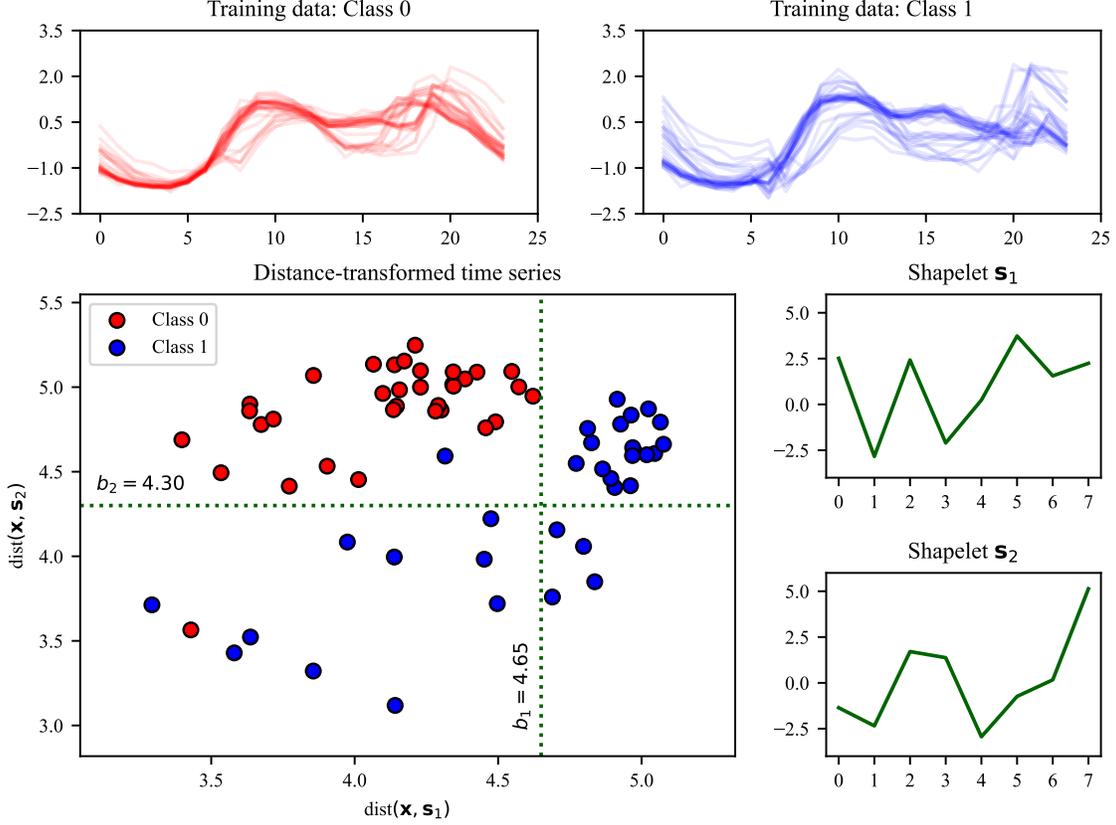


Figure 2: Example of shapelets-based decision tree built upon the *ItalyPowerDemand* dataset from the UCR repository [24]. The upper subplots show the training time series in red (Class 0) and blue (Class 1). The right subplots show the two shapelets s_1, s_2 in dark green. The left subplot displays the scatter plot of the time series based on $\text{dist}(\mathbf{x}, s_1)$ and $\text{dist}(\mathbf{x}, s_2)$.

Given a list of rules $\mathcal{R}_l(\mathbf{x})$, we define the set that contains the corresponding splitting of each rule as follows

$$\mathcal{S}_l(\mathbf{x}) = \{(a_1(\mathbf{x}), b_1), \dots, (a_{Pa(l)}(\mathbf{x}), b_{Pa(l)})\}. \quad (3)$$

As example, let us consider the decision tree depicted in Figure 1. The rule list corresponding to the first leaf node is

$$\mathcal{R}_1(\mathbf{x}) = [(\langle e^{(10)}, \mathbf{x} \rangle, 0.7, \leq), (\langle e^{(8)}, \mathbf{x} \rangle, 12.2, \leq)],$$

whereas the corresponding set of splittings is

$$\mathcal{S}_1(\mathbf{x}) = [(\langle e^{(10)}, \mathbf{x} \rangle, 0.7), (\langle e^{(8)}, \mathbf{x} \rangle, 12.2)].$$

Finally, we can represent a decision tree $\mathcal{T}(\mathbf{x})$ by all the paths it contains, expressing it as the set containing the corresponding rule lists

$$\mathcal{T}(\mathbf{x}) = \{\mathcal{R}_l(\mathbf{x}) \mid l \in \mathcal{L}\}. \quad (4)$$

For instance, the decision tree in Figure 1 can be represented as the following set of rule lists

$$\begin{aligned} \mathcal{T}(\mathbf{x}) = \{ & [(\langle e^{(10)}, \mathbf{x} \rangle, 0.7, \leq), (\langle e^{(8)}, \mathbf{x} \rangle, 12.2, \leq)], \\ & [(\langle e^{(10)}, \mathbf{x} \rangle, 0.7, \leq), (\langle e^{(8)}, \mathbf{x} \rangle, 12.2, >)], \\ & [(\langle e^{(10)}, \mathbf{x} \rangle, 0.7, >), (\langle e^{(2)}, \mathbf{x} \rangle, 97.8, \leq)], \\ & [(\langle e^{(10)}, \mathbf{x} \rangle, 0.7, >), (\langle e^{(2)}, \mathbf{x} \rangle, 97.8, >)] \}, \end{aligned}$$

whereas the decision tree for time series data in Figure 3 can be represented as

$$\begin{aligned} \mathcal{T}(\mathbf{x}) = \{ & [(\text{dist}(\mathbf{x}, s_1), 4.65, \leq), (\text{dist}(\mathbf{x}, s_2), 4.30, \leq)], \\ & [(\text{dist}(\mathbf{x}, s_1), 4.65, \leq), (\text{dist}(\mathbf{x}, s_2), 4.30, >)] \\ & [(\text{dist}(\mathbf{x}, s_1), 4.65, >)] \}. \end{aligned}$$

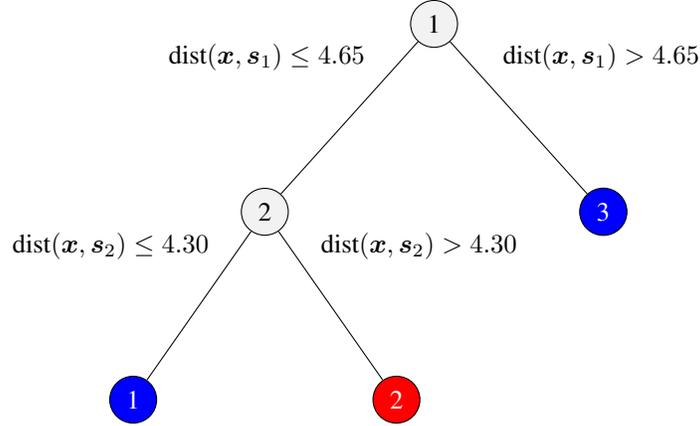


Figure 3: Example of a shapelets-based decision tree of depth 2 for the classification of temporal data.

3.3 Tree ensembles

A tree ensemble classification or regression method consists of learning multiple decision trees by bagging [13] or boosting [29], leveraging their aggregate predictions to obtain more accurate and robust results. The former approach consists of training a collection of decision trees with different samples bootstrapped from the same training dataset, obtaining a random forest [14]. Instead, in the latter approach trees are sequentially trained by exploiting the prediction error of the previous ones, obtaining boosted learners like XGBoost [20]. For sake of simplicity, in the reminder of this paper we focus on random forests as representative of tree ensemble methods. Exploiting the introduced formalism, we can express a random forest $RF(\mathbf{x})$ containing decision trees $\mathcal{T}_k(\mathbf{x})$, with $k \in K$ as their disjoint union, that is

$$RF(\mathbf{x}) = \bigsqcup_{k \in K} \mathcal{T}_k(\mathbf{x}). \quad (5)$$

In the classification setting, the prediction of a random forest corresponds to the majority vote of its decision trees. For regression tasks, the prediction is the average of all the predictions obtained by its decision trees. A generalized Random Shapelet Forest [38] is obtained by bagging decision trees whose feature selectors correspond to (1) applied to sampled shapelets. Similarly, a Time Series Forest [26] can be obtained by applying the same procedure choosing as feature one among mean, standard deviation and slope computed on sampled intervals. Thanks to the formalism we introduced, we can represent any random forest as a set of data-agnostic rule lists. Hereafter, we omit the arguments of the aforementioned mathematical objects to simplify the notation.

4 Our approach

In this section, we present and discuss the proposed method. Given a trained random forest RF containing a total of L rule lists, our approach consists of selecting the optimal rule lists by solving a set partitioning problem. In this way, we can guarantee that each point is assigned to only one of the rule lists it satisfies, mimicking a decision tree and improving interpretability. The key idea is to select the best subset of rules according to their robustness to data perturbation and predictive power, measured by computing a rule-specific regularization and loss function, respectively.

4.1 Preprocessing step

Since set partitioning problems are NP-hard [40], we alleviate the computational burden of our approach by separating the computation of regularization and loss functions from the optimization problem. Thus, we characterize each rule list by three quantities that are computed during the following preprocessing step. We define the *stability* of the j -th rule list as the sum of the Sørensen-Dice index [18, 41] computed on all the lists contained in RF , ignoring their inequality signs

$$\phi_j = \sum_{i \neq j} \frac{2|\mathcal{S}_j \cap \mathcal{S}_i|}{|\mathcal{S}_j| + |\mathcal{S}_i|}, \quad (6)$$

that is the total amount of shared splittings between rule list \mathcal{R}_j and all the other lists in the forest. In other words, we measure how much a rule is replicated through the whole forest. A list made of rules that are consistently replicated

inside the random forest is more stable than a list containing less frequent rules. By maximizing their stability, selected lists are less sensitive to data perturbation and they can more likely resemble a decision tree structure. This approach combines the effects of the fusion penalty of FIRE [42] and the occurrence frequency of SIRUS [6]. Indeed, the former penalty term promotes the learning of rules with more shared splittings, improving their interpretability. Instead, the latter method prunes the rules that entirely occur less than the frequency threshold parameter p_0 . In order to quantify the predictive power of the j -th rule list, we compute its loss depending on the learning task as follows

$$\xi_j = \begin{cases} N_j - \max_{c \in \mathcal{C}} N_{cj}, & \text{if classification,} \\ \text{MSE}(\mathcal{R}_j), & \text{if regression,} \end{cases} \quad (7)$$

where N_j is the number of data points that satisfy the rule list, and N_{cj} is the number of data points of class $c \in \mathcal{C}$ among them. Furthermore, $\text{MSE}(\mathcal{R}_j)$ corresponds to the Mean Squared Error (MSE) computed on the response values $y_i \in \mathbb{R}$ of data points that satisfy rule list \mathcal{R}_j . In other words, we quantify the loss of the j -th rule list as the number of misclassified points in the case of classification tasks. Instead, we consider the MSE computed on assigned points as the loss of the j -th rule list in the case of regression tasks. By computing loss values during this preprocessing step, we manage to easily handle non-linear and multiple regularization and loss functions without solving any optimization problem or tuning any parameter. After their computation, vectors ϕ_j and ξ_j are normalized to the same scale. Lastly, we keep track of the assignment for each of the N data point to each of the L lists through the matrix $\mathbf{A} \in \{0, 1\}^{N \times L}$, whose entries are computed as follows

$$A_{ij} = \begin{cases} 1, & \text{if point } \mathbf{x}_i \text{ satisfies rule list } \mathcal{R}_j, \\ 0, & \text{otherwise.} \end{cases} \quad (8)$$

4.2 Optimization problem

After employing the preprocessing step we described, we formulate the problem of selecting the best lists of rules as a set partitioning problem through Integer Programming. We introduce a binary decision variable for each rule list of the tree ensemble, that is $z_j \in \{0, 1\}$, with $j = 1, \dots, L$. Then, we exploit the corresponding quantities ϕ_j, ξ_j and assignment \mathbf{A} to write the following IP problem

$$\max_z \quad \sum_{j=1}^L \phi_j z_j - \sum_{j=1}^L \xi_j z_j \quad (9a)$$

$$\text{s.t.} \quad \sum_{j=1}^L A_{ij} z_j = 1, \quad i = 1, \dots, N, \quad (9b)$$

$$\sum_{j=1}^L z_j \leq \ell, \quad (9c)$$

$$z_j \in \{0, 1\}, \quad j = 1, \dots, L, \quad (9d)$$

where ℓ represents the maximum number of rule lists to be extracted. Solving this problem produces the optimized lists of rules, where the corresponding binary variable takes the value $z_j = 1$ in the solution. The objective function (9a) maximizes the stability of lists while minimizing their aggregated loss. Constraint (9b) ensures that each sample is assigned to exactly one rule list. Constraint (9c) imposes an upper bound on the number of selected lists. Finally, constraint (9d) specifies the domain of the decision variables. We remark that the proposed method is agnostic with respect to how stability and loss are measured. Indeed, our approach is flexible and easy to customize, allowing the end-user to compute multiple custom, non-linear stability and loss functions during the preprocessing step described in Section 4.1. Furthermore, the optimization problem is independent from both data and tree ensemble structures, as well as the learning task.

4.3 Training procedure

In this section, we describe the procedure to train and validate the proposed method when the maximum number of lists of rules to extract is not specified and cannot be inferred. Starting from an already trained random forest with training and validation sets, we need to choose a proper value for parameter $\ell \in \{\underline{\ell}, \dots, \bar{\ell}\}$. To avoid expensive tuning techniques, we propose a procedure to automate the learning process, providing a lower and an upper bound for its range. We compute the lower bound $\underline{\ell}$ by solving the optimization problem obtained from (9) by dropping constraint (9c) and

modifying the objective function as follows

$$\underline{\ell} = \min_z \sum_{j=1}^L z_j \quad (10a)$$

$$\text{s.t.} \quad \sum_{j=1}^L A_{ij} z_j = 1, \quad i = 1, \dots, N, \quad (10b)$$

$$z_j \in \{0, 1\}, \quad j = 1, \dots, L. \quad (10c)$$

We compute the upper bound $\bar{\ell}$ by solving the same problem with the opposite objective function. The objective values obtained from these solutions correspond to the desired bounds. Since the set partitioning constraint (10b) is tied to previously computed assignment \mathbf{A} , the number of different rule lists cannot be arbitrarily small or large. After computing bounds, we solve Problem (9) for each value of $\ell \in \{\underline{\ell}, \dots, \bar{\ell}\}$. Reoptimizing the same problem with a different right-hand side is not computationally intensive, since solvers can exploit effective warm start approaches [63]. Finally, we select the value with the lowest loss obtained on the validation set. We remark that ℓ is the only parameter of the proposed method, it has an immediate interpretation and it can be usually inferred from the application context. Moreover, under the most common benchmark settings found in literature, the maximum number of rules is fixed, allowing our approach to function as a parameter-free method.

5 Experiments and results

In this section, we present and discuss the experimental evaluation conducted to assess the performance of the proposed method against the state-of-the-art, for regression and classification tasks of tabular data and time series classification. To ensure a fair comparison, we selected as competing approaches the state-of-the-art methods that are clearly reproducible. We implemented all methods in Python 3.9, except for SIRUS, which was implemented in R 4.3.1. We ran all the experiments on the same machine equipped with a 3.3 GHz 8-core processor and 16 GB of memory. The proposed IP problems were solved through Gurobi 11.0 [34]. In order to compare multiple classifiers over the selected datasets, we perform the non-parametric Friedman test [25] combined with the signed-rank Wilcoxon-Holm post-hoc test [36], with a level of statistical significance equal to 0.05. According to Benavoli et al. [8], the Wilcoxon signed-rank test is more appropriate than the more common post-hoc Nemenyi test [49]. Details about benchmark datasets are contained in Table 2, Table 4 and Table 6. During data preprocessing, we applied one-hot encoding to tabular data with categorical features and discarded missing values. For regression tasks, we standardized the response vector. No preprocessing was applied to time series datasets.

5.1 Tabular regression

In this experiment, we compare the proposed method to the state-of-the-art about rule extraction for regression tasks of tabular data. In particular, competing methods are RuleFit [30], SIRUS [6] and NodeHarvest (NH) [46]. The experimental plan involves running each method on a selected benchmark of 22 datasets from the OpenML public repository [60]. Following the experimental plan of earlier works [42, 46], we extracted rules from a regression forest of 500 trees of depth 3 implemented through the `scikit-learn` package [48], and fixed the maximum amount of selected rule lists to 15. Since this quantity coincides with parameter ℓ , the proposed training procedure is not needed, and our method runs without validation or tuning steps. For competing methods, we respected the parameter tuning procedures described by their authors. We divided each dataset into 75/25 train-test split. We ran each regression task with 30 different random seeds, and we report average and standard deviation of the out-of-sample Mean Squared Error (MSE) in Table 2. For sake of clarity, we also report the results of the random forest (Full model). From obtained results, all methods achieves statistically equivalent performance (Friedman’s test p -value ≈ 0.3). Interestingly, all rule extraction methods manage to outperform the Full model, obtaining improved interpretability and performance. The median value of computing times of the proposed method is ≈ 7 minutes, and the average runtime of the Gurobi IP solver is $\approx 5\%$ of the total computing time. Competing methods are more efficient than our approach. Nevertheless, under this setting, the latter operates as a parameter-free method.

5.2 Tabular classification

Similarly to the previous experiment, we compare the proposed method to the state-of-the-art about rule extraction for classification tasks of tabular data. As competing methods, we consider the previously mentioned approaches used for regression tasks. However, the currently available implementation of NodeHarvest cannot tackle classification problems,

Table 1: Details of datasets from the OpenML repository for tabular data regression.

Dataset	Records	Features
Mercedes_Benz	4209	563
Moneyball	114	54
abalone	4177	10
autoMpg	392	25
bank32nh	8192	32
boston	506	22
cpu_small	8192	12
elevators	16599	18
house_16H	22784	16
houses	20640	8
kin8nm	8192	8
mtp	4450	202
no2	500	7
pol	15000	48
puma32H	8192	32
socmob	1156	39
space_ga	3107	6
stock	950	9
teccator	240	124
us_crime	123	249
wind	6574	14
wine_quality	6497	11

Table 2: Out-of-sample MSE values computed on benchmark datasets for tabular regression.

Dataset	Our method	RuleFit	SIRUS	NH	Full model
Mercedes_Benz	0.45 ± 0.10	0.45 ± 0.11	0.51 ± 0.10	0.45 ± 0.10	0.61 ± 0.05
Moneyball	0.25 ± 0.14	0.21 ± 0.08	0.20 ± 0.07	0.26 ± 0.08	0.31 ± 0.06
abalone	0.63 ± 0.06	0.60 ± 0.06	0.68 ± 0.06	0.60 ± 0.06	0.59 ± 0.04
autoMpg	0.31 ± 0.12	0.31 ± 0.08	0.28 ± 0.05	0.32 ± 0.08	0.25 ± 0.06
bank32nh	0.65 ± 0.03	0.64 ± 0.04	0.61 ± 0.04	0.65 ± 0.04	0.75 ± 0.04
boston	0.34 ± 0.11	0.28 ± 0.06	0.29 ± 0.09	0.31 ± 0.06	0.31 ± 0.03
cpu_small	0.09 ± 0.01	0.08 ± 0.01	0.11 ± 0.01	0.08 ± 0.01	0.12 ± 0.01
elevators	0.52 ± 0.03	0.54 ± 0.05	0.64 ± 0.04	0.53 ± 0.03	0.53 ± 0.06
house_16H	0.68 ± 0.05	0.69 ± 0.06	0.66 ± 0.06	0.69 ± 0.05	0.68 ± 0.02
houses	0.51 ± 0.01	0.52 ± 0.03	0.56 ± 0.02	0.51 ± 0.01	0.53 ± 0.11
kin8nm	0.41 ± 0.02	0.68 ± 0.02	0.65 ± 0.03	0.68 ± 0.05	0.66 ± 0.06
mtp	0.77 ± 0.03	0.73 ± 0.04	0.74 ± 0.03	0.75 ± 0.06	0.73 ± 0.03
no2	0.58 ± 0.13	0.58 ± 0.12	0.54 ± 0.10	0.60 ± 0.13	0.59 ± 0.10
pol	0.32 ± 0.01	0.29 ± 0.05	0.28 ± 0.02	0.30 ± 0.01	0.61 ± 0.02
puma32H	0.42 ± 0.01	0.45 ± 0.08	0.56 ± 0.06	0.42 ± 0.01	0.86 ± 0.02
socmob	0.45 ± 0.25	0.31 ± 0.11	0.37 ± 0.12	0.37 ± 0.25	0.49 ± 0.21
space_ga	0.41 ± 0.09	0.55 ± 0.10	0.53 ± 0.10	0.56 ± 0.09	0.54 ± 0.09
stock	0.09 ± 0.01	0.11 ± 0.03	0.24 ± 0.08	0.10 ± 0.01	0.11 ± 0.02
teccator	0.05 ± 0.11	0.05 ± 0.02	0.08 ± 0.02	0.04 ± 0.02	0.20 ± 0.01
us_crime	0.45 ± 0.19	0.33 ± 0.04	0.35 ± 0.09	0.50 ± 0.09	0.48 ± 0.07
wind	0.38 ± 0.01	0.37 ± 0.03	0.39 ± 0.02	0.36 ± 0.03	0.33 ± 0.01
wine_quality	0.69 ± 0.04	0.75 ± 0.04	0.78 ± 0.04	0.75 ± 0.02	0.75 ± 0.04
<i>Average</i>	0.43 ± 0.07	0.43 ± 0.06	0.46 ± 0.06	0.45 ± 0.05	0.50 ± 0.05

whereas SIRUS can only handle binary classification tasks. Therefore, we opted to exclude NodeHarvest from this experiment and select datasets with no more than 2 different classes. In particular, the experimental plan involves running each method on a selected benchmark of 14 datasets from the OpenML public repository [60], following the approach of earlier works [39, 62]. To assess the effectiveness of methods in extracting very short and sparse rules resembling a decision tree, we extracted rules from a random forest of 500 trees of depth 2, and fixed the maximum amount of selected rule lists to 4. Similar to the previous experiment, our method ran without validation or tuning steps. For competing methods, we followed the parameter tuning procedures described by their authors. We divided each dataset into 75/25 train-test split. We ran each regression task with 30 different random seeds. We report the average and standard deviation of the out-of-sample accuracy in Table 4. Based on the results, we observe that competing methods achieved statistically equivalent classification performance, as shown by the critical distance diagram depicted in Figure 4. In particular, the proposed approach outperforms RuleFit. We find these results satisfactory. Arguably, interpretable methods are preferred when they perform similarly than black box methods [51]. The median value of computing times of the proposed method is ≈ 1 minute, with Gurobi’s average runtime being $\approx 8.5\%$ of the total. Compared to competing methods, it is less efficient, as it requires more computational resources. However, our approach is more flexible than competing methods, as it can handle different data structures.

Table 3: Details of datasets from the OpenML repository for tabular data classification.

Dataset	Records	Features	Classes
adult	45222	120	2
bank-marketing	45211	51	2
banknoten	1372	4	2
blood-transfusion	748	4	2
diabetes	768	8	2
FICO	9871	37	2
heart-c	296	25	2
ilpd	583	11	2
ionosphere	351	34	2
MagicTelescope	19020	10	2
mushroom	5644	98	2
musk	6598	268	2
tic-tac-toe	958	27	2
wdbc	569	30	2

Table 4: Out-of-sample accuracy values computed on benchmark datasets for tabular classification.

Dataset	Our method	RuleFit	SIRUS	Full model
adult	0.81 ± 0.02	0.76 ± 0.01	0.76 ± 0.02	0.75 ± 0.00
bank-marketing	0.88 ± 0.00	0.88 ± 0.00	0.88 ± 0.00	0.88 ± 0.00
banknote	0.87 ± 0.03	0.86 ± 0.02	0.87 ± 0.03	0.90 ± 0.02
blood-transfusion	0.74 ± 0.03	0.75 ± 0.03	0.76 ± 0.02	0.75 ± 0.02
diabetes	0.69 ± 0.03	0.69 ± 0.05	0.70 ± 0.04	0.74 ± 0.02
FICO	0.67 ± 0.04	0.67 ± 0.04	0.71 ± 0.01	0.72 ± 0.03
heart-c	0.73 ± 0.03	0.77 ± 0.06	0.77 ± 0.05	0.83 ± 0.02
ilpd	0.70 ± 0.04	0.71 ± 0.02	0.72 ± 0.03	0.72 ± 0.03
ionosphere	0.89 ± 0.05	0.80 ± 0.06	0.88 ± 0.04	0.92 ± 0.03
MagicTelescope	0.75 ± 0.02	0.73 ± 0.02	0.73 ± 0.01	0.75 ± 0.02
mushroom	0.88 ± 0.02	0.88 ± 0.03	0.90 ± 0.01	0.87 ± 0.01
musk	0.87 ± 0.02	0.85 ± 0.01	0.93 ± 0.04	0.85 ± 0.03
tic-tac-toe	0.68 ± 0.02	0.66 ± 0.02	0.67 ± 0.03	0.68 ± 0.01
wdbc	0.90 ± 0.02	0.90 ± 0.03	0.91 ± 0.02	0.94 ± 0.02
<i>Average</i>	0.79 ± 0.03	0.78 ± 0.03	0.80 ± 0.03	0.81 ± 0.02
<i>Rank ($p \approx 0.02$)</i>	2.71	3.21	2.14	1.93

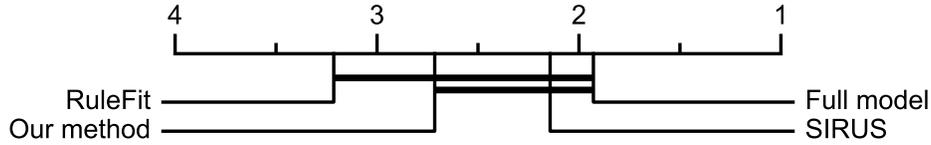


Figure 4: Critical distance diagram obtained by running the Friedman test [25] combined with the signed-rank Wilcoxon-Holm post-hoc test [36] on the results about classification of tabular data of Table 4.

5.3 Time series classification

The aim of this experiment is to assess the effectiveness of the proposed method in handling tree ensembles specifically designed for time series data. We chose the generalized Random Shapelet Forest (gRSF) [38] as the tree ensemble method for this purpose. To the best of our knowledge, gRSF represents the only ensemble method for time series data that provides interpretable features (shapelets), and our approach is the only extraction method working on temporal tree ensembles. The experimental plan consists of running gRSF and our method on a selected benchmark of 25 time series datasets from the UCR public repository [24], following the methodology of Karlsson et al. [38]. We remark that the UCR repository provides fixed train-test splits for each dataset, obviating the need for additional splitting procedures. Consequently, we conducted each classification task using only 10 different random seeds. In this experimental evaluation, we regard gRSF as the Full model and apply the proposed method to extract lists of rules from it. The gRSF method was trained with the tuned hyperparameters provided by its authors, with the exception of fixing the tree depth to 3 to maintain consistency with the previous experiments. Therefore, we selected time series datasets with no more than 2^3 different classes. To assess the effectiveness of the training procedure discussed in Section 4.3, we train our method by fixing parameter $\ell = 2^3$ and by running the procedure with 5-fold cross-validation. The average and standard deviation of the out-of-sample accuracy are reported in Table 6. From the obtained results, the proposed method with the training procedure achieves statistically equivalent performance to gRSF (Wilcoxon’s test p -value ≈ 0.2), with an average of 15 extracted rule lists. Our method with a fixed ℓ obtains lower accuracy values but runs faster. The median computation time with the training procedure is ≈ 17 minutes, whereas with fixed ℓ , it is ≈ 6 minutes. On average, the runtime of the Gurobi IP solver is negligible. Remarkably, with given hyperparameters, gRSF is significantly faster, running in less than 20 seconds per task. Nevertheless, the computational overhead of our method is justified by its interpretability and condensed predictive power.

Table 5: Details of datasets from the UCR repository for time series classification.

Dataset	Train size	Test size	Length	Classes
Beef	30	30	470	5
CBF	30	900	128	3
CinCECGTorso	40	1380	1639	4
Coffee	28	28	286	2
DiatomSizeReduction	16	306	345	4
ECG200	100	100	96	2
ECGFiveDays	23	861	136	2
FaceFour	24	88	350	4
GunPoint	50	150	150	2
Haptics	155	308	1092	5
InlineSkate	100	550	1882	7
ItalyPowerDemand	67	1029	24	2
MoteStrain	20	1252	84	2
OliveOil	30	30	570	4
Sony.1	20	601	70	2
Sony.2	27	953	65	2
StarLightCurves	1000	8236	1024	3
Symbols	25	995	398	6
Trace	100	100	275	4
TwoLeadECG	23	1139	82	2
TwoPatterns	1000	4000	128	4
UWaveGestureX	896	3582	315	8
UWaveGestureY	896	3582	315	8
UWaveGestureZ	896	3582	315	8
Wafer	1000	6164	152	2

Table 6: Out-of-sample accuracy computed on benchmark datasets for time series classification.

Dataset	Our method ($\ell = 8$)	Our method (w/ tuning)	gRSF (Full model)
Beef	0.55 ± 0.09	0.68 ± 0.10	0.65 ± 0.05
CBF	0.85 ± 0.07	0.93 ± 0.06	0.98 ± 0.00
CinCECGTorso	0.69 ± 0.06	0.83 ± 0.06	0.79 ± 0.00
Coffee	0.87 ± 0.08	0.96 ± 0.04	0.93 ± 0.01
DiatomSizeReduction	0.83 ± 0.10	0.96 ± 0.04	0.98 ± 0.01
ECG200	0.82 ± 0.02	0.92 ± 0.03	0.84 ± 0.02
ECGFiveDays	0.82 ± 0.12	0.90 ± 0.05	0.77 ± 0.01
FaceFour	0.82 ± 0.08	0.95 ± 0.02	0.96 ± 0.00
GunPoint	0.83 ± 0.07	0.92 ± 0.03	0.95 ± 0.01
Haptics	0.38 ± 0.03	0.61 ± 0.12	0.40 ± 0.02
InlineSkate	0.32 ± 0.03	0.74 ± 0.08	0.34 ± 0.02
ItalyPowerDemand	0.95 ± 0.01	0.93 ± 0.02	0.95 ± 0.01
MoteStrain	0.76 ± 0.09	0.85 ± 0.06	0.91 ± 0.00
OliveOil	0.79 ± 0.07	0.89 ± 0.04	0.87 ± 0.02
Sony.1	0.87 ± 0.10	0.96 ± 0.03	0.89 ± 0.01
Sony.2	0.86 ± 0.05	0.88 ± 0.04	0.92 ± 0.01
StarLightCurves	0.93 ± 0.03	0.97 ± 0.05	0.91 ± 0.01
Symbols	0.61 ± 0.11	0.76 ± 0.06	0.92 ± 0.01
Trace	0.96 ± 0.09	0.96 ± 0.05	0.82 ± 0.00
TwoLeadECG	0.87 ± 0.05	0.91 ± 0.03	0.96 ± 0.00
TwoPatterns	0.62 ± 0.11	0.77 ± 0.20	0.86 ± 0.00
UWaveGestureX	0.62 ± 0.04	0.61 ± 0.13	0.73 ± 0.02
UWaveGestureY	0.53 ± 0.04	0.59 ± 0.11	0.61 ± 0.01
UWaveGestureZ	0.58 ± 0.04	0.77 ± 0.22	0.62 ± 0.00
Wafer	0.94 ± 0.02	0.98 ± 0.03	0.90 ± 0.00
<i>Average</i>	0.75 ± 0.06	0.85 ± 0.07	0.82 ± 0.01

6 Conclusion and future work

In this paper, we introduce a novel method to extract interpretable rule lists from tree ensembles. Our approach involves solving a set partitioning problem, separating the computation of loss and regularization functions from the Integer Programming model. Leveraging the flexibility of Mathematical Programming, our method can incorporate multiple non-linear functions and it can handle both classification and regression tasks for tabular and time series data. We present extensive and statistically significant computational results for the classification and regression of tabular data, showing that the proposed method achieves comparable performance to other competing rule-extraction methods for tree ensembles. Notably, our approach works as a parameter-free method under common benchmark settings. In cases where prior task-specific knowledge is absent and the number of rule lists cannot be inferred beforehand, we propose an automated training procedure to validate our method effectively. Additionally, we provide empirical evidence that the proposed method can effectively extract rules from tree ensemble methods for the classification of temporal data. To the best of our knowledge, this is the first rule extraction method capable of handling complex data such as time series. Experiments also show that our method is computationally demanding and less efficient than competing approaches. Nevertheless, this behavior is almost completely ascribable to the preprocessing steps, empirically proving the efficiency of the proposed IP model. Future research may focus on improving computational efficiency and extending the introduced formalism to handle tree ensembles for more complex tasks, such as image [11, 45, 64] or text classification [12, 56].

Acknowledgments

This work was supported by Fedegari Autoclavi S.p.A. The authors thank Prof. Stefano Gualandi and Prof. Isak Samsten for their valuable support.

References

- [1] Agrawal, R., Imieliński, T., Swami, A., 1993. Mining association rules between sets of items in large databases, in: Proceedings of the 1993 ACM SIGMOD international conference on Management of data, pp. 207–216.
- [2] Allen, J.F., 1983. Maintaining knowledge about temporal intervals. *Commun. ACM* 26, 832–843.
- [3] Aria, M., Cuccurullo, C., Gnasso, A., 2021. A comparison among interpretative proposals for random forests. *Machine Learning with Applications* 6, 100094.
- [4] Auret, L., Aldrich, C., 2010. Change point detection in time series data with random forests. *Control Engineering Practice* 18, 990–1002.
- [5] Balas, E., Padberg, M.W., 1976. Set partitioning: A survey. *SIAM review* 18, 710–760.
- [6] Bénard, C., Biau, G., Da Veiga, S., Scornet, E., 2021a. Interpretable random forests via rule extraction, in: International Conference on Artificial Intelligence and Statistics, PMLR. pp. 937–945.
- [7] Bénard, C., Biau, G., Da Veiga, S., Scornet, E., 2021b. Sirius: Stable and interpretable rule set for classification. *Electronic Journal of Statistics* 15, 427–505.
- [8] Benavoli, A., Corani, G., Mangili, F., 2016. Should we really use post-hoc tests based on mean-ranks? *The Journal of Machine Learning Research* 17, 152–161. URL: <http://jmlr.org/papers/v17/benavoli16a.html>.
- [9] Bertsimas, D., Dunn, J., 2017. Optimal classification trees. *Machine Learning* 106, 1039–1082.
- [10] Bonasera, L., Gualandi, S., 2024. Optimal shapelets tree for time series interpretable classification. *EURO Journal on Computational Optimization* , 100091.
- [11] Bosch, A., Zisserman, A., Muñoz, X., 2007. Image classification using random forests and ferns, in: 2007 IEEE 11th international conference on computer vision, Ieee. pp. 1–8.
- [12] Bouaziz, A., Dartigues-Pallez, C., da Costa Pereira, C., Precioso, F., Lloret, P., 2014. Short text classification using semantic random forest, in: Data Warehousing and Knowledge Discovery: 16th International Conference, DaWaK 2014, Munich, Germany, September 2-4, 2014. Proceedings 16, Springer. pp. 288–299.
- [13] Breiman, L., 1996. Bagging predictors. *Machine learning* 24, 123–140.
- [14] Breiman, L., 2001. Random forests. *Machine learning* 45, 5–32.
- [15] Brunello, A., Guido, S., Stan, I.E., et al., 2019. Interval temporal logic decision tree learning. *LECTURE NOTES IN COMPUTER SCIENCE* , 778–793.

- [16] Carrizosa, E., Molero-Rio, C., Romero Morales, D., 2021. Mathematical optimization in classification and regression trees. *TOP* 29, 5–33.
- [17] Carrizosa, E., Morales, D.R., 2013. Supervised classification and mathematical optimization. *Computers & Operations Research* 40, 150–165.
- [18] Chao, A., Chazdon, R.L., Colwell, R.K., Shen, T.J., 2006. Abundance-based similarity indices and their estimation when there are unseen species in samples. *Biometrics* 62, 361–371.
- [19] Chen, G., Liu, H., Yu, L., Wei, Q., Zhang, X., 2006. A new approach to classification based on association rule mining. *Decision Support Systems* 42, 674–689.
- [20] Chen, T., He, T., Benesty, M., Khotilovich, V., Tang, Y., Cho, H., Chen, K., Mitchell, R., Cano, I., Zhou, T., et al., 2015. Xgboost: extreme gradient boosting. R package version 0.4-2 1, 1–4.
- [21] Cheng, H., Yan, X., Han, J., Hsu, C.W., 2006. Discriminative frequent pattern analysis for effective classification, in: 2007 IEEE 23rd international conference on data engineering, IEEE. pp. 716–725.
- [22] Cotofrei, P., Stoffel, K., 2002. Rule extraction from time series databases using classification trees, in: APPLIED INFORMATICS-PROCEEDINGS-, Citeseer. pp. 327–332.
- [23] Das, G., Lin, K.I., Mannila, H., Renganathan, G., Smyth, P., 1998. Rule discovery from time series., in: KDD, pp. 16–22.
- [24] Dau, H.A., Keogh, E., Kamgar, K., Yeh, C.C.M., Zhu, Y., Gharghabi, S., Ratanamahatana, C.A., Yanping, Hu, B., Begum, N., Bagnall, A., Mueen, A., Batista, G., Hexagon-ML, 2018. The ucr time series classification archive.
- [25] Demšar, J., 2006. Statistical comparisons of classifiers over multiple data sets. *The Journal of Machine Learning Research* 7, 1–30.
- [26] Deng, H., Runger, G., Tuv, E., Vladimir, M., 2013. A time series forest for classification and feature extraction. *Information Sciences* 239, 142–153.
- [27] Di Teodoro, G., Monaci, M., Palagi, L., 2024. Unboxing tree ensembles for interpretability: a hierarchical visualization tool and a multivariate optimal re-built tree. *EURO Journal on Computational Optimization* 12, 100084.
- [28] Dudek, G., 2015. Short-term load forecasting using random forests, in: Intelligent Systems’ 2014: Proceedings of the 7th IEEE International Conference Intelligent Systems IS’2014, September 24-26, 2014, Warsaw, Poland, Volume 2: Tools, Architectures, Systems, Applications, Springer. pp. 821–828.
- [29] Friedman, J.H., 2001. Greedy function approximation: a gradient boosting machine. *Annals of statistics* , 1189–1232.
- [30] Friedman, J.H., Popescu, B.E., 2008. Predictive learning via rule ensembles. *The Annals of Applied Statistics* , 916–954.
- [31] Fürnkranz, J., Gamberger, D., Lavrač, N., 2012. Foundations of rule learning. Springer Science & Business Media.
- [32] Grabocka, J., Schilling, N., Wistuba, M., Schmidt-Thieme, L., 2014. Learning time-series shapelets. *Proceedings of the ACM SIGKDD International Conference on Knowledge Discovery and Data Mining* doi:doi:10.1145/2623330.2623613.
- [33] Gunning, D., Stefik, M., Choi, J., Miller, T., Stumpf, S., Yang, G.Z., 2019. Xai—explainable artificial intelligence. *Science robotics* 4, eaay7120.
- [34] Gurobi Optimization, L., 2022. Gurobi optimizer reference manual. URL: <https://www.gurobi.com>.
- [35] Hooker, G., Mentch, L., Zhou, S., 2021. Unrestricted permutation forces extrapolation: variable importance requires at least one more model, or there is no free variable importance. *Statistics and Computing* 31.
- [36] Ismail Fawaz, H., Forestier, G., Weber, J., Idoumghar, L., Muller, P.A., 2019. Deep learning for time series classification: a review. *Data Mining and Knowledge Discovery* 33, 917–963.
- [37] Kadous, M.W., 1999. Learning comprehensible descriptions of multivariate time series., in: ICML, p. 463.
- [38] Karlsson, I., Papapetrou, P., Boström, H., 2016. Generalized random shapelet forests. *Data Mining and Knowledge Discovery* 30. doi:doi:<https://doi.org/10.1007/s10618-016-0473-y>.
- [39] Lawless, C., Dash, S., Gunluk, O., Wei, D., 2023. Interpretable and fair boolean rule sets via column generation. *Journal of Machine Learning Research* 24, 1–50.

- [40] Lewis, H.R., 1983. Michael r. πgarey and david s. johnson. computers and intractability. a guide to the theory of np-completeness. wh freeman and company, san francisco 1979, x+ 338 pp. The Journal of Symbolic Logic 48, 498–500.
- [41] Li, X., Wang, C., Zhang, X., Sun, W., 2020. Generic sao similarity measure via extended sørensen-dice index. IEEE Access 8, 66538–66552.
- [42] Liu, B., Mazumder, R., 2023. Fire: An optimization approach for fast interpretable rule extraction, in: Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, pp. 1396–1405.
- [43] Lu, H., Han, J., Feng, L., 1998. Stock movement prediction and n-dimensional inter-transaction association rules, in: 1998 ACM SIGMOD Workshop on Research Issues on Data Mining and Knowledge Discovery, Seattle, WA, USA, ACM, New York, USA.
- [44] Lucas, B., Shifaz, A., Pelletier, C., O’Neill, L., Zaidi, N., Goethals, B., Petitjean, F., Webb, G.I., 2019. Proximity forest: an effective and scalable distance-based classifier for time series. Data Mining and Knowledge Discovery 33, 607–635.
- [45] Man, W., Ji, Y., Zhang, Z., 2018. Image classification based on improved random forest algorithm, in: 2018 IEEE 3rd International Conference on Cloud Computing and Big Data Analysis (ICCCBDA), IEEE. pp. 346–350.
- [46] Meinshausen, N., 2010. Node harvest. The Annals of Applied Statistics , 2049–2072.
- [47] Ozden, B., Ramaswamy, S., Silberschatz, A., 1998. Cyclic association rules, in: Proceedings 14th International Conference on Data Engineering, IEEE. pp. 412–421.
- [48] Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A., Cournapeau, D., Brucher, M., Perrot, M., Duchesnay, E., 2011. Scikit-learn: Machine learning in Python. Journal of Machine Learning Research 12, 2825–2830.
- [49] Pohlert, T., 2014. The pairwise multiple comparison of mean ranks package (pmcpr). R package 27, 9.
- [50] Rodríguez, J.J., Alonso, C.J., Boström, H., 2001. Boosting interval based literals. Intelligent Data Analysis 5, 245–262.
- [51] Rudin, C., 2019. Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead. Nature machine intelligence 1, 206–215.
- [52] Sciavicco, G., Stan, I.E., 2020. Knowledge extraction with interval temporal logic decision trees, in: 27th International Symposium on Temporal Representation and Reasoning (TIME 2020), Schloss Dagstuhl-Leibniz-Zentrum für Informatik.
- [53] Sciavicco, G., Stan, I.E., Vaccari, A., 2019. Towards a general method for logical rule extraction from time series, in: International Work-Conference on the Interplay Between Natural and Artificial Computation, Springer. pp. 3–12.
- [54] Silva, A.P.D., 2017. Optimization approaches to supervised classification. European Journal of Operational Research 261, 772–788.
- [55] Strobl, C., Boulesteix, A.L., Kneib, T., Augustin, T., Zeileis, A., 2008. Conditional variable importance for random forests. BMC bioinformatics 9, 1–11.
- [56] Sun, Y., Li, Y., Zeng, Q., Bian, Y., 2020. Application research of text classification based on random forest algorithm, in: 2020 3rd international conference on advanced electronic materials, computers and software engineering (aemcse), IEEE. pp. 370–374.
- [57] Tavenard, R., Faouzi, J., Vandewiele, G., Divo, F., Androz, G., Holtz, C., Payne, M., Yurchak, R., Rußwurm, M., Kolar, K., Woods, E., 2020. Tslern, a machine learning toolkit for time series data. Journal of Machine Learning Research 21, 1–6.
- [58] Theissler, A., Spinnato, F., Schlegel, U., Guidotti, R., 2022. Explainable ai for time series classification: a review, taxonomy and research directions. IEEE Access 10, 100700–100724.
- [59] Ullah, A., Harib, K.H., 2006. Knowledge extraction from time series and its application to surface roughness simulation. Information Knowledge Systems Management 5, 117–134.
- [60] Vanschoren, J., Van Rijn, J.N., Bischl, B., Torgo, L., 2014. Openml: networked science in machine learning. ACM SIGKDD Explorations Newsletter 15, 49–60.
- [61] Wang, T., Rudin, C., 2015. Learning optimized or’s of and’s. arXiv preprint arXiv:1511.02210 .
- [62] Wei, D., Dash, S., Gao, T., Gunluk, O., 2019. Generalized linear rule models, in: International conference on machine learning, PMLR. pp. 6687–6696.

- [63] Witzig, J., 2014. Reoptimization techniques in MIP solvers. Ph.D. thesis. Zuse Institute Berlin.
- [64] Xu, B., Ye, Y., Nie, L., 2012. An improved random forest classifier for image classification, in: 2012 IEEE International Conference on Information and Automation, IEEE. pp. 795–800.
- [65] Yang, H., Rudin, C., Seltzer, M., 2017. Scalable bayesian rule lists, in: International conference on machine learning, PMLR. pp. 3921–3930.
- [66] Ye, L., Keogh, E., 2009. Time series shapelets: A new primitive for data mining, in: Proceedings of the 15th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, pp. 947–956. doi:doi:10.1145/1557019.1557122.
- [67] Zhou, Z., Hooker, G., 2021. Unbiased measurement of feature importance in tree-based methods. ACM Transactions on Knowledge Discovery from Data (TKDD) 15, 1–21.