

MLKD-BERT: Multi-level Knowledge Distillation for Pre-trained Language Models

Ying Zhang¹, Ziheng Yang¹, Shufan Ji¹

¹Beihang University

{yingzhang1998, yzh2206140, jishufan}@buaa.edu.cn

Abstract

Knowledge distillation is an effective technique for pre-trained language model compression. Although existing knowledge distillation methods perform well for the most typical model BERT, they could be further improved in two aspects: the relation-level knowledge could be further explored to improve model performance; and the setting of student attention head number could be more flexible to decrease inference time. Therefore, we are motivated to propose a novel knowledge distillation method MLKD-BERT to distill multi-level knowledge in teacher-student framework. Extensive experiments on GLUE benchmark and extractive question answering tasks demonstrate that our method outperforms state-of-the-art knowledge distillation methods on BERT. In addition, MLKD-BERT can flexibly set student attention head number, allowing for substantial inference time decrease with little performance drop.

1 Introduction

In recent years, large-scale pre-trained language models (PLMs) have been widely applied in natural language processing, such as BERT (Devlin et al., 2019), XLNet (Yang et al., 2019), and RoBERTa (Liu et al., 2019). The PLM usually has large number of parameters and long inference time, making it inapplicable to resource-limited devices and real-time scenarios. Therefore, it is crucial to reduce PLM’s storage and computation overhead while retaining its performance. Knowledge distillation (Hinton et al., 2015) is an effective technique for PLM compression. In knowledge distillation, a smaller compact student model is trained, under the guidance of a larger complicated teacher model, to keep similar model performance.

As for the most typical PLM BERT, there exist several knowledge distillation methods for model compression, including DistilBERT (Sanh et al., 2019), BERT-PKD (Sun et al., 2019), TinyBERT (Jiao et al., 2020), BERT-EMD (Li et al., 2020),

MINILM (Wang et al., 2020a), and MINILMv2 (Wang et al., 2021). Despite the effectiveness of previous methods, there still exist two problems not addressed well:

- Existing methods mainly distill feature-level knowledge, but seldom consider relation-level knowledge (relation among tokens and relation among samples). However, the relation-level knowledge may be valuable to improve the performance of student model.
- Most previous works use self-attention distribution to distill teacher’s self-attention modules, thus the student model is restricted to take the same attention head number as its teacher. Such restriction prevents the reduction of attention head number in student model, resulting in increased inference time.

Therefore, a more flexible knowledge distillation method with improved performance is preferred to transfer knowledge from teacher to student model.

In this paper, we propose a novel multi-level knowledge distillation method MLKD-BERT for BERT compression. MLKD-BERT conducts a two-stage distillation for feature-level as well as relation-level knowledge, with 6 distillation loss functions designed for embedding layer, Transformer layers, and prediction layer. Compared with previous works, we have made two main contributions:

- In addition to feature-level knowledge, our student model learns valuable relation-level knowledge (relation among tokens and relation among samples) from its teacher model, which further improves the performance.
- Our student model learns self-attention relation instead of self-attention distribution, making it flexible in attention head number setting.

As such, our student model could reduce attention head number to further decrease inference time.

Extensive experiments on GLUE (Wang et al., 2019) benchmark and extractive question answering tasks show that our MLKD-BERT outperforms state-of-the-art BERT distillation methods on various prediction tasks. In addition, MLKD-BERT can set smaller student attention head number, allowing for substantial inference time decrease with little performance drop. Moreover, MLKD-BERT is effective in PLM compression, in that MLKD-BERT keeps competitive performance (99.5% on average for GLUE tasks) as its teacher with 50% compression in parameters and inference time.

The rest of the paper is organized as follows. Related works are reviewed in Section 2. We introduce our method MLKD-BERT in Section 3, and conduct extensive experiments in Section 4. Finally, in Section 5, conclusions are drawn.

2 Related Works

2.1 Pre-trained Language Models

Nowadays, large-scale pre-trained language models have significantly improved the performance of many natural language processing tasks. Pre-trained language models are usually trained on large amounts of text data, and then fine-tuned for specific task. Early research efforts mainly focus on word embedding, such as word2vec (Mikolov et al., 2013) and GloVe (Pennington et al., 2014). Subsequently, researchers have shifted to contextual word embedding, including BERT (Devlin et al., 2019), GPT (Radford et al., 2018), ENRIE (Zhang et al., 2019), XLNet (Yang et al., 2019) and RoBERTa (Liu et al., 2019). However, those PLMs contain millions of parameters and take long inference time, making them inapplicable to resource-limited devices and real-time scenarios. Fortunately, there exist many compression techniques for PLMs, which reduce model size and accelerate model inference while keeping model performance.

2.2 Knowledge Distillation

Besides quantization (Shen et al., 2020) and network pruning (Wang et al., 2020b), knowledge distillation (Tang et al., 2019) has been proven to be an effective technique for PLM compression. As for the most typical PLM BERT, there exist several knowledge distillation methods for model compression. Distilled BiLSTM (Tang et al., 2019) tries to

distill knowledge from BERT into a simple LSTM. DistilBERT (Sanh et al., 2019) uses soft target probabilities and embedding outputs to train student model. BERT-PKD (Sun et al., 2019) learns from multiple intermediate layers of teacher model for incremental knowledge extraction. TinyBERT (Jiao et al., 2020), MobileBERT (Sun et al., 2020), and SID (Aguilar et al., 2020) further improve BERT-PKD by distilling more internal representations, such as embedding layer outputs and self-attention distribution. BERT-EMD (Li et al., 2020) allows each intermediate student layer to learn from any intermediate teacher layer based on Earth Mover’s Distance. MINILM (Wang et al., 2020a) uses self-attention distribution and value relation to conduct deep self-attention distillation. MINILMv2 (Wang et al., 2021) generalizes deep self-attention distillation in MINILM (Wang et al., 2020a), employing self-attention relation.

Although existing knowledge distillation methods perform well in BERT compression, they are limited in two aspects: the relation-level knowledge is not well explored by the student model to enhance performance; and the attention head number of student model is restricted to the same as its teacher, increasing the inference time. Hence, we are motivated to propose a more flexible knowledge distillation method for BERT with improved performance.

3 Method

MLKD-BERT employs a two-stage distillation procedure for downstream task prediction in teacher-student framework (illustrated in Figure 1). Stage 1 distills embedding-layer and Transformer-layers, emphasizing feature representation and transformation, while Stage 2 distills prediction-layer, emphasizing sample prediction. In knowledge distillation, each student layer is mapped to corresponding teacher layer. As the number of Transformer-layers in student model is smaller than that in teacher model, we take uniform mapping strategy (Jiao et al., 2020) for Transformer-layer (TL) mapping. For example, in Figure 1, when 2 student TLs are mapped to 4 teacher TLs, TL1 and TL2 in student model are mapped to TL2 and TL4 in teacher model, respectively.

In MLKD-BERT, we bring in some new relation-level knowledge to improve layer distillation. At embedding-layer, token similarity relation is employed to enhance feature representation. At

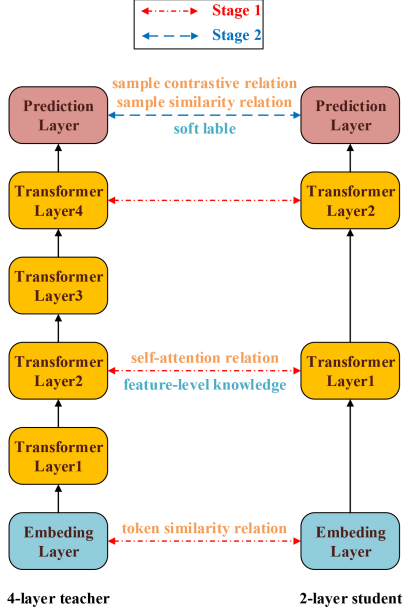


Figure 1: Framework of MLKD-BERT.

Transformer-layers, besides feature-level knowledge, self-attention relation is proposed for flexible student attention head number setting. At prediction-layer, in addition to soft labels, sample similarity relation and sample contrastive relation are introduced to enhance prediction. The distillation procedures will be detailed in the following subsections.

3.1 Embedding-layer Distillation

Since embedding-layer performs feature representation of tokens for each data sample, token similarity relation could be valuable knowledge to enhance embedding-layer distillation. In embedding-layer distillation, token similarity relation is transferred from teacher to student by minimizing the KL-divergence of token embedding similarities between teacher and student, according to the embedding distillation loss function \mathcal{L}_{EMB} defined in Eqn.(1):

$$\mathcal{L}_{\text{EMB}} = \frac{1}{|x|} \sum_{i=1}^{|x|} D_{\text{KL}}(\mathbf{R}_i^T || \mathbf{R}_i^S) \quad (1)$$

$$\mathbf{R}^T = \text{softmax}\left(\frac{\mathbf{E}^T \mathbf{E}^{T\top}}{\sqrt{d_h^T}}\right) \quad (2)$$

$$\mathbf{R}^S = \text{softmax}\left(\frac{\mathbf{E}^S \mathbf{E}^{S\top}}{\sqrt{d_h^S}}\right) \quad (3)$$

where $|x|$ is the length of input sequence; matrices $\mathbf{E}^T \in \mathbb{R}^{|x| \times d_h^T}$ and $\mathbf{E}^S \in \mathbb{R}^{|x| \times d_h^S}$ are token

embeddings of teacher and student; d_h^T and d_h^S are hidden dimension of teacher and student; matrices $\mathbf{R}^T \in \mathbb{R}^{|x| \times |x|}$ and $\mathbf{R}^S \in \mathbb{R}^{|x| \times |x|}$ are token embedding similarity matrices of teacher and student, respectively.

3.2 Transformer-layer Distillation

Standard Transformer-layer contains two main sub-layers: Multi-Head Attention (MHA) and Feed Forward Network (FFN). Transformer-layer distillation (illustrated in Figure 2) is conducted on MHA and FFN to transfer self-attention relation and feature-level knowledge, respectively.

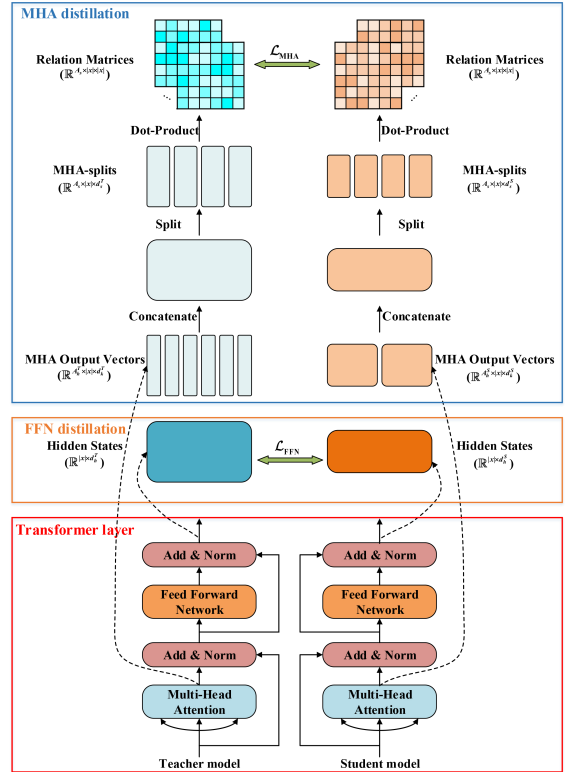


Figure 2: Transformer-layer Distillation: MHA Distillation and FFN Distillation.

As for MHA sub-layer, the similarities among its output vectors are defined as self-attention relation. At Transformer layer l , let A_h represents the number of attention heads, then output $\mathbf{O}_{l,a}$ ($a \in [1, A_h]$) of the a -th attention head, is computed via:

$$\mathbf{O}_{l,a} = \text{softmax}\left(\frac{\mathbf{Q}_{l,a} \mathbf{K}_{l,a}^\top}{\sqrt{d_k}}\right) \mathbf{V}_{l,a} \quad (4)$$

$$\mathbf{Q}_{l,a} = \mathbf{H}^{l-1} \mathbf{W}_{l,a}^Q \quad (5)$$

$$\mathbf{K}_{l,a} = \mathbf{H}^{l-1} \mathbf{W}_{l,a}^K \quad (6)$$

$$\mathbf{V}_{l,a} = \mathbf{H}^{l-1} \mathbf{W}_{l,a}^V \quad (7)$$

where $\mathbf{H}^{l-1} \in \mathbb{R}^{|x| \times d_h}$ is the input vectors of Transformer layer $l - 1$, with $|x|$ representing the length of input sequence and d_h representing the hidden dimension; $\mathbf{Q}_{l,a}, \mathbf{K}_{l,a}, \mathbf{V}_{l,a}$ are linearly projections of \mathbf{H}^{l-1} ; $\mathbf{W}_{l,a}^Q, \mathbf{W}_{l,a}^K, \mathbf{W}_{l,a}^V \in \mathbb{R}^{d_h \times d_k}$ are parameter matrices; and d_k is attention head size.

In MHA distillation, MHA outputs (i.e., $\mathbf{O}_{l,a}$ defined in Eqn.(4)) are concatenated together and then split into a certain number of vector groups (named MHA-splits), in both teacher and student models. We suggest setting the number of MHA-splits as the number of student attention heads. After that, self-attention relation is transferred from teacher to student by minimizing the KL-divergence of MHA output vector similarities between teacher and student. Given that the n -th student layer is mapped to the m -th teacher layer, the loss function for MHA distillation \mathcal{L}_{MHA} is defined in Eqn.(8):

$$\mathcal{L}_{\text{MHA}} = \frac{1}{A_s |x|} \sum_{n=1}^N \sum_{a=1}^{A_s} \sum_{i=1}^{|x|} D_{\text{KL}}(\mathbf{R}_{m,a,i}^T \parallel \mathbf{R}_{n,a,i}^S) \quad (8)$$

$$\mathbf{R}_{m,a}^T = \text{softmax}\left(\frac{\mathbf{O}_{m,a}^T \mathbf{O}_{m,a}^{TT}}{\sqrt{d_s^T}}\right) \quad (9)$$

$$\mathbf{R}_{n,a}^S = \text{softmax}\left(\frac{\mathbf{O}_{n,a}^S \mathbf{O}_{n,a}^{ST}}{\sqrt{d_s^S}}\right) \quad (10)$$

where $|x|$ is the length of input sequence; A_s is the number of MHA-splits; N is the number of student Transformer-layers; matrices $\mathbf{O}_{m,a}^T \in \mathbb{R}^{|x| \times d_s^T}$ and $\mathbf{O}_{n,a}^S \in \mathbb{R}^{|x| \times d_s^S}$ are MHA outputs in MHA-split a at teacher's Layer m and student's Layer n ; d_s^T and d_s^S are split-head size of teacher and student MHA-split; matrices $\mathbf{R}_{m,a}^T \in \mathbb{R}^{|x| \times |x|}$ and $\mathbf{R}_{n,a}^S \in \mathbb{R}^{|x| \times |x|}$ are MHA output vector similarities in MHA-split a at teacher's Layer m and student's Layer n , respectively.

Note that the teacher and student model should have the same number of MHA-splits. In MLKBERT, self-attention relation is transferred by MHA-split rather than MHA attention head. As such, student model does not have to set the same number of attention heads as its teacher. In this way, the number of attention heads in the student model can be set smaller, which could decrease inference time.

As for FFN sub-layer, the feature-level knowledge is distilled by minimizing the mean squared error of the output hidden states between teacher

and student, according to the FFN distillation loss function \mathcal{L}_{FFN} in Eqn.(11):

$$\mathcal{L}_{\text{FFN}} = \sum_{n=1}^N \text{MSE}(\mathbf{H}_n^S \mathbf{W}_h, \mathbf{H}_m^T) \quad (11)$$

Given that the n -th student layer is mapped to the m -th teacher layer, matrices $\mathbf{H}_n^S \in \mathbb{R}^{|x| \times d_h^S}$ and $\mathbf{H}_m^T \in \mathbb{R}^{|x| \times d_h^T}$ are the hidden states of student's Layer n and teacher's Layer m ; matrix $\mathbf{W}_h \in \mathbb{R}^{d_h^S \times d_h^T}$ is a learnable linear transformation, which transforms the student's hidden states into the same space as the teacher's hidden states.

In summary, as the first stage distillation covers both embedding-layer and Transformer-layers, the above distillation loss functions are summed up to the first stage distillation loss function in Eqn.(12):

$$\mathcal{L}_{\text{Stage 1}} = \mathcal{L}_{\text{EMB}} + \mathcal{L}_{\text{MHA}} + \mathcal{L}_{\text{FFN}} \quad (12)$$

3.3 Prediction-layer Distillation

As samples with same class label tend to be similar than samples with different class labels, relation among samples would be valuable knowledge for prediction-layer distillation. Here, we will bring in sample similarity relation and sample contrastive relation to enhance prediction-layer distillation.

Sample similarity relation is defined as the sample similarities within a data batch, without considering sample labels. The sample similarity relation is distilled from teacher to student by minimizing the KL-divergence of sample similarities between teacher and student, according to the sample-similarity distillation loss function \mathcal{L}_{SS} defined in Eqn.(13):

$$\mathcal{L}_{\text{SS}} = \frac{1}{b} \sum_{i=1}^b D_{\text{KL}}(\mathbf{R}_i^T \parallel \mathbf{R}_i^S) \quad (13)$$

$$\mathbf{R}^T = \text{softmax}\left(\frac{\mathbf{G}^T \mathbf{G}^{TT}}{\sqrt{d_h^T}}\right) \quad (14)$$

$$\mathbf{R}^S = \text{softmax}\left(\frac{\mathbf{G}^S \mathbf{G}^{ST}}{\sqrt{d_h^S}}\right) \quad (15)$$

where b is batch size; d_h^T and d_h^S are hidden dimension of teacher and student; matrices $\mathbf{G}^T \in \mathbb{R}^{b \times d_h^T}$ and $\mathbf{G}^S \in \mathbb{R}^{b \times d_h^S}$ are sample representations in a batch, i.e., [CLS] outputs from the last Transformer-layer of teacher and student; $\mathbf{R}^T \in \mathbb{R}^{b \times b}$ and $\mathbf{R}^S \in \mathbb{R}^{b \times b}$ are sample similarity matrices of teacher and student, respectively.

Sample contrastive relation is employed to map samples with same and different class labels (according to ground truth of training samples) into close and distant representation space, respectively. Sample contrastive relation is distilled by minimizing the sample-contrastive distillation loss function \mathcal{L}_{SC} in Eqn.(16) (Khosla et al., 2020):

$$\mathcal{L}_{SC} = \frac{1}{2b} \sum_{i=1}^{2b} \sum_{i \in I} \frac{1}{|P(i)|} \sum_{p \in P(i)} \mathcal{L}_{\text{InfoNCE}}(i, p) \quad (16)$$

$$\mathcal{L}_{\text{InfoNCE}}(i, p) = -\log \frac{\exp(\mathbf{h}_i \cdot \mathbf{h}_p) / \rho}{\sum_{a \in A(i)} \exp(\mathbf{h}_i \cdot \mathbf{h}_a) / \rho} \quad (17)$$

where b is batch size; $I \equiv \{1, \dots, 2b\}$, $A(i) \equiv I \setminus \{i\}$, $P(i) \equiv \{p | p \in A(i), y_p = y_i\}$; y_i is class label of i -th sample; ρ is scalar temperature parameter; \mathbf{h}_i is the i -th row of $\mathbf{H} \in \mathbb{R}^{2b \times d_h^T}$; $\mathbf{H} = \text{Concat}(\mathbf{G}^S \mathbf{W}_g, \mathbf{G}^T) = [\mathbf{h}_1; \dots; \mathbf{h}_{2b}]$, *i.e.*, $\mathbf{G}^S \mathbf{W}_g = [\mathbf{h}_1; \dots; \mathbf{h}_b]$, $\mathbf{G}^T = [\mathbf{h}_{b+1}; \dots; \mathbf{h}_{2b}]$; $\mathbf{W}_g \in \mathbb{R}^{d_h^S \times d_h^T}$ is linear transformation matrix; \mathbf{G}^T and \mathbf{G}^S are defined in Eqn.(14) and Eqn.(15).

Similar to previous distillation works, we also adopt soft label distillation by minimizing the soft-label distillation loss function \mathcal{L}_{KD} in Eqn.(18):

$$\mathcal{L}_{KD} = D_{\text{KL}}(\text{softmax}(\mathbf{z}^T / \tau) || \text{softmax}(\mathbf{z}^S / \tau)) \quad (18)$$

where τ is scalar temperature parameter; \mathbf{z}^T and \mathbf{z}^S are logits predicted by teacher and student, respectively.

In summary, the sample-similarity, sample-contrastive, and soft-label distillation loss functions are summed up to the second stage distillation loss function in Eqn.(19):

$$\mathcal{L}_{\text{Stage2}} = \mathcal{L}_{SS} + \mathcal{L}_{SC} + \mathcal{L}_{KD} \quad (19)$$

4 Experiments

4.1 Experimental Datasets

Our experiments are conducted on General Language Understanding Evaluation (GLUE) (Wang et al., 2019) benchmark and extractive question answering tasks. The former is sentence-level task while the latter is token-level task. GLUE includes 8 tasks: 1) Corpus of Linguistic Acceptability (CoLA) (Warstadt et al., 2019); 2) Stanford Sentiment Treebank (SST-2) (Socher et al.,

2013); 3) Microsoft Research Paraphrase Corpus (MRPC) (Dolan and Brockett, 2005); 4) Semantic Textual Similarity Benchmark (STS-B) (Cer et al., 2017); 5) Quora Question Pairs (QQP) (Chen et al., 2018); 6) Question Natural Language Inference (QNLI) (Rajpurkar et al., 2016); 7) Recognizing Textual Entailment (RTE) (Bentivogli et al., 2009); 8) Multi-Genre Natural Language Inference (MNLI) (Williams et al., 2018), which is further divided into in-domain (MNLI-m) and cross-domain (MNLI-mm) tasks. The extractive question answering tasks include SQuAD 1.1 (Rajpurkar et al., 2016) and SQuAD 2.0 (Rajpurkar et al., 2018). The GLUE tasks are evaluated on GLUE test sets and the extractive question answering tasks are evaluated on dev sets.

4.2 Experimental Setup

We take a pre-trained language model BERT-base (Devlin et al., 2019) with 109M parameters as the teacher model (number of layers $M = 12$, hidden size $d_h^T = 768$, intermediate size $d_h^{T'} = 3072$, and attention head number $A_h^T = 12$), which is fine-tuned for each specific task. Two student models are instantiated for comparative studies: 1) MLKD-BERT₄ ($N = 4$, $d_h^S = 312$, $d_h^{S'} = 1200$, $A_h^S = 12$) with 14.5M parameters; and 2) MLKD-BERT₆ ($N = 6$, $d_h^S = 768$, $d_h^{S'} = 3072$, $A_h^S = 12$) with 67.0M parameters. The student models are initialized with the general distillation model delivered by TinyBERT¹. The detailed hyper-parameters are presented in Appendix A.

4.3 Comparative Studies

Comparative studies are conducted to evaluate performance of MLKD-BERT against state-of-the-art BERT distillation baselines, including BERT-PKD (Sun et al., 2019), DistilBERT (Sanh et al., 2019), BERT-EMD (Li et al., 2020), TinyBERT (Jiao et al., 2020), and MINILMv2 (Wang et al., 2021). In addition, to measure the performance improvement delivered by distillation, MLKD-BERT is compared with a same structured pre-trained BERT model BERT_{TINY} (Turc et al., 2019), which is fine-tuned for each specific task without knowledge distillation. Note that all experiments are done without data augmentation.

The comparative results evaluated on the test

¹<https://github.com/huawei-noah/Pretrained-Language-Model/tree/master/TinyBERT>

Model	#Params	Speedup	MNLI-m/mm (393k)	QQP (364k)	QNLI (105k)	SST-2 (67k)	CoLA (8.5k)	STS-B (5.7k)	MRPC (3.7k)	RTE (2.5k)	Avg
BERT-base	109M	1.0×	84.2/83.6	71.6	90.8	94.3	52.6	83.9	87.3	67.3	79.5
BERT _{TINY}	14.5M	9.4×	75.4/74.9	66.5	84.8	87.6	19.5	77.1	83.2	62.6	70.2
BERT ₄ -PKD	52.2M	3.0×	79.9/79.3	70.2	85.1	89.4	24.8	79.8	82.6	62.3	72.6
DistilBERT ₄	52.2M	3.0×	78.9/78.0	68.5	85.2	91.4	32.8	76.1	82.4	54.1	71.9
BERT-EMD ₄	14.5M	9.4×	82.1 /80.6	69.3	87.2	91.0	25.6	82.3	87.6	66.2	74.7
TinyBERT ₄	14.5M	9.4×	81.4/80.4	69.9	85.9	91.9	35.2	81.5	85.4	62.1	74.8
MLKD-BERT₄	14.5M	9.4×	82.0/ 80.7	70.6	87.5	91.9	35.5	81.9	86.3	63.5	75.6
BERT ₆ -PKD	67.0M	2.0×	81.5/81.0	70.7	89.0	92.0	43.5	81.6	85.0	65.5	76.6
DistilBERT ₆	67.0M	2.0×	82.6/81.3	70.1	88.9	92.5	49.0	81.3	86.9	58.4	76.8
TinyBERT ₆	67.0M	2.0×	83.9/83.4	72.0	89.9	93.7	46.7	83.3	85.7	66.6	78.4
MINILMv2	67.0M	2.0×	83.8/83.3	70.9	90.2	92.9	46.6	84.3	89.1	69.2	78.9
MLKD-BERT₆	67.0M	2.0×	84.4 / 83.5	72.2	90.8	93.3	48.0	84.3	87.3	67.8	79.1

Table 1: Comparative Studies on GLUE Benchmark. The number under each task represents the number of its training samples. Avg represents the average score over all tasks. The subscript within each model name represents the number of Transformer layers. The best result on each task is in-bold.

Model	SQuAD 1.1	SQuAD 2.0	Avg
BERT-base	88.5	77.0	82.8
BERT ₄ -PKD	79.5	64.6	72.1
DistilBERT ₄	81.2	64.1	72.7
TinyBERT ₄	81.0	68.2	74.6
MLKD-BERT₄	82.0	68.9	75.5
BERT ₆ -PKD	85.3	69.8	77.6
DistilBERT ₆	86.2	69.5	77.9
TinyBERT ₆	88.0	76.1	82.1
MINILMv2	-	76.3	-
MLKD-BERT₆	88.3	76.5	82.4

Table 2: Comparative Studies on SQuAD 1.1 and SQuAD 2.0.

sets of GLUE official benchmark² are presented in Table 1. Here, different evaluation indices are adopted with regarding to the tasks: F1 metric for MRPC and QQP, Spearman correlation for STS-B, Matthew’s correlation for CoLA, and Accuracy for the other tasks.

Experimental results in Table 1 show that, among 4-layer models, our MLKD-BERT₄ ranks first on average performance and 5 specific tasks, while ranks second on the rest tasks. Among 6-layer models, our MLKD-BERT₆ delivers similar results. Moreover, MLKD-BERT₄ performs better than BERT₄-PKD and DistilBERT₄, with only 30% parameters and inference time. Therefore, our MLKD-BERT has an average improved performance, compared to state-of-the-art knowledge distillation methods on BERT.

To evaluate the effectiveness of MLKD-BERT distillation, MLKD-BERT is compared with BERT_{TINY} and its teacher BERT-base. Results show that our MLKD-BERT₄ is consistently better than BERT_{TINY} on all tasks with 5.3 improvement on average. Comparing with teacher model

BERT-base, MLKD-BERT₄ is 7.5x smaller and 9.4x faster, while keeping average 95.1% performance of its teacher; MLKD-BERT₆ keeps average 99.5% performance of its teacher, with only 50% parameters and inference time. As such, the distillation strategies designed for MLKD-BERT are effective to enhance model performance.

The comparative results evaluated on the dev sets of SQuAD 1.1 and SQuAD 2.0 are presented in Table 2, with F1 metric for evaluation. As those two tasks are token-level tasks, we remove \mathcal{L}_{SS} and \mathcal{L}_{SC} in Stage 2. The results in Table 2 show that our MLKD-BERT₄ and MLKD-BERT₆ outperform all other methods on SQuAD 1.1 and SQuAD 2.0, which further demonstrates the effectiveness of our method.

4.4 Inference Time vs. Performance

As MLKD-BERT can flexibly set attention head number for student model, this group of experiments are to evaluate its effect on model performance and inference time. 4-layer student model MLKD-BERT₄ instantiated with varied numbers of attention heads are experimented on GLUE tasks. MLKD-BERT₄ with 12 attention heads is taken as baseline as it has the same number of attention heads as its teacher. The inference time is measured by the time (\pm standard deviation) required for each batch data on a single GeForce RTX 2080Ti GPU. The batch size B_{size} is varied to provide more insights.

As shown in Table 3, with decrease of attention head number, the inference time decreases very fast with relatively little performance drop. And such effect is emphasized with the increase of batch size. As for batch size of 64 on MNLI-m task, when attention head number drops from 12 to 3, the in-

²<https://gluebenchmark.com>

MLKD-BERT ₄	B_{size}	MNLi-m			MNLi-mm		
		$A_h^S = 12$	$A_h^S = 6$	$A_h^S = 3$	$A_h^S = 12$	$A_h^S = 6$	$A_h^S = 3$
Inference time(ms)	1	4.23 ± 0.19	4.12 ± 0.24 (-2.60%)	4.07 ± 0.25 (-3.78%)	4.24 ± 0.28	4.14 ± 0.40 (-2.36%)	4.03 ± 0.27 (-4.95%)
	16	5.46 ± 0.19	5.09 ± 0.22 (-6.78%)	4.90 ± 0.32 (-10.26%)	5.47 ± 0.17	5.10 ± 0.29 (-6.76%)	4.84 ± 0.20 (-11.52%)
	32	10.34 ± 0.18	9.46 ± 0.17 (-8.51%)	9.00 ± 0.30 (-12.96%)	10.35 ± 0.20	9.46 ± 0.13 (-8.60%)	8.99 ± 0.24 (-13.14%)
	64	19.28 ± 0.20	17.52 ± 0.22 (-9.13%)	16.56 ± 0.18 (-14.11%)	19.28 ± 0.21	17.49 ± 0.17 (-9.28%)	16.59 ± 0.17 (-13.95%)
Performance		82.0	81.4 (-0.73%)	80.6 (-1.70%)	80.7	80.6 (-0.12%)	79.5 (-1.49%)

Table 3: Effect of Attention Head Number A_h^S on Model Performance and Inference Time.

Model	A_s	MNLi-m/-mm	SST-2	QQP	Avg
$A_h^S = 3$	3	80.6/79.5	91.9	70.0	80.5
	6	80.6/79.0	90.4	69.8	79.9
	12	80.4/79.3	91.0	69.9	80.1
$A_h^S = 6$	6	81.4/80.6	92.0	70.4	81.1
	8	80.7/80.0	91.3	70.4	80.6
	12	81.0/80.2	91.9	70.4	80.9

Table 4: Effect of MHA-split Number on Model Performance.

Model	Method	MNLi-m/-mm	SST-2	QQP	Avg
$A_h^S = 3$	Concat-split	80.6/79.5	91.9	70.0	80.5
	Average	80.3/79.2	90.8	70.0	80.0
	Random	80.4/79.2	90.8	69.9	80.0
$A_h^S = 6$	Concat-split	81.4/80.6	92.0	70.4	81.1
	Average	81.2/80.4	91.9	70.5	81.0
	Random	81.4/80.0	92.0	70.3	80.9

Table 5: Concat-split vs. Average and Random mapping

ference time of MLKD-BERT₄ decreases 14.11% while keeping over 98% prediction performance. More experimental results presented in Appendix B, deliver similar effect. Therefore, the flexible setting of student attention head number would allow substantial inference time decrease at little expense of performance drop.

4.5 MHA-split Studies

First we study the effect of MHA-split number A_s on model performance in MHA distillation. We instantiate MLKD-BERT₄ with 3 attention heads ($A_h^S = 3$) and 6 attention heads ($A_h^S = 6$), respectively. For the student model with $A_h^S = 3$, the number of MHA-splits varies with 3, 6 and 12; and for the model with $A_h^S = 6$, the number of MHA-splits varies with 6, 8 and 12. The training is conducted under the supervision of teacher model BERT-base, which has 12 attention heads.

Table 4 shows that, the student model performs best, when the MHA-split number A_s equals to the number of student attention heads A_h^S . This

Model	MNLi-m/-mm	CoLA	MRPC	Avg
MLKD-BERT ₄	82.0/80.7	35.5	86.3	71.2
\mathcal{L}_{FFN} for both FFN and MHA sub-layers	81.7/80.8	25.7	85.7	68.5
\mathcal{L}_{MHA} for both FFN and MHA sub-layers	80.6/79.7	26.6	85.6	68.1

Table 6: FFN vs. MHA Distillation.

might because it could keep the integrity of student model’s subspaces. That explains why we suggest setting the number of MHA-splits as the number of student attention heads.

As the number of attention heads in student model could be smaller than that in teacher model, the teacher attention heads are divided into several MHA-splits by the number of student attention heads, so that each student attention head is mapped to several teacher attention heads in a MHA-split. Our method (named Concat-split) concatenates all teacher attention heads in a MHA-split together. We could have two other methods to map student attention head to its teacher in a MHA-split: 1) Average mapping averages the teacher attention heads in a MHA-split; 2) Random mapping randomly selects one teacher attention head in a MHA-split.

The second group of experiments are conducted to compare the performance of Concat-split against Average and Random mapping. MLKD-BERT₄ with 3 attention heads ($A_h^S = 3$) and 6 attention heads ($A_h^S = 6$) are instantiated, respectively. As shown in Table 5, our Concat-split outperforms the two other methods on almost all tasks. We think it is because our method has less information loss.

4.6 FFN vs. MHA Distillation

In Transformer-layer distillation, as FFN distillation and MHA distillation can be applied on both FFN sub-layer and MHA sub-layer, we are to study

Model	MNLI-m/-mm	CoLA	MRPC	Avg
MLKD-BERT ₄	82.0/80.7	35.5	86.3	71.2
w/o \mathcal{L}_{EMB}	81.9/80.8	33.3	86.9	70.7
w/o \mathcal{L}_{MHA}	81.8/80.3	31.3	86.1	69.9
w/o \mathcal{L}_{FFN}	81.7/ 80.1	32.7	84.9	69.9
w/o \mathcal{L}_{SS}	81.8/80.4	33.7	85.2	70.3
w/o \mathcal{L}_{SC}	81.6 /80.4	32.2	86.2	70.1

Table 7: Effect of Distillation Loss Functions on Performance. The worst performance on each task is in-bold.

whether those two distillations could replace each other. As shown in Table 6, neither MHA distillation \mathcal{L}_{MHA} nor FFN distillation \mathcal{L}_{FFN} could perform well on both FFN and MHA sub-layers. Instead, \mathcal{L}_{MHA} on MHA sub-layer jointing \mathcal{L}_{FFN} on FFN sub-layer delivers best performance, which is conducted by our method MLKD-BERT₄.

Since the outputs of FFN sub-layer contain feature representations of tokens while the outputs of MHA sub-layer encode the relations of different tokens, feature-level distillation (FFN distillation) fits better for FFN sub-layer, and relation-level distillation (MHA distillation) performs better for MHA. That might explain why our method performs best.

4.7 Ablation Studies

The effect of different distillation loss functions (including \mathcal{L}_{EMB} , \mathcal{L}_{MHA} , \mathcal{L}_{FFN} , \mathcal{L}_{SS} , and \mathcal{L}_{SC}) on model performance are evaluated by ablation studies on MNLI-m/-mm, CoLA and MRPC tasks. MLKD-BERT₄ keeping all distillation loss functions is taken as the baseline.

As shown in Table 7, greater drop in performance indicates more importance of corresponding distillation loss function. As such, according to average performance, the distillation loss functions \mathcal{L}_{FFN} , \mathcal{L}_{MHA} , \mathcal{L}_{SC} , \mathcal{L}_{SS} , and \mathcal{L}_{EMB} are listed in importance descending order. As the removal of any distillation loss function leads to average performance drop, we may conclude that the distillation loss functions proposed by MLKD-BERT are all effective to enhance performance. Therefore, the relation-level knowledge (\mathcal{L}_{EMB} , \mathcal{L}_{MHA} , \mathcal{L}_{SS} , \mathcal{L}_{SC}) can be complementary to feature-level knowledge (\mathcal{L}_{FFN}) for performance enhancement. That could explain why our MLKD-BERT outperforms state-of-the-art knowledge distillation methods on BERT.

4.8 One-stage vs. Two-stage Distillation

Here we are to study whether the distillation procedure of MLKD-BERT should be partitioned into

Model	MNLI-m/-mm	CoLA	MRPC	Avg
MLKD-BERT ₄ (two-stage)	82.0/80.7	35.5	86.3	71.2
MLKD-BERT ₄ (one-stage)	80.7/80.2	28.5	86.2	68.9

Table 8: One-stage vs. Two-stage Distillation.

two stages. As we have got 6 distillation loss functions for MLKD-BERT, the one-stage procedure is designed to minimize the sum of the 6 distillation loss functions. Experimental results with MLKD-BERT₄ on MNLI-m/-mm, CoLA and MRPC tasks are presented in Table 8. We find that MLKD-BERT₄ with two-stage distillation outperforms one-stage distillation on all tasks. That might be because our procedure partition could emphasize different distillation objectives for Stage 1 and Stage 2. Stage 1 emphasizes distilling feature representation and transformation, while Stage 2 emphasizes distilling sample prediction.

5 Conclusion

In this paper, we propose a novel two-stage distillation method MLKD-BERT to distill multi-level knowledge in teacher-student framework. MLKD-BERT enhances existing knowledge distillation methods on BERT in two ways: bringing in valuable relation-level knowledge, and making flexible setting of student attention head number. Experimental results show that MLKD-BERT outperforms state-of-the-art BERT distillation methods on GLUE benchmark and extractive question answering tasks. We believe that, the easy adaption of our method would be helpful to other Transformer-based PLM compression in teacher-student framework.

Limitations

Our MLKD-BERT has two limitations: 1) The two-stage distillation costs relatively more training time than one-stage methods; 2) MLKD-BERT is limited to handle natural language understanding tasks.

References

Gustavo Aguilar, Yuan Ling, Yu Zhang, Benjamin Yao, Xing Fan, and Chenlei Guo. 2020. [Knowledge distillation from internal representations](#). In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020,*

- The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pages 7350–7357. AAAI Press.
- Luisa Bentivogli, Bernardo Magnini, Ido Dagan, Hoa Trang Dang, and Danilo Giampiccolo. 2009. [The fifth PASCAL recognizing textual entailment challenge](#). In *Proceedings of the Second Text Analysis Conference, TAC 2009, Gaithersburg, Maryland, USA, November 16-17, 2009*. NIST.
- Daniel M. Cer, Mona T. Diab, Eneko Agirre, Iñigo Lopez-Gazpio, and Lucia Specia. 2017. [Semeval-2017 task 1: Semantic textual similarity - multilingual and cross-lingual focused evaluation](#). *CoRR*, abs/1708.00055.
- Zihan Chen, Hongbo Zhang, Xiaoji Zhang, and Leqi Zhao. 2018. Quora question pairs. URL <https://www.kaggle.com/c/quora-question-pairs>.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4171–4186. Association for Computational Linguistics.
- William B. Dolan and Chris Brockett. 2005. [Automatically constructing a corpus of sentential paraphrases](#). In *Proceedings of the Third International Workshop on Paraphrasing, IWP@IJCNLP 2005, Jeju Island, Korea, October 2005, 2005*. Asian Federation of Natural Language Processing.
- Geoffrey E. Hinton, Oriol Vinyals, and Jeffrey Dean. 2015. [Distilling the knowledge in a neural network](#). *CoRR*, abs/1503.02531.
- Xiaoqi Jiao, Yichun Yin, Lifeng Shang, Xin Jiang, Xiao Chen, Linlin Li, Fang Wang, and Qun Liu. 2020. [Tinybert: Distilling BERT for natural language understanding](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020, Online Event, 16-20 November 2020*, volume EMNLP 2020 of *Findings of ACL*, pages 4163–4174. Association for Computational Linguistics.
- Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschiot, Ce Liu, and Dilip Krishnan. 2020. [Supervised contrastive learning](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Jianquan Li, Xiaokang Liu, Honghong Zhao, Ruifeng Xu, Min Yang, and Yaohong Jin. 2020. [BERT-EMD: many-to-many layer mapping for BERT compression with earth mover’s distance](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16-20, 2020*, pages 3009–3018. Association for Computational Linguistics.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized BERT pretraining approach](#). *CoRR*, abs/1907.11692.
- Tomás Mikolov, Ilya Sutskever, Kai Chen, Gregory S. Corrado, and Jeffrey Dean. 2013. [Distributed representations of words and phrases and their compositionality](#). In *Advances in Neural Information Processing Systems 26: 27th Annual Conference on Neural Information Processing Systems 2013. Proceedings of a meeting held December 5-8, 2013, Lake Tahoe, Nevada, United States*, pages 3111–3119.
- Jeffrey Pennington, Richard Socher, and Christopher D. Manning. 2014. [Glove: Global vectors for word representation](#). In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing, EMNLP 2014, October 25-29, 2014, Doha, Qatar, A meeting of SIGDAT, a Special Interest Group of the ACL*, pages 1532–1543. ACL.
- Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. 2018. Improving language understanding by generative pre-training.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. 2018. [Know what you don’t know: Unanswerable questions for squad](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics, ACL 2018, Melbourne, Australia, July 15-20, 2018, Volume 2: Short Papers*, pages 784–789. Association for Computational Linguistics.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [Squad: 100, 000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing, EMNLP 2016, Austin, Texas, USA, November 1-4, 2016*, pages 2383–2392. The Association for Computational Linguistics.
- Victor Sanh, Lysandre Debut, Julien Chaumond, and Thomas Wolf. 2019. [Distilbert, a distilled version of BERT: smaller, faster, cheaper and lighter](#). *CoRR*, abs/1910.01108.
- Sheng Shen, Zhen Dong, Jiayu Ye, Linjian Ma, Zhewei Yao, Amir Gholami, Michael W. Mahoney, and Kurt Keutzer. 2020. [Q-BERT: hessian based ultra low precision quantization of BERT](#). In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pages 8815–8821. AAAI Press.

- Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D. Manning, Andrew Y. Ng, and Christopher Potts. 2013. [Recursive deep models for semantic compositionality over a sentiment treebank](#). In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing, EMNLP 2013, 18-21 October 2013, Grand Hyatt Seattle, Seattle, Washington, USA, A meeting of SIG-DAT, a Special Interest Group of the ACL*, pages 1631–1642. ACL.
- Siqi Sun, Yu Cheng, Zhe Gan, and Jingjing Liu. 2019. [Patient knowledge distillation for BERT model compression](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, pages 4322–4331. Association for Computational Linguistics.
- Zhiqing Sun, Hongkun Yu, Xiaodan Song, Renjie Liu, Yiming Yang, and Denny Zhou. 2020. [Mobilebert: a compact task-agnostic BERT for resource-limited devices](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 2158–2170. Association for Computational Linguistics.
- Raphael Tang, Yao Lu, Linqing Liu, Lili Mou, Olga Vechtomova, and Jimmy Lin. 2019. [Distilling task-specific knowledge from BERT into simple neural networks](#). *CoRR*, abs/1903.12136.
- Iulia Turc, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [Well-read students learn better: The impact of student initialization on knowledge distillation](#). *CoRR*, abs/1908.08962.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. 2019. [GLUE: A multi-task benchmark and analysis platform for natural language understanding](#). In *7th International Conference on Learning Representations, ICLR 2019, New Orleans, LA, USA, May 6-9, 2019*. OpenReview.net.
- Wenhui Wang, Hangbo Bao, Shaohan Huang, Li Dong, and Furu Wei. 2021. [Minilmv2: Multi-head self-attention relation distillation for compressing pre-trained transformers](#). In *Findings of the Association for Computational Linguistics: ACL/IJCNLP 2021, Online Event, August 1-6, 2021*, volume ACL/IJCNLP 2021 of *Findings of ACL*, pages 2140–2151. Association for Computational Linguistics.
- Wenhui Wang, Furu Wei, Li Dong, Hangbo Bao, Nan Yang, and Ming Zhou. 2020a. [Minilm: Deep self-attention distillation for task-agnostic compression of pre-trained transformers](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Ziheng Wang, Jeremy Wohlwend, and Tao Lei. 2020b. [Structured pruning of large language models](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16-20, 2020*, pages 6151–6162. Association for Computational Linguistics.
- Alex Warstadt, Amanpreet Singh, and Samuel R. Bowman. 2019. [Neural network acceptability judgments](#). *Trans. Assoc. Comput. Linguistics*, 7:625–641.
- Adina Williams, Nikita Nangia, and Samuel R. Bowman. 2018. [A broad-coverage challenge corpus for sentence understanding through inference](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2018, New Orleans, Louisiana, USA, June 1-6, 2018, Volume 1 (Long Papers)*, pages 1112–1122. Association for Computational Linguistics.
- Zhilin Yang, Zihang Dai, Yiming Yang, Jaime G. Carbonell, Ruslan Salakhutdinov, and Quoc V. Le. 2019. [Xlnet: Generalized autoregressive pretraining for language understanding](#). In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 5754–5764.
- Zhengyan Zhang, Xu Han, Zhiyuan Liu, Xin Jiang, Maosong Sun, and Qun Liu. 2019. [ERNIE: enhanced language representation with informative entities](#). In *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, pages 1441–1451. Association for Computational Linguistics.

A Hyper-parameters for Two-stage Distillation

The detailed hyper-parameters for two-stage distillation of MLKD-BERT on GLUE tasks and extractive question answering tasks are presented in Table 9.

B Effect of Attention Head Number A_h^S on Model Performance and Inference Time on more GLUE tasks

The effect of attention head number A_h^S on model performance and inference time on more GLUE tasks are summarized in Table 10. We can observe the similar trends as the results on MNLI task in Table 3.

C GLUE Dataset

In this section, we provide a brief description of the tasks in GLUE benchmark (Wang et al., 2019). **MNLI**. Multi-Genre Natural Language Inference

Task	Stage 1				Stage 2					
	Epochs	Batch size	Max seq length	Learning rate	Epochs	Batch size	Max seq length	Learning rate	ρ	τ
CoLA	50	32	64	1e-5	30	32	64	1e-5	0.07	1.0
MNLI	6	32	128	3e-5	6	32	128	3e-5	0.07	1.0
MRPC	20	32	128	2e-5	15	32	128	2e-5	0.07	1.0
SST-2	15	32	64	2e-5	10	32	64	2e-5	0.07	1.0
STS-B	20	32	128	3e-5	15	32	128	3e-5	0.07	1.0
QQP	6	32	128	2e-5	6	32	128	2e-5	0.07	1.0
QNLI	10	32	128	2e-5	10	32	128	2e-5	0.07	1.0
RTE	20	32	128	2e-5	15	32	128	2e-5	0.07	1.0
SQuAD 1.1	4	16	384	3e-5	3	16	384	3e-5	0.07	1.0
SQuAD 2.0	4	16	384	3e-5	3	16	384	3e-5	0.07	1.0

Table 9: Hyper-parameters for Two-stage Distillation.

MLKD-BERT ₄	B_{size}	QQP			SST-2		
		$A_h^S = 12$	$A_h^S = 6$	$A_h^S = 3$	$A_h^S = 12$	$A_h^S = 6$	$A_h^S = 3$
Inference time(ms)	1	4.27 ± 0.33	4.16 ± 0.19 (-2.58%)	4.09 ± 0.20 (-4.22%)	4.24 ± 0.22	4.12 ± 0.22 (-2.83%)	4.00 ± 0.19 (-5.66%)
	16	5.46 ± 0.17	5.06 ± 0.21 (-7.33%)	4.93 ± 0.21 (-9.71%)	5.49 ± 0.20	5.07 ± 0.24 (-7.65%)	4.91 ± 0.30 (-10.56%)
	32	10.35 ± 0.17	9.48 ± 0.26 (-8.41%)	8.99 ± 0.22 (-13.14%)	10.39 ± 0.22	9.49 ± 0.18 (-8.66%)	9.01 ± 0.24 (-13.28%)
	64	19.28 ± 0.21	17.49 ± 0.18 (-9.28%)	16.60 ± 0.22 (-13.90%)	19.27 ± 0.20	17.49 ± 0.21 (-9.24%)	16.59 ± 0.23 (-13.91%)
Performance		70.6	70.4 (-0.28%)	70.0 (-0.85%)	91.9	92.0 (+0.11%)	91.9 (-0.00%)

Table 10: Effect of Attention Head Number A_h^S on Model Performance and Inference Time on more GLUE tasks.

is a large-scale, crowd-sourced entailment classification task (Williams et al., 2018). Given a pair of $\langle premise, hypothesis \rangle$, the goal is to predict whether the *hypothesis* is an entailment, contradiction, or neutral with respect to the *premise*.

QQP. Quora Question Pairs is a collection of question pairs from the website Quora. The task is to determine whether two questions are semantically equivalent (Chen et al., 2018).

QNLI. Question Natural Language Inference is a version of the Stanford Question Answering Dataset which has been converted to a binary sentence pair classification task by (Wang et al., 2019). Given a pair of $\langle question, context \rangle$, The task is to determine whether the *context* contains the *answer* to the question.

SST-2. The Stanford Sentiment Treebank is a binary single-sentence classification task, where the goal is to predict the sentiment of movie reviews (Socher et al., 2013).

CoLA. The Corpus of Linguistic Acceptability is a task to predict whether an English sentence is a grammatically correct one (Warstadt et al., 2019).

STS-B. The Semantic Textual Similarity Benchmark is a collection of sentence pairs drawn from news headlines and many other domains (Cer et al., 2017). The task aims to evaluate how similar two pieces of texts are by a score from 1 to 5.

MRPC. Microsoft Research Paraphrase Corpus is a paraphrase identification dataset where systems

aim to identify if two sentences are paraphrases of each other (Dolan and Brockett, 2005).

RTE. Recognizing Textual Entailment is a binary entailment task with a small training dataset (Bentivogli et al., 2009).

D SQuAD

Stanford Question Answering Dataset (SQuAD) is a reading comprehension dataset, consisting of questions posed by crowdworkers on a set of Wikipedia articles, where the answer to every question is a segment of text, or span, from the corresponding reading passage, or the question might be unanswerable.

SQuAD 1.1 (Rajpurkar et al., 2016) contains 100,000+ question-answer pairs on 500+ articles.

SQuAD 2.0 (Rajpurkar et al., 2018) combines the 100,000 questions in SQuAD 1.1 with over 50,000 unanswerable questions written adversarially by crowdworkers to look similar to answerable ones.