
Enhancing Class Fairness in Classification with A Two-Player Game Approach

Yunpeng Jiang

Shanghai Jiao Tong University
jyp9961@sjtu.edu.cn

Paul Weng*

Duke Kunshan University
paul.weng@duke.edu

Yutong Ban*

Shanghai Jiao Tong University
yban@sjtu.edu.cn

Abstract

Data augmentation is widely applied and has shown its benefits in different machine learning tasks. However, as recently observed in some downstream tasks, data augmentation may introduce an unfair impact on classifications. While it can improve the performance of some classes, it can actually be detrimental for other classes, which can be problematic in some application domains. In this paper, to counteract this phenomenon, we propose a FAir Classification approach with a Two-player game (FACT). We first formulate the training of a classifier with data augmentation as a fair optimization problem, which can be further written as an adversarial two-player game. Following this formulation, we propose a novel multiplicative weight optimization algorithm, for which we theoretically prove that it can converge to a solution that is fair over classes. Interestingly, our formulation also reveals that this fairness issue over classes is not due to data augmentation only, but is in fact a general phenomenon. Our empirical experiments demonstrate that the performance of our learned classifiers is indeed more fairly distributed over classes in five datasets, with only limited impact on the average accuracy.

1 Introduction

Data augmentation is a popular technique used in the field of computer vision to improve both training efficiency and performance of models [1][2]. It involves creating new training samples by applying semantically-preserving transformations, such as random shift[3] [4], random convolution [5] and random resized cropping, to the original data. The aim is to increase the diversity of the training dataset and prevent overfitting, leading to better generalizability to the testing dataset.

However, recent research [6] has highlighted a potential issue with data augmentation: although it is beneficial in improving the overall performance, data augmentation can lead to disparities in performance across different classes. This means that while there are significant improvements on the performance of some classes, others may experience a decline or minimal gains. This disparity raises concerns about fairness in classification tasks. If certain classes are consistently under-performing, it can lead to biased outcomes and a lack of equitable treatment for all classes[7][8].

As a result, there is growing interest in developing methods to achieve equitable performance among all classes within classification tasks. The goal of fair classification problems is to ensure that the benefits of data augmentation are evenly distributed across all classes, rather than being concentrated

*indicates the corresponding authors.

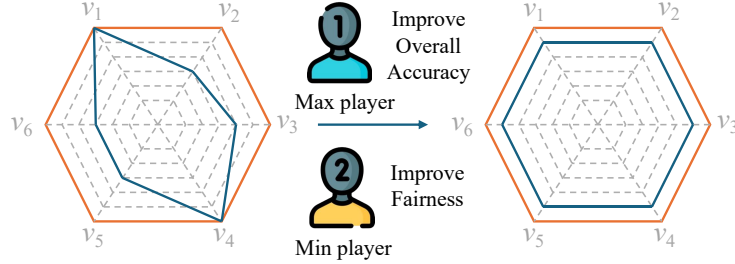


Figure 1: The proposed FACT formulates the fair classification problem as an adversarial two-player game, where v_i represents the accuracy of the i^{th} class.

in a few. This involves finding ways to mitigate the potential negative impact of data augmentation on certain classes while maintaining the positive effects on others.

In this paper, to address the challenge of achieving class fairness in classification tasks without compromising the overall model performance, we conceptualize the fair classification problem as an adversarial two-player game. The max player aims at maximizing the overall accuracy of the model while the min player focuses on ensuring fairness across different classes. We show that existing methods based on the standard max-min fairness [9, 10] or using the generalized Gini social welfare function (GGF) [11, 12] fall under this formulation. In the context of GGF, the min player is responsible for determining the weight for each class. Meanwhile, the max player’s role is to take into account the weights assigned by the min player and train the model such that the weighted accuracy of the model is maximized.

In this strategic interaction, we propose employing an adaptation of a multiplicative weight update method. Our method dynamically adjusts the weights assigned to each class to ensure that more focus is given to classes with weaker performance. Our approach extends the traditional framework by introducing a mechanism that encourages the min player to consider the max player’s objective, leading to a trade-off between accuracy and fairness. By adopting this multiplicative weight method, we aim to achieve a state of equilibrium where the model’s overall accuracy is optimized while simultaneously ensuring fair treatment among all classes.

Contributions Our contributions are four-fold: (i) We introduce a novel formulation of fair classification problems as an adversarial two-player game. (ii) This formalization highlights that the class-dependent effect of data augmentation is actually a more general phenomenon and not only due to this technique, which is also experimentally confirmed. (iii) We propose a multiplicative weight optimization method to solve this two-player game and further analyze the upper bound of the average loss, which proves its convergence. (iv) Experimental results show that the unfairness in classification problems can be mitigated, the worst class accuracies are improved, and meanwhile the impact on the average accuracy is limited.

2 Related Work

Our fair classification problem is different from, although not completely unrelated, the usual fair machine learning research direction [13]. Here, our focus is on obtaining a classifier whose performance has a fair distribution over classes. In the realm of addressing fairness in classification tasks, several approaches have been proposed, which can be categorized in two themes: relabelling and specialized loss functions.

One strategy to mitigate the unfairness of per-class accuracy is through the process of relabelling. Kirichenko et al. [14] demonstrate that by leveraging the more precise multi-label annotations available in ImageNet, the typically negative impact of data augmentation on individual class accuracies is substantially reduced. A related method is proposed by Jung et al. [8], who suggest a method for assigning group labels based on confidence scores. Further, Anclhia and Choi [15] introduce a "data clean-up" technique aimed at replacing biased labels with more equitable ones. Additionally, they propose a reweighting method that estimates statistical fairness with respect to the inferred fair labels.

Specialized loss functions have been introduced to achieve fairness in machine learning models. Notably, Lin et al. [7] introduce the focal loss for the task of dense object detection, which strategically decreases the training loss from correctly classified instances, thus concentrating the model’s learning efforts on the challenging samples. Szabó et al. [16] propose tilted cross entropy (TCE) loss, which fosters fairness in semantic segmentation tasks by dynamically assigning weights to various classes based on the ongoing training losses. Addressing the problem of model pruning, Meyer and Wong [17] recognize that while pruning might minimally impact overall performance, it can inadvertently introduce biases, leading to performance degradation for certain sample subsets. Inspired by focal loss, the authors propose a performance weighted loss function aimed at mitigating such unfairness. Furthermore, Park et al. [18] contribute to the field with the proposition of a novel fair supervised contrastive loss, designed explicitly for equitable representation learning.

In the context of fair optimization in multi-objective settings, the Generalized Gini social welfare function (GGF) [11], which includes the standard max-min fairness [9], plays a pivotal role. GGF is leveraged to assign appropriate weights to various components in the loss function. The purpose of this weighting scheme is to ensure that the learned model is more equitable and treats all objectives fairly. For instance, in more recent applications in machine learning, Siddique et al. [12] utilize GGF as a means to guarantee fairness over users in deep reinforcement learning. With the help of GGF, it becomes possible to reduce bias towards any single objective, thus fostering a fairer learning process. More generally, fair social welfare functions have been advocated [19–21] as a theoretically-founded approach to tackle fairness in machine learning.

Zietlow et al. [22] mention accuracy-fairness trade-off. This concept describes the scenario where incorporating a fairness regularizer into the loss function can enhance fairness metrics but may concurrently lead to a reduction in overall model accuracy. In light of this trade-off, a fair classifier should do well on the worst classes, as emphasized by Bitterwolf et al. [23], while also ensuring that the performance on the best classes does not decrease significantly.

3 Background

Before recalling the GGF function and the multiplicative weight method, we introduce a few notations: Δ_n denotes the $(n - 1)$ -simplex, i.e., the set of non-negative n -dimensional vectors \mathbf{w} that sums to one. For a vector \mathbf{v} , vector \mathbf{v}^\uparrow is obtained by sorting \mathbf{v} in a non-decreasing order (i.e., $v_1^\uparrow \leq \dots \leq v_n^\uparrow$).

Generalized Gini Social Welfare Function (GGF) GGF [11] extends the concept of Gini coefficient, often used to measure income equality, to a measure of social welfare including fairness:

$$GGF_{\mathbf{w}^\downarrow}(\mathbf{u}) = \sum_j w_j^\downarrow u_j^\uparrow, \quad (1)$$

where $\mathbf{w}^\downarrow \in \Delta_n$ such that $w_1^\downarrow > w_2^\downarrow > \dots > w_n^\downarrow$ and \mathbf{u} is a utility vector. As can be seen from its definition, GGF encodes fairness by assigning higher weights to worse-off components. When comparing two vectors, a higher GGF value indicates either overall utility and/or more equitable distribution. Interestingly, by setting \mathbf{w}^\downarrow close to $(1, 0, \dots, 0)$, GGF can encode the classic max-min fairness. One difficulty with exploiting GGF in applications is that it is not always clear how to choose this weight vector \mathbf{w}^\downarrow , which actually controls a trade-off between efficiency and equity.

Multiplicative Weight Method This method [24] is a learning algorithm, which can be applied by a player in adversarial two-player games. It updates the probabilities of the player’s strategy based on the outcomes of previous timesteps. Without loss of generality, we assume that the player is the min player. The player initializes a mixed strategy, i.e., probability distribution $\mathbf{w} \in \Delta_n$ over all her strategies (e.g., with a uniform distribution). Then at each timestep t , the player chooses a strategy i sampled according to her current mixed strategy \mathbf{w}^t and incurs loss v_i according to the other player’s choice and the payoff matrix. The player then updates her mixed strategy using the multiplicative weight method. The probability of strategy i is updated as:

$$w_i^{t+1} \leftarrow \frac{w_i^t \cdot e^{-\tau \cdot v_i}}{Z_t} \quad \text{with} \quad Z_t = \sum_{i=1}^n w_i^t \cdot e^{-\tau \cdot v_i}, \quad (2)$$

where $\tau > 0$ is a hyperparameter. This process is repeated for multiple rounds until convergence. The hyperparameter τ controls the update rate of the probabilities. Freund and Schapire [24] have

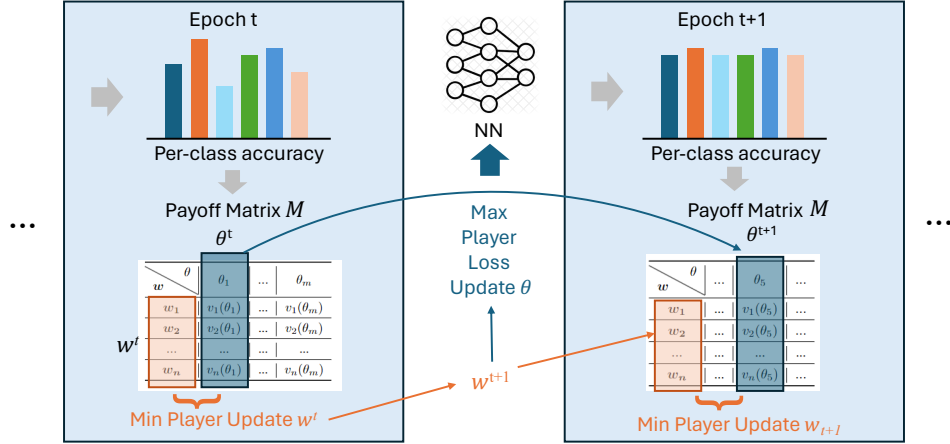


Figure 2: Our method optimized the classification fairness iteratively over epochs. At epoch t , the max player updates the model parameters θ^t by employing a loss function that incorporates weights w_t . Subsequently, the min player adjusts the w_t through a multiplicative weight algorithm based on the accuracy of each class, $v_i(\theta^t)$, to obtain the weights for the next epoch w_{t+1} . Consequently, the max player loss of epoch $t + 1$ is calculated with the updated weights w_{t+1} . The above process repeats for each epoch. For the payoff matrix M , each row corresponds to a class i , each column represents a set of model parameters θ , and each entry $v_i(\theta)$ indicates the accuracy achieved by the model with parameters θ when evaluated on class i .

proved that with an appropriate choice of τ , the mixed strategy is guaranteed to asymptotically suffer an average loss close to the minimum loss achievable by any fixed strategy.

4 Methodology

In this section, we introduce our proposed approach, FAir Classification with Two-player game (FAir Classification with Two-player game (FACT)), where the solution should satisfy two generally contradictory objectives. Firstly, it should achieve a high overall performance, the average accuracy over all classes should be maximized. Secondly, it should achieve fairness, the classification results should not favor any particular class over others. For this purpose, we formulate the fair classification problem as an adversarial two-player game, which motivates our adaptation of the multiplicative weights method. We finish this section with a theoretical proof of its convergence to an optimal fair classifier.

4.1 Fair Classification as An Adversarial Two-Player Game

To motivate our formulation of the fair classification problem (see Equation (5)), we first recall the standard classification problem. Traditionally, an n -class classification problem is solved by simply maximizing the average performance over all classes:

$$\max_{\theta} \frac{1}{n} \sum_{i=1}^n v_i(\theta), \quad (3)$$

where θ is the parameter of the classification model (e.g., a neural network) and $v_i(\theta)$ is the accuracy achieved by the model for the i^{th} class. As usual in deep learning, this optimization problem is solved approximately by training the model (e.g., minimizing an empirical risk expressed with a convex loss such as the cross-entropy loss). Training is usually performed with the assistance of data augmentation, which can improve significantly the sample efficiency.

However, this standard approach often results in a skewed performance distribution over classes, favoring some over others. To counteract this imbalance, a naive approach would be to resort to the standard minmax fairness², which can be interpreted as a two-player game. This alternative

²Here, this leads to a max-min formulation since we want to maximize performance.

perspective shifts the focus from the average performance to the performance of the worse classes:

$$\max_{\theta} \min_{\mathbf{w} \in \Delta_n} \sum_i w_i v_i(\theta). \quad (4)$$

This formulation aims to enhance the worst-class performance by assigning them greater weights. This two-player game could be solved as follows. At the end of training epoch t , the min player chooses \mathbf{w} , a probability distribution over classes. With the knowledge of \mathbf{w} , the max player computes her best response: she optimizes the weighted objective function $\sum_i w_i v_i(\theta)$ by updating θ . After the model parameter update at epoch $t + 1$, the loss of the min player is computed by the class accuracy weighted by \mathbf{w} . Meanwhile, due to the nature of the zero-sum game, the loss of the max player is the negative of the loss incurred by the min player.

Nonetheless, this max-min approach raises another issue. The min player may finally converge (e.g., by applying the multiplicative weights method) to a \mathbf{w} that assigns all probability weight to one worst class and zero probability to all the others. By focusing solely on the worst class, the performance of the other classes is neglected, potentially leading to sub-optimal outcomes of the classification model as a whole. To avoid this extreme case, we instead a constrained max-min formulation:

$$\max_{\theta} \min_{\mathbf{w} \in \Delta_n^c} \sum_i w_i v_i(\theta), \quad (5)$$

where Δ_n^c is a strict subset of Δ_n excluding its extreme points. Depending on applications, different subsets could possibly be defined. This refinement ensures that the maximization of the worst-class performance occurs with a controlled set of weights. Then the efforts to enhance the accuracies of the worst classes do not come at the cost of substantial reductions in the performance of other classes. This offers a more balanced approach to improving the worst-class performance while minimizing the impact on the other classes. This constrained max-min formulation defines our fair classification problem. Before explaining how it can be solved by adapting the multiplicative weight method, we further discuss how it is related to fair optimization as modeled by the GGF.

This refined problem shares a close relationship with the GGF (Equation (1)). Indeed, to enforce fairness via GGF, the objective function in Equation (3) can be changed to:

$$GGF_{\mathbf{w}^\downarrow}(\mathbf{v}(\theta)) = \sum_i w_i^\downarrow v_i^\uparrow(\theta) \quad (6)$$

where $\mathbf{w}^\downarrow \in \Delta_n$ is a strictly decreasing weight vector (i.e., $w_1^\downarrow > \dots > w_n^\downarrow$). By maximizing this function during the training process, the model is not only optimized for higher overall accuracy but also for fairness among classes, leading to an increase of the accuracies of the worst classes. Interestingly, GGF can be rewritten as follows:

$$GGF_{\mathbf{w}^\downarrow}(\mathbf{v}(\theta)) = \min_{s \in \mathbb{S}_n} \sum_i w_{s(i)}^\downarrow v_i(\theta), \quad (7)$$

where \mathbb{S}_n is the symmetric group of order n , i.e., set of all permutations of n elements. Using this rewriting, optimizing GGF corresponds to the following max-min problem:

$$\max_{\theta} \min_{s \in \mathbb{S}_n} \sum_i w_{s(i)}^\downarrow v_i(\theta) \quad (8)$$

This problem formulation indicates that when we train the model to optimize the GGF-based objective function, the min player chooses a permutation s , while the max player tune the weights θ to maximize the weighted sum defined by the min player. Therefore, our fair classification problem defined in Equation (5) includes the GGF-based formulation by setting the constrained simplex to only contain weights that corresponds to reorderings of weights \mathbf{w}^\downarrow . However, our generic fair classification problem is more flexible since it does not require to define precisely weight vector \mathbf{w}^\downarrow , which is hard to choose in practice.

4.2 Fair Optimization via Multiplicative Weight Algorithm

As defined above, the min player has a mixed strategy \mathbf{w} over classes while the max player maximizes the sum of weighted accuracies by optimizing θ . This adversarial two-player game is a well studied

Algorithm 1 Fair Classification Approach with a Two-Player Game (FACT)

Hyperparameters: total number of training epochs T , total number of iterations in every epoch K , multiplicative weight update parameter τ , the lower bound of the weights w_{\min} .

```
1: Initialize model parameters  $\theta$ .
2: Initialize a weight vector  $\mathbf{w}^0$  with a uniform distribution.
3: for  $t = 0 \dots T$  do
4:   // update  $\theta$ 
5:   for  $k = 0 \dots K$  do
6:     Sample a minibatch of samples from the whole training dataset.
7:     Compute loss  $L_i^t$  for class  $i$ .
8:     The loss of this minibatch is computed as  $L_\theta = \sum_{i=1}^n \pi(\mathbf{w}^t)_i \cdot L_i^t$ .
9:     Update the parameters of the model  $\theta$  with the gradients of  $L_\theta$ .
10:  end for
11:  // update  $\mathbf{w}^t$ 
12:  Compute the training accuracy of all classes  $\mathbf{v}^t$  at epoch  $t$ .
13:  Update  $\mathbf{w}^t$  using  $\mathbf{v}^t$ ,  $\tau$  and  $w_{\min}$  based on Equation (10).
14: end for
```

problem. The min player can minimize its loss by applying the *hedge* algorithm [24], also known as multiplicative weights to attach significance to the worst classes. The max player can directly apply the same weights of all classes as the min player. In this way, it is more likely that the accuracies of the classes emphasized by the min player are improved most in the next training epoch. The overview of our method is shown in Figure 2.

The update rule of the multiplicative weights algorithm is as follows:

$$w_i^{t+1} \leftarrow \frac{w_i^t \times e^{-\tau \cdot v_i^t}}{Z_t}, \quad (9)$$

where τ is a hyperparameter and Z_t is a normalization factor $Z_t = \sum_{i=1}^n w_i^t \times e^{-\tau \cdot v_i^t}$.

Intuitively, applying multiplicative weights algorithm will increase the weights of worse-classified classes and decrease the weights of better-classified ones. As a result, the class accuracies of the trained classifier should be more fairly-distributed. Freund and Schapire [24] proved that with a proper choice of τ , the mixed strategy updated by Equation (9) is guaranteed to suffer an average loss close to the minimum loss achievable by any fixed strategy.

However, in Equation (5), we introduce a lower bound of the weight assigned to each class. The min player selects \mathbf{w} from Δ_n^c instead of the whole simplex Δ_n . This modification introduces some consequences on the theoretical guarantee, which will be discussed in Section 4.3. For simplicity and concreteness, in this paper, we set Δ_n^c as the set denoted $\pi(\Delta_n)$ (see Equation (10)) of vectors in Δ_n whose components are all larger than or equal to w_{\min} , a chosen hyperparameter.

According to this modification, our min-player update rule can be transformed into the following:

$$u_i^t \leftarrow \pi(\mathbf{w}^t)_i \times e^{-\tau \cdot v_i^t}, \quad w_i^{t+1} \leftarrow \frac{u_i^t}{Z_t}, \quad \pi(\mathbf{w}^{t+1})_i \leftarrow \frac{\pi(\mathbf{u}^t)_i}{\sum_i \pi(\mathbf{u}^t)_i}, \quad (10)$$

where $Z_t = \sum_{i=1}^n u_i^t$ is the normalization factor and $\tau > 0$ is a hyperparameter.

The pseudocode provided in Algorithm 1 outlines our method. Initially, the model parameters θ and an uniform weight vector \mathbf{w} is initialized. Over training epochs, the model is updated based on the calculated loss. Note that in the loss function, the weight vector is $\pi(\mathbf{w}^t)$ because the min player selects her weights from Δ_n^c . Afterwards, the weight vector $\pi(\mathbf{w}^t)$ is updated according to the model's performance on all classes during this epoch. The training process iterates until the number of epochs T is reached, leading to both accurate predictions and fairness across different classes.

4.3 Theoretical Proof of the Convergence

In this section, we prove that the average loss suffered by our method is approximately equal to the minimum loss achievable by any fixed strategy.

Table 1: We present the fairness metrics of different methods on five datasets in the following two tables. In the second column of each table, "std", "COV", and "range" respectively denote the standard deviation, coefficient of variation, and range of class accuracies. For each method used on each dataset, the reported result is averaged over 8 crop lower bounds. The std and range are listed in % while COV is listed in values. Lower is better.

Method	CIFAR-10			CIFAR-100			Fashion-Mnist			Mini-ImageNet			ImageNet		
	std	COV	range	std	COV	range	std	COV	range	std	COV	range	std	COV	range
Normal[25]	4.55	0.049	12.6	11.8	0.157	49.4	5.94	0.063	18.3	11.2	0.152	47.6	17.3	0.247	66.9
Focal[7]	4.76	0.052	14.1	11.2	0.150	48.4	6.05	0.064	18.9	11.2	0.151	48.4	17.0	0.252	65.5
PW[17]	4.65	0.050	13.4	11.4	0.152	48.5	6.12	0.066	18.7	11.2	0.151	47.6	17.4	0.256	66.5
TCE[16]	4.45	0.048	12.8	11.7	1.394	58.4	6.59	0.071	20.8	12.6	0.186	54.8	17.1	0.244	57.9
GGF[12]	4.12	0.044	11.9	11.2	0.149	47.5	5.98	0.064	19.4	12.1	0.172	59.7	16.9	0.241	65.4
FACT(Ours)	3.86	0.042	10.7	10.8	0.143	44.7	5.44	0.058	16.7	10.6	0.143	45.9	16.7	0.241	65.0

Theorem 1. *The average loss of our strategy compared to the optimal fixed strategy is approximately bounded by $\frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}}$.*

$$\frac{1}{T} \sum_{t=1}^{t=T} V_{\pi(\mathbf{w}^t), \mathbf{v}^t} \leq \frac{1}{T} \min_{\tilde{\mathbf{w}}} \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} + \frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}}, \quad (11)$$

where T is the number of total epochs, $\tilde{\mathbf{w}}$ can be any arbitrary weight vector, π is the constrained simplex, $\pi(\mathbf{w}^t)$ is the weight vector chosen by our method at epoch t , \mathbf{v}^t is the accuracy vector for all classes at epoch t , $V_{\mathbf{w}, \mathbf{v}} = \sum_{i=1}^n w_i v_i$ is the weighted accuracy of choosing \mathbf{w} when the accuracy vector is \mathbf{v} and can also be regarded as the loss for the min player, $\alpha_t = \frac{\sum_{i, \epsilon_i^t > 0} \tilde{w}_i v_i^t}{\sum_i \tilde{w}_i v_i^t} = \frac{\sum_{i, \epsilon_i^t > 0} \tilde{w}_i v_i^t}{V_{\tilde{\mathbf{w}}, \mathbf{v}^t}}$ and $\epsilon_i^t = \frac{\pi(\mathbf{u}^t)_i}{u_i^t} - 1$.

The detailed proof of Theorem 1 can be found in Appendix A.

5 Experimental Results

5.1 Baselines, Experimental Setup, and Evaluation Metrics

In order to show the effectiveness of our proposed method, we perform a set of experiments aimed at investigating whether our method alleviate unfairness in classification tasks. We compare our method with four baselines across five classification tasks. The objective is to demonstrate the efficacy of our method in comparison to these existing techniques.

Baselines Except for normal cross entropy loss, we further select four baseline methods, which are specifically designed for training a fair classifier. These include focal loss [7], tilted cross entropy loss (TCE) [16], performance weighted loss (PW) [17] and GGF-enhanced cross entropy loss [12]. The detailed descriptions and hyperparameters of these baseline methods are listed in Appendix B.

Experimental Setup To evaluate the performance of our method versus these baselines, we run experiments on five classification tasks: CIFAR-10, CIFAR-100 [26], Fashion-Mnist [27], Mini-ImageNet and ImageNet [28]. Following the setup of [6], we train a Resnet-50 model without loading of pretrained weights and apply random resized cropping as the data augmentation technique during the training process. The crop lower bound $0 < \beta \leq 1$ is a hyperparameter that determines the minimum possible size of the original image remaining in the cropped image. A smaller β indicates a stronger data augmentation. We conduct experiments using 8 distinct crop lower bounds, ranging from 0.48 to 1. These experiments are carried out for each method across various tasks. Detailed hyperparameters of our method can be found in Appendix D.

Evaluation Metrics To assess the effectiveness of our approach and compare it with the baselines, we employ the commonly used metric in classification tasks, namely the overall evaluation accuracy.

Table 2: The worst class accuracies of different methods on five datasets. The worst class accuracies are calculated as the accuracies of the worst 10% classes and averaged over 8 crop lower bounds. We average the results over 8 crop lower bounds and report the mean \pm the standard deviation in the table. The accuracies are listed in %. Higher is better.

	CIFAR-10	CIFAR-100	Fashion-Mnist	Mini-ImageNet	ImageNet
Method	Worst Class Accuracies				
Normal[25]	84.4 \pm 1.9	53.6 \pm 3.0	81.0 \pm 1.6	53.8 \pm 4.5	35.9 \pm 2.6
Focal[7]	82.4 \pm 1.1	55.1 \pm 2.4	80.5 \pm 1.4	52.9 \pm 4.2	34.8 \pm 2.1
PW[17]	83.4 \pm 1.3	54.7 \pm 3.0	80.6 \pm 3.6	53.9 \pm 3.8	34.4 \pm 2.1
TCE[16]	84.3 \pm 1.9	44.6 \pm 17.2	78.4 \pm 4.3	45.1 \pm 4.7	36.3 \pm 2.1
GGF[12]	85.1 \pm 1.9	55.5 \pm 3.1	80.0 \pm 2.0	47.7 \pm 3.3	36.6 \pm 2.2
FACT(Ours)	85.8\pm1.4	56.4\pm2.3	82.5\pm2.6	54.8\pm3.7	36.7\pm2.9

Then to investigate whether the trained classifiers can alleviate unfairness brought by data augmentation, we calculate the range, standard deviation and the coefficient of variation of class accuracies. The coefficient of variation (COV) is a measure of relative variability and is calculated as the ratio of the standard deviation to the mean. We also compare the worst class accuracies achieved by our method with those of the baseline methods. The mathematical definitions of range, standard deviation and the coefficient of variation can be found in Appendix E.

5.2 Results and Analysis

Through these experiments, we aim to answer the following questions in detail.

- Does our method learn a classifier that is more fairly-distributed over classes?
- Does our method improve the worst class performance?
- Does our method degrade the overall performance a lot?

Does our method learn a classifier that is more fairly-distributed over classes? To effectively address whether our method learns a more equitably distributed classifier across classes, we analyze the results from five datasets. As detailed in Table 1, the results of each datasets are assessed using three key fairness metrics: standard deviation, coefficient of variation and range. These metrics are fundamental in evaluating the fairness of the learned classifiers. Our analysis reveals that, consistently across all five datasets, our method leads to a remarkable reduction in the standard deviation of class accuracies. This reduction indicates a narrower spread of accuracies among different classes, which is a positive indicator for fairness. The coefficient of variation further corroborates the trend by demonstrating a reduced relative variability in class accuracies. This decrease implies that the distribution of class accuracy is more uniform, which ensures fairness in learned classifiers. The range of class accuracies also shows a diminished gap between the best and worst class accuracies, indicating a more even performance across all classes. In summary, the fairness metrics from five datasets strongly substantiate the assertion that our method learns a classifier that exhibits a more balanced and thus fairer distribution of accuracies across classes. We also include the plots of fairness metrics along the training in Figure 3. We can observe that our method consistently outperform others with lower standard deviation and COV along the training process.

Does our method improve the worst class performance? Here we focus on the improvement in worst-class performance. One overarching goal of our method is to ensure that the least accurate classes receive enhancement. To examine the efficacy of our method in improving worst class performance, we hereby specifically present the accuracies of the worst 10% classes across five diverse datasets in Table 2. This table meticulously documents the accuracies of these classes using other baseline methods and our method. We can observe a consistent trend of improvement of the worst-class accuracies with our method across all five datasets. This improvement indicates that our approach is effective in mitigating the disparity in class accuracies, resulting in more balanced classifiers. Detailed plots of worst class accuracies have been provided in Appendix F. These plots visualize the enhancements achieved by our method across the worst classes.

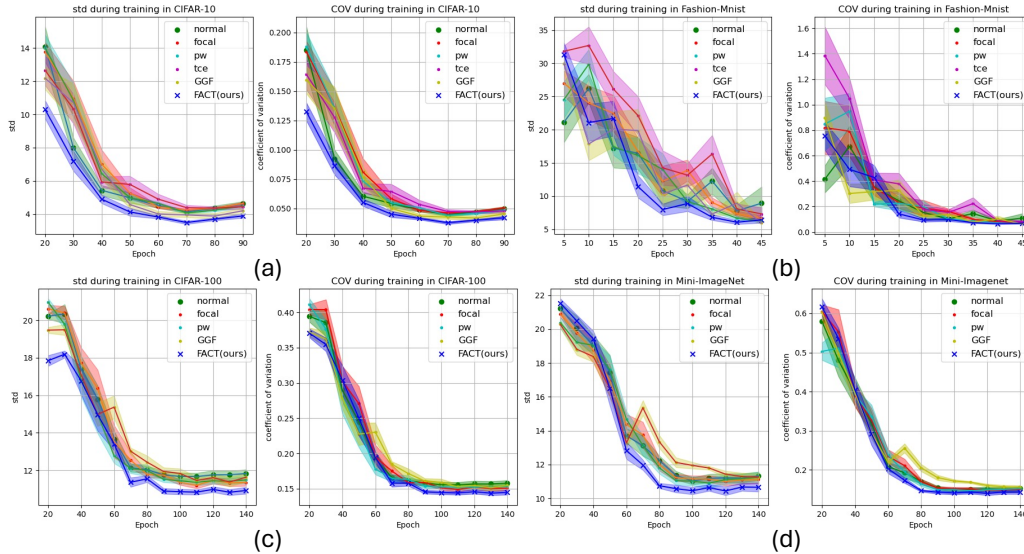


Figure 3: Evaluation of fairness metrics over training epochs on CIFAR-10(a), Fashion-Mnist(b), CIFAR-100(c) and Mini-Imagenet(d) datasets. Left: the std of class accuracies (in %); Right: the coefficient of variation (COV) of class accuracies. Lower is better. From the figure, we can observe that during training, our method consistently outperforms others by maintaining the lowest standard deviation of class accuracies and the lowest COV.

Table 3: The average accuracies of different methods on five datasets. We average the results over 8 crop lower bounds and report the mean \pm the standard deviation in the table. The accuracies are listed in %. Higher is better.

	CIFAR-10	CIFAR-100	Fashion-Mnist	Mini-ImageNet	ImageNet
Method	Average Accuracies				
Normal[25]	92.8 \pm 0.6	75.2 \pm 2.0	94.1 \pm 0.5	74.4 \pm 2.6	70.3 \pm 2.6
Focal[7]	91.9 \pm 0.5	75.5 \pm 1.6	94.0 \pm 0.3	74.2 \pm 2.8	67.7 \pm 2.5
PW[17]	92.4 \pm 0.6	75.2 \pm 1.8	93.6 \pm 1.3	74.3 \pm 3.0	68.0 \pm 2.4
TCE[16]	92.9 \pm 0.8	63.6 \pm 23.8	93.2 \pm 0.9	68.2 \pm 3.8	70.2 \pm 2.3
GGF[12]	93.0 \pm 1.1	75.3 \pm 1.8	94.2 \pm 0.4	70.6 \pm 2.1	70.0 \pm 2.2
FACT(Ours)	92.6 \pm 0.9	75.7 \pm 1.7	94.0 \pm 0.4	74.5 \pm 2.3	69.6 \pm 2.4

Does our method degrade the overall performance a lot? We display the average accuracies in Table 3 to examine whether our method leads to a significant decline in the overall performance. The results reveal a fairness-accuracy trade-off that is often inevitable when striving for more equitable machine learning models. In three out of the five datasets, our method results in a slight decrease in overall accuracy compared to the baselines. However, it is crucial to emphasize that this degradation is relatively limited, compared to our improvement of worst class accuracies, suggesting that our approach manages to balance the contradictory demands of accuracy and fairness. Remarkably, in the remaining two datasets, our method surpasses all baselines, underscoring its potential to enhance both fairness and accuracy simultaneously. These findings highlight that while there may be a trade-off, our method proves its worth in achieving a more balanced performance across different classes without significantly sacrificing the overall accuracy.

6 Conclusion

In this paper, we addressed the critical issue of fairness in classification tasks. To tackle the challenge, we propose FACT, a novel approach that conceptualizes the fair classification problem as an adversarial two-player game. With this novel formalization, we propose a multiplicative weight

method that strategically adjusts class weights to achieve a balance between fairness and overall accuracy. We validate our method both empirically and theoretically. Consistent with our theoretical analysis, the experimental results show that our method successfully mitigates unfairness, improves the worst class performance, and has a limited impact on overall accuracy. Importantly, with very few hyperparameters, our method is simple yet effective. This simplicity makes our method easily adaptable to various machine-learning applications. For future work, our work lays a foundation for further exploration in fair machine learning. There is potential to extend our method to other domains and to combine it with additional techniques that promote fairness.

References

- [1] Teerath Kumar, Alessandra Mileo, Rob Brennan, and Malika Bendeche. Image data augmentation approaches: A comprehensive survey and future directions, 2023.
- [2] Guozheng Ma, Zhen Wang, Zhecheng Yuan, Xueqian Wang, Bo Yuan, and Dacheng Tao. A comprehensive survey of data augmentation in visual reinforcement learning, 2022.
- [3] Ilya Kostrikov, Denis Yarats, and Rob Fergus. Image augmentation is all you need: Regularizing deep reinforcement learning from pixels. *CoRR*, abs/2004.13649, 2020. URL <https://arxiv.org/abs/2004.13649>.
- [4] Denis Yarats, Rob Fergus, Alessandro Lazaric, and Lerrel Pinto. Mastering visual continuous control: Improved data-augmented reinforcement learning. *CoRR*, abs/2107.09645, 2021. URL <https://arxiv.org/abs/2107.09645>.
- [5] Nicklas Hansen, Hao Su, and Xiaolong Wang. Stabilizing deep q-learning with convnets and vision transformers under data augmentation. *CoRR*, abs/2107.00644, 2021. URL <https://arxiv.org/abs/2107.00644>.
- [6] Randall Balestriero, Leon Bottou, and Yann LeCun. The effects of regularization and data augmentation are class dependent. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, editors, *Advances in Neural Information Processing Systems*, volume 35, pages 37878–37891. Curran Associates, Inc., 2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/file/f73c04538a5e1cad40ba5586b4b517d3-Paper-Conference.pdf.
- [7] Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollár. Focal loss for dense object detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 42(2): 318–327, 2020. doi: 10.1109/TPAMI.2018.2858826.
- [8] Sangwon Jung, Sanghyuk Chun, and Taesup Moon. Learning fair classifiers with partially annotated group labels. *CoRR*, abs/2111.14581, 2021. URL <https://arxiv.org/abs/2111.14581>.
- [9] John Rawls. *The Theory of Justice*. Harvard university press, 1971.
- [10] Chongjie Zhang and Julie A. Shah. Fairness in multi-agent sequential decision-making. In *Advances in Neural Information Processing Systems*, 2014.
- [11] John A. Weymark. Generalized gini inequality indices. *Mathematical Social Sciences*, 1(4): 409–430, 1981. ISSN 0165-4896. doi: [https://doi.org/10.1016/0165-4896\(81\)90018-4](https://doi.org/10.1016/0165-4896(81)90018-4). URL <https://www.sciencedirect.com/science/article/pii/0165489681900184>.
- [12] Umer Siddique, Paul Weng, and Matthieu Zimmer. Learning fair policies in multi-objective (Deep) reinforcement learning with average and discounted rewards. In Hal Daumé III and Aarti Singh, editors, *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 8905–8915. PMLR, 13–18 Jul 2020. URL <https://proceedings.mlr.press/v119/siddique20a.html>.
- [13] Simon Caton and Christian Haas. Fairness in machine learning: A survey. *CoRR*, abs/2010.04053, 2020. URL <https://arxiv.org/abs/2010.04053>.
- [14] Polina Kirichenko, Randall Balestriero, Mark Ibrahim, Shanmukha Ramakrishna Vedantam, Hamed Firooz, and Andrew Gordon Wilson. Understanding the class-specific effects of data augmentations. In *ICLR 2023 Workshop on Pitfalls of limited data and computation for Trustworthy ML*, 2023. URL <https://openreview.net/forum?id=wd0orJ402u>.
- [15] Saurav Anclhia and YooJung Choi. A probabilistic approach to fairness under label bias. In *The 6th Workshop on Tractable Probabilistic Modeling*, 2023. URL <https://openreview.net/forum?id=a1NfxQP0pY>.
- [16] Attila Szabó, Hadi Jamali Rad, and Siva-Datta Mannava. Tilted cross entropy (TCE): promoting fairness in semantic segmentation. *CoRR*, abs/2103.14051, 2021. URL <https://arxiv.org/abs/2103.14051>.

- [17] Robbie Meyer and Alexander Wong. A fair loss function for network pruning. In *Workshop on Trustworthy and Socially Responsible Machine Learning, NeurIPS 2022*, 2022. URL <https://openreview.net/forum?id=Y8PmDhBdmv>.
- [18] Sungho Park, Jewook Lee, Pilhyeon Lee, Sunhee Hwang, Dohyung Kim, and Hyeran Byun. Fair contrastive learning for facial attribute classification. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10379–10388, 2022. doi: 10.1109/CVPR52688.2022.01014.
- [19] Hoda Heidari, Claudio Ferrari, Krishna P. Gummadi, and Andreas Krause. Fairness behind a veil of ignorance: A welfare analysis for automated decision making. In *NeurIPS*, 2018.
- [20] Till Speicher, Hoda Heidari, Nina Grgic-Hlaca, Krishna P. Gummadi, Adish Singla, Adrian Weller, and Muhammad Bilal Zafar. A unified approach to quantifying algorithmic unfairness: Measuring individual & group unfairness via inequality indices. In *KDD*, pages 2239–2248, 2018.
- [21] Paul Weng. Fairness in reinforcement learning. In *AI for Social Good Workshop at IJCAI*, 2019.
- [22] D. Zietlow, M. Lohaus, G. Balakrishnan, M. Kleindessner, F. Locatello, B. Scholkopf, and C. Russell. Leveling down in computer vision: Pareto inefficiencies in fair deep classifiers. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10400–10411, Los Alamitos, CA, USA, jun 2022. IEEE Computer Society. doi: 10.1109/CVPR52688.2022.01016. URL <https://doi.ieeecomputersociety.org/10.1109/CVPR52688.2022.01016>.
- [23] Julian Bitterwolf, Alexander Meinke, Valentyn Boreiko, and Matthias Hein. Classifiers should do well even on their worst classes. In *ICML 2022 Shift Happens Workshop*, 2022. URL <https://openreview.net/forum?id=QxIXCVYJ2WP>.
- [24] Yoav Freund and Robert E. Schapire. Adaptive game playing using multiplicative weights. *Games and Economic Behavior*, 29:79–103, 1999. URL <https://api.semanticscholar.org/CorpusID:15295656>.
- [25] Tilmann Gneiting and Adrian E Raftery. Strictly proper scoring rules, prediction, and estimation. *Journal of the American Statistical Association*, 102(477):359–378, 2007. doi: 10.1198/016214506000001437. URL <https://doi.org/10.1198/016214506000001437>.
- [26] Alex Krizhevsky. Learning multiple layers of features from tiny images. 2009. URL <https://api.semanticscholar.org/CorpusID:18268744>.
- [27] Han Xiao, Kashif Rasul, and Roland Vollgraf. Fashion-mnist: a novel image dataset for benchmarking machine learning algorithms. *CoRR*, abs/1708.07747, 2017. URL <http://arxiv.org/abs/1708.07747>.
- [28] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *International Journal of Computer Vision (IJCV)*, 115(3):211–252, 2015. doi: 10.1007/s11263-015-0816-y.

A Proof of Theorem 1

The average loss of our strategy compared to the optimal fixed strategy is approximately bounded by $\frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}}$.

$$\frac{1}{T} \sum_{t=1}^{t=T} V_{\pi(\mathbf{w}^t), \mathbf{v}^t} \leq \frac{1}{T} \min_{\tilde{\mathbf{w}}} \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} + \frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}} \quad (12)$$

where T is the number of total epochs, $\tilde{\mathbf{w}}$ can be any arbitrary weight vector, $\pi(\mathbf{w}^t)$ is the weight vector chosen by our method at epoch t , \mathbf{v}^t is the accuracy vector for all classes at epoch t , $V_{\mathbf{w}, \mathbf{v}} = \sum_{i=1}^n w_i v_i$ is the weighted accuracy of choosing w when the accuracy vector is \mathbf{v} and can also be regarded as the loss for the min player, $\alpha_t = \frac{\sum_{i, \epsilon_i^t > 0} \tilde{w}_i v_i^t}{\sum_i \tilde{w}_i v_i^t} = \frac{\sum_{i, \epsilon_i^t > 0} \tilde{w}_i v_i^t}{V_{\tilde{\mathbf{w}}, \mathbf{v}}}$ and $\epsilon_i^t = \frac{\pi(\mathbf{u}^t)_i}{u_i^t} - 1$.

Proof.

$$\begin{aligned} KL(\tilde{\mathbf{w}} \parallel \pi(\mathbf{w}^{t+1})) - KL(\tilde{\mathbf{w}} \parallel \pi(\mathbf{w}^t)) &= [KL(\tilde{\mathbf{w}} \parallel \pi(\mathbf{w}^{t+1})) - KL(\tilde{\mathbf{w}} \parallel \mathbf{w}^{t+1})] \\ &\quad + [KL(\tilde{\mathbf{w}} \parallel \mathbf{w}^{t+1}) - KL(\tilde{\mathbf{w}} \parallel \pi(\mathbf{w}^t))] \end{aligned} \quad (13)$$

We firstly prove that for any $\tilde{\mathbf{w}}$, $KL(\tilde{\mathbf{w}} \parallel \pi(\mathbf{w}^{t+1})) - KL(\tilde{\mathbf{w}} \parallel \mathbf{w}^{t+1})$ has an upper bound.

Let

$$\begin{aligned} \epsilon_i^t &= \frac{\pi(\mathbf{u}^t)_i}{u_i^t} - 1 \\ \alpha_t &= \frac{\sum_{i, \epsilon_i^t > 0} \tilde{w}_i v_i^t}{\sum_i \tilde{w}_i v_i^t} = \frac{\sum_{i, \epsilon_i^t > 0} \tilde{w}_i v_i^t}{V_{\tilde{\mathbf{w}}, \mathbf{v}}} \end{aligned} \quad (14)$$

$$\begin{aligned} &KL(\tilde{\mathbf{w}} \parallel \pi(\mathbf{w}^{t+1})) - KL(\tilde{\mathbf{w}} \parallel \mathbf{w}^{t+1}) \\ &= \sum_{i=1}^{i=n} \tilde{w}_i \ln \frac{\pi(\mathbf{w}^{t+1})_i}{w_i^{t+1}} \\ &= \sum_{i=1}^{i=n} \tilde{w}_i [\ln(\pi(\mathbf{u}^t)_i) - \ln \left(\sum_{j=1}^{j=n} \pi(\mathbf{u}^t)_j \right) - \ln(u_i^t) + \ln \left(\sum_{j=1}^{j=n} u_j^t \right)] \\ &= \ln \left(\sum_{j=1}^{j=n} u_j^t \right) - \ln \left(\sum_{j=1}^{j=n} \pi(\mathbf{u}^t)_j \right) + \sum_{i=1}^{i=n} \tilde{w}_i \left[\ln \frac{\pi(\mathbf{u}^t)_i}{u_i^t} \right] \\ &\leq \sum_{i=1}^{i=n} \tilde{w}_i \left[\ln \frac{\pi(\mathbf{u}^t)_i}{u_i^t} \right] \\ &\leq \sum_{i, \epsilon_i^t > 0} \tilde{w}_i [\ln(e^{\tau v_i^t})] \\ &= \sum_{i, \epsilon_i^t > 0} \tilde{w}_i \cdot \tau v_i^t \\ &= \alpha_t \cdot \tau V_{\tilde{\mathbf{w}}, \mathbf{v}} \end{aligned} \quad (15)$$

The first inequality holds because $\pi(\mathbf{u}^t)_j > u_j^t$ for any j . The second inequality holds because $\ln \frac{\pi(\mathbf{u}^t)_i}{u_i^t} = 0$ for $\epsilon_i^t = 0$ and $\frac{\pi(\mathbf{u}^t)_i}{u_i^t} = \frac{\pi(\mathbf{u}^t)_i}{\pi(\mathbf{w}^t)_i \cdot e^{-\tau \cdot v_i^t}} = \frac{u_{\min}}{\pi(\mathbf{w}^t)_i \cdot e^{-\tau \cdot v_i^t}} \approx \frac{u_{\min}}{\pi(\mathbf{u}^t)_i \cdot e^{-\tau \cdot v_i^t}} \leq e^{\tau \cdot v_i^t}$.

We then prove that for any $\tilde{\mathbf{w}}$, $KL(\tilde{\mathbf{w}} \parallel \mathbf{w}^{t+1}) - KL(\tilde{\mathbf{w}} \parallel \pi(\mathbf{w}^t))$ has an upper bound. For simplicity, define $V_{\mathbf{w}, \mathbf{v}} = \sum_i w_i v_i$.

$$\begin{aligned}
& KL(\tilde{\mathbf{w}}|\mathbf{w}^{t+1}) - KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^t)) \\
&= \sum_{i=1}^{i=n} \tilde{w}_i \ln \frac{\tilde{w}_i}{w_i^{t+1}} - \sum_{i=1}^{i=n} \tilde{w}_i \ln \frac{\tilde{w}_i}{\pi(\mathbf{w}^t)_i} \\
&= \sum_{i=1}^{i=n} \tilde{w}_i \ln \frac{\pi(\mathbf{w}^t)_i}{w_i^{t+1}} \\
&= \sum_{i=1}^{i=n} \tilde{w}_i \ln \left(\frac{Z_t}{e^{-\tau \cdot v_i^t}} \right) \\
&= \sum_{i=1}^{i=n} \tilde{w}_i \ln Z_t + \tau \sum_{i=1}^{i=n} \tilde{w}_i v_i^t \\
&= \ln Z_t + \tau V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&= \ln \sum_{i=1}^{i=n} \pi(\mathbf{w}^t)_i \cdot e^{-\tau \cdot v_i^t} + \tau V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&\leq \ln \sum_{i=1}^{i=n} \pi(\mathbf{w}^t)_i \cdot (1 - (1 - e^{-\tau})v_i^t) + \tau V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&= \ln \left(1 - (1 - e^{-\tau}) \sum_{i=1}^{i=n} \pi(\mathbf{w}^t)_i \cdot v_i^t \right) + \tau V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&= \ln(1 - (1 - e^{-\tau})V_{\pi(\mathbf{w}^t), \mathbf{v}^t}) + \tau V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&\leq -(1 - e^{-\tau})V_{\pi(\mathbf{w}^t), \mathbf{v}^t} + \tau V_{\tilde{\mathbf{w}}, \mathbf{v}^t}
\end{aligned} \tag{16}$$

The first inequality holds because $e^{-\tau v_i^t} \leq 1 - (1 - e^{-\tau})v_i^t$ for $\tau > 0$ and $0 \leq v_i^t \leq 1$. The second inequality holds because $\ln(1 - (1 - e^{-\tau})V_{\pi(\mathbf{w}^t), \mathbf{v}^t}) \leq -(1 - e^{-\tau})V_{\pi(\mathbf{w}^t), \mathbf{v}^t}$ for $0 \leq (1 - e^{-\tau})V_{\pi(\mathbf{w}^t), \mathbf{v}^t} < 1$.

Sum eq. (15) and eq. (16) together, we get the upper bound of $KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^{t+1})) - KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^t))$.

$$KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^{t+1})) - KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^t)) \leq -(1 - e^{-\tau})V_{\pi(\mathbf{w}^t), \mathbf{v}^t} + (1 + \alpha_t)\tau V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \tag{17}$$

Sum eq. (17) from $t = 1$ to $t = T$, we get the upper bound of $KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^{T+1})) - KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^1))$.

$$KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^{T+1})) - KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^1)) \leq \sum_{t=1}^{t=T} \left(-(1 - e^{-\tau})V_{\pi(\mathbf{w}^t), \mathbf{v}^t} + (1 + \alpha_t)\tau V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \right) \tag{18}$$

From eq. (18), we get the upper bound of $\sum_{t=1}^{t=T} V_{\pi(\mathbf{w}^t), \mathbf{v}^t}$. Note that since $w_i^1 = \frac{1}{n}$ for all i , $KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^{T+1})) - KL(\tilde{\mathbf{w}}|\pi(\mathbf{w}^1)) \leq \ln n$ for any $\tilde{\mathbf{w}}$. Here, we set τ as $\ln\left(1 + \frac{1}{1 + \max_t \alpha_t} \sqrt{\frac{\ln n}{T}}\right)$.

$$\begin{aligned}
\sum_{t=1}^{t=T} V_{\pi(\mathbf{w}^t), \mathbf{v}^t} &\leq \frac{1}{1 - e^{-\tau}} \left(KL(\tilde{\mathbf{w}} \parallel \mathbf{w}^1) - KL(\tilde{\mathbf{w}} \parallel \mathbf{w}^{T+1}) \right) + (1 + \alpha_t) \tau \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&\leq \frac{1}{1 - e^{-\tau}} \ln n + (1 + \max_t \alpha_t) \frac{\tau}{1 - e^{-\tau}} \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&\leq \left(1 + \frac{1}{e^\tau - 1}\right) \ln n + (1 + \max_t \alpha_t) \frac{1 + e^{-\tau}}{2e^{-\tau}} \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&= \left(1 + \frac{1}{e^\tau - 1}\right) \ln n + (1 + \max_t \alpha_t) \frac{1 + e^\tau}{2} \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&= \left(1 + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{T}{\ln n}}\right) \ln n + (1 + \max_t \alpha_t) \left(1 + \frac{1}{2(1 + \max_t \alpha_t)} \sqrt{\frac{\ln n}{T}}\right) \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \tag{19}
\end{aligned}$$

Dividing both sides by T , we obtain the upper bound of $\frac{1}{T} \sum_{t=1}^{t=T} V_{\mathbf{w}^t, \mathbf{v}^t}$.

$$\begin{aligned}
\frac{1}{T} \sum_{t=1}^{t=T} V_{\pi(\mathbf{w}^t), \mathbf{v}^t} &\leq \frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}} + (1 + \max_t \alpha_t) \left(\frac{1}{T} + \frac{1}{2(1 + \max_t \alpha_t)} \sqrt{\frac{\ln n}{T^3}} \right) \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&= \frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}} + \left(\frac{1 + \max_t \alpha_t}{T} + \frac{1}{2} \sqrt{\frac{\ln n}{T^3}} \right) \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} \\
&\leq \left(\frac{1 + \max_t \alpha_t}{T} + \frac{1}{2} \sqrt{\frac{\ln n}{T^3}} \right) \min_{\tilde{\mathbf{w}}} \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} + \frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}} \\
&\approx \left(\frac{1}{T} + \frac{1}{2} \sqrt{\frac{\ln n}{T^3}} \right) \min_{\tilde{\mathbf{w}}} \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t} + \frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}} \tag{20}
\end{aligned}$$

$\frac{1}{T} \sum_{t=1}^{t=T} V_{\pi(\mathbf{w}^t), \mathbf{v}^t}$ represents the average performance of our strategy while $\min_{\tilde{\mathbf{w}}} \frac{1}{T} \sum_{t=1}^{t=T} V_{\tilde{\mathbf{w}}, \mathbf{v}^t}$ represents the best performance we can achieve by any fixed $\tilde{\mathbf{w}}$. The above inequality guarantees that the average loss of our strategy compared to this optimal $\tilde{\mathbf{w}}$ is approximately bounded by $\frac{\ln n}{T} + (1 + \max_t \alpha_t) \cdot \sqrt{\frac{\ln n}{T}}$, which can be minimized when T gets larger. \square

B Detailed Descriptions and Hyperparameters of Baselines

cross entropy loss The first baseline is normal cross entropy loss.

$$CE(p_t) = -\ln(p_t) \tag{21}$$

focal loss This method adds a factor to the standard cross entropy loss.

$$FL(p_t) = -\ln(p_t) * (1 - p_t)^\gamma \tag{22}$$

where p_t is the model's estimated probability for the class with label $y = 1$ and $\gamma > 0$ is a hyperparameter.

tilted cross entropy loss This method assigns a weight to different classes. The weight of each class is obtained from the previous training loss of this class by the following equation.

$$\begin{aligned}
CE(p_t) &= -\ln(p_t) * w_t \\
w_t(c) &= \frac{e^{L_t(c)}}{\sum_{i=1}^n e^{L_t(i)}} \tag{23}
\end{aligned}$$

where $w_t(i)$ is the weight assigned to class i and $L_t(i)$ is the training loss of class i .

performance weighted loss (PW Loss) Similar to focal loss, this method adds a factor to the standard cross entropy loss.

$$FL(p_t) = -\ln(p_t) * ((1 - p_t)^\gamma + \theta) \quad (24)$$

where θ is an additional hyperparameter that makes this loss more flexible than focal loss .

GGF enhanced cross entropy loss This approach utilizes the GGF loss at a frequency specified by f . When $f = 1$, the GGF loss is consistently applied. For $f = 2$, the model alternates between applying the standard loss and the GGF loss. The weights assigned to different classes are determined based on the ranking of their training accuracies of the last epoch. The weight for class i at epoch t can be written as:

$$w_t^i = \max[\alpha^{\text{Rank}(v_{t-1}^i)-1}, w_{\min}] \quad (25)$$

where v_{t-1}^i is the training accuracy of class i at epoch $t - 1$, α and w_{\min} are two hyperparameters.

Table 4: Hyperparameters of Baselines

Focal Loss	CIFAR-10	CIFAR-100	Fashion-Mnist	Mini-Imagenet	Imagenet
γ	2.0	2.0	2.0	2.0	2.0
PW Loss	CIFAR-10	CIFAR-100	Fashion-Mnist	Mini-Imagenet	Imagenet
γ	2.5	2.5	2.5	2.5	2.5
θ	0.8	0.8	0.8	0.8	0.8
GGF Loss	CIFAR-10	CIFAR-100	Fashion-Mnist	Mini-Imagenet	Imagenet
α	0.9	0.98	0.98	0.95	0.998
w_{\min}	0.1	0.1	0.1	0.01	0.2
f	1	2	2	2	1

C Preprocessing of Datasets

For CIFAR-10, CIFAR-100 and Fashion-Mnist datasets, we use the built-in datasets from the library of *torchvision.datasets*. For the Mini-Imagenet and Imagenet datasets, we retrieve them from their respective websites and utilize the predefined partitions for training and evaluation.

D Hyperparameters of Our Method

There are only two hyperparameters in our method, the parameter of multiplicative weight update τ and the lower bound of class weights w_{\min} . The simplicity in the number of hyperparameters not only eases the implementation of our method but also reduces the complexity of hyperparameter tuning to achieve optimal performance. Among all five datasets, we do very little tuning and set $\tau = 1$ and $w_{\min} = \frac{1}{2n}$ where n is the number of classes in that specific dataset.

Note that in our theoretical proof appendix A, we set τ to be $\ln(1 + \frac{1}{1 + \max_t \alpha_t} \sqrt{\frac{\ln n}{T}})$. However, it is important to mention that the robustness of our approach is not solely contingent upon this exact value. In practice, we have observed that even when τ is set to 1, a commonly used default value in experiments, our method still demonstrates strong performance. The consistency of the performance across five datasets underscores our method’s resilience and adaptability, indicating that the benefits of our approach are not exclusively tied to the precise tuning of hyperparameters.

E Mathematical Definition of Evaluation Metrics

Mathematically, we define the range r_t , standard deviation σ_t and the coefficient of variation c_t of class accuracies v_t at epoch t as follows.

$$\begin{aligned} r_t &= \max_i v_t^i - \min_i v_t^i \\ \mu_t &= \sum_{i=1}^n v_t^i \\ \sigma_t &= \sqrt{\frac{\sum_{i=1}^n (v_t^i - \mu_t)^2}{n - 1}} \\ c_t &= \frac{\sigma_t}{\mu_t} \end{aligned} \tag{26}$$

F Plots of Worst Class Accuracies

For an in-depth analysis of the performance improvement in the worst class accuracies, detailed plots are shown in fig. 4, fig. 5, fig. 6, fig. 7 and fig. 8 for five datasets. In each of the five figures, the x-axis represents the x^{th} worst class, while the y-axis denotes the evaluation accuracy of that particular class. This arrangement allows for a clear visualization of the effectiveness of our method in improving the accuracy of these worst classes within each dataset. By examining the figures, we can observe how our approach consistently outperforms the other baseline methods across different datasets and almost all worst classes, highlighting its robustness and effectiveness in improving the worst class performance.

G Plots of Fairness Metrics during Training

As shown in fig. 9, fig. 10, fig. 11 and fig. 12, we include plots of fairness metrics during training in CIFAR-10, Fashion-Mnist, Mini-ImageNet and ImageNet datasets. From the plots, we can observe that our method consistently outperform other methods with the lowest standard deviation of class accuracies and the lowest coefficient of variation (COV).

H Compute Resources We Use

In all our experiments, we utilize a GPU server equipped with 8 cards that have either RTX-4090 or A6000 GPUs and are powered by AMD EPYC 7763 CPUs. For the CIFAR-10 dataset experiments, training a resnet-50 model for 100 epochs on a single GPU card takes approximately 3 hours. When working with the CIFAR-100 dataset, a resnet-50 model trained for 150 epochs on one GPU card requires about 4.5 hours. On the Fashion-MNIST dataset, a resnet-50 model trained for 50 epochs on one GPU card completes in less than 2 hours. For the Mini-Imagenet dataset, an experiment involving a resnet-50 model trained for 150 epochs on one GPU card consumes around 4.5 hours. Lastly, for the Imagenet dataset, training a resnet-50 model for 88 epochs on one GPU card demands roughly 2 days of computational time.

I Limitations of Our Work

While our approach has yielded commendable improvements in fairness metrics, it is essential to acknowledge a limitation that emerged from our experiments. We observe a decrease in overall accuracy across 3 out of the 5 datasets we examined, as discussed in table 3. This trade-off between fairness and accuracy presents a limitation of our work, as enhancing fairness may sometimes come at the expense of the overall model performance.

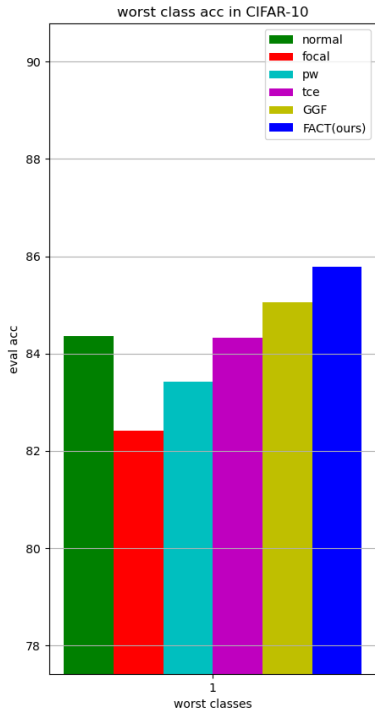


Figure 4: Worst class accuracies of different methods in CIFAR-10 dataset.

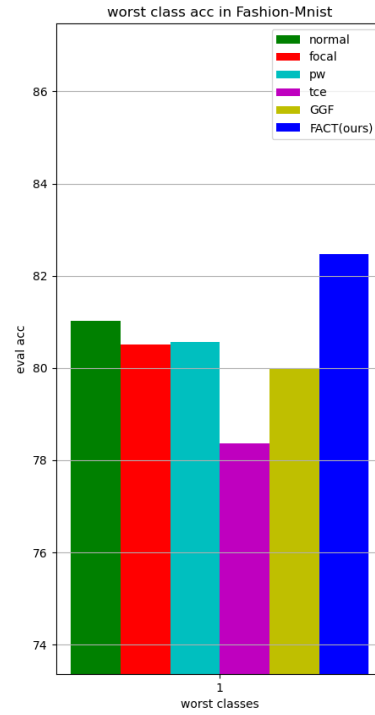


Figure 5: Worst class accuracies of different methods in Fashion-Mnist dataset.

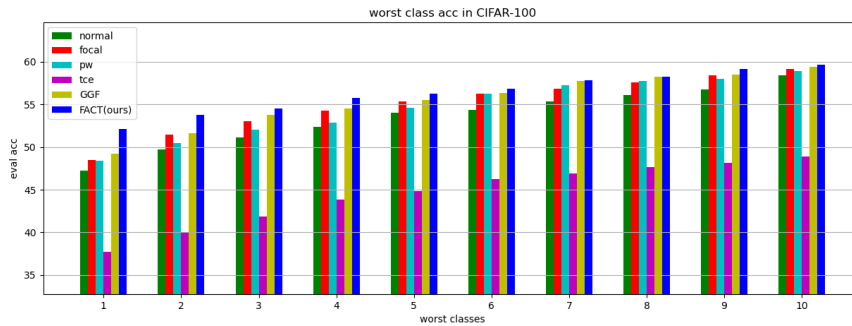


Figure 6: Worst class accuracies of different methods in CIFAR-100 dataset.

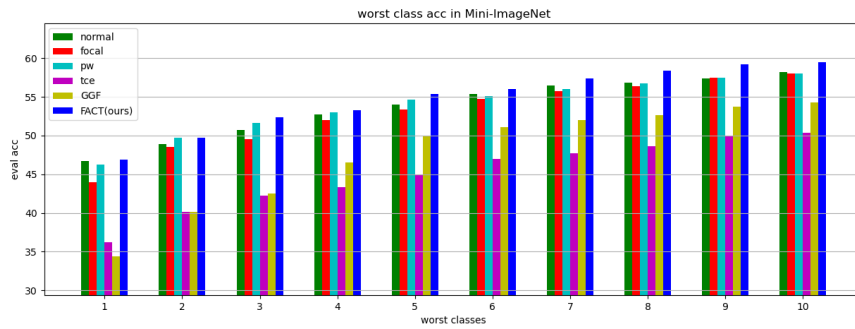


Figure 7: Worst class accuracies of different methods in Mini-Imagenet dataset.

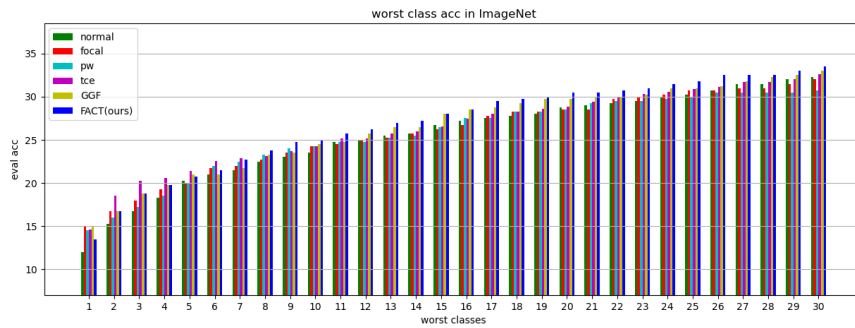


Figure 8: Worst class accuracies of different methods in ImageNet dataset.

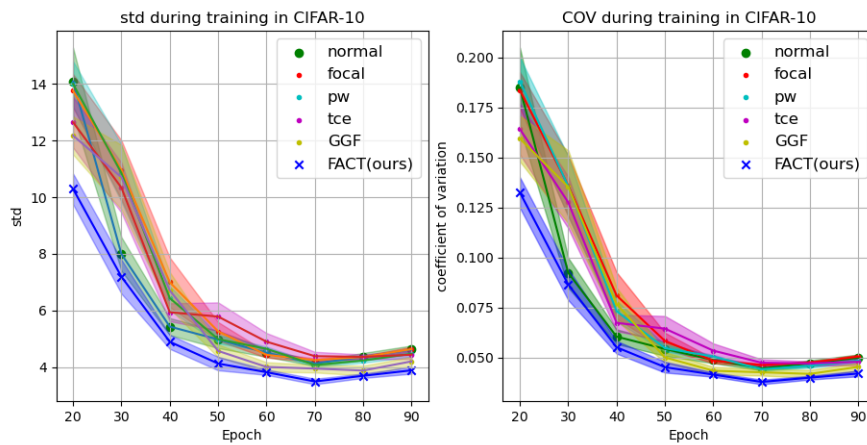


Figure 9: Fairness metrics during training in CIFAR-10 dataset.

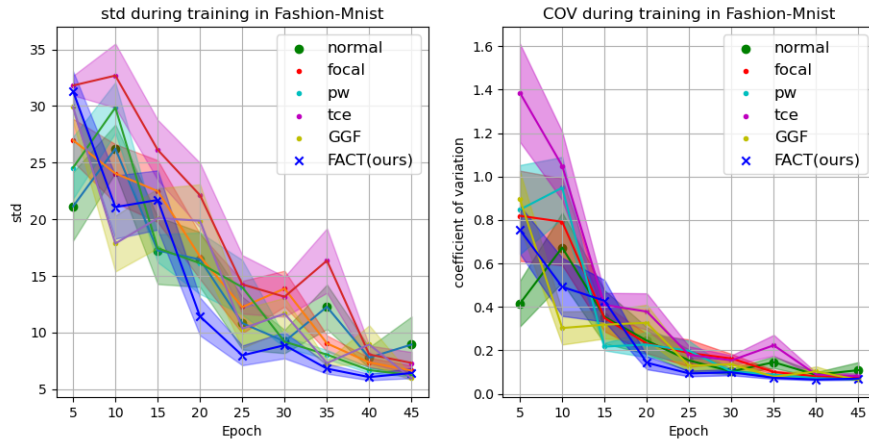


Figure 10: Fairness metrics during training in Fashion-Mnist dataset.

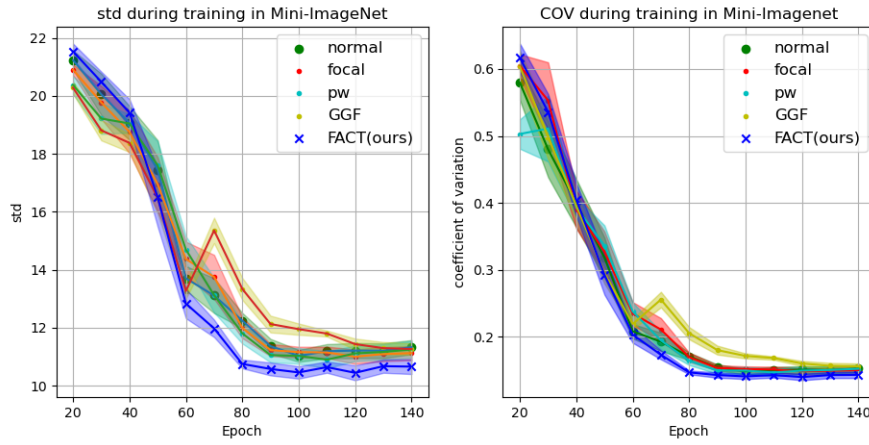


Figure 11: Fairness metrics during training in Mini-ImageNet dataset.

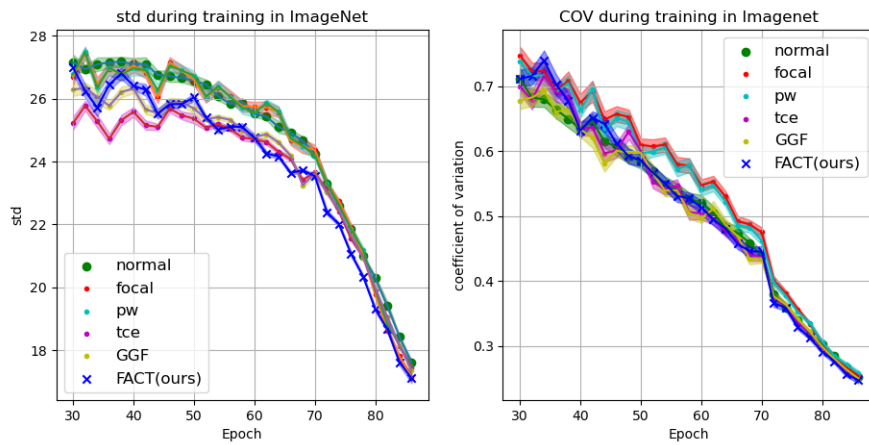


Figure 12: Fairness metrics during training in ImageNet dataset.

J Broader Impacts

Positive societal impacts By proposing and validating a novel method that balances accuracy with fairness, we contribute to the development of a more equitable machine learning system. This kind of system have the potential to positively affect various domains, such as healthcare and education, where unbiased decisions can lead to more just outcomes for all individuals.

Negative societal impacts To the best of our knowledge, we don't see any negative societal impacts of our work.