

7th ABAW Competition: Multi-Task Learning and Compound Expression Recognition

Dimitrios Kollias¹, Stefanos Zafeiriou², Irene Kotsia³, Abhinav Dhall⁴, Shreya Ghosh⁵, Chunchang Shao¹, and Guanyu Hu^{1,6}

¹ Queen Mary University of London, UK

d.kollias@qmul.ac.uk

² Imperial College London, UK

³ Cogitat, UK

⁴ Flinders University, Australia

⁵ Curtin University, Australia

⁶ Xi'an Jiaotong University, China

Abstract. This paper describes the 7th Affective Behavior Analysis in-the-wild (ABAW) Competition, which is part of the respective Workshop held in conjunction with ECCV 2024. The 7th ABAW Competition addresses novel challenges in understanding human expressions and behaviors, crucial for the development of human-centered technologies. The Competition comprises of two sub-challenges: i) Multi-Task Learning (the goal is to learn at the same time, in a multi-task learning setting, to estimate two continuous affect dimensions, valence and arousal, to recognise between the mutually exclusive classes of the 7 basic expressions and 'other'), and to detect 12 Action Units); and ii) Compound Expression Recognition (the target is to recognise between the 7 mutually exclusive compound expression classes). s-Aff-Wild2, which is a static version of the A/V Aff-Wild2 database and contains annotations for valence-arousal, expressions and Action Units, is utilized for the purposes of the Multi-Task Learning Challenge; a part of C-EXPR-DB, which is an A/V in-the-wild database with compound expression annotations, is utilized for the purposes of the Compound Expression Recognition Challenge. In this paper, we introduce the two challenges, detailing their datasets and the protocols followed for each. We also outline the evaluation metrics, and highlight the baseline systems and their results. Additional information about the competition can be found at <https://affective-behavior-analysis-in-the-wild.github.io/7th>.

Keywords: ABAW and affective behavior analysis in-the-wild and multi-task learning and compound expression recognition and Aff-Wild2 and s-Aff-Wild2 and C-EXPR-DB and valence-arousal estimation and basic-compound expression recognition and action unit detection

1 Introduction

Facial behavior analysis, bridging computer vision, physiology, and psychology, has broad applications including medicine, e-learning, marketing, entertainment

and law. Recent advancements in large-scale datasets and deep learning have propelled the field forward significantly.

The 7th Affective Behavior Analysis in-the-wild (ABAW) Workshop and Competition continues to promote interdisciplinary collaboration by uniting experts from academia, industry, and government. Held alongside ECCV 2024, this workshop focuses on analyzing affective behavior in real-world contexts. This research is pivotal for advancing human-centered technologies such as human-computer interaction (HCI) systems and intelligent digital assistants. By improving our understanding of human emotions and behaviors, machines can more effectively engage with users across diverse contexts, including variations in age, gender, and social background, thereby fostering trust and improving real-life interactions.

The ABAW Competition is a crucial component of the Workshop and consists of two distinct challenges.

The first challenge focuses on Multi-Task Learning (MTL). This challenge aims to simultaneously address three tasks: (i) estimating two continuous affect dimensions (valence and arousal), (ii) recognizing eight distinct classes of facial expressions, and (iii) detecting the activation of 12 Action Units (AUs). Valence represents the positivity or negativity of an affective state on a continuous scale ranging from -1 to 1, while arousal measures the intensity of the affective state, from active to passive, also on a scale from -1 to 1. The eight expression classes include the six basic expressions (anger, disgust, fear, happiness, sadness, and surprise), the neutral state, and an 'other' category for affective states that do not fit into the other seven classes. Action Units correspond to specific facial muscle movements, with the selected AUs for this challenge being: AU1, AU2, AU4, AU6, AU7, AU10, AU12, AU15, AU23, AU24, AU25, and AU26.

For this Challenge, a static version of the Aff-Wild2 database [31–36, 38–42, 42–48, 101], named s-Aff-Wild2, is used. It consists of around 222K images that contain annotations in terms of the previously mentioned tasks.

The participants are allowed to use the provided s-Aff-Wild2 database and/or any publicly available or private databases. The participants are not allowed to use the (A/V) Aff-Wild2 database (images and annotations). Teams are allowed to use any -publicly or not- available pre-trained model (as long as it has not been pre-trained on Aff-Wild2). The pre-trained model can be pre-trained on any task (e.g., VA estimation, Expression Recognition, AU detection, Face Recognition). Any methodological solution will be accepted for this Challenge.

The second Challenge targets Compound Expression (CE) Recognition. This task involves identifying seven distinct compound expressions in each frame of the provided dataset. The compound expressions to be recognized are: Fearfully Surprised, Happily Surprised, Sadly Surprised, Disgustedly Surprised, Angrily Surprised, Sadly Fearful, and Sadly Angry.

For this Challenge, a subset of the C-EXPR-DB database [32] is utilized, comprising 56 videos. C-EXPR-DB is an audiovisual (A/V) in-the-wild database containing a total of 400 videos and approximately 200,000 frames. The subset

provided for this Challenge includes 56 videos with roughly 26,500 frames, which are unannotated.

Teams are allowed to use any -publicly or not- available pre-trained model and any -publicly or not- available database (that contains any annotations, e.g. VA, basic or compound expressions, AUs).

The seventh iteration of the ABAW Competition will take place as part of the ABAW Workshop, held in conjunction with ECCV 2024. This competition continues the successful legacy of previous ABAW Competitions, which have been held alongside IEEE CVPR 2024, 2023, 2022 and 2017, ECCV 2022, ICCV 2021 and IEEE FG 2020. These events have consistently attracted numerous teams from academia and industry worldwide [1–8, 10–30, 37, 37, 41, 49–75, 75–90, 90–100, 102–110, 111, 111–113, 113].

2 Competition Corpora

Below, we provide an overview of the databases used in each Challenge. For detailed information, we recommend referring to the original documentation. Additionally, we describe the pre-processing steps taken for the Challenges, which involve cropping and aligning all image frames. These steps were utilized in our baseline experiments.

2.1 Multi-Task Learning Challenge

A static version of the Aff-Wild2 database, termed s-Aff-Wild2, was created by selecting specific frames from the original database. This Challenge’s database includes 221,928 images annotated for: (i) valence and arousal; (ii) eight expressions (six basic expressions: anger, disgust, fear, happiness, sadness, and surprise; the neutral state; and an ‘other’ category for all other affective states); and (iii) twelve Action Units (AUs).

Figure 1 illustrates the 2D Valence-Arousal histogram of annotations in s-Aff-Wild2. Table 1 displays the distribution of the eight expression annotations in s-Aff-Wild2. Table 2 lists the twelve annotated AUs, their corresponding actions, and their distribution in s-Aff-Wild2.

The s-Aff-Wild2 dataset is divided into training, validation, and test sets. Initially, the training and validation sets, along with their annotations, are made available to participants for developing and testing their methodologies. The test set, however, is provided without annotations at a later stage.

Participants receive two versions of s-Aff-Wild2: cropped one and cropped-aligned one. All images/frames are processed using RetinaFace [9] to extract face bounding boxes and five facial landmarks. The images are cropped based on these bounding boxes. All cropped images have dimensions of $112 \times 112 \times 3$. The cropped-aligned version is obtained by applying similarity transformation using the five facial landmarks (two eyes, nose, and two mouth corners). Both versions are provided to participants, and the cropped-aligned version was used in our baseline experiments (described in Section 4).

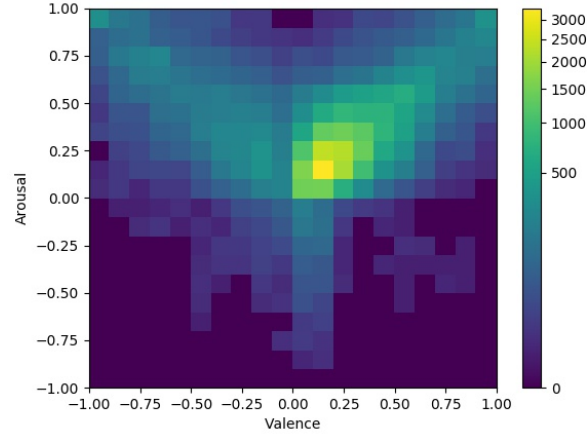


Fig. 1: Multi-Task-Learning Challenge: 2D Valence-Arousal Histogram of Annotations in s-Aff-Wild2

Table 1: Multi-Task-Learning Challenge: Number of Annotated Images for each of the 8 Expressions

Expressions	No of Images
Neutral	37,073
Anger	8,094
Disgust	5,922
Fear	6,899
Happiness	32,397
Sadness	13,447
Surprise	9,873
Other	39,701

2.2 Compound Expression Recognition Challenge

This Challenge utilizes a subset of the C-EXPR-DB database, consisting of 56 videos. The full C-EXPR-DB is an audiovisual in-the-wild dataset with 400 videos totaling approximately 200,000 frames, each annotated with 12 compound expressions. For this Challenge, the focus will be on recognizing the following seven compound expressions: Fearfully Surprised, Happily Surprised, Sadly Surprised, Disgustedly Surprised, Angrily Surprised, Sadly Fearful, and Sadly Angry.

Participants receive an unannotated subset of C-EXPR-DB (56 videos with about 26,500 frames) and must develop methodologies to recognize the seven specified compound expressions on a per-frame basis. Approaches may include supervised or self-supervised learning, domain adaptation, and zero- or few-shot learning techniques.

Table 2: Multi-Task-Learning Challenge: Distribution of AU Annotations in Aff-Wild2

Action Unit #	Action	Total Number of Activated AUs
AU 1	inner brow raiser	29,995
AU 2	outer brow raiser	14,183
AU 4	brow lowerer	31,926
AU 6	cheek raiser	49,413
AU 7	lid tightener	72,806
AU 10	upper lip raiser	68,090
AU 12	lip corner puller	47,820
AU 15	lip corner depressor	5,105
AU 23	lip tightener	6,538
AU 24	lip pressor	8,052
AU 25	lips part	122,518
AU 26	jaw drop	19,439

3 Evaluation Metrics for each Challenge

In this subsection, we detail the metrics used to evaluate the performance of methodologies developed by participating teams in each challenge.

3.1 Multi-Task Learning Challenge

The performance assessment for this Challenge is a composite measure that includes the following:

- Valence and Arousal Estimation: Evaluated using the Concordance Correlation Coefficient (CCC).
- Expression Recognition: Evaluated using the macro F1 Score across eight expression categories.
- Action Unit Detection: Evaluated using the binary F1 Score for each of the twelve AUs.

Concordance Correlation Coefficient (CCC): CCC measures the agreement between two variables and ranges from -1 to 1, with higher values indicating better agreement. It is calculated as follows:

$$\rho_c = \frac{2s_{xy}}{s_x^2 + s_y^2 + (\bar{x} - \bar{y})^2}, \quad (1)$$

where s_x and s_y are the variances of all video valence/arousal annotations and predicted values, respectively, \bar{x} and \bar{y} are their corresponding mean values and s_{xy} is the corresponding covariance value.

F1 Score: F1 Score is the harmonic mean of precision and recall, providing a balance between the two. It ranges from 0 to 1, with higher values indicating better performance. It is defined as follows:

$$F_1 = \frac{2 \times \textit{precision} \times \textit{recall}}{\textit{precision} + \textit{recall}} \quad (2)$$

Overall Evaluation Criterion: The total performance measure for the Multi-Task Learning Challenge is the sum of the average CCC for valence and arousal, the macro F1 Score for expressions, and the binary F1 Score for AUs. The formula is as follows:

$$\begin{aligned} \mathcal{P}_{MTL} &= \mathcal{P}_{VA} + \mathcal{P}_{EXPR} + \mathcal{P}_{AU} \\ &= \frac{\rho_a + \rho_v}{2} + \frac{\sum_{expr} F_1^{expr}}{8} + \frac{\sum_{au} F_1^{au}}{12} \end{aligned} \quad (3)$$

3.2 Compound Expression Recognition Challenge

The evaluation metric for this challenge is based on the average F1 Score across the seven compound expressions. Thus, the performance criterion for the Compound Expression Recognition Challenge is defined as follows:

$$\mathcal{P}_{CE} = \frac{\sum_{expr} F_1^{expr}}{7} \quad (4)$$

This formula calculates the mean F1 Score for all seven compound expressions, ensuring a balanced evaluation of performance across the different expression categories.

4 Baseline Network and Performance

The baseline system is built entirely using open-source machine learning libraries to guarantee the reproducibility of results. Implemented in TensorFlow, the training process took approximately five hours on a Titan X GPU, utilizing a learning rate of 10^{-4} and a batch size of 128.

4.1 Multi-Task Learning Challenge

The baseline model utilized is a VGG16 network with its convolutional layers fixed, training only the three fully connected layers. This model was pre-trained on the VGGFACE dataset. The output layer includes 22 units: 2 linear units for valence and arousal predictions, 8 softmax units for expression predictions, and 12 sigmoid units for action unit predictions. During training with the cropped-aligned version of the s-Aff-Wild2 database, the MixAugment technique [69] was employed for data augmentation. Additionally, all image pixel intensity values were normalized to the range $[-1, 1]$.

Table 3 presents the evaluation results on the s-Aff-Wild2 validation set, showing the combined score of the average CCC for valence and arousal, the average F1 score for the expression categories, and the average F1 score for the AUs.

Table 3: Multi-Task Learning Challenge results of the baseline model on the validation set of s-Aff-Wild2; overall metric is in %

Teams	Overall Metric	Github
VGGFACE with MixAugment [69]	32.0	-
VGGFACE without MixAugment [69]	30.0	-

5 Conclusion

In this paper we have presented the seventh Affective Behavior Analysis in-the-wild Competition (ABAW) held in conjunction with ECCV 2024. This Competition follows its predecessors from CVPR 2024, 2023, 2022 & 2017, ECCV 2022, ICCV 2021 and IEEE FG 2020. It features two challenges: Multi-Task Learning (MTL) to concurrently address Valence-Arousal Estimation, Expression Recognition, and Action Unit Detection; and Compound Expression Recognition, focusing on recognizing seven compound expressions. The databases utilized for this Competition are s-Aff-Wild2 and a subset of C-EXPR-DB.

References

1. Antoniadis, P., Pikoulis, I., Filntisis, P.P., Maragos, P.: An audiovisual and contextual approach for categorical and continuous emotion recognition in-the-wild. arXiv preprint arXiv:2107.03465 (2021) [3](#)
2. Chang, W.Y., Hsu, S.H., Chien, J.H.: Fatauva-net : An integrated deep learning framework for facial attribute recognition, action unit (au) detection, and valence-arousal estimation. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshop (2017) [3](#)
3. Chang, Y., Wu, Y., Miao, X., Wang, J., Wang, S.: Multi-task learning for emotion descriptors estimation at the fourth abaw challenge. arXiv preprint arXiv:2207.09716 (2022) [3](#)
4. Chen, S., Jin, Q., Zhao, J., Wang, S.: Multimodal multi-task learning for dimensional and continuous emotion recognition. In: Proceedings of the 7th Annual Workshop on Audio/Visual Emotion Challenge. pp. 19–26. ACM (2017) [3](#)
5. Deng, D.: Multiple emotion descriptors estimation at the abaw3 challenge. arXiv preprint arXiv:2203.12845 (2022) [3](#)
6. Deng, D., Chen, Z., Shi, B.E.: Fau, facial expressions, valence and arousal: A multi-task solution. arXiv preprint arXiv:2002.03557 (2020) [3](#)
7. Deng, D., Chen, Z., Shi, B.E.: Multitask emotion recognition with incomplete labels. In: 2020 15th IEEE International Conference on Automatic Face and Gesture Recognition (FG 2020). pp. 592–599. IEEE (2020) [3](#)
8. Deng, D., Wu, L., Shi, B.E.: Towards better uncertainty: Iterative training of efficient networks for multitask emotion recognition. arXiv preprint arXiv:2108.04228 (2021) [3](#)
9. Deng, J., Guo, J., Ververas, E., Kotsia, I., Zafeiriou, S.: Retinaface: Single-shot multi-level face localisation in the wild. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 5203–5212 (2020) [3](#)
10. Do, N.T., Nguyen-Quynh, T.T., Kim, S.H.: Affective expression analysis in-the-wild using multi-task temporal statistical deep learning model. In: 2020 15th IEEE International Conference on Automatic Face and Gesture Recognition (FG 2020). pp. 624–628. IEEE (2020) [3](#)
11. Dresvyanskiy, D., Markitantov, M., Yu, J., Li, P., Kaya, H., Karpov, A.: Sun team’s contribution to abaw 2024 competition: Audio-visual valence-arousal estimation and expression recognition. arXiv preprint arXiv:2403.12609 (2024) [3](#)
12. Dresvyanskiy, D., Ryumina, E., Kaya, H., Markitantov, M., Karpov, A., Minker, W.: An audio-video deep and transfer learning framework for multimodal emotion recognition in the wild. arXiv preprint arXiv:2010.03692 (2020) [3](#)
13. Gera, D., Balasubramanian, S.: Affect expression behaviour analysis in the wild using spatio-channel attention and complementary context information. arXiv preprint arXiv:2009.14440 (2020) [3](#)
14. Gera, D., Balasubramanian, S.: Affect expression behaviour analysis in the wild using consensual collaborative training. arXiv preprint arXiv:2107.05736 (2021) [3](#)
15. Gera, D., Kumar, B.N.S., Kumar, B.V.R., Balasubramanian, S.: Ss-mfar: Semi-supervised multi-task facial affect recognition. arXiv preprint arXiv:2207.09012 (2022) [3](#)
16. Gera, D., Kumar, B.N.S., Kumar, B.V.R., Balasubramanian, S.: Abaw: Facial expression recognition in the wild. arXiv preprint arXiv:2303.09785 (2023) [3](#)

17. Haider, I., Tran, M.T., Kim, S.H., Yang, H.J., Lee, G.S.: An ensemble approach for multiple emotion descriptors estimation using multi-task learning. arXiv preprint arXiv:2207.10878 (2022) 3
18. Hallmen, T., Deuser, F., Oswald, N., André, E.: Unimodal multi-task fusion for emotional mimicry prediction. arXiv preprint arXiv:2403.11879 (2024) 3
19. Han, S., Meng, Z., Khan, A.S., Tong, Y.: Incremental boosting convolutional neural network for facial action unit recognition. In: Advances in neural information processing systems. pp. 109–117 (2016) 3
20. Hoai, D.L., Lim, E., Choi, E., Kim, S., Pant, S., Lee, G.S., Kim, S.H., Yang, H.J.: An attention-based method for action unit detection at the 3rd abaw competition. arXiv preprint arXiv:2203.12428 (2022) 3
21. Hu, G., Papadopoulou, E., Kollias, D., Tzouveli, P., Wei, J., Yang, X.: Bridging the gap: Protocol towards fair and consistent affect analysis. arXiv preprint arXiv:2405.06841 (2024) 3
22. Jeong, J.Y., Hong, Y.G., Kim, D., Jung, Y., Jeong, J.W.: Facial expression recognition based on multi-head cross attention network. arXiv preprint arXiv:2203.13235 (2022) 3
23. Jeong, J.Y., Hong, Y.G., Oh, J., Hong, S., Jeong, J.W., Jung, Y.: Learning from synthetic data: Facial expression classification based on ensemble of multi-task networks. arXiv preprint arXiv:2207.10025 (2022) 3
24. Ji, X., Ding, Y., Li, L., Chen, Y., Fan, C.: Multi-label relation modeling in facial action units detection. arXiv preprint arXiv:2002.01105 (2020) 3
25. Jiang, W., Wu, Y., Qiao, F., Meng, L., Deng, Y., Liu, C.: Facial action unit recognition with multi-models ensembling. arXiv preprint arXiv:2203.13046 (2022) 3
26. Jin, Y., Zheng, T., Gao, C., Xu, G.: A multi-modal and multi-task learning method for action unit and expression recognition. arXiv preprint arXiv:2107.04187 (2021) 3
27. Karas, V., Tellamekala, M.K., Mallol-Ragolta, A., Valstar, M., Schuller, B.W.: Continuous-time audiovisual fusion with recurrence vs. attention for in-the-wild affect recognition. arXiv preprint arXiv:2203.13285 (2022) 3
28. Kim, J.H., Kim, N., Hong, M., Won, C.: Cca-transformer: Cascaded cross-attention based transformer for facial analysis in multi-modal data (2024) 3
29. Kim, J.H., Kim, N., Won, C.S.: Facial expression recognition with swin transformer. arXiv preprint arXiv:2203.13472 (2022) 3
30. Kim, J.H., Kim, N., Won, C.S.: Multi-modal facial expression recognition with transformer-based fusion networks and dynamic sampling. arXiv preprint arXiv:2303.08419 (2023) 3
31. Kollias, D.: Abaw: Valence-arousal estimation, expression recognition, action unit detection & multi-task learning challenges. arXiv preprint arXiv:2202.10659 (2022) 2
32. Kollias, D.: Multi-label compound expression recognition: C-expr database & network. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 5589–5598 (2023) 2
33. Kollias, D., Arsenos, A., Kollias, S.: A deep neural architecture for harmonizing 3-d input data analysis and decision making in medical imaging. Neurocomputing 542, 126244 (2023) 2
34. Kollias, D., Cheng, S., Pantic, M., Zafeiriou, S.: Photorealistic facial synthesis in the dimensional affect space. In: European Conference on Computer Vision. pp. 475–491. Springer (2018) 2

35. Kollias, D., Cheng, S., Ververas, E., Kotsia, I., Zafeiriou, S.: Deep neural network augmentation: Generating faces for affect analysis. *International Journal of Computer Vision* pp. 1–30 (2020) [2](#)
36. Kollias, D., Nicolaou, M.A., Kotsia, I., Zhao, G., Zafeiriou, S.: Recognition of affect in the wild using deep neural networks. In: *Computer Vision and Pattern Recognition Workshops (CVPRW), 2017 IEEE Conference on*. pp. 1972–1979. IEEE (2017) [2](#)
37. Kollias, D., Psaroudakis, A., Arsenos, A., Theofilou, P.: Facernet: a facial expression intensity estimation network. *arXiv preprint arXiv:2303.00180* (2023) [3](#)
38. Kollias, D., Schulc, A., Hajiyev, E., Zafeiriou, S.: Analysing affective behavior in the first abaw 2020 competition. In: *2020 15th IEEE International Conference on Automatic Face and Gesture Recognition (FG 2020)(FG)*. pp. 794–800. IEEE Computer Society (2020) [2](#)
39. Kollias, D., Sharmanska, V., Zafeiriou, S.: Face behavior a la carte: Expressions, affect and action units in a single network. *arXiv preprint arXiv:1910.11111* (2019) [2](#)
40. Kollias, D., Sharmanska, V., Zafeiriou, S.: Distribution matching for heterogeneous multi-task learning: a large-scale face study. *arXiv preprint arXiv:2105.03790* (2021) [2](#)
41. Kollias, D., Sharmanska, V., Zafeiriou, S.: Distribution matching for multi-task learning of classification tasks: a large-scale study on faces & beyond. *arXiv preprint arXiv:2401.01219* (2024) [2](#), [3](#)
42. Kollias, D., Tzirakis, P., Baird, A., Cowen, A., Zafeiriou, S.: Abaw: Valence-arousal estimation, expression recognition, action unit detection & emotional reaction intensity estimation challenges. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 5888–5897 (2023) [2](#)
43. Kollias, D., Tzirakis, P., Cowen, A., Zafeiriou, S., Shao, C., Hu, G.: The 6th affective behavior analysis in-the-wild (abaw) competition. *arXiv preprint arXiv:2402.19344* (2024) [2](#)
44. Kollias, D., Tzirakis, P., Nicolaou, M.A., Papaioannou, A., Zhao, G., Schuller, B., Kotsia, I., Zafeiriou, S.: Deep affect prediction in-the-wild: Aff-wild database and challenge, deep architectures, and beyond. *International Journal of Computer Vision* pp. 1–23 (2019) [2](#)
45. Kollias, D., Zafeiriou, S.: Expression, affect, action unit recognition: Aff-wild2, multi-task learning and arcface. *arXiv preprint arXiv:1910.04855* (2019) [2](#)
46. Kollias, D., Zafeiriou, S.: Va-stargan: Continuous affect generation. In: *International Conference on Advanced Concepts for Intelligent Vision Systems*. pp. 227–238. Springer (2020) [2](#)
47. Kollias, D., Zafeiriou, S.: Affect analysis in-the-wild: Valence-arousal, expressions, action units and a unified framework. *arXiv preprint arXiv:2103.15792* (2021) [2](#)
48. Kollias, D., Zafeiriou, S.: Analysing affective behavior in the second abaw2 competition. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*. pp. 3652–3660 (2021) [2](#)
49. Kuhnke, F., Rumberg, L., Ostermann, J.: Two-stream aural-visual affect analysis in the wild. *arXiv preprint arXiv:2002.03399* (2020) [3](#)
50. Lee, H., Lim, H., Lim, S.: Byel: Bootstrap on your emotion latent. *arXiv preprint arXiv:2207.10003* (2022) [3](#)
51. Lei, J., Liu, Z., Zou, Z., Li, T., Juan, X., Wang, S., Yang, G., Feng, Z.: Mid-level representation enhancement and graph embedded uncertainty suppressing for facial expression recognition. *arXiv preprint arXiv:2207.13235* (2022) [3](#)

52. Li, I., et al.: Technical report for valence-arousal estimation on affwild2 dataset. arXiv preprint arXiv:2105.01502 (2021) **3**
53. Li, S., Xu, Y., Wu, H., Wu, D., Yin, Y., Cao, J., Ding, J.: Facial affect analysis: Learning from synthetic data & multi-task learning challenges. arXiv preprint arXiv:2207.09748 (2022) **3**
54. Li, Y., Sun, H., Liu, Z., Han, H.: Affective behaviour analysis using pretrained model with facial priori. arXiv preprint arXiv:2207.11679 (2022) **3**
55. Lin, L., Papabathini, S., Wang, X., Hu, S.: Robust light-weight facial affective behavior recognition with clip. arXiv preprint arXiv:2403.09915 (2024) **3**
56. Liu, H., Zeng, J., Shan, S., Chen, X.: Emotion recognition for in-the-wild videos. arXiv preprint arXiv:2002.05447 (2020) **3**
57. Mao, S., Fan, X., Peng, X.: Spatial and temporal networks for facial expression recognition in the wild videos. arXiv preprint arXiv:2107.05160 (2021) **3**
58. Meng, L., Liu, Y., Liu, X., Huang, Z., Jiang, W., Zhang, T., Deng, Y., Li, R., Wu, Y., Zhao, J., et al.: Multi-modal emotion estimation for in-the-wild videos. arXiv preprint arXiv:2203.13032 (2022) **3**
59. Min, S., Yang, J., Lim, S., Lee, J., Lee, S., Lim, S.: Emotion recognition using transformers with masked learning. arXiv preprint arXiv:2403.13731 (2024) **3**
60. Mutlu, O.C., Honarmand, M., Surabhi, S., Wall, D.P.: Tempt: Temporal consistency for test-time adaptation. arXiv preprint arXiv:2303.10536 (2023) **3**
61. Nguyen, D.K., Ho, N.H., Pant, S., Yang, H.J.: A transformer-based approach to video frame-level prediction in affective behaviour analysis in-the-wild. arXiv preprint arXiv:2303.09293 (2023) **3**
62. Nguyen, D.K., Pant, S., Ho, N.H., Lee, G.S., Kim, S.H., Yang, H.J.: Multi-task cross attention network in facial behavior analysis. arXiv preprint arXiv:2207.10293 (2022) **3**
63. Nguyen, H.H., Huynh, V.T., Kim, S.H.: An ensemble approach for facial expression analysis in video. arXiv preprint arXiv:2203.12891 (2022) **3**
64. Nguyen-Xuan, B., Nguyen-Hoang, T., Tai-Do, N.: Emotic masked autoencoder with attention fusion for facial expression recognition. arXiv preprint arXiv:2403.13039 (2024) **3**
65. Oh, G., Jeong, E., Lim, S.: Causal affect prediction model using a facial image sequence. arXiv preprint arXiv:2107.03886 (2021) **3**
66. Pahl, J., Rieger, I., Seuss, D.: Multi-label class balancing algorithm for action unit detection. arXiv preprint arXiv:2002.03238 (2020) **3**
67. Phan, K.N., Nguyen, H.H., Huynh, V.T., Kim, S.H.: Expression classification using concatenation of deep neural network for the 3rd abaw3 competition. arXiv preprint arXiv:2203.12899 (2022) **3**
68. Praveen, R.G., Alam, J.: Recursive cross-modal attention for multimodal fusion in dimensional emotion recognition. arXiv preprint arXiv:2403.13659 (2024) **3**
69. Psaroudakis, A., Kollias, D.: Mixaugment & mixup: Augmentation methods for facial expression recognition. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 2367–2375 (2022) **3, 6, 7**
70. Rajasekar, G.P., de Melo, W.C., Ullah, N., Aslam, H., Zeeshan, O., Denorme, T., Pedersoli, M., Koerich, A., Cardinal, P., Granger, E.: A joint cross-attention model for audio-visual fusion in dimensional emotion recognition. arXiv preprint arXiv:2203.14779 (2022) **3**
71. Ryumina, E., Markitantov, M., Ryumin, D., Kaya, H., Karpov, A.: Audio-visual compound expression recognition method based on late modality fusion and rule-based decision. arXiv preprint arXiv:2403.12687 (2024) **3**

72. Saito, J., Mi, X., Uchida, A., Youoku, S., Yamamoto, T., Murase, K.: Action units recognition using improved pairwise deep architecture. arXiv preprint arXiv:2107.03143 (2021) [3](#)
73. Savchenko, A.V.: Frame-level prediction of facial expressions, valence, arousal and action units for mobile devices. arXiv preprint arXiv:2203.13436 (2022) [3](#)
74. Savchenko, A.V.: Hse-nn team at the 4th abaw competition: Multi-task emotion recognition and learning from synthetic images. arXiv preprint arXiv:2207.09508 (2022) [3](#)
75. Savchenko, A.V.: Emotieffnet facial features in uni-task emotion recognition in video at abaw-5 competition. arXiv preprint arXiv:2303.09162 (2023) [3](#)
76. Savchenko, A.V.: Hsemotion team at the 6th abaw competition: Facial expressions, valence-arousal and emotion intensity prediction. arXiv preprint arXiv:2403.11590 (2024) [3](#)
77. Shu, T., Wang, X., Wang, R., Chen, C., Zhang, Y., Sun, X.: Mutimodal feature extraction and attention-based fusion for emotion estimation in videos. arXiv preprint arXiv:2303.10421 (2023) [3](#)
78. Sun, H., Lian, Z., Liu, B., Tao, J., Sun, L., Cai, C.: Two-aspect information fusion model for abaw4 multi-task challenge. arXiv preprint arXiv:2207.11389 (2022) [3](#)
79. Tallec, G., Yvinec, E., Dapogny, A., Bailly, K.: Multi-label transformer for action unit detection. arXiv preprint arXiv:2203.12531 (2022) [3](#)
80. Vu, M.T., Beurton-Aimar, M.: Multitask multi-database emotion recognition. arXiv preprint arXiv:2107.04127 (2021) [3](#)
81. Vu, T., Huynh, V.T., Kim, S.H.: Vision transformer for action units detection. arXiv preprint arXiv:2303.09917 (2023) [3](#)
82. Waligora, P., Zeeshan, O., Aslam, H., Belharbi, S., Koerich, A.L., Pedersoli, M., Bacon, S., Granger, E.: Joint multimodal transformer for dimensional emotional recognition in the wild. arXiv preprint arXiv:2403.10488 (2024) [3](#)
83. Wang, J., Huang, J., Cai, B., Cao, Y., Yun, X., Wang, S.: Zero-shot compound expression recognition with visual language model at the 6th abaw challenge. arXiv preprint arXiv:2403.11450 (2024) [3](#)
84. Wang, L., Li, H., Liu, C.: Hybrid cnn-transformer model for facial affect recognition in the abaw4 challenge. arXiv preprint arXiv:2207.10201 (2022) [3](#)
85. Wang, L., Wang, S.: A multi-task mean teacher for semi-supervised facial affective behavior analysis. arXiv preprint arXiv:2107.04225 (2021) [3](#)
86. Wang, L., Wang, S., Qi, J.: Multi-modal multi-label facial action unit detection with transformer. arXiv preprint arXiv:2203.13301 (2022) [3](#)
87. Wang, S., Chang, Y., Wang, J.: Facial action unit recognition based on transfer learning. arXiv preprint arXiv:2203.14694 (2022) [3](#)
88. Wang, S., Chang, Y., Wu, Y., Miao, X., Wu, J., Zhu, Z., Wang, J., Xiao, Y.: Facial affective behavior analysis method for 5th abaw competition. arXiv preprint arXiv:2303.09145 (2023) [3](#)
89. Wang, Z., Song, S., Luo, C., Zhou, Y., Xie, W., Shen, L., et al.: Spatio-temporal au relational graph representation learning for facial action units detection. arXiv preprint arXiv:2303.10644 (2023) [3](#)
90. Wen, Z., Zhang, F., Zhang, S., Sun, H., Xu, M., Sun, L., Lian, Z., Liu, B., Tao, J.: Multimodal fusion with pre-trained model features in affective behaviour analysis in-the-wild. arXiv preprint arXiv:2403.15044 (2024) [3](#)
91. Xie, H.X., Li, I., Lo, L., Shuai, H.H., Cheng, W.H., et al.: Technical report for valence-arousal estimation in abaw2 challenge. arXiv preprint arXiv:2107.03891 (2021) [3](#)

92. Xue, F., Sun, Y., Yang, Y.: Exploring expression-related self-supervised learning for affective behaviour analysis. arXiv preprint arXiv:2303.10511 (2023) **3**
93. Xue, F., Tan, Z., Zhu, Y., Ma, Z., Guo, G.: Coarse-to-fine cascaded networks with smooth predicting for video facial expression recognition. arXiv preprint arXiv:2203.13052 (2022) **3**
94. Yin, Y., Tran, M., Chang, D., Wang, X., Soleymani, M.: Multi-modal facial action unit detection with large pre-trained models for the 5th competition on affective behavior analysis in-the-wild. arXiv preprint arXiv:2303.10590 (2023) **3**
95. Youoku, S., Toyoda, Y., Yamamoto, T., Saito, J., Kawamura, R., Mi, X., Murase, K.: A multi-term and multi-task analyzing framework for affective analysis in-the-wild. arXiv preprint arXiv:2009.13885 (2020) **3**
96. Yu, J., Cai, Z., He, P., Xie, G., Ling, Q.: Multi-model ensemble learning method for human expression recognition. arXiv preprint arXiv:2203.14466 (2022) **3**
97. Yu, J., Cai, Z., Li, R., Zhao, G., Xie, G., Zhu, J., Zhu, W.: Exploring large-scale unlabeled faces to enhance facial expression recognition. arXiv preprint arXiv:2303.08617 (2023) **3**
98. Yu, J., Wei, Z., Cai, Z.: Exploring facial expression recognition through semi-supervised pretraining and temporal modeling. arXiv preprint arXiv:2403.11942 (2024) **3**
99. Yu, J., Zhang, Z., Wei, Z., Zhao, G., Cai, Z., Wang, Y., Xie, G., Zhu, J., Zhu, W.: Aud-tgn: Advancing action unit detection with temporal convolution and gpt-2 in wild audiovisual contexts. arXiv preprint arXiv:2403.13678 (2024) **3**
100. Yu, J., Zhao, G., Wan, Y., Wei, Z., Zheng, Y., Zhang, Z., Cai, Z., Xie, G., Zhu, J., Zhu, W.: Multimodal fusion method with spatiotemporal sequences and relationship learning for valence-arousal estimation. arXiv preprint arXiv:2403.12425 (2024) **3**
101. Zafeiriou, S., Kollias, D., Nicolaou, M.A., Papaioannou, A., Zhao, G., Kotsia, I.: Aff-wild: Valence and arousal ‘in-the-wild’challenge. In: Computer Vision and Pattern Recognition Workshops (CVPRW), 2017 IEEE Conference on. pp. 1980–1987. IEEE (2017) **2**
102. Zhang, S., An, R., Ding, Y., Guan, C.: Continuous emotion recognition using visual-audio-linguistic information: A technical report for abaw3. arXiv preprint arXiv:2203.13031 (2022) **3**
103. Zhang, S., Ding, Y., Wei, Z., Guan, C.: Audio-visual attentive fusion for continuous emotion recognition. arXiv preprint arXiv:2107.01175 (2021) **3**
104. Zhang, S., Zhao, Z., Guan, C.: Multimodal continuous emotion recognition: A technical report for abaw5. arXiv preprint arXiv:2303.10335 (2023) **3**
105. Zhang, T., Liu, C., Liu, X., Liu, Y., Meng, L., Sun, L., Jiang, W., Zhang, F.: Emotion recognition based on multi-task learning framework in the abaw4 challenge. arXiv preprint arXiv:2207.09373 (2022) **3**
106. Zhang, W., Guo, Z., Chen, K., Li, L., Zhang, Z., Ding, Y.: Prior aided streaming network for multi-task affective recognition at the 2nd abaw2 competition. arXiv preprint arXiv:2107.03708 (2021) **3**
107. Zhang, W., Qiu, F., Liu, C., Li, L., Du, H., Guo, T., Yu, X.: Affective behaviour analysis via integrating multi-modal knowledge. arXiv preprint arXiv:2403.10825 (2024) **3**
108. Zhang, W., Zhang, Z., Qiu, F., Wang, S., Ma, B., Zeng, H., An, R., Ding, Y.: Transformer-based multimodal information fusion for facial expression analysis. arXiv preprint arXiv:2203.12367 (2022) **3**

109. Zhang, Y.H., Huang, R., Zeng, J., Shan, S., Chen, X.: m^3 t: Multi-modal continuous valence-arousal estimation in the wild. arXiv preprint arXiv:2002.02957 (2020) [3](#)
110. Zhang, Z., An, L., Cui, Z., Dong, T., et al.: Facial affect recognition based on transformer encoder and audiovisual fusion for the abaw5 challenge. arXiv preprint arXiv:2303.09158 (2023) [3](#)
111. Zhou, W., Lu, J., Ling, C., Wang, W., Liu, S.: Boosting continuous emotion recognition with self-pretraining using masked autoencoders, temporal convolutional networks, and transformers. arXiv preprint arXiv:2403.11440 (2024) [3](#)
112. Zhou, W., Lu, J., Xiong, Z., Wang, W.: Continuous emotion recognition based on tcn and transformer. arXiv preprint arXiv:2303.08356 (2023) [3](#)
113. Zou, P., Wang, R., Wen, K., Peng, Y., Sun, X.: Spatial-temporal transformer for affective behavior analysis. arXiv preprint arXiv:2303.10561 (2023) [3](#)