

# FedSat: A Statistical Aggregation Approach for Class Imbalanced Clients in Federated Learning

Sujit Chowdhury, Raju Halder

## Abstract

Federated learning (FL) has emerged as a promising paradigm for privacy-preserving distributed machine learning, but faces challenges with heterogeneous data distributions across clients. This paper introduces FedSat, a novel FL approach designed to tackle various forms of data heterogeneity simultaneously. FedSat employs a cost-sensitive loss function and a prioritized class-based weighted aggregation scheme to address label skewness, missing classes, and quantity skewness across clients. While the proposed cost-sensitive loss function enhances model performance on minority classes, the prioritized class-based weighted aggregation scheme ensures client contributions are weighted based on both statistical significance and performance on critical classes. Extensive experiments across diverse data-heterogeneity settings demonstrate that FedSat significantly outperforms state-of-the-art baselines, with an average improvement of 1.8% over the second-best method and 19.87% over the weakest-performing baseline. The approach also demonstrates faster convergence compared to existing methods. These results highlight FedSat's effectiveness in addressing the challenges of heterogeneous federated learning and its potential for real-world applications.

## Index Terms

Deep learning, federated learning, cost-sensitive loss function, weighted aggregation, data heterogeneity.

## I. INTRODUCTION

**F**EDERATED Learning (FL) [1] has emerged as a promising paradigm for training machine learning models across decentralized edge devices, enabling privacy-preserving and efficient model updates without the need to centralize sensitive data. However, the effectiveness of FL is often challenged by various factors, including non-independent and identically distributed (non-IID) datasets, varying network conditions, and heterogeneous devices among clients. This yields biases in model training, leading to sub-optimal performance [2], [3].

Since its inception, a significant research effort has been observed in the literature to address the above-mentioned challenges. The authors in [4]–[7] attempted to improve the performance of FL models by regulating local epochs or server-side updates in presence of non-IID datasets. However, they experience a slow and sometime unstable convergence due to the diverse local objectives arising from heterogeneous data distributions, commonly known as client drift, as reported in [8]–[10]. Similarly, the regularization techniques adopted in [8], [11]–[15] often face difficulty due to the skewness in labels, features, and quantity of the data across various clients, leading to a slow and unstable convergence. In general, most of the existing approaches employed simple aggregation schemes [1], [3], [8], [9], [11], [12], which are unable to deal with extreme heterogeneous settings, where clients' models differ from each other significantly due to their local data.

To showcase the impact of heterogeneous data settings in FL, the authors in [2] developed a benchmark with comprehensive non-IID configurations, including label skew, features skew, and quantity skew. The empirical study revealed that none of the existing state-of-the-art FL approaches consistently outperform each other under all different configurations. This finding inspires researchers to develop specialized algorithms tailored to specific non-IID configurations for further enhancing the performance of the global model. For instance, the authors in [3] attempted to mitigate label skewness by utilizing logits calibration which handles missing classes during the local training. Similarly, [16] aimed at addressing the feature distribution skewness by utilizing batch normalization techniques. On the other hand, FedCorr [17] is introduced to address data heterogeneity concerning both local label quality and label skewness by computing a Gaussian Mixture Model (GMM) based on the cumulative Local Intrinsic Dimensionality (LID) scores from all clients.

Unfortunately, none of the approaches offers a unified framework to robustly tackle the multifaceted challenges posed by data heterogeneity. They either focus on specific aspects of data skewness or require complex data correction models, which can be difficult to generalize across diverse FL environments. Therefore, creating an effective FL framework that works well in all situations remains a challenging and open problem in the field of Federated Learning.

To this aim, this paper presents FedSat, a novel federated learning approach specifically designed to tackle various forms of data heterogeneity simultaneously. In particular, we introduce a prioritized class-based weighted aggregation scheme and a cost-sensitive loss function to address the following: label skewness, missing classes, and quantity skewness. The proposed cost-sensitive loss function significantly enhances model performance by assigning higher

Sujit Chowdhury and Raju Halder are with the Department of Computer Science and Engineering, Indian Institute of Technology Patna, India, 801106. ( E-mail: {sujit\_2021cs35, halder}@iitp.ac.in )

This work has been submitted to the IEEE for possible publication. Copyright may be transferred without notice, after which this version may no longer be accessible.

misclassification penalties to minority classes, thereby effectively managing class imbalance. Meanwhile, the prioritized class-based weighted aggregation scheme ensures that clients' contributions to the global model are weighted based on both the statistical significance of their locally trained models and their performance on critical classes. This approach enhances the robustness and accuracy of the global model, particularly when faced with extreme non-IID data heterogeneity.

**FedSat** operates in three key stages: (1) the server randomly selects a subset of clients for local model training, employing the novel cost-sensitive loss function; (2) the server then engages a set of workers for each client from the remaining pool to analyze statistical performance of the trained parameters and to compute layer-wise coefficient matrices. This statistical analysis provides weight scores which balance the impact of both label and quantity skews by identifying underperforming classes, while the layer-wise coefficients help to fine-tune the gradients to accommodate data heterogeneity effectively; and (3) finally, the server utilizes the adjusted local parameters and computed weight scores to generate more generalized and robust global parameters, effectively mitigating various form of data heterogeneity altogether.

We conduct an extensive set of experiments across diverse data-heterogeneity settings, showcasing a substantial performance enhancement with the **FedSat** compared to the baselines [1], [3], [7]–[9], [11], [12], [18], even in case of extreme non-convex data settings.

### A. Contributions

- We introduce **FedSat**, a novel federated learning approach designed to achieve robust and generalized global models in highly heterogeneous data settings.
- We propose a cost-sensitive loss function to address the effect of label skewness and missing classes during local training.
- We propose prioritized class-based weighted aggregation scheme which, unlike traditional aggregation schemes, leverages class-wise statistical insights to enhance the performance of critical classes and generates a robust global model.
- We perform an extensive experiments across diverse data-heterogeneity settings, which demonstrate a significant performance improvement of **FedSat** compared to the baselines, while also ensuring the robustness of the global model.

The rest of the paper is organized as follows: Section II presents an overview of the related work. We present the details of **FedSat** in Section III. The convergence analysis of **FedSat** is presented in Section IV. Section V provides the prototype implementation and detailed experimental evaluation. Finally, Section VI concludes the paper.

## II. RELATED WORK

To address the issue of users data privacy and communication bottleneck in distributed learning, McMahan et al. first introduced the federated learning algorithm FedAvg [1] in 2017. This approach allows decentralized devices to train models locally, followed by the aggregation of their trained parameters on a central server. Since then, significant advancements in federated learning approaches have been observed in the literature, primarily addressing various challenges of FL settings, such as high communication costs, data heterogeneity, model divergence, client drift, and label skewness. To speed up the convergence of FedAvg in heterogeneous settings [4]–[7], a series of SGD-based approaches have been proposed, especially for large-scale training in Federated Learning. In [7] the authors proposed FedAvgM, aiming to address the slow convergence of FedAvg, particularly in scenarios with non-IID data across diverse clients, by adding a momentum in the global model update process on the server. However, due to the integration of momentum, careful tuning of hyper-parameters is required to converge the global model. To further tackle heterogeneity in FL, a list of approaches [11], [12], [19]–[22] applied regularization method. FedProx [11] introduced a temperature parameter and a proximal regularization term into the optimization function to control the model drift between client and server, especially mitigating the client straggler issue in a heterogeneous system. However, because of the proximity term, local updates shift towards the last global update, which does not assure alignment between global and local optima. To this aim, FedDyn [12] introduced a dynamic regularization term in the local loss function, aligning local updates with global model parameters. This approach mitigates client drift arising from local overfitting. Recently, authors in [9] proposed a momentum-based algorithm, FedLADA, which achieves linear speedup in convergence by mitigating client drift issues due to local overfitting via utilization of the global gradient descent and locally adaptive amended optimizer. Likewise, some studies [8], [12], [14], [18], [23] use client-specific control variates, a variance reduction technique, to control the update direction. SCAFFOLD [8], which is an improvement of DANE [14], employs additional server-specific control variates to address the client drift in its local updates. Chen et al. [18] proposed Elastic aggregation, which adaptively interpolates client models based on parameter sensitivity to prevent server model drift and improve convergence in federated learning with non-IID data.

Another line of work develops FL algorithms based on the feature representation of the training model [10], [24]–[26]. MOON [25] addresses non-IID data distributions among clients by utilizing similarity between model representations to correct the local model updates of individual clients. CCVR [10] introduced the classifier regularization and

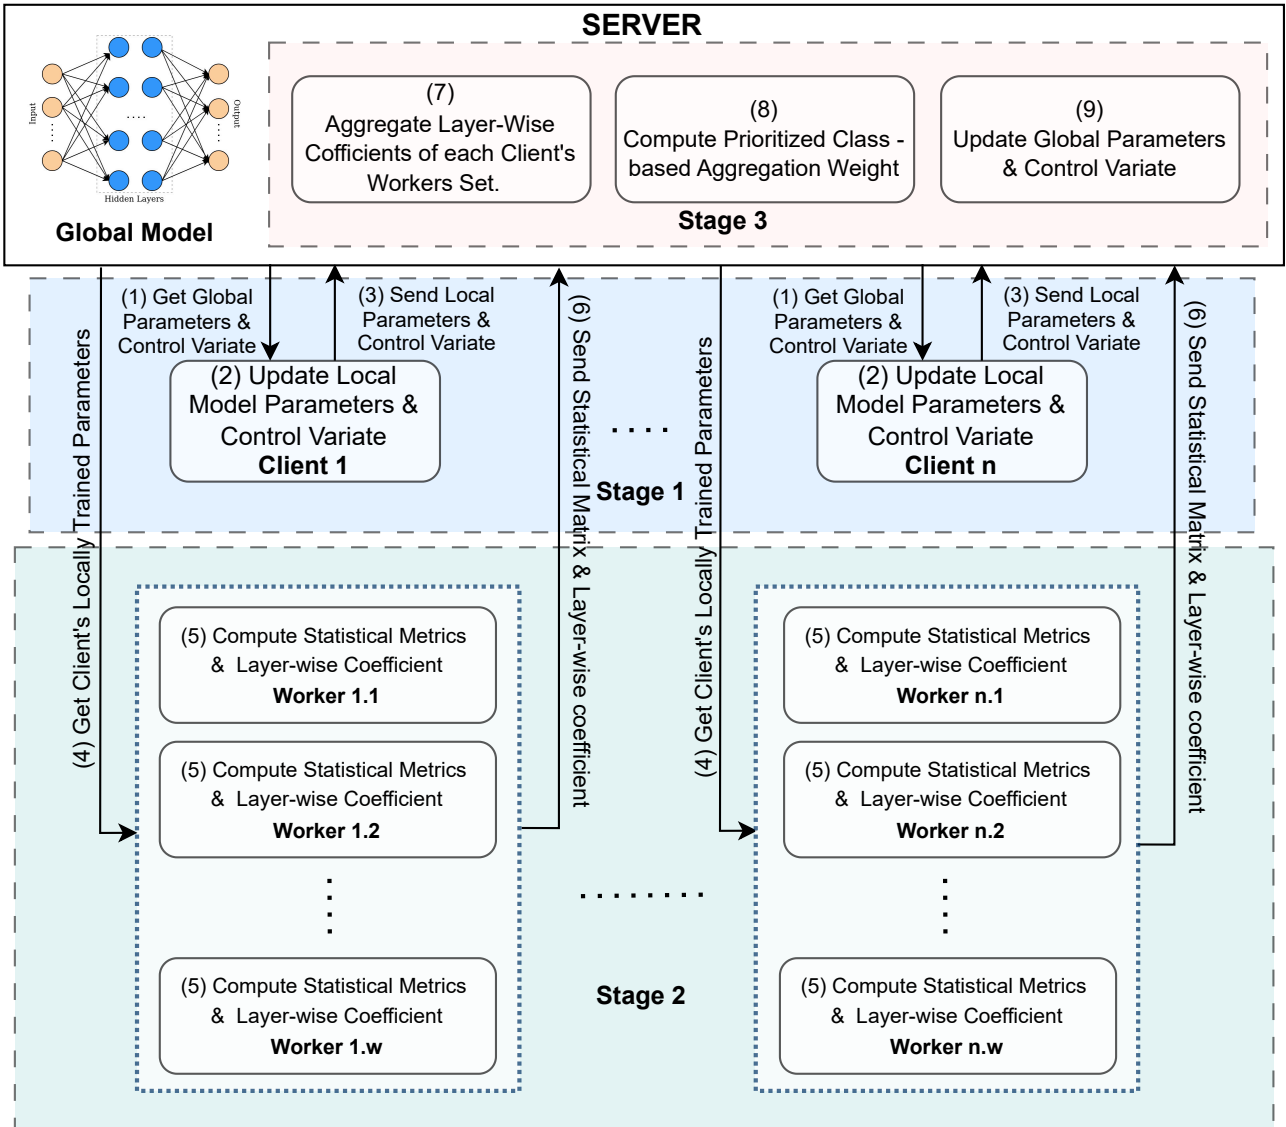


Fig. 1: FedSat Framework Architecture.

calibration method to improve FL performance by fine-tuning the classifier using virtual representations sampled from an approximated Gaussian mixture model.

An attempt to tackle class skewness in the datasets across clients is reported in [3], [17]. FedCorr [17] introduced an FL framework for handling label noise while protecting data privacy. It comprises three stages: identifying and correcting noisy data, fine-tuning the model using cleaner data, and standard training with all corrected data. To improve the performance of FL approaches in label-skewed dataset distribution across clients, [3] introduced FedLC, which adjusts logits before computing cross-entropy loss based on the probability of each class occurrence.

### III. FEDSAT: PROPOSED FL APPROACH

Figure 1 depicts an architectural overview of FedSat. It involves a set of nodes, acting as either clients or workers in a particular round. The server node is responsible for facilitating data communication among the selected clients and workers in each round (Steps 1, 3, 4, and 6). It also aggregates client-specific coefficients computed by the associated workers and employs a novel prioritized class-based weighted aggregation scheme to update the global model parameters (Steps 7-9). The client nodes are responsible for locally training the global model parameters and sending the updated parameters back to the server (Steps 2 and 3). The worker nodes calculate layer-wise coefficients and statistical metrics for their associated client's parameters (Step 5).

#### A. Learning Objectives

Let  $\mathcal{K}$  be the set of clients participated in the system and  $m$  be the number of distinct classes present in the dataset available with  $\mathcal{K}$  clients. The dataset  $\mathcal{D}_k$  associated with the client  $k \in \mathcal{K}$  is defined as:  $\mathcal{D}_k = \{d_k^i | i = 1 \dots m\}$ , where

$d_k^i = \{(x_k^{ij}, l_k^{ij}) | j = 1 \dots n_k^i\}$  is the set of data-samples  $x_k^{ij}$  and their associated labels  $l_k^{ij}$  in the  $i^{th}$  class. Observe that, due to the heterogeneity, the number of data samples in different classes may vary, i.e.  $|d_k^i| \geq 0$ .

In FedSat, our primary goal is to achieve a resilient global model  $\Theta^*$  through collaborative training of local models across the clients, even in presence of various heterogeneous settings. To formalize, we characterize the optimal global model  $\Theta^*$  as follows:

$$\Theta^* = \underset{\Theta}{\operatorname{argmin}} \sum_{k \in \mathcal{K}} \vartheta_k L(\theta_k) \quad (1)$$

where

- $\Theta = \{\theta_k | k \in \mathcal{K}\}$  is the set of locally trained parameters of the clients,
- $\vartheta_k$  is the aggregation weight assigned to the parameters of the client  $k$  using our proposed statistical weight calculation algorithm, and
- $L(\theta_k)$  is the loss function defined for a batch of  $\mathcal{N}$  random samples in  $\mathcal{D}_k$  in terms of cost-sensitive loss  $\mathcal{L}_{CS}$  as follows:

$$L(\theta_k) = \frac{1}{\mathcal{N}} \sum_{r=1}^{\mathcal{N}} \mathcal{L}_{CS}^r(\theta_k; x_k^{ij}, l_k^{ij}), \quad (2)$$

where  $(x_k^{ij}, l_k^{ij}) \in \mathcal{D}_k$

### B. Local Training

At the commencement of each round  $t$ , the server randomly selects a subset  $S_t \subseteq \mathcal{K}$  of clients. Once the clients are selected, the server disseminates the current global model  $\Theta_t$  and the global control variate  $c_t$  to all the chosen clients in  $S_t$ . Each client then loads the global model parameters to its local model (setting  $\theta_k = \Theta_t$ ) and subsequently updates its local model by minimizing the cost-sensitive objective function while incorporating control variates.

To achieve this, each client  $k \in S_t$  updates its local model according to the equation provided below, incorporating the cost-sensitive loss and client-drift corrections [8] for each epoch  $e$  in the  $t$ -th round:

$$\theta_{t,k}^{e+1} = \theta_{t,k}^e - \eta_l \left( \frac{\partial \mathcal{L}_{CS}(\theta_{t,k}^e)}{\partial \theta_{t,k}^e} + c_t - c_{t,k} \right) \quad (3)$$

where  $\eta_l$  is the learning rate,  $\mathcal{L}_{CS}(\theta_{t,k}^e)$  is the cost-sensitive loss function defined as:

$$\mathcal{L}_{CS}(\theta_{t,k}^e) = \sum_{i=1}^{|\mathcal{D}_k|} cs_{l_i, \hat{l}} \cdot \mathcal{L}(\theta_{t,k}^e, l_i, \hat{l}) \quad (4)$$

Here,  $cs_{l_i, \hat{l}}$  represents the cost associated with misclassifying a sample of class  $l_i$  as  $\hat{l}$ , and  $\mathcal{L}$  is the standard loss (e.g., cross-entropy loss [27]). The value of  $cs_{l_i, \hat{l}}$  is obtained from the cost-sensitive matrix  $CS$ , defined below:

$$CS = \begin{bmatrix} cs_{1,1} & cs_{1,2} & \cdots & cs_{1,m} \\ cs_{2,1} & cs_{2,2} & \cdots & cs_{2,m} \\ \vdots & \vdots & \ddots & \vdots \\ cs_{m,1} & cs_{m,2} & \cdots & cs_{m,m} \end{bmatrix}$$

where  $cs_{l_i, \hat{l}}$  represents the cost of predicting a sample of class  $l_i$  as class  $\hat{l}$ . For correctly classified samples where  $l_i = \hat{l}$ , the cost  $cs_{l_i, \hat{l}}$  is set to 1 as there is no penalty for predicting the correct class.

Upon completion of local updates, each client  $k$  updates its control variate  $c_{t+1,k}$ , as follows:

$$c_{t+1,k} = c_{t,k} - c_t + \frac{1}{\mathbf{B}\eta_l} \cdot \frac{\partial \mathcal{L}_{CS}(\theta_{t,k})}{\partial \theta_{t,k}} \quad (5)$$

where  $\mathbf{B}$  is the training batch size,  $c_t$  is the global control variate, and  $c_{t,k}$  is the control variate of client  $k$  at round  $t$ .

Each client  $k$  then transmits the updated model parameters  $\theta_{t,k}$  and the control variate correction  $c_{t+1,k}$  back to the server. The server aggregates these updates to adjust the global model and control variate for the next round. This process ensures that the global model is updated while mitigating possible client drift, and the cost-sensitive matrix  $CS$  helps in addressing class imbalance effectively.

### C. Learned parameter analysis

Given a set of selected clients  $S_t \subseteq \mathcal{K}$  at round  $t$ , let  $WS_t$  be a subset of workers, disjoint from  $S_t$ , chosen from the client set  $\mathcal{K}$ .

Suppose  $W_{t,k} \subseteq \wp(WS_t)$  is the set of workers employed to analyze and verify the learned parameters of the client  $k$  at round  $t$ . Each worker in  $W_{t,k}$  loads its assigned client parameters into its model and computes the following crucial matrices:

1) *Layer-wise coefficient matrix*: Given the client parameters  $\theta_k$  for the client  $k$  at round  $t$ , the layer-wise coefficient  $\xi_{i,w}$  is computed for  $\mathbf{E}$  epochs by each worker  $w \in W_{t,k}$  as follows:

$$\xi_{i,w}^{e+1} = \nu \times \xi_{i,w}^e + (1 - \nu) \times \|\nabla \mathcal{L}_{ce}(\theta_k^i; \hat{\mathcal{D}}_w)\|^2 \quad (6)$$

where  $\nu$  is the hyper-parameter for computing the exponentially-decayed moving average of  $\xi_{i,w}^e$  in epoch  $e$ ,  $\theta_k^i$  is the  $i^{\text{th}}$  layer parameters of  $\theta_k$ , and  $\hat{\mathcal{D}}_w \subset \mathcal{D}_w$  is the test dataset associated with the worker  $w$ .

These coefficients are then used to compute the adaptive gradient for each client's parameters. The final aggregated layer-wise coefficient matrix  $\Lambda_{t,k}$  for client  $k$  is computed as:

$$\Lambda_{t,k} = \left[ \sum_{w \in W_{t,k}} \frac{|\bar{\mathcal{D}}_w|}{\sum_{w' \in W_{t,k}} |\mathcal{D}_{w'}|} \times \xi_{i,w} \mid i \in \mathbb{L} \right] \quad (7)$$

where  $\mathbb{L}$  is the number of layers present in the model parameters.

2) *Statistical evaluation matrices*: Let us now define three class-wise matrices which we use in the weight computation process:

a) *Prediction Matrix ( $\hat{\mathbf{Z}}$ )*:

$$\hat{\mathbf{Z}}_{t,k}^w = \left[ |\hat{\mathcal{Z}}_{t,k}^{w,i}| \mid i \in 1 \dots m \right] \quad (8)$$

where  $\hat{\mathcal{Z}}_{t,k}^{w,i} = \{x_k^{ij} \mid i = \arg \max_{y \in 1 \dots m} P(Y = y | X = (x_k^{ij}, \theta_k))\}$  is the set of samples of the worker  $w$  which are predicted as class  $i$  utilizing  $\theta_k$ .

b) *True Positive Matrix (TP)*:

$$\mathbf{TP}_{t,k}^w = \left[ |\mathcal{TP}_{t,k}^{w,i}| \mid i \in 1 \dots m \right] \quad (9)$$

where  $\mathcal{TP}_{t,k}^{w,i} = \{x_k^{ij} \mid l_k^{ij} = \arg \max_{y \in 1 \dots m} P(Y = y | X = (x_k^{ij}, \theta_k))\}$  is the set of samples of the worker  $w$  which are predicted correctly as class  $i$  utilizing  $\theta_k$ .

c) *Target Matrix (T)*:

$$\mathbf{T}_{t,k}^w = \left[ |\mathcal{T}_{t,k}^{w,i}| \mid i \in 1 \dots m \right] \quad (10)$$

where  $\mathcal{T}_{t,k}^{w,i} = \{x_k^{ij} \mid j = 1 \dots n_k^i\}$  is the set of samples of the worker  $w$  which are labeled as class  $i$ .

The worker then sends these results to the server for weight computation and global model update.

#### D. Weight computation

After obtaining class-specific matrices from all participating workers at round  $t$ , the server proceeds to compute three crucial metrics: False Negative Rate (FNR), False Positive Rate (FPR), and Accuracy (ACC). These metrics help to assess the class-wise performance of the trained parameters' of each client across the chosen workers.

The FNR of client  $k$  at round  $t$  is determined by the ratio of incorrectly classified negative instances to the total number of true negative instances, defined below:

$$\text{FNR}_{t,k} = \left[ \text{fnr}_{t,k}^i \mid i \in 1 \dots m \right] \quad (11)$$

where

$$\text{fnr}_{t,k}^i = \frac{\sum_{w \in W_{t,k}} (|\mathcal{T}_{t,k}^{w,i}| - |\mathcal{TP}_{t,k}^{w,i}|)}{\sum_{w \in W_{t,k}} |\mathcal{TP}_{t,k}^{w,i}|} \quad (12)$$

Similarly, FPR of client  $k$  at round  $t$  is calculated as the ratio of falsely classified positive instances to the total number of true negative instances, computed as follows:

$$\text{FPR}_{t,k} = \left[ \text{fpr}_{t,k}^i \mid i \in 1 \dots m \right] \quad (13)$$

where

$$\text{fpr}_{t,k}^i = \frac{\sum_{w \in W_{t,k}} (|\hat{\mathcal{Z}}_{w,i}^k| - |\mathcal{TP}_{t,k}^{w,i}|)}{\sum_{w \in W_{t,k}} (\sum_{r \in 1 \dots m} |\mathcal{T}_{t,k}^{w,r}| - |\mathcal{T}_{t,k}^{w,i}|)} \quad (14)$$

Finally, ACC of each client  $k$  at round  $t$  is computed by evaluating the ratio of correctly classified instances to the total number of instances defined as:

$$\text{ACC}_{t,k} = \left[ \text{acc}_{t,k}^i \mid i \in 1 \dots m \right] \quad (15)$$

---

**Algorithm 1: Statistical Weight Computation**


---

**Input** : Client parameters learning statistics: *stats*, list of clients who locally trained the model and submitted to the server:  $S_t$   
**Output** : Weights: *weights*

```

1 calculate error and accuracy
2 for each client  $k$  in  $S_t$  do
3   for worker  $w$  in  $S_{k,t}$  do
4     for each class  $i$  in  $(1 \dots m)$  do
5       Compute  $\text{FNR}_{t,k}$  following Equation 11.
6       Compute  $\text{FPR}_{t,k}$  following Equation 13.
7       Compute  $\text{ACC}_{t,k}$  following Equation 15.
8 analyze the performance for each client  $k$  in  $S_t$  do
9   for each class  $i$  in  $(1 \dots m)$  do
10    compute  $\mathcal{E}_{t,k}^i$  following Equation 18.
11 Choose the priority class  $\mathcal{PC}_t$  following the Equation 19.
12 Select clients parameters set  $A_t$  for aggregation following Equation 20.
13 for each client  $k$  in  $A_t$  do
14   Compute weight  $\vartheta_{t,k}$  following Equation 21.
```

---

where

$$\text{acc}_{t,k}^i = \frac{\sum_{w \in W_{t,k}} \mathcal{TP}_{t,k}^{w,i}}{\sum_{w \in W_{t,k}} \mathcal{T}_{t,k}^{w,i}} \quad (16)$$

Following the above computations, the server assigns a vector of prioritization score ( $\mathcal{E}_{t,k}$ ) to each client  $k$  at round  $t$ , aiming to identify classes that require enhanced performance. This score considers both false negative and false positive rates, normalized to the maximum rates across all classes, computed below:

$$\mathcal{E}_{t,k} = [\mathcal{E}_{t,k}^i \mid i \in 1 \dots m] \quad (17)$$

where

$$\mathcal{E}_{t,k}^i = \alpha \times \frac{\text{FNR}_{t,k}[i]}{\max_{r \in 1 \dots m} \text{FNR}_{t,k}[r]} + \beta \times \frac{\text{FPR}_{t,k}[i]}{\max_{r \in 1 \dots m} \text{FPR}_{t,k}[r]} \quad (18)$$

and  $\alpha, \beta$  are the coefficients used to set the importance of the computed metrics.

Subsequently, the server selects a priority class ( $\mathcal{PC}_t$ ) at round  $t$  to focus on improving the performance of the most critical class, based on the sum of prioritization scores across all classes, as follows:

$$\mathcal{PC}_t = \arg \max_{i \in 1 \dots m} \sum_{k \in S_t} \mathcal{E}_{t,k}^i \quad (19)$$

Further, a set of client parameters ( $A_t$ ) is selected for aggregation based on their corresponding prioritization scores. Clients with scores exceeding a certain threshold relative to the average score across all classes are chosen for weighted aggregation defined as:

$$A_t = \left\{ \theta_{t,k} \mid \sum_{i \in 1 \dots m} \mathcal{E}_{t,k}^i \geq \frac{\sigma}{|S_t|} \times \sum_{c \in S_t} \sum_{i \in 1 \dots m} \mathcal{E}_{t,c}^i \right\} \quad (20)$$

where  $\sigma$  is the hyper-tuned parameters for determining the threshold, which varies from task to task.

Finally, each selected client's parameters are assigned an aggregation weight ( $\vartheta_{t,k}$ ), reflecting their contribution to the global model update. This weight value is determined by considering the client's accuracy, the number of true positive instances, and the prioritization score of the respective class, among other factors. This is computed as follows:

$$\begin{aligned} \vartheta_{t,k} &= \frac{\sum_{i \in 1 \dots m} \text{ACC}_{t,k}[i] \times \sum_{i \in 1 \dots m} \text{TP}_{t,k}[i]}{\sum_{i \in 1 \dots m} \mathcal{E}_{t,k}[i]} \\ &\times \frac{\max(1, \text{TP}_{t,k}[\mathcal{PC}_t])}{\sum_{i \in 1 \dots m} \text{TP}_{t,k}[i] - \sum_{i \in 1 \dots m} \text{TP}_{t,k}[i]} \end{aligned} \quad (21)$$

This approach ensures that clients with higher performance and relevance contribute more significantly to the global model update process, thus improving overall model quality. The overall algorithmic steps are depicted in Algorithm 1.

### E. Global model update

Once the aggregated weights  $\vartheta_{t,k}$  and the layer-wise coefficient matrix  $\Lambda_{t,k}$  are computed, the server applies weighted federated aggregation to update the global model, according to the following Equation:

$$\Theta_{t+1} = \Theta_t - \eta_g \times \sum_{k \in A_t} \vartheta_{t,k} \times \varphi_{t,k} \quad (22)$$

where  $\eta_g$  is global learning rate, and  $\varphi_{t,k}$  is the fine-tuned gradient of client  $k$  corresponding to the coefficient matrix defined as:

$$\varphi_{t,k} = \left[ 1 + \psi - \frac{\Lambda_{t,k}[i]}{\max(\Lambda_{t,k})} \times (\Theta_t^i - \theta_{t,k}^i) \mid i \in \mathcal{N} \right] \quad (23)$$

---

**Algorithm 2: FedSAT Algorithm**


---

**Input** : Initial global model parameters:  $\Theta_0$ , Initial global control variate:  $c_0$ , Set of participated client:  $\mathcal{K}$ , Hyper-parameters: Global learning rate  $\eta_g$ , Local learning rate  $\eta_l$ , number of local epochs  $\mathbf{E}$ , Number of global rounds  $\mathbf{R}$

**Output** : Trained model:  $\Theta$

```

1 for  $t$  in range( $\mathbf{R}$ ) do
2   Server selects a subset  $S_t$  of  $n$  clients at random.
3   Set  $W_t \leftarrow \mathcal{K} - S_t$ 
4   At client side:
5   for each client  $k$  in  $S_t$  do
6     Fetch global model parameters  $\Theta_t$  and the hyper-parameters ( $\eta_l$ ,  $\mathbf{E}$ ) from the server.
7     Initialize global model parameters  $\theta_t \leftarrow \Theta_t$ 
8     for epoch  $i$  in range( $\mathbf{E}$ ) do
9       Update the local model parameters following Equation 3.
10      Update local control variate following Equation 5.
11      Send the locally trained model parameters  $\theta_{t+1}$  and  $c_{t+1,k}$  to the server.
12    for each client  $k$  in  $S_t$  do
13      Server selects a subset  $W_{t,k}$  of  $m$  workers at random from set  $W_t$ 
14      Update  $W_t \leftarrow W_t - W_{t,k}$ 
15      At worker side:
16      for each worker  $w$  in  $W_{t,k}$  do
17        Fetch updated parameters  $\theta_k$  of client  $k$ .
18        for each layer  $i$  in (layers of  $\theta_k$ ) do
19          Compute layer-wise coefficient matrix  $\xi_w^i$  following Equation 6.
20          Compute prediction matrix  $\hat{\mathbf{Z}}_{t,k}^w$  following Equation 8.
21          Compute true positive matrix  $\mathbf{TP}_{t,k}^w$  following Equation 9.
22          Compute target matrix  $\mathbf{T}_{t,k}$  following Equation 10.
23        Compute aggregated coefficient following Equation 7.
24      Compute statistical weight for each client following Algorithm 1.
25      Compute global model parameters  $\Theta_{t+1}$  following Equation 22.
26      Compute global control variate  $c_{t+1}$  following Equation 24.
```

---

where  $\psi$  is the hyper-parameter to control gradient fine-tune step, and  $\mathcal{N}$  is the number of layers present in the parameters.

Further, the server updates the global control variate, by aggregating control variate of all the selected clients  $A_t$ , defined as:

$$c_{t+1} = c_t - \frac{|A_t|}{|\mathcal{K}|} \times \sum_{k \in A_t} \vartheta_{t,k} \times c_{t+1,k} \quad (24)$$

where  $\mathcal{K}$  is the total number of clients participated in training, and  $c_{t+1,k}$  is the updated control variate of client  $k$  at round  $t$ .

Observe that, unlike existing methods, our approach introduces a novel aggregation scheme for updating the global model  $\Theta_t$  by computing  $\vartheta_{t,k}$  and  $\Lambda_{t,k}$  from a broad set of workers. Here,  $\Lambda_{t,k}$  is utilized to derive more generalized and refined gradients  $\varphi_{t,k}$  for the parameters  $\theta_{t,k}$ . Meanwhile,  $\vartheta_{t,k}$  serves to improve the accuracy performance of clients dealing with highly skewed datasets, thereby enhancing the overall robustness of the global model. The aggregated global update  $\Theta_{t+1}$  is computed as a weighted combination of the adaptive gradients  $\varphi_{t,k}$  contributed by each selected client. On the other hand, global control variate helps to mitigate client's model drift during local training. This ensures that clients demonstrating higher performance and relevance make a more significant impact on the global model update process. Through this iterative approach, continual refinement and enhancement of the global model occur within the federated learning framework.

### F. Training process

The core training process of FedSAT, as outlined in Algorithm 2, is a multi-step iterative approach. At each global round  $t$ , the server interacts with a subset of clients and their associated workers to update the global model. Let us describe this in detail:

- 1) **Initialization.** At the beginning of the training process, the server defines the set of clients  $\mathcal{K}$  who participate in the training and statistical analysis process, and sets the following: (a) initial global model parameters  $\Theta_0$ , (b) initial global control variate  $c_0$ , (c) set of participated clients  $\mathcal{K}$ , and (d) various hyper-parameters.
- 2) **Iterative training.** In each round  $t$ , the server randomly selects a subset  $S_t$  of clients to participate in the local training. Each selected client  $k \in S_t$  fetches the current global model parameters  $\Theta_t$  and  $c_t$  from the server. It then initializes its local model parameters  $\theta_t$  with  $\Theta_t$  and performs local training for a predetermined number of epochs  $\mathbf{E}$ . During each epoch  $e$ , the client updates its model parameters based on its local dataset  $\mathcal{D}_k$ , according to Equation 3. After completing the local training, each client submits its updated model parameters back to the server. Next, the server randomly selects a subset  $W_{t,k}$ , disjoint from  $S_t$ , of workers for parameters analysis of each client  $k \in S_t$ . Each worker in set  $W_{t,k}$  fetches their associated model parameters from the server and computes learning statistics in order to verify their integrity and correctness. Based on the statistical performance analysis of all the model parameters, the server selects a set  $A_t$  of locally trained parameters and computes aggregation weights  $\vartheta_{t,k}$  according to Algorithm 1. Finally, the global model parameters ( $\Theta$ ) are updated using the computed weights.

- 3) **Termination.** After completing  $T$  rounds of training, the training process terminates and the optimal global model  $\Theta^* = \max_{t \in 1 \dots T} \text{accuracy}(\Theta_t)$  is obtained.

#### IV. CONVERGENCE PROOF

*Assumption 1:* Both the cost-sensitive loss function  $\mathcal{L}_{CS}$  and the cross-entropy loss function  $\mathcal{L}_{CE}$  are  $\mu$ -strongly convex and  $L$ -smooth.

*Assumption 2:* Let  $\hat{l}$  be the predicted class of an input sample labelled with class  $l_i$ . The cost incurred during loss minimization by the loss function  $\mathcal{L}_{CS}$  is as follows:

$$cs_{l_i, \hat{l}} = \begin{cases} 1 & \text{if } \hat{l} = l_i \\ 1 < cs_{l_i, \hat{l}} < C_{max} & \text{if } \hat{l} \neq l_i \end{cases} \quad (25)$$

where  $C_{max}$  is the maximum cost bound.

*Lemma 1 (Improvement Through Cost-Sensitive Loss):* Let  $\theta_{CS}$  and  $\theta_{CE}$  be the parameters obtained after training with cost-sensitive loss function  $\mathcal{L}_{CS}$  and cross-entropy loss functions  $\mathcal{L}_{CE}$ , respectively. Let both the assumptions 1 and 2 hold. Then, the expected improvement of the local parameters updated using the  $\mathcal{L}_{CS}$  compared to the parameters obtained by employing  $\mathcal{L}_{CE}$  is always greater than or equal to zero. That is,  $\mathbb{E}[\theta_{CS} - \theta_{CE}] \geq 0$ .

*Proof 1:* Let the cross-entropy loss  $\mathcal{L}_{CE}$  be defined as:

$$\mathcal{L}_{CE}(\theta, x, l) = -\log(p(l|x; \theta)) \quad (26)$$

where  $p(l|x; \theta)$  represents the probability that the model assigns to the correct label  $l$  given the input  $x$  and the model parameters  $\theta$ . By taking the gradient on both sides, we get:

$$\nabla \mathcal{L}_{CE}(\theta, x, l) = -\nabla \log(p(l|x; \theta)) \quad (27)$$

Now, for a batch of sample size  $N$ , the parameters updated using  $\mathcal{L}_{CE}$  is:

$$\theta_{CE} = \theta - \eta_l \cdot \frac{1}{N} \sum_{i=1}^N \nabla \mathcal{L}_{CE}(\theta, x_i, l_i) \quad (28)$$

Rearranging this equation, we get:

$$\theta = \theta_{CE} + \eta_l \cdot \frac{1}{N} \sum_{i=1}^N \nabla \mathcal{L}_{CE}(\theta, x_i, l_i) \quad (29)$$

From Equations 27 and 29, we obtain:

$$\theta = \theta_{CE} - \underbrace{\frac{\eta_l}{N} \sum_{i=1}^N \nabla \log(p(l_i|x_i; \theta))}_{g_t} \quad (30)$$

This simplifies to:

$$\theta = \theta_{CE} - g_t \quad (31)$$

Similarly, for  $\mathcal{L}_{CS}$ , we have:

$$\theta_{CS} = \theta - \eta_l \cdot \frac{1}{N} \sum_{i=1}^N \nabla \mathcal{L}_{CS}(\theta, x_i, l_i) \quad (32)$$

From Equation 4, we get:

$$\theta = \theta_{CS} + \eta_l \cdot \frac{1}{N} \sum_{i=1}^N cs_{l_i, \hat{l}_i} \cdot \nabla \mathcal{L}_{CE}(\theta, x_i, l_i) \quad (33)$$

From Equations 27 and 33, we obtain:

$$\theta = \theta_{CS} - \underbrace{\frac{\eta_l}{N} \sum_{i=1}^N \nabla \log(p(l_i|x_i; \theta))}_{g_t} \cdot \sum_{i=1}^N cs_{l_i, \hat{l}_i} \quad (34)$$

This simplifies to:

$$\theta = \theta_{CS} - g_t \cdot \sum_{i=1}^N cs_{l_i, \hat{l}_i} \quad (35)$$



From Equations 31 and 35, we have the following equivalence relation:

$$\begin{aligned}\theta_{CE} - g_t &= \theta_{CS} - g_t \cdot \sum_{i=1}^N cs_{l_i, \hat{l}_i} \\ \theta_{CS} - \theta_{CE} &= g_t \cdot \sum_{i=1}^N cs_{l_i, \hat{l}_i} - g_t\end{aligned}$$

Now, by taking the expectation on both sides, we have:

$$\begin{aligned}\mathbb{E}[\theta_{CS} - \theta_{CE}] &= \mathbb{E}\left[g_t \cdot \sum_{i=1}^N cs_{l_i, \hat{l}_i} - g_t\right] \\ &= \mathbb{E}\left[g_t \cdot \sum_{i=1}^N cs_{l_i, \hat{l}_i}\right] - \mathbb{E}[g_t]\end{aligned}$$

Substituting the value of  $g_t$  from Equation 30, we get:

$$\begin{aligned}\mathbb{E}[\theta_{CS} - \theta_{CE}] &= \mathbb{E}\left[\frac{\eta_l}{N} \sum_{i=1}^N \nabla \mathcal{L}_{CE}(\theta, x_i, l_i) \cdot \sum_{i=1}^N cs_{l_i, \hat{l}_i}\right] \\ &\quad - \mathbb{E}\left[\frac{\eta_l}{N} \sum_{i=1}^N \nabla \mathcal{L}_{CE}(\theta, x_i, l_i)\right]\end{aligned}$$

Assuming independence between the gradients and the cost-sensitive weights, we have:

$$\begin{aligned}\mathbb{E}[\theta_{CS} - \theta_{CE}] &= \frac{\eta_l}{N} \mathbb{E}\left[\sum_{i=1}^N \nabla \mathcal{L}_{CE}(\theta, x_i, l_i)\right] \\ &\quad \times \left(\overbrace{\mathbb{E}\left[\sum_{i=1}^N cs_{l_i, \hat{l}_i}\right]}^{\text{Cost-Sensitive Improvement}} - 1\right)\end{aligned}$$

According to Assumption 2,  $cs_{l_i, \hat{l}_i} \geq 1$  for all  $i$ , which gives:

$$\mathbb{E}\left[\sum_{i=1}^N cs_{l_i, \hat{l}_i}\right] - 1 \geq 0$$

Given that  $\eta_l > 0$  (learning rate is positive) and  $\mathbb{E}[\nabla \mathcal{L}_{CE}(\theta, x_i, l_i)]$  points in the direction of the steepest ascent of the loss function, we can conclude:

$$\mathbb{E}[\theta_{CS} - \theta_{CE}] \geq 0 \quad (36)$$

*Lemma 2 (Improved Accuracy for Critical Class through Prioritized Class-based Weighted Aggregation Scheme):* Let  $Acc_{\mathcal{P}_t}(\Theta_t)$  be the accuracy of the model  $\Theta_t$  on the priority class  $\mathcal{P}_t$  at round  $t$ . Our proposed prioritized class-based weighted aggregation scheme ensures an expected improvement in accuracy for  $\mathcal{P}_t$  by an amount  $\delta$  (where  $\delta > 0$ ), as follows:

$$\mathbb{E}[Acc_{\mathcal{P}_t}(\Theta_{t+1})] \geq Acc_{\mathcal{P}_t}(\Theta_t) + \delta$$

*Proof 2:* Let  $S_t$  be the set of selected clients at round  $t$ , and  $A_t \subseteq S_t$  be the set of clients selected for aggregation according to Equation (7).

From Equation 21, we get the aggregation weight  $\vartheta_{t,k}$  for client  $k$  as follows:

$$\vartheta_{t,k} \propto \frac{AC_{t,k} \times TP_{t,k}[\mathcal{P}_t]}{\sum_{i \in 1 \dots m} \mathcal{E}_{t,k}[i]} \quad (37)$$

where  $\mathcal{E}_{t,k}$  is the prioritization score for client  $k$ ,  $AC_{t,k} = \sum_{i \in 1 \dots m} Acc_{t,k}[i]$  denotes the accuracy of the client  $k$ 's model parameters, and  $TP_{t,k}[\mathcal{P}_t]$  represents the accuracy of underperforming class at round  $t$ .

From Equation 22, we obtain the change in the global model parameters after one round of training as:

$$\Theta_{t+1} - \Theta_t = -\eta_g \sum_{k \in A_t} \vartheta_{t,k} \varphi_{t,k}. \quad (38)$$

Let  $f_{\Theta}(x)$  be the prediction of model  $\Theta$  for input  $x$  and corresponding correct label  $l$ . We can express the accuracy on the priority class  $\mathcal{P}_t$  as:

$$Acc_{\mathcal{P}C_t}(\Theta) = \mathbb{E}_{(x,l) \sim \mathcal{D}^{\mathcal{P}C_t}} [\mathbb{I}(f_{\Theta}(x) = l)]$$

where  $\mathcal{D}^{\mathcal{P}C_t}$  is the distribution of samples from the priority class. After the global update, the change in accuracy for the priority class can be expressed as:

$$\begin{aligned} & \mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta_{t+1}) - Acc_{\mathcal{P}C_t}(\Theta_t)] \\ &= \mathbb{E}_{(x,l) \sim \mathcal{D}^{\mathcal{P}C_t}} [\mathbb{I}(f_{\Theta_{t+1}}(x) = l) - \mathbb{I}(f_{\Theta_t}(x) = l)] \end{aligned}$$

By following Taylor's expansion approximation, we have:

$$\begin{aligned} & \mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta_{t+1}) - Acc_{\mathcal{P}C_t}(\Theta_t)] \\ & \approx \mathbb{E}_{(x,l) \sim \mathcal{D}^{\mathcal{P}C_t}} [\nabla \mathbb{I}(f_{\Theta_t}(x) = l) \cdot (\Theta_{t+1} - \Theta_t)] \end{aligned}$$

Substituting value of  $\Theta_{t+1} - \Theta_t$  from Equation 38, we get:

$$\begin{aligned} & \mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta_{t+1}) - Acc_{\mathcal{P}C_t}(\Theta_t)] \\ &= \mathbb{E}_{(x,l) \sim \mathcal{D}^{\mathcal{P}C_t}} \left[ \nabla \mathbb{I}(f_{\Theta_t}(x) = l) \cdot -\eta_g \sum_{k \in A_t} \vartheta_{t,k} \varphi_{t,k} \right] \\ &= \sum_{k \in A_t} \vartheta_{t,k} \cdot \underbrace{\left( -\eta_g \mathbb{E}_{(x,y) \sim \mathcal{D}^{\mathcal{P}C_t}} [\nabla \mathbb{I}(f_{\Theta_t}(x) = l) \cdot \varphi_{t,k}] \right)}_{\Delta Acc_{\mathcal{P}C_t}^k} \end{aligned}$$

The term inside the summation represents the contribution of each client  $k$  to the improvement in accuracy for the priority class, denoted as  $\Delta Acc_{\mathcal{P}C_t}^k$ . Therefore:

$$\mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta_{t+1}) - Acc_{\mathcal{P}C_t}(\Theta_t)] = \mathbb{E} \left[ \sum_{k \in A_t} \vartheta_{t,k} \Delta Acc_{\mathcal{P}C_t}^k \right]$$

According to Equation 37, since  $\vartheta_{t,k}$  gives more weight to clients with better performance on the priority class, and  $A_t$  is selected based on the prioritization scores, we have:

$$\mathbb{E} \left[ \sum_{k \in A_t} \vartheta_{t,k} \Delta Acc_{\mathcal{P}C_t}^k \right] > 0$$

Therefore, we can conclude that:

$$\mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta_{t+1})] \geq Acc_{\mathcal{P}C_t}(\Theta_t) + \delta$$

where  $\delta = \mathbb{E} \left[ \sum_{k \in A_t} \vartheta_{t,k} \Delta Acc_{\mathcal{P}C_t}^k \right] > 0$ .

*Lemma 3 (Convergence of Global Model):* Let  $\Theta_t$  be the global model parameters at round  $t$ . Under Assumptions 1 and 2, and with appropriate learning rates  $\eta_l$  and  $\eta_g$ , FedSat converges in expectation  $\mathbb{E}[\mathcal{L}(\Theta_{t+1})] \leq \mathcal{L}(\Theta_t) - \rho^2$ , where  $\mathcal{L}(\Theta)$  is the global model loss function and  $\rho$  is a constant representing the improvement per round.

*Proof 3:* Let  $\mathcal{L}(\Theta)$  be the L-smooth global loss function. Therefore, we have the following inequality relation:

$$\begin{aligned} \mathcal{L}(\Theta_{t+1}) &\leq \mathcal{L}(\Theta_t) + \langle \nabla \mathcal{L}(\Theta_t), (\Theta_{t+1} - \Theta_t) \rangle \\ &\quad + \frac{L}{2} \|\Theta_{t+1} - \Theta_t\|^2 \end{aligned} \tag{39}$$

$$\begin{aligned} \mathcal{L}(\Theta_{t+1}) - \mathcal{L}(\Theta_t) &\leq \langle \nabla \mathcal{L}(\Theta_t), (\Theta_{t+1} - \Theta_t) \rangle \\ &\quad + \frac{L}{2} \|\Theta_{t+1} - \Theta_t\|^2 \end{aligned} \tag{40}$$

By taking expectations on both sides, we have:

$$\begin{aligned} \mathbb{E}[\mathcal{L}(\Theta_{t+1}) - \mathcal{L}(\Theta_t)] &\leq \mathbb{E}[\nabla \mathcal{L}(\Theta_t) \cdot (\Theta_{t+1} - \Theta_t)] \\ &\quad + \frac{L}{2} \mathbb{E}[\|\Theta_{t+1} - \Theta_t\|^2], \end{aligned} \tag{41}$$

Substituting, the value of  $\Theta_{t+1} - \Theta_t$  from Equation 38 we get:

$$\begin{aligned} \mathbb{E}[\mathcal{L}(\Theta_{t+1}) - \mathcal{L}(\Theta_t)] &\leq -\eta_g \mathbb{E} \left[ \nabla \mathcal{L}(\Theta_t) \cdot \sum_{k \in A_t} \vartheta_{t,k} \varphi_{t,k} \right] \\ &\quad + \frac{L\eta_g^2}{2} \mathbb{E} \left[ \left\| \sum_{k \in A_t} \vartheta_{t,k} \varphi_{t,k} \right\|^2 \right] \end{aligned} \tag{42}$$

Since  $\vartheta_{t,k}$  gives more weight to clients with better performance on the priority class, and  $A_t$  is selected based on prioritization scores, we have:

$$\mathbb{E} \left[ \underbrace{\sum_{k \in A_t} \vartheta_{t,k} \varphi_{t,k}}_{\rho} \right] > 0.$$

Therefore, we can conclude that:

$$\mathbb{E}[\mathcal{L}(\Theta_{t+1})] \leq \mathcal{L}(\Theta_t) - \rho^2.$$

Hence, the FedSat algorithm converges in expectation, improving overall global model accuracy, specifically for the priority class.

*Theorem 1 (Faster Convergence and Robust Model Generation in FedSat):* Let  $\{\Theta_t\}_{t=0}^T$  be the sequence of global model parameters produced by FedSat over  $T$  rounds using the cost-sensitive loss function  $\mathcal{L}_{CS}$ . Let  $\{\Theta'_t\}_{t=0}^T$  be the sequence produced by a standard federated learning algorithm under the same conditions using the standard cross-entropy loss function  $\mathcal{L}_{CE}$ . Under assumptions 1 and 2, FedSat guarantees faster convergence and robust global model generation over sufficiently large  $T$ , formalized as follows:

*Faster convergence:*  $\exists \gamma > 1$  such that

$$\mathbb{E}[\mathcal{L}_{CS}(\Theta_0) - \mathcal{L}_{CS}(\Theta_T)] \geq \gamma \cdot \mathbb{E}[\mathcal{L}_{CE}(\Theta'_0) - \mathcal{L}_{CE}(\Theta'_T)]$$

*Robust model generation:*  $\exists \varrho > 0$  such that  $\forall t \in \{1, \dots, T\}$ :  $\mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta_t)] \geq \mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta'_t)] + \varrho$ .

*Proof 1:* According to Lemma 3, for each round  $t$  in FedSat, we have:

$$\mathbb{E}[\mathcal{L}_{CS}(\Theta_1)] \leq \mathcal{L}_{CS}(\Theta_0) - \delta^2.$$

Repeating this over  $T$  rounds of training, we get:

$$\mathbb{E}[\mathcal{L}_{CS}(\Theta_T)] \leq \mathcal{L}_{CS}(\Theta_0) - T \cdot \delta^2.$$

Similarly, for training using the standard FL algorithm, we obtain:

$$\mathbb{E}[\mathcal{L}_{CE}(\Theta'_T)] \leq \mathcal{L}_{CE}(\Theta'_0) - T \cdot \delta'^2.$$

where  $\delta'$  represents one round of improvement for training the model using  $\mathcal{L}_{CE}$ . Hence, from Lemma 3, the expected change in loss for  $\mathcal{L}_{CS}$  and  $\mathcal{L}_{CE}$ , we obtain:

$$\begin{aligned} \mathbb{E}[\mathcal{L}_{CS}(\Theta_T) - \mathcal{L}_{CS}(\Theta_0)] &\leq \mathbb{E}[\nabla \mathcal{L}_{CS}(\Theta_0) \cdot (\Theta_T - \Theta_0)] \\ &\quad + \frac{L}{2} \mathbb{E}[\|\Theta_T - \Theta_0\|^2], \end{aligned} \quad (43)$$

$$\begin{aligned} \mathbb{E}[\mathcal{L}_{CE}(\Theta'_T) - \mathcal{L}_{CE}(\Theta'_0)] &\leq \mathbb{E}[\nabla \mathcal{L}_{CE}(\Theta'_0) \cdot (\Theta'_T - \Theta'_0)] \\ &\quad + \frac{L}{2} \mathbb{E}[\|\Theta'_T - \Theta'_0\|^2], \end{aligned} \quad (44)$$

Assuming that  $\Theta_0$  and  $\Theta'_0$  are equivalent, according to Lemma 1 we conclude:

$$\underbrace{\mathbb{E}[\mathcal{L}_{CS}(\Theta_0) - \mathcal{L}_{CS}(\Theta_T)]}_{\text{Faster convergence}} \geq \gamma \cdot \mathbb{E}[\mathcal{L}_{CE}(\Theta'_0) - \mathcal{L}_{CE}(\Theta'_T)]$$

where  $\gamma > 0$  is the constant factor represents the improvement of FedSat over traditional FL algorithm. Now, according to Lemma 2 for  $\Theta$  we have:

$$\mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta_{t+1})] \geq Acc_{\mathcal{P}C_t}(\Theta_t) + \delta$$

Similarly, for  $\Theta'$ , we have:

$$\mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta'_{t+1})] \geq Acc_{\mathcal{P}C_t}(\Theta'_t) + \delta'$$

According to Lemma 1,  $\Theta$  always performs better or equivalent to  $\Theta'$ , hence we can conclude that:

$$\underbrace{\mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta_t)]}_{\text{Robust model generation}} \geq \mathbb{E}[Acc_{\mathcal{P}C_t}(\Theta'_t)] + \varrho$$

where  $\varrho = \delta - \delta'$  represents the improvement of FedSat over traditional FL algorithm, which leads to enhanced the accuracy of  $\mathcal{P}C_t$ .

TABLE I: Details of Datasets

Name	Train Samples	Test Samples	Input Size	Classes
MNIST	60,000	10,000	$28 \times 28$	10
CIFAR-10	50,000	10,000	$32 \times 32$	10
CIFAR-100	50,000	10,000	$32 \times 32$	100

## V. EXPERIMENTAL EVALUATION

This section presents performance evaluation of FedSat, with a detailed comparative analysis w.r.t. the baseline models.

### A. Implementation

We implement FedSat and the baseline methods using Python 3.9 with the support of PyTorch library [28]. The codebase comprises 8718 lines of code (LoC). For local training, we consider four neural networks, namely MLP, LeNet-5, ResNet-8, and ResNet-18. Their architectures are described as follows: (1) MLP model is a 3-layer network with neurons (80, 60, 10) and ELU activation; (2) LeNet-5 [29] model is a 7-layer CNN with 5x5 convolutions, tanh activation, and average pooling; (3) ResNet-8 [30] model is a CNN with an initial 3x3 convolutional layer, followed by 3 residual blocks, batch normalization, ReLU activation, and global average pooling; and (4) ResNet-18 [30] model is a CNN with an initial 7x7 convolutional layer, followed by 4 residual blocks, batch normalization, ReLU activation, and global average pooling. We employed the PyTorch SGD optimizer for updating model parameters during training.

### B. Experiment Setup

In this study, we conduct a comprehensive evaluation of FedSat, by comparing its performance against state-of-the-art approaches. To this aim, we consider the following 8 baseline methods: FedAvg, FedProx, SCAFFOLD, FedLC, FedAvgM, FedLada, Elastic, and FedDyn, which represent a diverse range of strategies for federated learning. Our experiments are performed on three widely-used datasets: MNIST, CIFAR-10, and CIFAR-100, each presenting unique challenges and characteristics. The details of these datasets are summarized in Table I. To investigate the effectiveness of FedSat and the baseline methods under different model architectures, we employ a variety of neural networks for local training. Specifically, when training on the MNIST dataset, we utilize MLP and LeNet-5 models, which are well-suited for the task of handwritten digit recognition. For more complex CIFAR-10 and CIFAR-100 datasets, we employ ResNet-8 and ResNet-18 models, which already depicted a superior performance on image classification tasks. To ensure fairness and reproducibility of our comparisons, we maintain fixed random seeds and consistent settings across all experiments. This allows us to isolate the impact of federated learning algorithms on model performance, minimizing the influence of random variations.

### C. Dataset Distribution Settings

To explore the performance under various data distribution scenarios, we establish the following three distinct client dataset configurations: (i)

- 1) *Label skewed (LS)*: In this setting, the label distribution varies across clients, simulating a scenario where each client has a different proportion of samples from each class. To create a label-skewed dataset, we use the Dirichlet distribution [31] on the label ratios to ensure uneven label distributions among clients.
- 2) *Label skew with missing classes (LSMC)*: In this setting, we create a non-IID dataset where, in addition to the label skewness, each client has a different subset of the total classes, and the distributions of these classes are skewed. To achieve this, we randomly select  $C$  classes out of  $m$  available classes, where  $C < m$ . Lower values of  $C$  indicate a more extreme non-IID setting. This configuration simulates a more challenging scenario where some classes are entirely absent from clients' data distributions. This reflects real-world situations where clients may have access to only a subset of the overall class distribution, and the available classes are not evenly represented.
- 3) *Label and Quantity Skew with Missing Classes (LQSMC)*: In this case, along with the previous data setting (LSMC), we additionally introduce quantity skewness in the data distribution. Specifically, we determine the number of classes available for each client by randomly sampling from the range  $[n, m]$ , where  $n$  is the minimum number of classes per client and  $m$  is the total number of classes in the dataset. To incorporate quantity skew, we assign a varying number of samples to each client based on their available number of classes, with class ratios skewed within the available classes. Clients with a higher number of classes receive a larger quantity of samples, while clients with fewer classes receive a smaller quantity.

By considering these diverse dataset configurations, we aim to provide a thorough and realistic assessment of FedSat and the baseline methods, revealing their strengths and limitations under a range of non-IID data distributions.

TABLE II: Comparison of method performance for training with 16 batch size (**B**) and 5 local epochs (**E**) on different datasets and model architecture in label-skewed data settings. Here,  $\eta_l$  represents the local learning rate used for training.

Methods	$\eta_l=0.01$						$\eta_l=0.001$					
	MNIST		CIFAR-10		CIFAR-100		MNIST		CIFAR-10		CIFAR-100	
	MLP	LeNet-5	ResNet-8	ResNet-18	ResNet-8	ResNet-18	MLP	LeNet-5	ResNet-8	ResNet-18	ResNet-8	ResNet-18
Elastic	95.62	98.76	76.82	83.95	38.34	57.53	90.89	98.45	63.96	72.60	21.15	31.49
FedAvg	95.14	98.48	75.87	84.02	36.67	57.33	90.56	98.12	62.14	71.50	18.68	30.28
FedAvgM	96.08	98.59	74.71	85.20	35.37	58.61	91.79	97.88	59.18	78.07	20.81	37.74
FedDyn	92.15	96.72	64.78	82.58	20.78	55.62	90.71	97.56	56.30	77.11	20.96	36.70
FedLADA	95.72	98.85	75.02	79.11	31.17	44.22	95.96	97.23	59.90	75.14	25.44	27.61
FedLC	95.00	98.41	70.76	83.78	27.87	57.22	90.44	97.76	56.16	70.94	16.43	27.66
FedProx	95.28	98.27	61.52	83.91	25.94	51.34	90.57	97.55	62.26	71.74	18.55	30.32
SCAFFOLD	98.28	99.45	87.17	89.61	59.02	66.91	96.33	98.33	82.58	85.41	43.91	<b>58.12</b>
<b>FedSat</b>	<b>98.51</b>	<b>99.47</b>	<b>87.67</b>	<b>90.70</b>	<b>60.35</b>	<b>68.48</b>	<b>97.00</b>	<b>98.67</b>	<b>84.05</b>	<b>85.61</b>	<b>52.35</b>	57.95

TABLE III: Comparison of method performance for training with ( $\eta_l=0.01$ , **B**=16, **E**=5) on label skewed datasets with missing class data settings. Here,  $n$  denotes the number of classes present in each client.

Methods	MNIST						CIFAR-10						CIFAR-100					
	MLP			LeNet-5			ResNet-8			ResNet-18			ResNet-8			ResNet-18		
	$n=2$	$n=4$	$n=6$	$n=2$	$n=4$	$n=6$	$n=2$	$n=4$	$n=6$	$n=2$	$n=4$	$n=6$	$n=20$	$n=40$	$n=60$	$n=20$	$n=40$	$n=60$
Elastic	90.43	93.22	94.49	96.32	97.99	98.06	57.46	63.52	66.09	45.1	64.52	72.87	33.37	38.23	38.31	57.81	61.03	60.25
FedAvg	90.1	92.84	93.92	95.92	97.74	97.76	55.66	62.03	65.49	43.04	62.6	71.66	32.04	37.01	37.53	55.99	60.81	59.55
FedAvgM	92.61	93.62	94.82	96.69	97.78	98.15	45.29	58.75	63.3	42.53	53.57	63.13	22.43	29.22	32.77	38.25	50.34	58.3
FedDyn	84.72	86.7	87.55	90.37	91.15	93.08	54.55	53.73	55.8	37.24	55.25	68.68	14.31	18.42	19.58	55.56	58.55	58.19
FedLADA	92.95	93.58	94.64	95.18	97.58	98.48	26.88	37.34	58.16	27.79	28.66	44.09	13.39	24.26	31.43	21.51	35.06	37.02
FedLC	88.65	92.68	93.18	94.2	96.91	97.23	41.55	58.42	65.27	27.84	52.05	65.29	24.47	27.47	27.94	45.47	54.57	54.26
FedProx	90.44	93.07	93.16	94.07	97.25	97.55	39.14	47.56	53.63	11.98	11.98	11.84	20.84	25.15	25.52	12.13	12.86	12.78
SCAFFOLD	97.91	98.00	98.45	99.21	99.31	99.46	78.33	81.25	82.29	91.81	86.95	85.68	51.28	58.51	58.66	53.7	61.83	69.24
<b>FedSat</b>	<b>98.49</b>	<b>98.27</b>	<b>98.52</b>	<b>99.44</b>	<b>99.46</b>	<b>99.58</b>	<b>82.87</b>	<b>84.1</b>	<b>84.79</b>	<b>92.31</b>	<b>87.82</b>	<b>85.85</b>	<b>56.13</b>	<b>62.12</b>	<b>62.34</b>	<b>70.27</b>	<b>71.19</b>	<b>70.35</b>

#### D. Hyper-parameters

To ensure a fair and comprehensive evaluation, we carefully select and fix the hyper-parameters for all methods in our experiments. The global learning rate  $\eta_g$  is set to 1.0 across all settings, providing a consistent baseline for comparison. For FedSat, we chose  $\mu = 0.95$  to compute the layer-wise coefficient over batches of test samples for each client, enabling effective aggregation of client updates. Additionally, we set  $\tau = 0.65$  to enhance the impact of each client’s local gradients, striking a balance between local and global optimization. To calculate the prioritization score of each client’s parameters, we determine  $\alpha = 0.3$  and  $\beta = 0.2$ , giving appropriate weight to both the client’s data characteristics and model performance.

For the baseline methods, we consider optimal hyper-parameters settings as recommended in their respective proposals. To maintain consistency and fairness across all methods, we fix the local learning rate  $\eta_l$ , batch size **B**, number of epochs **E**, and number of global rounds **R**. We conduct experiments with two local learning rates,  $\eta_l \in \{0.01, 0.001\}$ , and two batch size settings,  $\mathbf{B} \in \{16, 32\}$ , to explore the impact of these hyper-parameters on the performance of each method. By carefully controlling these variables, we aim to provide a rigorous and unbiased evaluation of FedSat and the baseline approaches, shedding light on their relative strengths and weaknesses under various hyper-parameter configurations.

#### E. Performance Evaluation

In this section, we demonstrate the performance of FedSat under various heterogeneous settings compared to the state-of-the-art solutions. We perform 200 rounds for MLP and LeNet-5 MNIST, 400 rounds for ResNet-8 on CIFAR-10 and CIFAR-100, and 250 rounds for ResNet-18 on CIFAR-10 and CIFAR-100 datasets. The results under three different heterogeneous data-distributions are described below:

a) *Evaluation on LS*: The performance evaluation of FedSat w.r.t. the baselines on **LS** distribution is summarized in Table II. As observed, FedSat consistently demonstrates higher test accuracy than the baseline methods across all different datasets and model architectures. On an average, FedSat surpasses the second-best method, SCAFFOLD, by 1.8% and the weakest-performing method, FedLC, by 19.87%. These results underscore FedSat’s effectiveness in addressing label-skewed non-IID settings, potentially due to its novel cost-sensitive loss function and proposed weighted aggregation mechanism which incorporates both parameters quality and imbalance training. Further, the sensitivity to local learning rates, as observed in case of FedProx, FedDyn, and FedLADA, emphasizes the critical need for meticulous hyper-parameter tuning.

b) *Evaluation on LSMC*: The performance in case of label skewed datasets with missing classes is depicted in Table III, where the lower value of  $n$  indicates more challenging heterogeneous settings.

Observed that FedSat achieves highest accuracy in all settings, with an average improvement of 3.34% over the second-best method. It is worthwhile to mention that FedSat demonstrates more significant improvements on

TABLE IV: Comparison of method performance for training with ( $\eta_l=0.01$ ,  $B=16$ ,  $E=5$ ) on combination of label skewed and quantity skewed data settings. Here,  $n$  denotes the minimum number of classes present in each client.

Methods	MNIST				CIFAR-10				CIFAR-100			
	MLP		LeNet-5		ResNet-8		ResNet-18		ResNet-8		ResNet-18	
	$n=2$	$n=4$	$n=2$	$n=4$	$n=2$	$n=4$	$n=2$	$n=4$	$n=20$	$n=40$	$n=20$	$n=40$
Elastic	94.93	98.53	98.53	98.31	66.64	69.42	72.25	73.51	35.87	37.27	55.95	54.33
FedAvg	94.29	98.24	98.24	97.97	65.66	68.13	70.92	73.68	34.35	36.16	55.84	53.88
FedAvgM	94.62	98.66	98.66	98.03	62.51	63.14	65.34	65.89	27.89	31.37	58.4	58.93
FedDyn	87.26	90.32	92.73	93.08	54.65	56.43	67.52	68.65	21.27	22.18	54.19	53.43
FedLADA	93.45	98.96	98.96	98.22	54.74	59.76	44.86	53.74	29.03	30.23	24.73	37.74
FedLC	93.78	98.05	98.05	97.37	56.94	59.38	65.38	67.54	26.25	26.37	51.61	50.66
FedProx	94.48	98.15	98.15	97.37	53.55	54.50	11.79	10.76	23.63	24.43	12.98	12.89
SCAFFOLD	98.24	98.21	99.12	<b>99.57</b>	82.91	84.38	<b>85.74</b>	86.35	56.13	56.57	64.39	63.13
FedSat	<b>98.54</b>	<b>98.58</b>	<b>99.46</b>	99.52	<b>84.08</b>	<b>85.07</b>	85.68	<b>86.89</b>	<b>58.85</b>	<b>60.21</b>	<b>65.64</b>	<b>64.96</b>

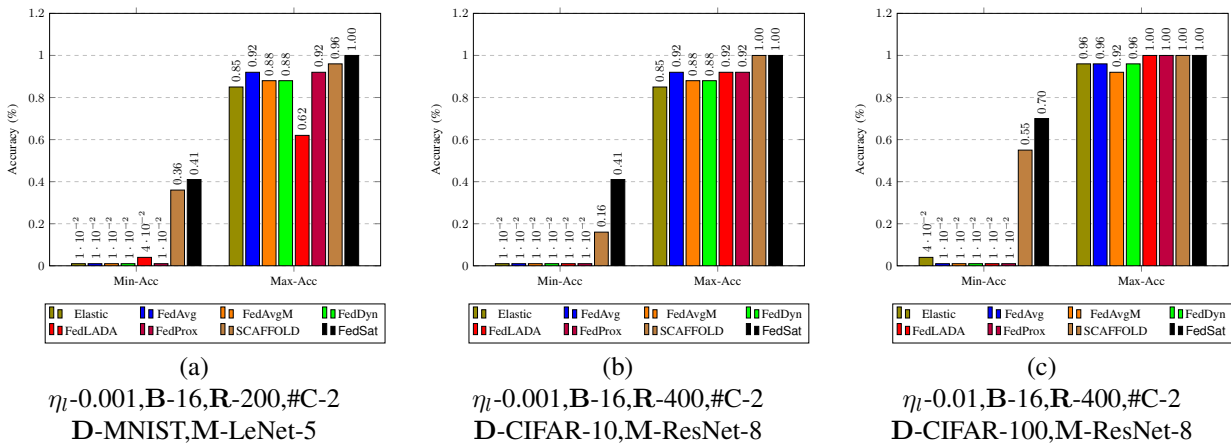


Fig. 2: Comparison of the highest and lowest client accuracies achieved by FedSat and baseline methods across various settings. The settings are defined by the local learning rate ( $\eta_l$ ), batch size ( $B$ ), number of global rounds ( $R$ ), number of classes per client ( $\#C$ ), dataset ( $D$ ), and model architecture ( $M$ ).

challenging datasets, achieving a 0.51% improvement on the simplest dataset MNIST, a 1.98% improvement on CIFAR-10, and a remarkable 6.86% improvement on the most challenging dataset CIFAR-100 compared to the best baseline method. Furthermore, in the extreme heterogeneous setting ( $n=2$ ), FedSat exhibits a more pronounced impact on accuracy, with an average improvement of 4.51% across all settings compared to the best-performing baseline SCAFFOLD.

This suggests that FedSat’s design elements, particularly the cost-sensitive loss function, effectively mitigate the negative effects of label skewed data distribution and our novel prioritized class-based weighted aggregation scheme dealing with the unstable trained model due to missing classes. In contrast, the methods based on simple aggregation schemes, such as FedAvg, FedAvgM, FedLC, and FedProx, experience substantial performance drops, emphasizing the necessity for adaptations to handle the impact of missing classes. Interestingly, when training with a high local learning rate (0.01), FedProx, FedDyn, and FedLADA exhibit significant performance drops and instability mainly due to their additional gradient correction being proportional to the local learning rate.

c) *Evaluation on LQSMC*: Table IV illustrates the performance comparison of FedSat against baselines under the combined challenges of label skew and quantity skew data distribution with missing classes. The results demonstrate that FedSat achieves the highest accuracy in most settings, especially on the more challenging CIFAR-10 and CIFAR-100 datasets. On an average, FedSat outperforms the second-best method by 1.47% across all settings. It is worth to mention that, methods based on simple aggregation schemes, like FedAvg, FedAvgM, FedProx and FedLC, experience substantial performance drops, with an average decrease of 19.81% compared to FedSat. Notably, as the dataset complexity increases, FedSat’s performance improvement becomes more significant. On MNIST, CIFAR-10, and CIFAR-100, FedSat outperforms the best alternative, SCAFFOLD, by average margins of 0.23%, 1.18%, and 2.03%, respectively. Similar to **LSMC**, the performance drops of FedProx, FedDyn, and FedLADA are also observed, due to training with high local learning rate.

This significant advantage suggests that FedSat’s design choices, particularly the proposed weighted aggregation mechanism that considers both data quality and quantity, are highly effective in mitigating the negative effects of model biases towards a class due to data imbalances.

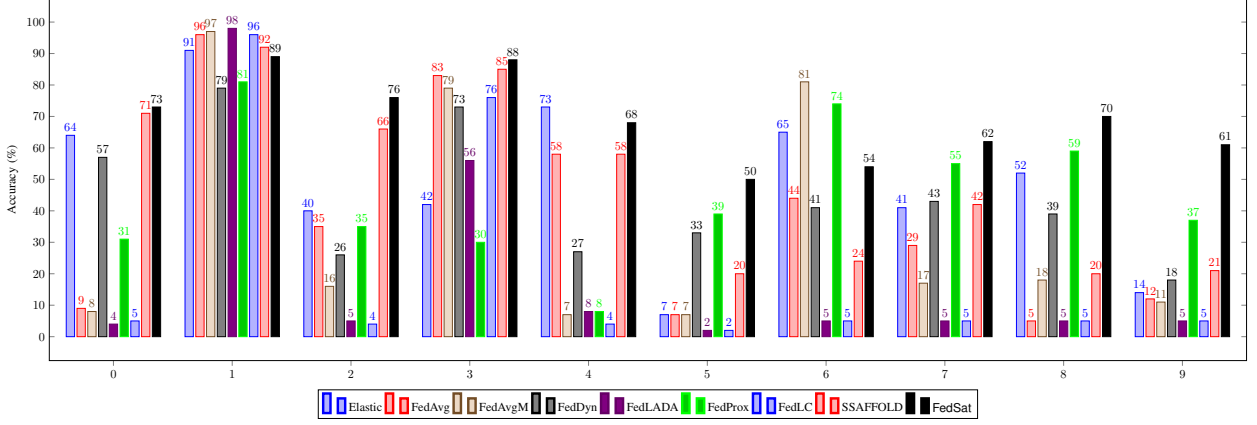


Fig. 3: Class-wise accuracy comparison between FedSat and baseline methods on the CIFAR-10 dataset with label skew, where each client is assigned only 2 classes.

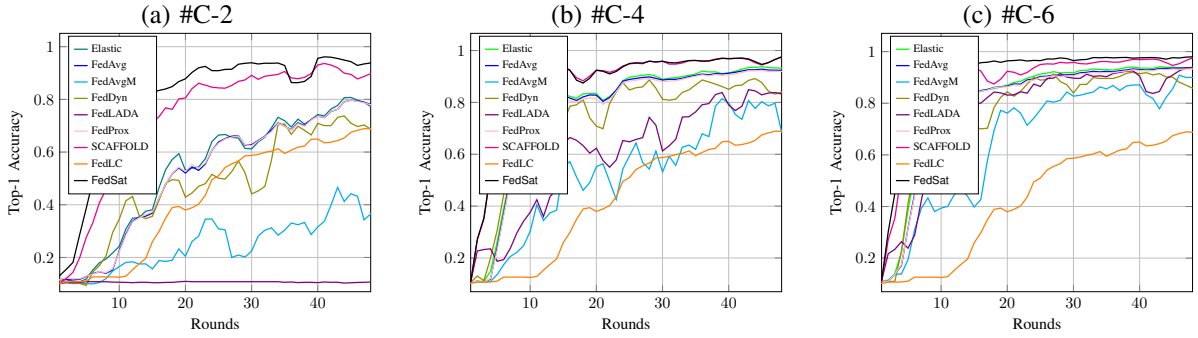


Fig. 4: Top-1 accuracy on MNIST Dataset using LeNet5 model architecture.

## F. Analysis of FedSat

*a) Robustness:* We assess the robustness of our proposed method by comparing the class-wise accuracy with various baselines, as depicted in Figures 2 and 3. It is evident from Figure 2 that FedSat outperforms all other baselines in terms of minimum testing accuracy. For instance, in Figure 2(a), FedSat achieves a minimum accuracy of 0.41, while the highest minimum accuracy among baselines is 0.36. This represents a 13.89% improvement in accuracy for the lowest-performing clients. Similarly, in Figure 2(b), FedSat’s minimum accuracy is 0.41, compared to 0.16 for the best-performing baseline, indicating a 156.25% improvement. In the most challenging setting, as observed in Figure 2(c), FedSat maintains a minimum accuracy of 0.70, while the highest baseline achieves only 0.55, representing a 27.27% improvement.

On the other hand, Figure 3 demonstrates that, in contrast to the baselines, FedSat achieves consistent accuracy across all classes by leveraging its novel prioritized class-based weighted aggregation scheme. For instance, in class 1, FedSat achieves an accuracy of 76%, while the best-performing baseline reaches only 66%, and the worst-performing baseline achieves a mere 35%. Unlike the baselines, FedSat performance is consistent across all classes, with maintaining an average accuracy improvement of 28.75% over the best baseline and 82.5% over the worst baseline. Also, observe that FedDyn shows slightly higher minimum accuracy but still falls short of SCAFFOLD and FedSat. Whereas Elastic, FedAvg, FedAvgM, and FedProx exhibit low minimum accuracy and inconsistent class-wise accuracy. Additionally, FedLADA demonstrates inconsistent minimum accuracy and highly varying class-wise accuracy.

*b) Convergence:* Figures 4, 5, and 6 depict the learning efficiency of FedSat compared with the baselines on the MNIST, CIFAR-10, and CIFAR-100 datasets, respectively.

Across various settings with different numbers of clients, FedSat consistently learns faster and achieves higher accuracy than the other methods. On MNIST (Figure 4), FedSat converges rapidly within the first 10-20 rounds, reaching an accuracy close to 100%, while the baselines require more rounds to achieve similar performance. On CIFAR-10 (Figure 5), FedSat maintains a clear advantage over the baselines, converging faster and achieving a higher final accuracy. The performance gap is even more significant on the more challenging CIFAR-100 dataset (Figure 6), where FedSat outperforms the baselines by a considerable margin in terms of both convergence speed and final accuracy. These observations highlight FedSat’s effectiveness in handling data heterogeneity and its ability to learn efficiently in various federated settings, which can be attributed to its novel aggregation scheme and cost-sensitive loss function.

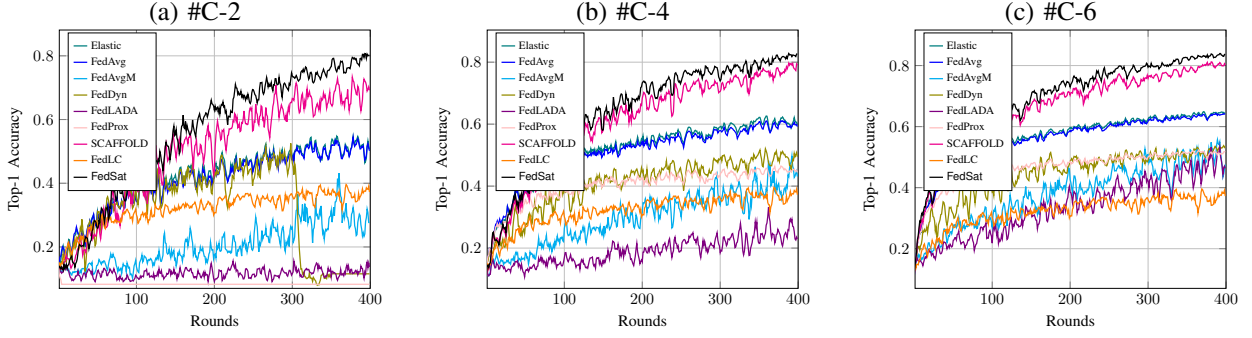


Fig. 5: Top-1 accuracy on CIFAR10 dataset using ResNet model architecture.

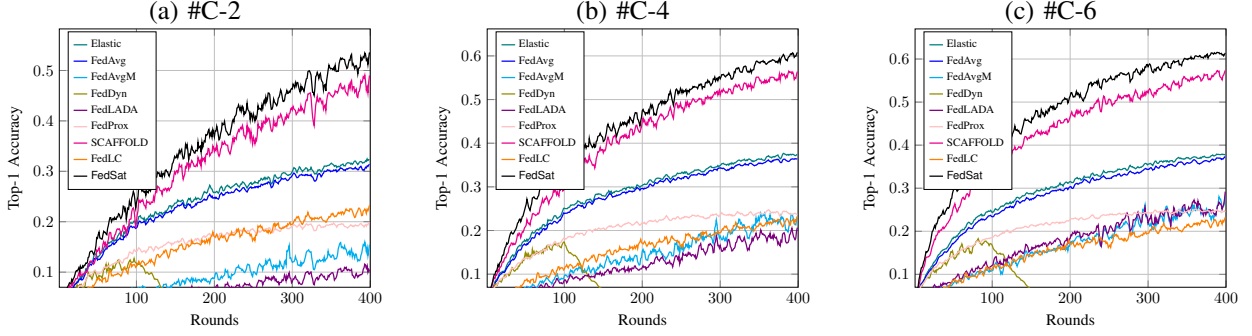


Fig. 6: Top-1 accuracy on CIFAR-100 dataset using ResNet-8 model architecture.

*c) Scalability:* To show the scalability of FedSat, we vary the number of clients on CIFAR-10. Specifically, we consider the following four settings: (1) partitioning the dataset into 200 clients and randomly sampling 15 clients in each round, (2) partitioning the dataset into 200 clients and randomly sampling 10 clients in each round, (3) partitioning the dataset into 100 clients and randomly sampling 15 clients in each round, and (4) partitioning the dataset into 100 clients and randomly sampling 10 clients in each round. It is evident from the Figure 7 that across all settings, FedSat maintains its high performance, consistently achieving the highest final accuracy and faster convergence than the baselines. As the number of total clients increases, the performance gap between FedSat and the baselines widens, with FedSat outperforming the best baseline (SCAFFOLD) by 3-12% in terms of final accuracy. Moreover, FedSat’s performance remains stable and superior to the baselines, regardless of the number of clients selected per round, demonstrating its robustness to variations in client participation. These observations highlight FedSat’s ability to

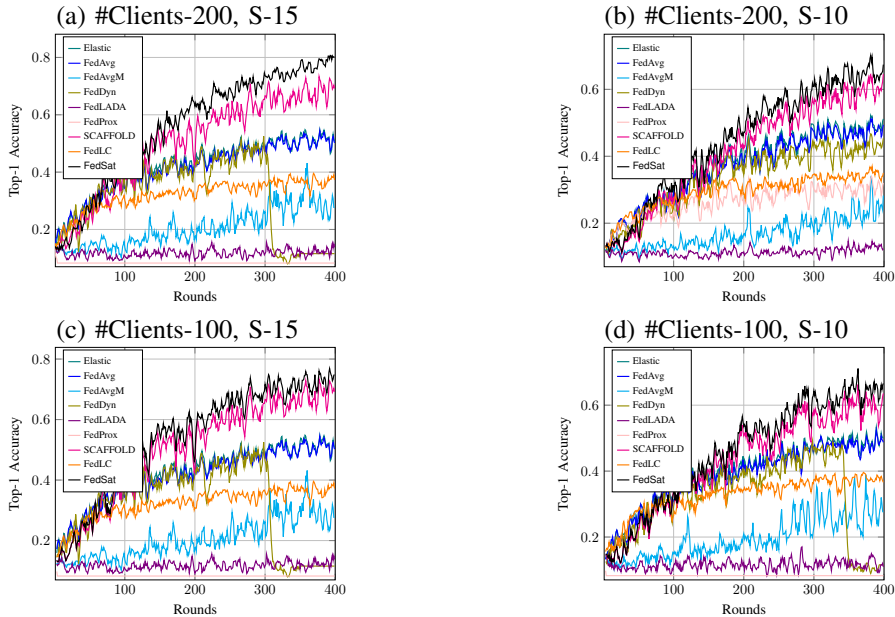


Fig. 7: Comparison of scalability with baselines on CIFAR10 dataset using ResNet-8 model architecture.



efficiently leverage increased data and computational resources in larger federated networks, making it a promising solution for real-world, large-scale federated learning applications.

## VI. CONCLUSION

This paper introduces FedSat, a novel federated learning approach designed to address the challenges posed by heterogeneous data distributions across clients. By incorporating a cost-sensitive loss function and a prioritized class-based weighted aggregation scheme, FedSat effectively mitigates the negative effects of label skewness, missing classes, and quantity skewness in federated learning environments. Our extensive experimental evaluation across various datasets (MNIST, CIFAR-10, and CIFAR-100) and model architectures (MLP, LeNet-5, ResNet-8, and ResNet-18) demonstrates the superiority of FedSat over state-of-the-art baseline methods. In particular, FedSat consistently achieves higher accuracy, with an average improvement of 1.8% over the second-best method and up to 19.87% over the weakest-performing baseline. FedSat’s robustness is particularly evident in extreme non-IID scenarios, where it demonstrates significant improvements in minimum accuracy for a client by up to 36.25% on average. This highlights FedSat’s ability to enhance the performance of underrepresented classes and clients, leading to a more balanced and equitable learning outcome. Furthermore, FedSat exhibits faster convergence rates and better scalability compared to existing methods, maintaining its performance advantages even as the number of clients increases. This scalability makes FedSat a promising solution for large-scale, real-world federated learning applications. Our future plan aims to incorporate various privacy preserving techniques, such as differential privacy or secure aggregation, to further enhance its utility in privacy-sensitive domains. Further, we plan to extend blockchain support as a way to prevent various adversarial attacks in FedSat.

## REFERENCES

- [1] McMahan *et al.*, “Communication-efficient learning of deep networks from decentralized data,” in *Artificial intelligence and statistics*. PMLR, 2017, pp. 1273–1282.
- [2] Q. Li, Y. Diao, Q. Chen, and B. He, “Federated learning on non-iid data silos: An experimental study,” in *2022 IEEE 38th International Conference on Data Engineering (ICDE)*, 2022.
- [3] J. Zhang *et al.*, “Federated learning with label distribution skew via logits calibration,” in *International Conference on Machine Learning*. PMLR, 2022, pp. 26 311–26 329.
- [4] X. Li *et al.*, “On the convergence of fedavg on non-iid data,” in *International Conference on Learning Representations*, 2020.
- [5] H. Yang, M. Fang, and J. Liu, “Achieving linear speedup with partial worker participation in non-IID federated learning,” in *International Conference on Learning Representations*, 2021.
- [6] T. Lin *et al.*, “Don’t use large mini-batches, use local SGD,” in *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net, 2020.
- [7] T.-M. H. Hsu, H. Qi, and M. Brown, “Measuring the effects of non-identical data distribution for federated visual classification,” *arXiv preprint arXiv:1909.06335*, 2019.
- [8] S. P. Karimireddy *et al.*, “SCAFFOLD: Stochastic controlled averaging for federated learning,” in *Proceedings of the 37th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 119. PMLR, 13–18 Jul 2020, pp. 5132–5143.
- [9] Y. Sun *et al.*, “Efficient federated learning via local adaptive amended optimizer with linear speedup,” *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 45, no. 12, pp. 14 453–14 464, 2023.
- [10] M. Luo *et al.*, “No fear of heterogeneity: Classifier calibration for federated learning with non-iid data,” *Advances in Neural Information Processing Systems*, vol. 34, pp. 5972–5984, 2021.
- [11] X. Yuan and P. Li, “On convergence of fedprox: Local dissimilarity invariant bounds, non-smoothness and beyond,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 10 752–10 765, 2022.
- [12] D. A. E. Acar *et al.*, “Federated learning based on dynamic regularization,” in *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net, 2021.
- [13] J. Wang *et al.*, “Tackling the objective inconsistency problem in heterogeneous federated optimization,” *Advances in neural information processing systems*, vol. 33, pp. 7611–7623, 2020.
- [14] O. Shamir, N. Srebro, and T. Zhang, “Communication-efficient distributed optimization using an approximate newton-type method,” in *Proceedings of the 31st International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 32, no. 2. Beijing, China: PMLR, 22–24 Jun 2014, pp. 1000–1008.
- [15] T. Li *et al.*, “FedDane: A federated newton-type method,” in *2019 53rd Asilomar Conference on Signals, Systems, and Computers*, 2019.
- [16] X. Li *et al.*, “FedBN: Federated learning on non-IID features via local batch normalization,” in *International Conference on Learning Representations*, 2021.
- [17] J. Xu *et al.*, “Fedcorr: Multi-stage federated learning for label noise correction,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2022, pp. 10 184–10 193.
- [18] D. Chen and others, “Elastic aggregation for federated optimization,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 12 187–12 197.

- [19] L. Gao *et al.*, “Feddc: Federated learning with non-iid data via local drift decoupling and correction,” in *IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2022, New Orleans, LA, USA, June 18-24, 2022*. IEEE, 2022, pp. 10 102–10 111.
- [20] F. Varno *et al.*, “Adabest: Minimizing client drift in federated learning via adaptive bias estimation,” in *Computer Vision - ECCV 2022 - 17th European Conference, Tel Aviv, Israel, October 23-27, 2022, Proceedings, Part XXIII*, ser. Lecture Notes in Computer Science, vol. 13683. Springer, 2022, pp. 710–726.
- [21] H. Zhao, Z. Li, and P. Richtárik, “FedPAGE: A fast local stochastic gradient method for communication-efficient federated learning,” 2022.
- [22] S. Zhou and G. Y. Li, “Federated learning via inexact admm,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 45, no. 8, pp. 9699–9708, 2023.
- [23] K. Mishchenko and thers, “Proxskip: Yes! local gradient steps provably lead to communication acceleration! finally!” in *International Conference on Machine Learning, ICML 2022, 17-23 July 2022, Baltimore, Maryland, USA*, ser. Proceedings of Machine Learning Research, vol. 162. PMLR, 2022, pp. 15 750–15 769.
- [24] L. Collins *et al.*, “Fedavg with fine tuning: Local updates lead to representation learning,” in *Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022*, 2022.
- [25] Q. Li, B. He, and D. Song, “Model-contrastive federated learning,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2021, pp. 10 713–10 722.
- [26] Y. Yu, A. Wei, S. P. Karimireddy, Y. Ma, and M. Jordan, “Tct: Convexifying federated learning using bootstrapped neural tangent kernels,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 30 882–30 897, 2022.
- [27] A. Krizhevsky, I. Sutskever, and G. E. Hinton, “Imagenet classification with deep convolutional neural networks,” *Communications of the ACM*, vol. 60, no. 6, pp. 84–90, 2017.
- [28] Paszke *et al.*, “Pytorch: An imperative style, high-performance deep learning library,” in *Advances in Neural Information Processing Systems*, H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, Eds., vol. 32. Curran Associates, Inc., 2019.
- [29] Y. Lecun, L. Bottou, Y. Bengio, and P. Haffner, “Gradient-based learning applied to document recognition,” *Proceedings of the IEEE*, vol. 86, no. 11, pp. 2278–2324, 1998.
- [30] K. He, X. Zhang, S. Ren, and J. Sun, “Deep residual learning for image recognition,” *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016.
- [31] N. Bouguila, D. Ziou, and J. Vaillancourt, “Novel mixtures based on the dirichlet distribution: Application to data and image classification,” vol. 2734, 07 2003, pp. 172–181.