

NNSIGHT AND NDIF: DEMOCRATIZING ACCESS TO FOUNDATION MODEL INTERNALS

Jaden Fiotto-Kaufman*, Alexander R Loftus*, Eric Todd, Jannik Brinkmann, Caden Juang, Koyena Pal, Can Rager, Aaron Mueller, Samuel Marks, Arnab Sen Sharma, Francesca Lucchetti, Michael Ripa, Adam Belfki, Nikhil Prakash, Sumeet Multani, Carla Brodley, Arjun Guha, Jonathan Bell, Byron Wallace, David Bau

ABSTRACT

The enormous scale of state-of-the-art foundation models has limited their accessibility to scientists, because customized experiments on large models require costly hardware and complex engineering that is impractical for most researchers. To alleviate these problems, we introduce NNSight, an open-source Python package with a simple, flexible API that can express interventions on any PyTorch model by building computation graphs. We also introduce NDIF, a collaborative research platform providing researchers access to foundation-scale LLMs via the NNSight API. Code, documentation, and tutorials are available at <https://nnsight.net/>.

1 INTRODUCTION

Research on large-scale AI currently faces two practical challenges: *lack of transparent model access*, and *lack of adequate computational resources*. This paper introduces the NNSight library and the *National Deep Inference Fabric* (NDIF), which together aim to address both of these challenges.

Model access is limited by the secrecy of state-of-the-art commercial model parameters (OpenAI et al., 2023; Anthropic, 2024; Gemini Team et al., 2024). Commercial application programming interfaces (APIs) offer frontier models “as a service,” allowing thousands of concurrent users to share model instances and thus reducing computational costs. However, these APIs lack transparency for scientists studying model internals, such as intermediate activations or gradients used during neural network inference and training.

Models with openly downloadable parameters provide partial transparency (Scao et al., 2022; Black et al., 2021; Touvron et al., 2023; Jiang et al., 2023). However, the adoption of these models is often limited to smaller sizes because models with tens of billions of parameters exceed a single GPU’s memory capacity. When scaled to hundreds of billions of parameters, these models are too large even for the combined GPU memory of a single node. For example, inference on a 530 billion parameter LLM requires about 1TB of GPU memory just to load the model parameters in 16-bit precision (Aminabadi et al., 2022). Even if a scientist has access to such resources, evaluating large models blocks others from using the same resources concurrently, preventing their efficient utilization. The problem is worse still when we wish to perform deeper analyses of model internals, as such experiments are generally even more compute- and time-intensive. Thus, despite evidence that key capabilities emerge only in the largest models (Wei et al., 2022; Patel & Pavlick, 2022; Rae et al., 2021; Brown et al., 2020), studying them can often seem unattainable.

As a result, most researchers are limited to studying model internals using smaller models (Hernandez et al., 2024; Marks et al., 2024b; Brinkmann et al., 2024; Hanna et al., 2023; Wang et al., 2022). Research on large models is also typically limited to “black-box” investigations using commercial APIs. In other words, research into the internal mechanisms of the largest (and most capable) models has been hindered by multiple infrastructural barriers.

Surveys of AI research needs have documented this unsatisfactory situation (Shevlane, 2022; Bucknall & Trager, 2023; Casper et al., 2024): Specifically, Bucknall & Trager (2023) highlights the need for *structured model access APIs* that offer greater transparency than existing commercial AI APIs.

*Equal contribution; correspondence to: j.fiotto-kaufman@northeastern.edu, loftus.al@northeastern.edu

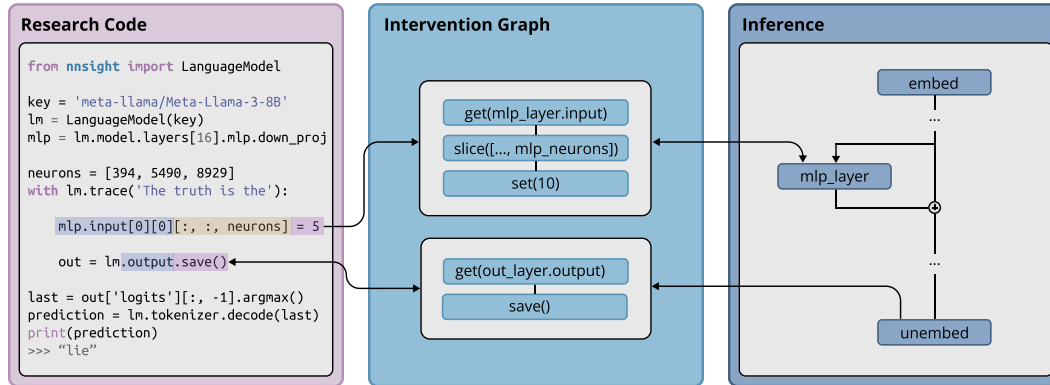


Figure 1: The NNsight intervention graph. Research code (left) is mapped to an intervention graph (middle) that defines modifications to the original model (right). The graph is created in the trace context window and the modified model is executed upon exiting the context window. Users can run on their local infrastructure or remotely on NDIF (Section 3) by setting the remote flag; this can be helpful for running interventions on very large models. This code example sets neuron activations to a high value, which causes the model to output the opposite word to the subject in the prompt.

This paper describes two technologies, NNsight and NDIF, co-designed to address these barriers to large-scale AI research. NNsight is a structured model access API that standardizes a flexible programming idiom for expressing fully transparent model access without requiring user custody of model parameters. NDIF supports this idiom by providing a remote-execution service, which facilitates behind-the-scenes sharing of large model instances. NNsight and NDIF are both open-source projects, distributed under a permissive MIT license. Together, these resources provide a turn-key serverless infrastructure for studying (large) open models, and a reusable component-based architecture suitable for commercial deployment.

NNsight is an extension to PyTorch (Paszke et al., 2019) that builds an intervention graph for remote hooks, leveraging the same modular graph idiom that deep learning frameworks have used to support automatic differentiation (Bottou & Le Cun, 1988; Bottou & Gallinari, 1990; Abadi et al., 2016; AI-Rfou et al., 2016; Bradbury et al., 2018), and extending it to support remote execution instead.

NDIF is an online service supporting remote NNsight requests. Like commercial inference services, it allows many users to share instances of large-scale models, which would otherwise be costly for individual users to host. But unlike commercial inference services, NDIF provides the transparency necessary for comprehensive AI research.

2 TRANSPARENT AND FLEXIBLE MODEL INTERACTIONS

NNsight minimizes the learning curve for researchers by providing transparent access to PyTorch-based models. Our approach combines a novel tracing context with programming idioms that will be familiar to PyTorch users.

NNsight’s core API uses a tracing context that encapsulates model interactions within a defined scope, building and executing its intervention graph upon exiting the scope. Inside this context, users can employ standard PyTorch operations to manipulate model internals, probe activations, and implement custom interventions.

Consider Code Example 1¹, which loads the Llama-3-8B language model (AI@Meta, 2024) from HuggingFace (Wolf et al., 2020), then uses NNsight to activate three neurons that invert its output:

```
1 from nnsight import LanguageModel
2
3 lm = LanguageModel("meta-llama/Meta-Llama-3-8B")
```

¹All code examples in this paper use NNsight 0.2 syntax. Future versions will further simplify the API.

```

4 mlp = lm.model.layers[16].mlp.down_proj
5 neurons = [394, 5490, 8929]
6
7 with lm.trace("The truth is the"):
8     mlp.input[0][0][:, :, neurons] = 5
9     logits = lm.output['logits'].save()
10
11 last = logits[:, -1].argmax()
12 prediction = lm.tokenizer.decode(last)
13 print(prediction)
14 >>> lie

```

Code Example 1: Using NNsight to activate three neurons that cause the model to invert the meaning of its output, producing “lie” rather than “truth.”

Inside the tracing context, a forward pass is run, the activations are altered, and the output of the model is saved. The tracing context window—with `model.trace(...)`—delineates the scope of interventions, while operations within the window use PyTorch syntax and idioms to investigate and manipulate model internals. NNsight uses the scope to lazily build the intervention graph, and then executes the optimized graph upon exiting the context window.

Because model interactions are specified through user-written code, NNsight enables a wide range of interventions beyond simple probing and manipulation. That includes supporting custom attention mechanisms, gradient flow modifications, and dynamic computational graph alterations, all using familiar PyTorch constructs.

Access to intermediate inputs, outputs, and gradients also enables other common (interpretability) methods such as pruning ablations (Li et al., 2024), causal mediation analysis (Vig et al., 2020; Meng et al., 2022; Geva et al., 2023), fine-tuning-based methods (Lester et al., 2021; Wu et al., 2023), gradient-based attribution (Sundararajan et al., 2017; Ancona et al., 2019; Bastings et al., 2022; Kramár et al., 2024), sparse dictionary learning (Templeton et al., 2024; Marks et al., 2024a; Gao et al., 2024), and others.

NNsight’s design principles embody a “minimal learning, maximal flexibility” philosophy. This lowers the barrier for entry to advanced deep learning research by providing a transparent interface to the underlying model’s architecture.

3 REMOTE EXECUTION ON NDIF

On its own, NNsight empowers researchers to explore the internals of models running on their own hardware. Combining with the National Deep Inference Fabric (NDIF), however, allows them to work with foundation models hosted on remote GPUs by toggling a single keyword argument. Code Example 2 shows the forward pass from Code Example 1 being run remotely.

```

1 with lm.trace("The truth is the", remote=True):
2     mlp.input[0][0][:, :, neurons] = 5
3     logits = lm.output['logits'].save()

```

Code Example 2: Passing `remote=True` into a tracing context runs the model on NDIF infrastructure. This example assumes all objects are the same as in Code Example 1.

The intervention graph generated by NNsight is then transmitted to NDIF for execution, where the interventions it defines are hooked into the model and run. Results that are explicitly requested to be copied to the client side via `.save()` are then seamlessly sent back to the user. There is no overhead on the user’s part to set up the large model or allocate computational resources.

The remote API works exactly the same way as the local API. This is a key design benefit, because it allows users to efficiently develop and debug their experiments locally on smaller models before executing them remotely on large models. The user experience is designed to be the same as if the user had a large model running on their own machine.

NDIF hosts a predefined set of models with the weights preloaded into the remote cache. It can run inference for multiple users in batches at any given time, and an autoscaling feature dynamically

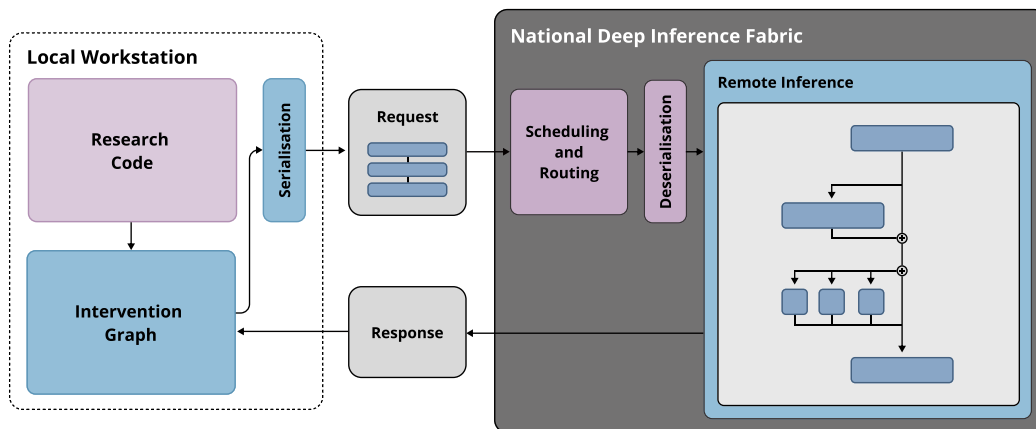


Figure 2: An overview of the NNsight and NDIF remote pipeline. Researchers write intervention code using NNsight’s API. NNsight builds an intervention graph, which is serialized with a custom serialization format and sent in a request to the NDIF server. The request is scheduled to a worker serving the requested model, which de-serializes the intervention graph. The model is executed with the input from the request, interleaving the intervention graph alongside the model’s normal computation graph. The saved results are sent back to the user.

adjusts the allocation of GPU memory and computational power for each model deployment, while also managing the number of operational replicas to isolate different requests.

4 DESIGN

One of the core goals of NNsight is to create a common, highly-legible notation for expressing changes to models. Previously, researchers accessing model internals have “forked” code to add customization or have used *callback hooks*, but these ad-hoc conventions create diverse codebases which may be hard to read and understand. NNsight addresses this problem by introducing a workflow based on Python context managers that organizes model modifications in a way that is concise and easy to understand.

Within a context, NNsight exposes the inputs, outputs, and gradients of PyTorch Modules. Users can leverage this to modify computation anywhere in a PyTorch Module’s forward or backward pass. Upon exiting the context manager, the interventions generate a computation graph which is hooked into a PyTorch Module. Users can extract PyTorch objects like activations, model outputs, or gradients from a given forward or backward pass using a `save` method. If the code is executed remotely, `save` will download and store the value in a local variable that the user can access.

4.1 INTERVENTIONS ARE PYTORCH CODE

Interventions are defined using basic PyTorch operations, which are written with regular PyTorch code (Figure 1, left). This is accomplished by overloading Python and PyTorch code within the tracing context. This setup allows users already familiar with PyTorch and NumPy syntax to create sophisticated interventions quickly, with as little overhead as possible.

4.2 GRAPH REPRESENTATION

Once interventions are defined, they can be represented as an intervention graph (Figure 1, middle). This allows for a number of flexible downstream use cases. For instance, when executing remotely, the graph is sent to a remote server through an intermediate custom json format (see Figure 2, Serialisation). Users can share their interventions with other users by exporting the graph to json or to a visualization, creating an ecosystem of shareable model interventions.

An intervention graph setup also allows for graph-based optimizations. By manipulating the graph, intermediate operations within user code can be trimmed, combined, and substituted to reduce computational costs. This is especially helpful for large models, where memory and performance savings can be significant.

4.3 FLEXIBILITY

NNsight directly hooks into the PyTorch `nn.Module` object, allowing it to work with any torch model, Module, or architecture. To support common use cases, we include infrastructure for accessing custom models distributed by popular platforms like HuggingFace and Meta. However, the core package is architecture-agnostic: Interventions on custom models are a core use-case. For example, Sharma et al. (2024) used NNsight to investigate the mechanisms of factual recall in the Mamba state space model Gu & Dao (2023). This flexibility, along with the shareable graph idiom, enforces a common language across codebases: Regardless of input modality or model architecture, intervention graphs are saved using the same json specification.

4.4 TRANSPARENCY

The computation graph is fully accessible to the user during runtime. This allows users to inspect, debug, and understand the sequence and nature of operations being applied to the model. Each node in the graph contains information about the operation it represents.

5 IMPLEMENTATION

NNsight is built on a few core components that define a compositional language for modifying models. These components include the tracing context for building computation graphs, an envoy system for wrapping PyTorch modules, and an intervention graph for representing and executing operations. This section details the implementation of these elements and how they interact to provide NNsight’s functionality.

5.1 THE TRACING CONTEXT

The core workflow in NNsight uses tracing contexts to build computation graphs, defined by an NNsight class object or one of its subclasses. When an NNsight object wraps a PyTorch Module, the tracing context exposes intermediate inputs and outputs. Within this context, user-specified operations, written in Python and PyTorch become nodes in an intervention graph. The graph’s execution is deferred until the context exits.

This deferred execution scheme allows for debugging user specified operations and compute-efficient tracking of model operations without immediate execution. Code Example 3 shows basic usage of the tracing context to run a forward pass on a model and save the output.

```

1 from nnsight import NNsight
2 model = NNsight(model)
3 with model.trace("Hello World"):
4     output = model.output.save()

```

Code Example 3: Basic usage of the trace context manager and the NNsight class. The initial model object can be any Torch Module. The output method accesses the activations in a forward pass with the “Hello World” prompt. trace can take input of any type, not just strings.

Upon exiting the context window, the intervention graph is interleaved with the PyTorch Module computation graph. To enable efficient debugging, NNsight also includes a scanning and validation mode. These use PyTorch’s FakeTensor system. FakeTensors are lightweight tensor objects that mimic the behavior of real tensors without allocating memory for actual data. Before execution, scanning passes FakeTensors through the model in order to find information about the future inputs and outputs of modules. Then during validation, interventions added in the tracing context are executed using the FakeTensors created during scanning. This verifies the intervention’s executability, raising errors if bugs are detected, all providing the same information as scanning, but with

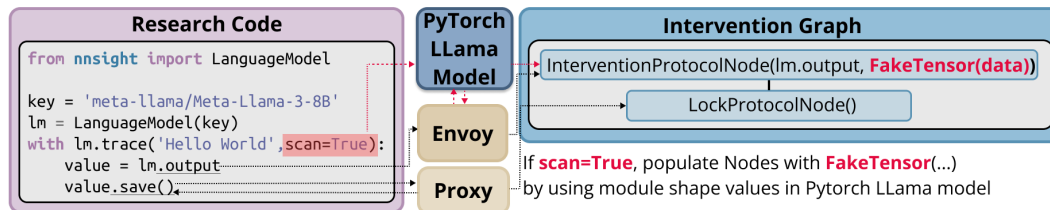


Figure 3: The components involved in creating nodes within the Intervention Graph. Module calls like `lm.output` are processed through Envoy, resulting in the creation of relevant ProtocolNodes, such as `InterventionProtocolNode()`. Everything else goes through Proxy layer to create other relevant nodes in the graph. All nodes are encapsulated within `InterventionProxy()`, which users see upon printing nodes. When the scan flag is enabled, NNSight scans the modules in the PyTorch model instance to gather related data shapes, creating FakeTensors that are included in the respective intervention graph nodes and returned to the user.

downstream intervention proxies. This enables rapid iteration and debugging without incurring the full computational cost of model execution. Unless the save method is used, intermediate values are discarded to conserve memory by default.

5.2 THE ENVOY SYSTEM

When a PyTorch model is initialized with the NNSight class, each module in the model’s hierarchy is recursively wrapped with an Envoy object. Envoy objects allow for access to model inputs and outputs, for deferred execution, and for additional interventions as illustrated in Figure 3.

Modules wrapped with an Envoy class define `.input` and `.output` properties. Accessing either property creates a Proxy object, which serves as a placeholder for the tensor data that will flow through the Module during model execution. Proxy objects allow users to define operations and interventions on the model’s computation graph without immediately executing them. Proxy objects serve as entry points into the intervention graph; they enable tracking of dependencies between different parts of the computation, as each operation on a proxy creates a new node in the graph. Input and output proxies propagate into all further nodes on the graph.

The Envoy class also implements custom attribute handling and iteration methods to seamlessly integrate with the underlying PyTorch Module structure. It can wrap any PyTorch Module, regardless of its internal complexity. This includes custom modules, nested structures, and even dynamic architectures. This system enables NNSight to support interventions on *any* model architecture built with PyTorch.

5.3 INTERVENTION GRAPH

The intervention graph is implemented through a Graph class in NNSight. The Graph class maintains a dictionary of nodes (`self.nodes`), each representing an operation or intervention.

The graph supports a validation mode (`self.validate`), which can execute nodes with proxy values as they are added. This allows for early detection of issues like shape mismatches without running the full model, and for validating each operation in the graph. The graph automatically generates unique names for each node so that each operation can be uniquely identified and referenced.

Upon execution, dead nodes are removed for optimization and the computation graph is compiled. The intervention graph is interleaved with the underlying Module, so that execution occurs alongside the existing computation graph at the right points. Upon exiting the tracing context, the graph is executed with real values rather than FakeTensors.

5.3.1 INVOCATION

Multiple tracing contexts can be used with an `invoke` method, allowing for complex, multi-stage interventions. Code Example 4 uses `invoke` to implement activation patching - an intervention technique where neural network activations are replaced across a pair of inputs - which is a fundamental method for model interventions. Using NNsight's `invoke` contexts, we can access and then replace a hidden state between a pair of prompts.

```

1 edit_prompt = "The Colosseum is located in the city of"
2 base_prompt = "The Louvre is located in the city of"
3
4 layer = lm.model.layers[5]
5
6 with lm.trace() as tracer:
7     with tracer.invoke(source_prompt):
8         hidden_state = layer.output[0][:,6,:]
9
10    with tracer.invoke(base_prompt):
11        layer.output[0][:,5,:] = hidden_state
12        out = lm.output.logits.save()
13
14 print(lm.tokenizer.decode(out[-1,-1,:].argmax()))
15 >>> Rome

```

Code Example 4: Using `invoke` allows for precise control over the computation of individual prompts within a tracing context. In this example, token indices 5 & 6 correspond to last token of subject entities in the edit and the base prompt (i.e., *Colosseum* and *Louvre*). The edit prompt's subject representation is accessed at an early layer (layer 5) and inserted in place of the subject representation of the base prompt at the corresponding layer. This intervention changes the LM prediction for the base prompt from *Paris* to respond with *Rome* instead.

Prompts passed to different invokes are combined into a single batch for forward execution, so that multiple invokes only require a single forward pass. This design allows researchers to define interventions that can access and modify data across different prompts within the same tracing context. The intervention graph is still populated upon exiting the tracing context, with a single intervention graph built across all `invoke` contexts.

5.4 THE SESSION CONTEXT

The session context in NNsight extends functionality for scenarios involving multiple traces. Unlike standard trace contexts where values are destroyed after execution, session tracks and preserves these values across multiple traces. The values can then be used for interventions that require information from previous executions of the intervention graph.

The session context enables an environment for multiple forward passes on remote infrastructure. Sessions are particularly valuable when working with very large models, as it allows researchers to perform complex analyses and interventions without the need to transfer large amounts of intermediate data between passes.

Because the session context allows multiple forward and backward passes, it can be used for things like remote training and fine-tuning, including parameter-efficient fine-tuning (Lester et al., 2021), Low-Rank Adapters (Hu et al., 2021), and probing methods (Belinkov, 2022).

6 PERFORMANCE

In this section we compare the performance of NNsight with other libraries that enable interventions on model internals. To ensure a fair comparison, we focus on libraries that use PyTorch as the underlying deep learning framework. We find that NNsight achieves competitive time efficiency across a range of tasks.

Our performance comparison includes runtime measurements for activation patching and attribution patching across models with varying parameter counts and architectures. Specifically, we consider

GPT-2 (Radford et al., 2019), Gemma-7B (Team et al., 2024), and Llama3-70B (AI@Meta, 2024), and use a single batch with 32 examples. For activation patching, we focus on a single MLP layer, whereas for attribution patching, we consider all MLP layers. The tests were conducted on a server with eight NVIDIA A100-SXM4-80GB with CUDA version 12.4 and an Intel(R) Xeon(R) Platinum 8468 48-Core CPU.

Table 1 presents the runtime results. Overall, we find that all libraries achieve comparable performance across both activation patching and attribution patching. This suggests that the choice of library should be based on factors such as usability, feature set, and compatibility with existing workflows—rather than purely based on performance considerations.

Framework	Activation Patching			Attribution Patching		
	GPT-2 XL	Gemma-7B	Llama3-70B	GPT-2 XL	Gemma-7B	Llama3-70B
baukit	0.092 ± 0.001	0.414 ± 0.001	2.282 ± 0.022	0.196 ± 0.005	0.819 ± 0.029	5.074 ± 0.058
pyvene	0.096 ± 0.001	0.417 ± 0.001	2.272 ± 0.274	0.202 ± 0.018	0.825 ± 0.027	5.072 ± 0.068
TransformerLens	0.114 ± 0.011	—*	—*	0.222 ± 0.017	—*	—*
nnsight	0.068 ± 0.003	0.337 ± 0.014	2.360 ± 0.027	0.224 ± 0.015	0.896 ± 0.013	6.921 ± 0.053

Table 1: Runtime in seconds of different libraries for performing activation patching and attribution patching on models at different scales (GPT2-XL 1.5B, Gemma 7B, Llama3 70B). * TransformerLens currently has an issue with multi-GPU processing. We will update the results once this issue is fixed.

7 RELATED WORK

Research model hosting frameworks. The most similar previous works are Garcon (Elhage et al., 2021) and Petals (Borzunov et al., 2022). Garcon is a proprietary internal research system at Anthropic that supports remote inspection and customization of large models hosted on a remote cluster. Unlike the computation-graph approach of NNsight, Garcon operates by allowing researchers to hook models via arbitrary-code execution. As a result, co-tenancy is unsafe, so unlike the NDIF server which shares model instances between many users, Garcon requires each user to allocate their own model instance, which is computationally expensive. The Petals system has similar goals, but instead of distributing experiment code, it distributes foundation-model computation across user-contributed nodes in a BitTorrent-style swarm. Petals achieves co-tenancy by leaving researcher-defined computations on the user’s own system. Unlike Petals, NNsight can avoid costly model-internal data transfers by executing computation graphs on NDIF servers.

Several other solutions for sharing hosted model resources have been developed, including VLLM (Kwon et al., 2023), Huggingface TGI (Dehaene et al., 2024) and Nvidia TensorRT-LLM (Nvidia, 2024). These are systems for LLM inference acceleration that support large-scale multiuser model sharing. However, unlike NDIF, these systems only provide black-box API access to models, and do not permit model inspection or modification, which limits their utility for interpretability research.

Frameworks for model internals. Numerous efforts have been made to create robust tools for exploring and manipulating model internals. TransformerLens (Nanda & Bloom, 2022) is designed to facilitate the exploration of GPT-style decoder-only language models. It allows users to apply custom functions to outputs of specific model modules. Unlike NNsight which operates on arbitrary PyTorch networks, TransformerLens is limited to autoregressive transformers. Pyvene (Wu et al., 2024) supports configurable intervention schemes on PyTorch modules, decorating a PyTorch module with hooks that allow activations to be collected and overwritten. Pyvene operates at a higher level of abstraction, and can be configured as a layer over NNsight. Baukit (Bau, 2022), a spiritual predecessor to NNsight, provides a range of utilities which simplify tracing and editing activations. But unlike NNsight, it lacks an intermediate representation for user actions on models. Penzai (Johnson, 2024) is an open-source functional library which provides a modular system that allows for introspection, visualization, and manipulation of neural network computation graphs; Penzai works within the JAX framework, in contrast to NNsight which works with PyTorch models.

These frameworks are all designed to support *local* experiments, executed on compute resources controlled by the researcher conducting them. NNsight, however, is designed to support both local and remote experiments.

8 ECOSYSTEM

The NNsight project encourages community participation. Interested researchers can join the NDIF Discord for updates, feedback, and collaboration opportunities. We welcome open-source participation via the project `github` page. For more information, visit our website, which contains detailed documentation, tutorials, and links to NNsight’s GitHub repository and Discord server.

More information on NDIF can be found at <https://ndif.us>. Requests for early access to NDIF resources can be made through the Discord community. They are available to educational and research users with a U.S. affiliation after a short application. Other researchers with private GPU clusters may also deploy their own instance of NDIF, as the implementation is open-sourced with a permissive MIT license.

9 LIMITATIONS

NNsight and NDIF are limited in several areas:

Intervention graph optimization. The intervention graph can be optimized by removing unnecessary operations, fusing operations, and applying other optimizations that are difficult to do in the dynamic Python environment. Libraries like TorchScript (DeVito, 2022) and TorchFX incorporate many such optimizations out-of-the-box.

High-level abstractions. NNsight operates at a low level, using PyTorch operations within tracing contexts. This is a conscious design choice, because the tensor manipulation design choices in PyTorch are a familiar idiom going all the way back to APL (Iverson, 1962), minimizing user overhead to get started. However, packages like `pyvene` (Wu et al., 2024) or `TransformerLens` (Nanda & Bloom, 2022) provide abstractions which build functionality on top of PyTorch, and provide a common set of abstractions regardless of the underlying model’s implementation details.

Closed-source model support. NNsight cannot run closed-source, proprietary models like GPT-4 or Claude. However, the API is designed to be technically feasible for companies to support without giving up custody of their proprietary model parameters.

10 CONCLUSION

We introduce NNsight, an open-source Python library that provides access to the internals of foundation models, including those too large to analyze on most individual or academic hardware. By leveraging NDIF infrastructure, NNsight enables researchers to perform complex interventions and explore neural networks at a scale previously limited by computational and financial constraints. NNsight supports a range of research activities focussed on model interpretability, including probing, intervention, and optimization; it is designed to be intuitive, architecture-agnostic, and capable of both local and remote execution.

NNsight and NDIF provide tooling to run interpretability analyses in a standardized way and the ability to do so on (very) large models hosted remotely, respectively. Our hope is that this helps to democratize large model access and ultimately facilitate rapid progress on research into large generative models and their inner-workings.

11 ACKNOWLEDGEMENTS

The National Deep Inference Fabric and NNsight are supported by the U.S. National Science Foundation Award IIS-2408455. We are also grateful for the support of Open Philanthropy (ET, KP, SM, AS, NP, DB), Manifold Reagents (CR), and the Zuckerman Postdoctoral Fellowship (AM). We thank Brett Bode, William Gropp, Greg Bauer, and Volodymyr Kindratenko at NCSA for their

help working with DeltaAI, which provides the primary computing infrastructure for NDIF, and we thank Thea Shaheen for invaluable assistance with infrastructure for the project at Northeastern. We also thank Callum McDougall for developing the NNsight tutorial in the ARENA 3.0 materials and Dmitrii Troitskii for running outreach and tutorial efforts. We thank Clément Dumas and Gonçalo Paulo for valuable feedback as early research adopters, Zhengxuan Wu for implementing pyvene on NNsight, and Zhongbo Zhu for valuable advice on serving infrastructure. Finally, we are grateful for the ongoing feedback and engagement of our community of users on Discord.

REFERENCES

- Martín Abadi, Paul Barham, Jianmin Chen, Zhifeng Chen, Andy Davis, Jeffrey Dean, Matthieu Devin, Sanjay Ghemawat, Geoffrey Irving, Michael Isard, et al. TensorFlow: a system for Large-Scale machine learning. In *12th USENIX symposium on operating systems design and implementation (OSDI 16)*, pp. 265–283, 2016.
- AI@Meta. Llama 3 model card, 2024. URL https://github.com/meta-llama/llama3/blob/main/MODEL_CARD.md.
- Rami Al-Rfou, Guillaume Alain, Amjad Almahairi, Christof Angermüller, Dzmitry Bahdanau, Nicolas Ballas, Frédéric Bastien, Justin Bayer, Anatoly Belikov, Alexander Belopolsky, Yoshua Bengio, Arnaud Bergeron, James Bergstra, Valentin Bisson, Josh Blecher Snyder, Nicolas Bouchard, Nicolas Boulanger-Lewandowski, Xavier Bouthillier, Alexandre de Brébisson, Olivier Breuleux, Pierre Luc Carrier, Kyunghyun Cho, Jan Chorowski, Paul Francis Christiano, Tim Cooijmans, Marc-Alexandre Côté, Myriam Côté, Aaron C. Courville, Yann Dauphin, Olivier Delalleau, Julien Demouth, Guillaume Desjardins, Sander Dieleman, Laurent Dinh, Mélanie Ducoffe, Vincent Dumoulin, Samira Ebrahimi Kahou, D. Erhan, Ziye Fan, Orhan Firat, Mathieu Germain, Xavier Glorot, Ian J. Goodfellow, M. Graham, Çağlar Gülçehre, Philippe Hamel, Iban Harlouchet, Jean-Philippe Heng, Balázs Hidasi, Sina Honari, Arjun Jain, Sébastien Jean, Kai Jia, Mikhail Korobov, Vivek Kulkarni, Alex Lamb, Pascal Lamblin, Eric Larsen, César Laurent, Sea Sun Lee, Simon Lefrançois, Simon Lemieux, Nicholas Léonard, Zhouhan Lin, Jesse A. Livezey, Cory Lorenz, Jeremiah Lowin, Qianli Ma, Pierre-Antoine Manzagol, Olivier Mastropietro, Robert T. McGibbon, Roland Memisevic, Bart van Merriënboer, Vincent Michalski, Mehdi Mirza, Alberto Orlandi, Christopher Joseph Pal, Razvan Pascanu, Mohammad Pezeshki, Colin Raffel, Daniel Renshaw, Matthew Rocklin, Adriana Romero, Markus Roth, Peter Sadowski, John Salvatier, François Savard, Jan Schlüter, John Schulman, Gabriel Schwartz, Iulian Serban, Dmitriy Serdyuk, Samira Shabanian, Étienne Simon, Sigurd Spieckermann, S. Ramana Subramanyam, Jakub Sygnowski, Jérémie Tanguay, Gijs van Tulder, Joseph P. Turian, Sebastian Urban, Pascal Vincent, Francesco Visin, Harm de Vries, David Warde-Farley, Dustin J. Webb, Matthew Willson, Kelvin Xu, Lijun Xue, Li Yao, Saizheng Zhang, and Ying Zhang. Theano: A python framework for fast computation of mathematical expressions. *ArXiv*, abs/1605.02688, 2016. URL <https://api.semanticscholar.org/CorpusID:8993325>.
- Reza Yazdani Aminabadi, Samyam Rajbhandari, Minjia Zhang, Ammar Ahmad Awan, Cheng Li, Du Li, Elton Zheng, Jeff Rasley, Shaden Smith, Olatunji Ruwase, and Yuxiong He. Deepspeed-inference: Enabling efficient inference of transformer models at unprecedented scale. *SC22: International Conference for High Performance Computing, Networking, Storage and Analysis*, pp. 1–15, 2022. URL <https://api.semanticscholar.org/CorpusID:250243681>.
- Marco Ancona, Enea Ceolini, Cengiz Öztireli, and Markus Gross. Gradient-based attribution methods. *Explainable AI: Interpreting, explaining and visualizing deep learning*, pp. 169–191, 2019.
- Anthropic. The claude 3 model family: Opus, sonnet, haiku, 2024. URL <https://api.semanticscholar.org/CorpusID:268232499>.
- Jasmijn Bastings, Sebastian Ebert, Polina Zablotskaia, Anders Sandholm, and Katja Filippova. “will you find these shortcuts?” a protocol for evaluating the faithfulness of input salience methods for text classification. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang (eds.), *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pp. 976–991, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.emnlp-main.64. URL <https://aclanthology.org/2022.emnlp-main.64>.
- David Bau. Baukit, 2022. URL <https://github.com/davidbau/baukit>.

- Yonatan Belinkov. Probing classifiers: Promises, shortcomings, and advances. *Computational Linguistics*, 48(1):207–219, 2022.
- Sid Black, Leo Gao, Phil Wang, Connor Leahy, and Stella Biderman. Gpt-neo: Large scale autoregressive language modeling with mesh-tensorflow, 2021. URL <https://api.semanticscholar.org/CorpusID:245758737>.
- Alexander Borzunov, Dmitry Baranchuk, Tim Dettmers, Max Ryabinin, Younes Belkada, Artem Chumachenko, Pavel Samygin, and Colin Raffel. Petals: Collaborative inference and fine-tuning of large models. *ArXiv*, abs/2209.01188, 2022. URL <https://api.semanticscholar.org/CorpusID:252070588>.
- Léon Bottou and Patrick Gallinari. A framework for the cooperation of learning algorithms. *Advances in neural information processing systems*, 3, 1990.
- Léon Bottou and Yann Le Cun. Sn: A simulator for connectionist models. In *Proceedings of NeuroNimes 88*, pp. 371–382, Nimes, France, 1988. URL <http://leon.bottou.org/papers/bottou-lecun-88>.
- James Bradbury, Roy Frostig, Peter Hawkins, Matthew James Johnson, Chris Leary, Dougal Maclaurin, George Necula, Adam Paszke, Jake VanderPlas, Skye Wanderman-Milne, and Qiao Zhang. JAX: composable transformations of Python+NumPy programs, 2018. URL <http://github.com/google/jax>.
- Jannik Brinkmann, Abhay Sheshadri, Victor Levoso, Paul Swoboda, and Christian Bartelt. A mechanistic analysis of a transformer trained on a symbolic multi-step reasoning task, 2024.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeff Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. *ArXiv*, abs/2005.14165, 2020. URL <https://api.semanticscholar.org/CorpusID:218971783>.
- Benjamin S Bucknall and Robert F Trager. Structured access for third-party research on frontier ai models: Investigating researcher’s model access requirements, 2023. URL https://cdn.governance.ai/Structured_Access_for_Third-Party_Research.pdf.
- Stephen Casper, Carson Ezell, Charlotte Siegmann, Noam Kolt, Taylor Lynn Curtis, Benjamin Bucknall, Andreas Haupt, Kevin Wei, Jérémy Scheurer, Marius Hobbhahn, et al. Black-box access is insufficient for rigorous ai audits. In *The 2024 ACM Conference on Fairness, Accountability, and Transparency*, pp. 2254–2272, 2024.
- Olivier Dehaene, Nicolas Patry, David Richard Holtz, Daniël de Kok, and contributors. HuggingFace text generation interface. URL <https://github.com/huggingface/text-generation-inference>, 2024.
- Zachary DeVito. Torchscript: Optimized execution of pytorch programs. *Retrieved January*, 2022.
- Nelson Elhage, Neel Nanda, Catherine Olsson, Tom Henighan, Nicholas Joseph, Ben Mann, Amanda Askell, Yuntao Bai, Anna Chen, Tom Conerly, Nova DasSarma, Dawn Drain, Deep Ganguli, Zac Hatfield-Dodds, Danny Hernandez, Andy Jones, Jackson Kernion, Liane Lovitt, Kamal Ndousse, Dario Amodei, Tom Brown, Jack Clark, Jared Kaplan, Sam McCandlish, and Chris Olah. Garcon. URL <https://transformer-circuits.pub/2021/garcon/index.html>, 2021.
- Leo Gao, Tom Dupré la Tour, Henk Tillman, Gabriel Goh, Rajan Troll, Alec Radford, Ilya Sutskever, Jan Leike, and Jeffrey Wu. Scaling and evaluating sparse autoencoders. *arXiv preprint arXiv:2406.04093*, 2024.

Gemini Team, Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy P. Lillcrap, Jean-Baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, Ioannis Antonoglou, Rohan Anil, Sebastian Borgeaud, Andrew M. Dai, Katie Millican, Ethan Dyer, Mia Glaese, Thibault Sottiaux, Benjamin Lee, Fabio Viola, Malcolm Reynolds, Yuanzhong Xu, James Molloy, Jilin Chen, Michael Isard, Paul Barham, Tom Hennigan, Ross McIlroy, Melvin Johnson, Johan Schalkwyk, Eli Collins, Eliza Rutherford, Erica Moreira, Kareem W. Ayoub, Megha Goel, Clemens Meyer, Gregory Thornto, Zhen Yang, Henryk Michalewski, Zaheer Abbas, Nathan Schucher, Ankesh Anand, Richard Ives, James Keeling, Karel Lenc, Salem Haykal, Siamak Shakeri, Pranav Shyam, Aakanksha Chowdhery, Roman Ring, Stephen Spencer, Eren Sezener, Luke Vilnis, Oscar Chang, Nobuyuki Morioka, George Tucker, Ce Zheng, Oliver Woodman, Nithya Attaluri, Tomás Kociský, Evgenii Eltyshev, Xi Chen, Timothy Chung, Vittorio Selo, Siddhartha Brahma, Petko Georgiev, Ambrose Slone, Zhenkai Zhu, James Lottes, Siyuan Qiao, Ben Caine, Sebastian Riedel, Alex Tomala, Martin Chadwick, J Christopher Love, Peter Choy, Sid Mittal, Neil Houlsby, Yunhao Tang, Matthew Lamm, Libin Bai, Qiao Zhang, Luheng He, Yong Cheng, Peter Humphreys, Yujia Li, Sergey Brin, Albin Cassirer, Ying-Qi Miao, Lukás Zilka, Taylor Tobin, Kelvin Xu, Lev Proleev, Daniel Sohn, Alberto Magni, Lisa Anne Hendricks, Isabel Gao, Santiago Ontan'on, Oskar Bunyan, Nathan Byrd, Abhanshu Sharma, Biao Zhang, Mario Pinto, Rishika Sinha, Harsh Mehta, Dawei Jia, Sergi Caelles, Albert Webson, Alex Morris, Becca Roelofs, Yifan Ding, Robin Strudel, Xuehan Xiong, Marvin Ritter, Mostafa Dehghani, Rahma Chaabouni, Abhijit Karmarkar, Guangda Lai, Fabian Mentzer, Bibo Xu, YaGuang Li, Yujing Zhang, Tom Le Paine, Alex Goldin, Behnam Neyshabur, Kate Baumli, Anselm Levskaya, Michael Laskin, Wenhao Jia, Jack W. Rae, Kefan Xiao, Antoine He, Skye Giordano, Lakshman Yagati, Jean-Baptiste Lespiau, Paul Natsev, Sanjay Ganapathy, Fangyu Liu, Danilo Martins, Nanxin Chen, Yunhan Xu, Megan Barnes, Rhys May, Arpi Vezer, Junhyuk Oh, Ken Franko, Sophie Bridgers, Ruizhe Zhao, Boxi Wu, Basil Mustafa, Sean Sechrist, Emilio Parisotto, Thanumalayan Sankaranarayana Pillai, Chris Larkin, Chenjie Gu, Christina Sorokin, Maxim Krikun, Alexey Guseynov, Jessica Landon, Romina Datta, Alexander Pritzel, Phoebe Thacker, Fan Yang, Kevin Hui, A.E. Hauth, Chih-Kuan Yeh, David Barker, Justin Mao-Jones, Sophia Austin, Hannah Sheahan, Parker Schuh, James Svensson, Rohan Jain, Vinay Venkatesh Ramasesh, Anton Briukhov, Da-Woon Chung, Tamara von Glehn, Christina Butterfield, Priya Jhakra, Matt Wiethoff, Justin Frye, Jordan Grimstad, Beer Changpinyo, Charline Le Lan, Anna Bortsova, Yonghui Wu, Paul Voigtlaender, Tara N. Sainath, Charlotte Smith, Will Hawkins, Kris Cao, James Besley, Srivatsan Srinivasan, Mark Omernick, Colin Gaffney, Gabriela de Castro Surita, Ryan Burnell, Bogdan Damoc, Junwhan Ahn, Andrew Brock, Mantas Pajarskas, Anastasia Petrushkina, Seb Noury, Lorenzo Blanco, Kevin Swersky, Arun Ahuja, Thi Avrahami, Vedant Misra, Raoul de Liedekerke, Mariko Iinuma, Alex Polozov, Sarah York, George van den Driessche, Paul Michel, Justin Chiu, Rory Blevins, Zach Gleicher, Adrià Recasens, Alban Rustemi, Elena Gribovskaya, Aurko Roy, Wiktor Gworek, S'ebastien M. R. Arnold, Lisa Lee, James Lee-Thorp, Marcello Maggioni, Demis Hassabis, Koray Kavukcuoglu, Jeffrey Dean, and Oriol Vinyals. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *ArXiv*, abs/2403.05530, 2024. URL <https://api.semanticscholar.org/CorpusID:268297180>.

Mor Geva, Jasmijn Bastings, Katja Filippova, and Amir Globerson. Dissecting recall of factual associations in auto-regressive language models. *arXiv preprint arXiv:2304.14767*, 2023.

Albert Gu and Tri Dao. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv preprint arXiv:2312.00752*, 2023.

Michael Hanna, Ollie Liu, and Alexandre Variengien. How does gpt-2 compute greater-than?: Interpreting mathematical abilities in a pre-trained language model, 2023. URL <https://arxiv.org/abs/2305.00586>.

Evan Hernandez, Arnab Sen Sharma, Tal Haklay, Kevin Meng, Martin Wattenberg, Jacob Andreas, Yonatan Belinkov, and David Bau. Linearity of relation decoding in transformer language models. In *Proceedings of the 2024 International Conference on Learning Representations*, 2024.

J. Edward Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *ArXiv*, abs/2106.09685, 2021. URL <https://api.semanticscholar.org/CorpusID:235458009>.

- Kenneth E Iverson. A programming language. In *Proceedings of the May 1-3, 1962, spring joint computer conference*, pp. 345–351, 1962.
- Albert Qiaochu Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L’elio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. Mistral 7b. *ArXiv*, abs/2310.06825, 2023. URL <https://api.semanticscholar.org/CorpusID:263830494>.
- Daniel D. Johnson. Penzai: A jax research toolkit for building, editing, and visualizing neural networks., 2024. URL <https://github.com/google-deepmind/penzai>.
- János Kramár, Tom Lieberum, Rohin Shah, and Neel Nanda. Atp*: An efficient and scalable method for localizing llm behaviour to components. *arXiv preprint arXiv:2403.00745*, 2024.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*, 2023.
- Brian Lester, Rami Al-Rfou, and Noah Constant. The power of scale for parameter-efficient prompt tuning. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih (eds.), *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 3045–3059, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.243. URL <https://aclanthology.org/2021.emnlp-main.243>.
- Maximilian Li, Xander Davies, and Max Nadeau. Circuit breaking: Removing model behaviors with targeted ablation. *Computing Research Repository*, arXiv:2309.05973, 2024.
- Samuel Marks, Can Rager, Eric J Michaud, Yonatan Belinkov, David Bau, and Aaron Mueller. Sparse feature circuits: Discovering and editing interpretable causal graphs in language models. *arXiv preprint arXiv:2403.19647*, 2024a.
- Samuel Marks, Can Rager, Eric J. Michaud, Yonatan Belinkov, David Bau, and Aaron Mueller. Sparse feature circuits: Discovering and editing interpretable causal graphs in language models, 2024b. URL <https://arxiv.org/abs/2403.19647>.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in gpt. In *Neural Information Processing Systems*, 2022. URL <https://api.semanticscholar.org/CorpusID:255825985>.
- Neel Nanda and Joseph Bloom. Transformerlens. <https://github.com/TransformerLensOrg/TransformerLens>, 2022.
- Nvidia. TensorRT-LLM. URL <https://github.com/NVIDIA/TensorRT-LLM>, 2024.
- OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mo Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Benjamin Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Sim’on Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Raphael Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter

- Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Lukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Hendrik Kirchner, Jamie Ryan Kiros, Matthew Knight, Daniel Kokotajlo, Lukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kopic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Adeola Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel P. Mossing, Tong Mu, Mira Murati, Oleg Murk, David M’ely, Ashvin Nair, Reiichiro Nakano, Rajeep Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Ouyang Long, Cullen O’Keefe, Jakub W. Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alexandre Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Pondé de Oliveira Pinto, Michael Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario D. Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin D. Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas A. Tezak, Madeleine Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cer’on Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll L. Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. URL <https://api.semanticscholar.org/CorpusID:257532815>.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems*, 32, 2019.
- Roma Patel and Ellie Pavlick. Mapping language models to grounded conceptual spaces. In *International Conference on Learning Representations*, 2022. URL <https://api.semanticscholar.org/CorpusID:251647156>.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI Blog*, 2019.
- Jack W. Rae, Sebastian Borgeaud, Trevor Cai, Katie Millican, Jordan Hoffmann, Francis Song, John Aslanides, Sarah Henderson, Roman Ring, Susannah Young, Eliza Rutherford, Tom Henigan, Jacob Menick, Albin Cassirer, Richard Powell, George van den Driessche, Lisa Anne Hendricks, Maribeth Rauh, Po-Sen Huang, Amelia Glaese, Johannes Welbl, Sumanth Dathathri, Saffron Huang, Jonathan Uesato, John F. J. Mellor, Irina Higgins, Antonia Creswell, Nathan McAleese, Amy Wu, Erich Elsen, Siddhant M. Jayakumar, Elena Buchatskaya, David Budden, Esme Sutherland, Karen Simonyan, Michela Paganini, L. Sifre, Lena Martens, Xiang Lorraine Li, Adhiguna Kuncoro, Aida Nematzadeh, Elena Gribovskaya, Domenic Donato, Angeliki Lazaridou, Arthur Mensch, Jean-Baptiste Lespiau, Maria Tsimpoukelli, N. K. Grigorev, Doug Fritz, Thibault Sottiaux, Mantas Pajarskas, Tobias Pohlen, Zhitao Gong, Daniel Toyama, Cyprien de Masson d’Autume, Yujia Li, Tayfun Terzi, Vladimir Mikulik, Igor Babuschkin, Aidan Clark, Diego de Las Casas, Aurelia Guy, Chris Jones, James Bradbury, Matthew G. Johnson, Blake A. Hechtman, Laura Weidinger, Iason Gabriel, William S. Isaac, Edward Lockhart, Simon Osindero, Laura Rimell, Chris Dyer, Oriol Vinyals, Kareem W. Ayoub, Jeff Stanway, L. L.

Bennett, Demis Hassabis, Koray Kavukcuoglu, and Geoffrey Irving. Scaling language models: Methods, analysis & insights from training gopher. *ArXiv*, abs/2112.11446, 2021. URL <https://api.semanticscholar.org/CorpusID:245353475>.

Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagnère, Alexandra Sasha Luccioni, François Yvon, Matthias Gallé, Jonathan Tow, Alexander M. Rush, Stella Biderman, Albert Webson, Pawan Sasanka Ammanamanchi, Thomas Wang, Benoît Sagot, Niklas Muennighoff, Albert Villanova del Moral, Olatunji Ruwase, Rachel Bawden, Stas Bekman, Angelina McMillan-Major, Iz Beltagy, Huu Nguyen, Lucile Saulnier, Samson Tan, Pedro Ortiz Suarez, Victor Sanh, Hugo Laurençon, Yacine Jernite, Julien Launay, Margaret Mitchell, Colin Raffel, Aaron Gokaslan, Adi Simhi, Aitor Soroa Etxabe, Alham Fikri Aji, Amit Alfassy, Anna Rogers, Ariel Kreisberg Nitzav, Canwen Xu, Chenghao Mou, Chris C. Emezue, Christopher Klamm, Colin Leong, Daniel Alexander van Strien, David Ifeoluwa Adelani, Dragomir R. Radev, Eduardo Gonz’alez Ponferrada, Efrat Levkovizh, Ethan Kim, Eyal Natan, Francesco De Toni, Gérard Dupont, Germán Kruszewski, Giada Pistilli, Hady ElSahar, Hamza Benyamina, Hieu Trung Tran, Ian Yu, Idris Abdulummin, Isaac Johnson, Itziar Gonzalez-Dios, Javier de la Rosa, Jenny Chim, Jesse Dodge, Jian Zhu, Jonathan Chang, Jorg Frohberg, Josephine Tobing, Joydeep Bhattacharjee, Khalid Almubarak, Kimbo Chen, Kyle Lo, Leandro von Werra, Leon Weber, Long Phan, Loubna Ben Allal, Ludovic Tanguy, Manan Dey, Manuel Romero Muñoz, Maraim Masoud, María Grandury, Mario vSavsko, Max Huang, Maximin Coavoux, Mayank Singh, Mike Tian-Jian Jiang, Minh Chien Vu, Mohammad A. Jauhar, Mustafa Ghaleb, Nishant Subramani, Nora Kassner, Nurulaqilla Khamis, Olivier Nguyen, Omar Espejel, Ona de Gibert, Paulo Villegas, Peter Henderson, Pierre Colombo, Priscilla Amuok, Quentin Lhoest, Rheza Harliman, Rishi Bommasani, Roberto López, Rui Ribeiro, Salomey Osei, Sampo Pyysalo, Sebastian Nagel, Shamik Bose, Shamsuddeen Hassan Muhammad, Shanya Sharma, S. Longpre, Somaieh Nikpoor, S. Silberberg, Suhas Pai, Sydney Zink, Tiago Timponi Torrent, Timo Schick, Tristan Thrush, Valentin Danchev, Vassilina Nikoulina, Veronika Laippala, Violette Lepercq, Vrinda Prabhu, Zaid Alyafeai, Zeerak Talat, Arun Raja, Benjamin Heinzerling, Chenglei Si, Elizabeth Salesky, Sabrina J. Mielke, Wilson Y. Lee, Abheesht Sharma, Andrea Santilli, Antoine Chaffin, Arnaud Stiegler, Debajyoti Datta, Eliza Szczechla, Gunjan Chhablani, Han Wang, Harshit Pandey, Hendrik Strobelt, Jason Alan Fries, Jos Rozen, Leo Gao, Lintang Sutawika, M Saiful Bari, Maged S. Al-Shaibani, Matteo Manica, Nihal V. Nayak, Ryan Teehan, Samuel Albanie, Sheng Shen, Srulik Ben-David, Stephen H. Bach, Taewoon Kim, Tali Bers, Thibault Févry, Trishala Neeraj, Urmish Thakker, Vikas Raunak, Xiang Tang, Zheng-Xin Yong, Zhiqing Sun, Shaked Brody, Y Uri, Hadar Tojarieh, Adam Roberts, Hyung Won Chung, Jaesung Tae, Jason Phang, Ofir Press, Conglong Li, Deepak Narayanan, Hatim Bourfoune, Jared Casper, Jeff Rasley, Max Ryabinin, Mayank Mishra, Minjia Zhang, Mohammad Shoeybi, Myriam Peyrounette, Nicolas Patry, Nouamane Tazi, Omar Sanseviero, Patrick von Platen, Pierre Cornette, Pierre Franccois Lavallée, Rémi Lacroix, Samyam Rajbhandari, Sanchit Gandhi, Shaden Smith, Stéphane Requena, Suraj Patil, Tim Dettmers, Ahmed Baruwa, Amanpreet Singh, Anastasia Cheveleva, Anne-Laure Ligozat, Arjun Subramonian, Aur’elie N’ev’ool, Charles Lovering, Daniel H Garrette, Deepak R. Tunuguntla, Ehud Reiter, Ekaterina Taktasheva, Ekaterina Voloshina, Eli Bogdanov, Genta Indra Winata, Hailey Schoelkopf, Jan-Christoph Kalo, Jekaterina Novikova, Jessica Zosa Forde, Xiangru Tang, Jungo Kasai, Ken Kawamura, Liam Hazan, Marine Carpuat, Miruna Clinciu, Najoung Kim, Newton Cheng, Oleg Serikov, Omer Antverg, Oskar van der Wal, Rui Zhang, Ruochoen Zhang, Sebastian Gehrmann, Shachar Mirkin, S. Osher Pais, Tatiana Shavrina, Thomas Scialom, Tian Yun, Tomasz Limisiewicz, Verena Rieser, Vitaly Protasov, Vladislav Mikhailov, Yada Pruksachatkun, Yonatan Belinkov, Zachary Bamberger, Zdenek Kasner, Zdeněk Kasner, Amanda Pestana, Amir Feizpour, Ammar Khan, Amy Faranak, Ananda Santa Rosa Santos, Anthony Hevia, Antigona Undreaaj, Arash Aghagol, Arezoo Abdollahi, Aycha Tammour, Azadeh HajiHosseini, Bahareh Behroozi, Benjamin Ayoade Ajibade, Bharat Kumar Saxena, Carlos Muñoz Ferrandis, Danish Contractor, David M. Lansky, Davis David, Douwe Kiela, Duong Anh Nguyen, Edward Tan, Emi Baylor, Ezinwanne Ozoani, Fatim Tahirah Mirza, Frankline Ononiwu, Habib Rezanejad, H.A. Jones, Indrani Bhattacharya, Irene Solaiman, Irina Sedenko, Isar Nejadgholi, Jan Passmore, Joshua Seltzer, Julio Bonis Sanz, Karen Fort, Livia Dutra, Mairon Samagaio, Maraim Elhadri, Margot Mieskes, Marissa Gerchick, Martha Akinlolu, Michael McKenna, Mike Qiu, Muhammed Ghauri, Mykola Burynok, Nafis Abrar, Nazneen Rajani, Nour Elkott, Nourhan Fahmy, Olanrewaju Samuel, Ran An, R. P. Kromann, Ryan Hao, Samira Alizadeh, Sarmad Shubber, Silas L. Wang, Sourav Roy, Sylvain Viguier, Thanh-Cong Le, Tobi Oyejade, Trieu Nguyen Hai Le, Yoyo Yang, Zach

- Nguyen, Abhinav Ramesh Kashyap, Alfredo Palasciano, Alison Callahan, Anima Shukla, Antonio Miranda-Escalada, Ayush Kumar Singh, Benjamin Beilharz, Bo Wang, Caio Matheus Fonseca de Brito, Chenxi Zhou, Chirag Jain, Chuxin Xu, Clémentine Fourier, Daniel Le'on Perin'an, Daniel Molano, Dian Yu, Enrique Manjavacas, Fabio Barth, Florian Fuhrmann, Gabriel Altay, Giyaseddin Bayrak, Gully Burns, Helena U. Vrabec, Iman I.B. Bello, Isha Dash, Ji Soo Kang, John Giorgi, Jonas Golde, Jose David Posada, Karthi Sivaraman, Lokesh Bulchandani, Lu Liu, Luisa Shinzato, Madeleine Hahn de Bykhovetz, Maiko Takeuchi, Marc Pàmies, María Andrea Castillo, Marianna Nezhurina, Mario Sanger, Matthias Samwald, Michael Cullan, Michael Weinberg, M Wolf, Mina Mihaljcic, Minna Liu, Moritz Freidank, Myungsun Kang, Natasha Seelam, Nathan Dahlberg, Nicholas Michio Broad, Nikolaus Muellner, Pascale Fung, Patricia Haller, R. Chandrasekhar, Renata Eisenberg, Robert Martin, Rodrigo Canalli, Rosaline Su, Ruisi Su, Samuel Cahyawijaya, Samuele Garda, Shlok S Deshmukh, Shubhanshu Mishra, Sid Kiblawi, Simon Ott, Sinee Sang-aaroonsiri, Srishti Kumar, Stefan Schweter, Sushil Pratap Bharati, Tanmay Laud, Théo Gigant, Tomoya Kainuma, Wojciech Kusa, Yanis Labrak, Yashasvi Bajaj, Y. Venkatraman, Yifan Xu, Ying Xu, Yu Xu, Zhee Xao Tan, Zhongli Xie, Zifan Ye, Mathilde Bras, Younes Belkada, and Thomas Wolf. Bloom: A 176b-parameter open-access multilingual language model. *ArXiv*, abs/2211.05100, 2022. URL <https://api.semanticscholar.org/CorpusID:253420279>.
- Arnab Sen Sharma, David Atkinson, and David Bau. Locating and editing factual associations in mamba. *ArXiv*, abs/2404.03646, 2024. URL <https://api.semanticscholar.org/CorpusID:268889738>.
- Toby Shevlane. Structured access: an emerging paradigm for safe ai deployment, 2022. URL <https://arxiv.org/abs/2201.05159>.
- Mukund Sundararajan, Ankur Taly, and Qiqi Yan. Axiomatic attribution for deep networks. In Doina Precup and Yee Whye Teh (eds.), *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, pp. 3319–3328. PMLR, 06–11 Aug 2017. URL <https://proceedings.mlr.press/v70/sundararajan17a.html>.
- Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, Pouya Tafti, Léonard Hussenot, Pier Giuseppe Sessa, Aakanksha Chowdhery, Adam Roberts, Aditya Barua, Alex Botev, Alex Castro-Ros, Ambrose Slone, Amélie Héliou, Andrea Tacchetti, Anna Bulanova, Antonia Paterson, Beth Tsai, Bobak Shahriari, Charline Le Lan, Christopher A. Choquette-Choo, Clément Crepy, Daniel Cer, Daphne Ippolito, David Reid, Elena Buchatskaya, Eric Ni, Eric Noland, Geng Yan, George Tucker, George-Christian Muraru, Grigory Rozhdestvenskiy, Henryk Michalewski, Ian Tenney, Ivan Grishchenko, Jacob Austin, James Keeling, Jane Labanowski, Jean-Baptiste Lespiau, Jeff Stanway, Jenny Brennan, Jeremy Chen, Johan Ferret, Justin Chiu, Justin Mao-Jones, Katherine Lee, Kathy Yu, Katie Millican, Lars Lowe Sjoesund, Lisa Lee, Lucas Dixon, Machel Reid, Maciej Mikula, Mateo Wirth, Michael Sharman, Nikolai Chinaev, Nithum Thain, Olivier Bachem, Oscar Chang, Oscar Wahltinez, Paige Bailey, Paul Michel, Petko Yotov, Rahma Chaabouni, Ramona Comanescu, Reena Jana, Rohan Anil, Ross McIlroy, Ruiho Liu, Ryan Mullins, Samuel L Smith, Sebastian Borgeaud, Sertan Girgin, Sholto Douglas, Shree Pandya, Siamak Shakeri, Soham De, Ted Klimentko, Tom Hennigan, Vlad Feinberg, Wojciech Stokowiec, Yu hui Chen, Zafarali Ahmed, Zhitao Gong, Tris Warkentin, Ludovic Peran, Minh Giang, Clément Farabet, Oriol Vinyals, Jeff Dean, Koray Kavukcuoglu, Demis Hassabis, Zoubin Ghahramani, Douglas Eck, Joelle Barral, Fernando Pereira, Eli Collins, Armand Joulin, Noah Fiedel, Evan Senter, Alek Andreev, and Kathleen Kenealy. Gemma: Open models based on gemini research and technology, 2024. URL <https://arxiv.org/abs/2403.08295>.
- Adly Templeton, Tom Conerly, Jonathan Marcus, Jack Lindsey, Trenton Bricken, Brian Chen, Adam Pearce, Craig Citro, Emmanuel Ameisen, Andy Jones, Hoagy Cunningham, Nicholas L Turner, Callum McDougall, Monte MacDiarmid, C. Daniel Freeman, Theodore R. Sumers, Edward Rees, Joshua Batson, Adam Jermyn, Shan Carter, Chris Olah, and Tom Henighan. Scaling monosemanticity: Extracting interpretable features from claude 3 sonnet. *Transformer Circuits Thread*, 2024. URL <https://transformer-circuits.pub/2024/scaling-monosemanticity/index.html>.
- Hugo Touvron, Louis Martin, Kevin R. Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Daniel M. Bikel, Lukas Blecher, Cristian Cantón Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes,

- Jeremy Fu, Wenxin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony S. Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel M. Kloumann, A. V. Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, R. Subramanian, Xia Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zhengxu Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models. *ArXiv*, abs/2307.09288, 2023. URL <https://api.semanticscholar.org/CorpusID:259950998>.
- Jesse Vig, Sebastian Gehrmann, Yonatan Belinkov, Sharon Qian, Daniel Nevo, Yaron Singer, and Stuart Shieber. Investigating gender bias in language models using causal mediation analysis. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 12388–12401. Curran Associates, Inc., 2020. URL https://proceedings.neurips.cc/paper_files/paper/2020/file/92650b2e92217715fe312e6fa7b90d82-Paper.pdf.
- Kevin Wang, Alexandre Variengien, Arthur Conmy, Buck Shlegeris, and Jacob Steinhardt. Interpretability in the wild: a circuit for indirect object identification in gpt-2 small, 2022. URL <https://arxiv.org/abs/2211.00593>.
- Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed Huai hsin Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. Emergent abilities of large language models. *ArXiv*, abs/2206.07682, 2022. URL <https://api.semanticscholar.org/CorpusID:249674500>.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. Transformers: State-of-the-art natural language processing. In Qun Liu and David Schlangen (eds.), *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 38–45, Online, October 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-demos.6. URL <https://aclanthology.org/2020.emnlp-demos.6>.
- Zhengxuan Wu, Atticus Geiger, Thomas Icard, Christopher Potts, and Noah Goodman. Interpretability at scale: Identifying causal mechanisms in alpaca. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine (eds.), *Advances in Neural Information Processing Systems*, volume 36, pp. 78205–78226. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/f6a8b109d4d4fd64c75e94aaf85d9697-Paper-Conference.pdf.
- Zhengxuan Wu, Atticus Geiger, Aryaman Arora, Jing Huang, Zheng Wang, Noah D. Goodman, Christopher D. Manning, and Christopher Potts. pyvene: A library for understanding and improving pytorch models via interventions. *ArXiv*, abs/2403.07809, 2024. URL <https://api.semanticscholar.org/CorpusID:268363532>.