

Shapley Value-based Contrastive Alignment for Multimodal Information Extraction

Wen Luo

State Key Laboratory of Multimedia Information
Processing
School of Computer Science
Peking University
Beijing, China
llvvvv22222@gmail.com

Shen Tianshu

Wangxuan Institute of Computer Technology
Peking University
Beijing, China
shents@stu.pku.edu.cn

Yu Xia

State Key Laboratory of Multimedia Information
Processing
School of Computer Science
Peking University
Beijing, China
yuxia@pku.edu.cn

Sujian Li*

School of Computer Science
Peking University
Beijing, China
lisujian@pku.edu.cn

Abstract

The rise of social media and the exponential growth of multimodal communication necessitates advanced techniques for Multimodal Information Extraction (MIE). However, existing methodologies primarily rely on direct Image-Text interactions, a paradigm that often faces significant challenges due to semantic and modality gaps between images and text. In this paper, we introduce a new paradigm of Image-Context-Text interaction, where large multimodal models (LMMs) are utilized to generate descriptive textual context to bridge these gaps. In line with this paradigm, we propose a novel Shapley Value-based Contrastive Alignment (Shap-CA) method, which aligns both context-text and context-image pairs. Shap-CA initially applies the Shapley value concept from cooperative game theory to assess the individual contribution of each element in the set of contexts, texts and images towards total semantic and modality overlaps. Following this quantitative evaluation, a contrastive learning strategy is employed to enhance the interactive contribution within context-text/image pairs, while minimizing the influence across these pairs. Furthermore, we design an adaptive fusion module for selective cross-modal fusion. Extensive experiments across four MIE datasets demonstrate that our method significantly outperforms existing state-of-the-art methods.

CCS Concepts

• **Computing methodologies** → **Information extraction.**

*Corresponding author.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

MM '24, October 28–November 1, 2024, Melbourne, VIC, Australia

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 979-8-4007-0686-8/24/10

<https://doi.org/10.1145/3664647.3681367>

Keywords

multimodal information extraction, multimodal alignment, contrastive learning

ACM Reference Format:

Wen Luo, Yu Xia, Shen Tianshu, and Sujian Li. 2024. Shapley Value-based Contrastive Alignment for Multimodal Information Extraction. In *Proceedings of the 32nd ACM International Conference on Multimedia (MM '24)*, October 28–November 1, 2024, Melbourne, VIC, Australia. ACM, New York, NY, USA, 10 pages. <https://doi.org/10.1145/3664647.3681367>

1 Introduction

The exponential growth of social media platforms has initiated a new phase of communication, characterized by the exchange of multimodal data, primarily texts and images. This diverse landscape necessitates advanced techniques for multimodal information extraction (MIE) [10, 39, 45], which primarily aims to utilize auxiliary image inputs to enhance the performance of identifying entities or relations within the unstructured text.

To the best of our knowledge, the majority of previous methods of MIE mainly concentrate on the direct interaction between images and text. These approaches either (1) encode images directly and employ efficient attention mechanisms to facilitate image-text interactions [4, 30, 34, 37, 41, 43, 44], or (2) detect finer-grained visual objects within images and use Graph Neural Networks or attention mechanisms to establish interactions between text and objects [9–11, 17, 18, 42, 45, 46, 51, 53]. Despite the advancements made by these methods, this direct Image-Text interaction paradigm still suffers from the simultaneous existence of semantic and modality gaps. The semantic gap refers to the disparity between the meaning conveyed by the text and the actual content depicted by the image. For instance, in Figure 1, the word “Rocky” could refer to the dog in the image but could also be a name for a cat or a person. Furthermore, even the direct alignment of the word “dog” with an image of a dog remains a challenge due to the representation inconsistency, resulting in a modality gap. The presence of these two gaps weakens the connection between images and text, potentially leading to erroneous predictions of entities or relations.

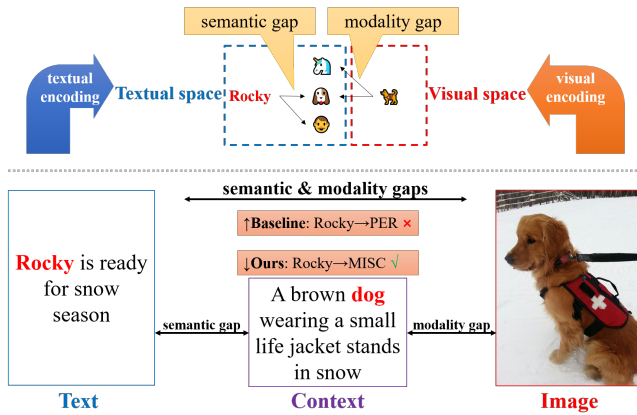


Figure 1: The semantic and modality gaps.

To mitigate the semantic and modality gaps, we propose an approach that relies on an intermediary, rather than direct interactions between texts and images. Given that text is the primary source of information extraction and images serve a supporting role, we suggest the use of a textual intermediary to bridge these gaps. As large multimodal models (LMMs) demonstrate impressive results on instruction-following and visual comprehension [26, 27], and excel at generating descriptive textual context for images, we employ the powerful generative ability of LMMs to create an intermediate context for reducing the burden of aligning image and text directly. As shown in Figure 1, with the divide-and-conquer strategy, we only need to model the connections between the generated context and the original text or image, forming an Image-Context-Text interaction paradigm.

The core challenge now is aligning the context-text pairs and context-image pairs in the hidden feature space, respectively, where the alignment with text bridges the semantic gap, and the alignment with images addresses the modality gap. In this scenario, contexts, texts, and images can be considered as three kinds of elements in the hidden space trying to achieve optimal collective semantic and modality overlaps. Drawing inspiration from cooperative game theory, we adapt the concept of the Shapley value [14], which provides an equitable mechanism for assessing each individual’s contribution towards collective utility. In this paper, we propose a novel Shapley Value-based Contrastive Alignment (**Shap-CA**) method, which leverages a contrastive learning strategy to construct coherent and compatible representations for these three elements based on their Shapley values. Within this framework, each element is considered a player, and the collective utility of a set of elements is defined as the total semantic or modality overlap. Shap-CA initially calculates the average marginal contribution of each player to the collective utility to estimate their Shapley value. Intuitively, contexts contributing significantly to the overall overlap (i.e., having a larger Shapley value) should have a higher probability of forming a true pair with the text or image. Consequently, a contrastive learning strategy is then employed to enhance the interactive contribution within context-text/image pairs, while minimizing the influence across these pairs. Through this process, Shap-CA not only strengthens the intrinsic connections within each pair but

also accentuates the disparities between different pairs, effectively bridging the semantic and modality gaps. Furthermore, we design an adaptive fusion module to obtain the informative fused features across modalities. This module assesses the relevance of each modal feature to the bridging context, strategically weighing their importance to achieve a finer-grained selective cross-modal fusion. Finally, a linear-chain CRF [22] or a word-pair contrastive layer is employed for prediction.

Overall, the main contributions of this paper can be summarized as follows:

- We are the first to introduce the Image-Context-Text interaction paradigm and leverage LMMs to generate descriptive context as a bridge to mitigate semantic and modality gaps for MIE.
- We propose a novel Shapley value-based contrastive alignment method, capturing semantic and modality relationships within and across image-text pairs for effective multimodal representations.
- Extensive experiments demonstrate that our method substantially outperforms existing state-of-the-art methods on four MIE datasets.

2 Related Work

Multimodal Information Extraction Multimodal Information Extraction (MIE) is an evolving research domain primarily aimed at enhancing the recognition of entities and relations by utilizing supplemental image inputs. This field can be primarily subdivided into three critical tasks: Multimodal Named Entity Recognition (MNER), Multimodal Relation Extraction (MRE) and Multimodal Joint Entity-Relation Extraction (MJERE). In particular, the tasks of MNER [37, 39] and MRE [10, 51] are concerned with identifying entities and relations separately, while the MJERE task [45] aims to extract entities and their associated relations jointly. Most of existing methods are concentrated around the paradigm of direct Image-Text interaction [9, 30, 34, 37, 42–45, 51, 53]. Wang et al. [41] designed a fine-grained cross-modal attention module to enhance the cross-modal alignment. Sun et al. [37], Xu et al. [43], and Liu et al. [28] focus on quantifying and controlling the influence of images on texts through gate mechanisms or text-image relationship inference. To facilitate the alignment between visual objects and text, Zhao et al. [50] and Yuan et al. [45] propose a heterogeneous graph network and an edge-enhanced graph neural network, respectively. Additionally, there are some other studies [18, 39] that employ external knowledge, such as machine reading comprehension [18], to foster model reasoning. Regardless of these substantial advancements, these approaches still fail to address the potential dual gaps existing between images and texts due to representation inconsistencies. In this study, we aim to comprehensively consider these semantic and modality gaps and propose Shap-CA, which leverages the bridging context to mitigate these gaps and achieve a more coherent and compatible representation.

Large Multimodal Models Large multimodal models have recently gained substantial traction in the research community [2, 23]. Similar to the trend observed with large language models, several studies have indicated that scaling up the training data [6, 12, 49] or model size [6, 31] can significantly enhance these large multimodal

models' capabilities. Moreover, visual instruction tuning can equip large multimodal models with excellent instruction-following, visual understanding, and natural language generation abilities [27]. This advancement empowers these models to excel in interpreting images according to instructions and generating informative textual contexts. However, their open-ended generative characteristics have resulted in less than satisfactory performance when directly applied to information extraction tasks [38].

3 Methodology

3.1 Task Definition

Given an input text $t = \{t_1, \dots, t_{n_t}\}$ with n_t tokens and its attached image I , our method aims to predict the output entity/relation labels y . The format of the labels y is task-dependent. Specifically, for MNER, they are sequential labels. For MRE and MJERE, they are word-pair labels [45].

3.2 Overview

The architecture of Shap-CA is shown in Figure 2. Initially, we utilize a LMM, e.g., LLaVA-1.5 [26], to extract the textual bridging context from the image. Subsequently, we employ a pretrained textual transformer to extract features from the text and the context. In parallel, an image encoder is used to derive visual features from the image. Following this, we apply a Shapley value-based contrastive alignment to construct more coherent representations. The adaptive fusion module is then employed to obtain the informative features across modalities. Finally, these comprehensive representations are fed into a CRF or a word-pair contrastive layer for prediction.

3.3 Encoding Module

Context Generation Given an image I , we utilize a pretrained LMM to generate a textual context as the bridging context $c = \{c_1, \dots, c_{n_c}\}$ with n_c tokens.

Textual and Visual Encoding In order to acquire contextualized textual features, we concatenate the input text t with the bridging context c . Following this, we employ a pretrained textual transformer to extract both sentence-level and token-level features:

$$\mathbf{x}_t, \mathbf{H}_t, \mathbf{x}_c, \mathbf{H}_c = \text{Transformer}([t; c]) \quad (1)$$

where $\mathbf{x}_t, \mathbf{x}_c \in \mathbb{R}^d$ represent the sentence-level features, while $\mathbf{H}_t \in \mathbb{R}^{n_t \times d}, \mathbf{H}_c \in \mathbb{R}^{n_c \times d}$ denote the token-level features of the input text and context, respectively. Simultaneously, we employ an image encoder to extract the visual features of the image I :

$$\mathbf{x}_v, \mathbf{H}_v = \text{ImageEncoder}(I) \quad (2)$$

where $\mathbf{x}_v, \mathbf{H}_v$ denotes the global visual feature and the regional visual features of the image, respectively.

3.4 Shapley Value-based Contrastive Alignment

To construct more coherent representations, we leverage the Shapley value to perform both context-text alignment and context-image alignment. The Shapley value offers a solution for the equitable allocation of total utility among players based on their individual marginal contributions and has widespread application [15, 16, 20].

We are the first to utilize the Shapley value for multimodal alignment through contrastive learning.

3.4.1 Preliminary. In the context of a cooperative game, suppose we have k players, represented by $K = \{1, \dots, k\}$, and a utility function $\mathbf{u} : 2^k \rightarrow \mathbb{R}$ that assigns a reward to each coalition (subset) of players. The Shapley value of player i is then defined as [19]:

$$\phi_i(\mathbf{u}) = \frac{1}{k} \sum_{S \subseteq K \setminus \{i\}} \frac{1}{\binom{k-1}{|S|}} [\mathbf{u}(S \cup \{i\}) - \mathbf{u}(S)] \quad (3)$$

The Shapley value essentially quantifies the average marginal contribution of a player to all potential coalitions (subsets). We detail the context-text alignment as an example as follows.

3.4.2 Context-Text Alignment.

Shapley Value Approximation. In the context-text alignment, inputs are a mini-batch of k context-text pairs $\{(\mathbf{x}_c^a, \mathbf{x}_t^a)\}_{a=1}^k$. Here, we view the k bridging contexts as players, denoted as $K = \{1, \dots, k\}$ for simplicity. These players, or contexts, collaboratively contribute to the semantic comprehension of a specific text feature. Consider the j -th pooled text feature, \mathbf{x}_t^j , and a selected subset of context players, denoted as a coalition $S \subseteq K$. The central idea is based on an assumption: if all the contexts within the subset S and the text \mathbf{x}_t^j form positive pairs, the utility of S for \mathbf{x}_t^j would be represented by the expected semantic overlap between them. This utility captures the collective semantic relationships between the text and the contexts within the coalition, as formalized by:

$$\begin{aligned} \mathbf{u}_j(S) &= \sum_{i \in S} p_i \text{sim}(\mathbf{x}_t^j, \mathbf{x}_c^i) \\ p_i &= \frac{e^{\text{sim}(\mathbf{x}_t^j, \mathbf{x}_c^i)/\tau}}{\sum_{a \in S} e^{\text{sim}(\mathbf{x}_t^j, \mathbf{x}_c^a)/\tau}} \end{aligned} \quad (4)$$

Here, $\text{sim}(\mathbf{x}_t^j, \mathbf{x}_c^i)$ denotes the semantic overlap between the text and each context (i.e., individual semantic contribution), measured by cosine similarity. The weight p_i , computed through a softmax operation with a temperature of τ , models the cooperative behavior among different contexts by normalizing these individual semantic contributions. This approach intuitively suggests that the stronger the semantic overlap a context shares with the text (i.e., the larger the semantic contribution), the more likely it is to form a true pair with the text in real-world situations. From this perspective, the utility of the coalition can be interpreted as an expectation over the semantic overlaps of each context within S with the text, where the expectation weights are given by the likelihood of each context-text pair being positive. This method naturally prioritizes contexts that have a higher degree of semantic overlap with the text, thereby refining the overall semantic understanding.

However, as indicated by Eqn. 3, the computation of the Shapley value requires an exponentially large number of computations relative to the size of the mini-batch, which poses a challenge during training. To address this, we extend Monte-Carlo approximation methods [8, 33] to our training setting for estimating the Shapley value. We present the detailed algorithm in Alg. 1. It begins with a random permutation of k context players and an initial stride of s , which is set to $\text{batch_size}/2$. At each iteration, the algorithm scans each player in the current permutation and calculates the

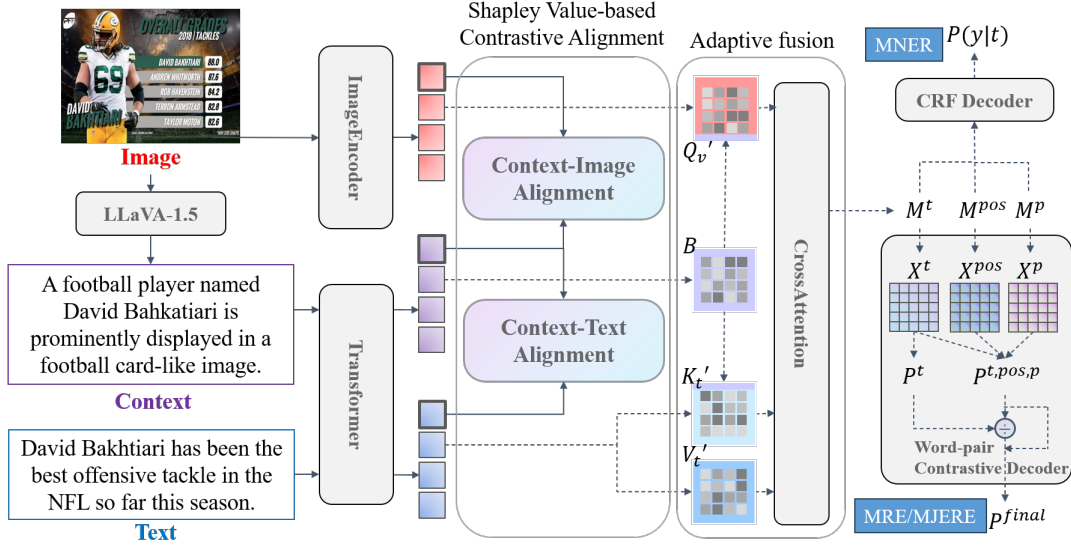


Figure 2: The overall architecture of Shap-CA.

marginal contribution when the player is added to the coalition formed by the preceding players. This marginal contribution serves as an unbiased estimate of the Shapley value for that player, improving with each iteration. Subsequently, the algorithm updates the permutation through a cyclic shift of the current stride and halves the stride for the next iteration. This gradual reduction in stride results in more stable marginal contributions over time, as the size of the subsets for each player changes less dramatically on average. The process continues until the stride falls to zero.

Algorithm 1: Cyclic Shapley Value Approximation

INPUT: k context players, a pooled text \mathbf{x}_t^j , an initial stride $s = \text{batch_size}/2$

OUTPUT: Approximated Shapley value of k players $\{\hat{\phi}_1(\mathbf{u}_j), \dots, \hat{\phi}_k(\mathbf{u}_j)\}$

$P \leftarrow$ Random permutation of the players;

while $s > 0$ **do**

for $i \in \{1, \dots, k\}$ **do**

 Compute the marginal contribution $m_{P[i]}$ when adding player $P[i]$ to the preceding coalition $P[1 \sim i-1]$;

 Update $\hat{\phi}_{P[i]}(\mathbf{u}_j)$ with $m_{P[i]}$;

end

 Apply a cyclic shift to P by s steps;

$s = s/2$;

end

Contrastive Learning. After acquiring the approximated Shapley value $\{\hat{\phi}_1(\mathbf{u}_j), \dots, \hat{\phi}_k(\mathbf{u}_j)\}$, we introduce a context-to-text contrastive loss that aims to maximize the average marginal semantic contribution from each context player to the text with which it forms a true positive pair (i.e., the text from the same pair), while

simultaneously minimizing the contributions between the true negative pairs (i.e., all other texts not paired with this context).

$$\mathcal{L}_{c2t} = -\frac{1}{k} \sum_{j=1}^k \left[\hat{\phi}_j(\mathbf{u}_j) - \sum_{i \neq j} \hat{\phi}_i(\mathbf{u}_j) \right] \quad (5)$$

In a symmetrical manner, we can treat the k pooled text as players, and derive the text-to-context contrastive loss \mathcal{L}_{t2c} . The semantic loss $\mathcal{L}_{semantic}$ is the average of these two contrastive losses:

$$\mathcal{L}_{semantic} = \frac{1}{2} (\mathcal{L}_{c2t} + \mathcal{L}_{t2c}) \quad (6)$$

3.4.3 Context-Image Alignment. Similarly, we can employ Alg. 1 to estimate the Shapley value for a mini-batch of k context-image pairs $\{(\mathbf{x}_c^a, \mathbf{x}_v^a)\}_{a=1}^k$ and derive the context-to-image loss \mathcal{L}_{c2v} and the image-to-context loss \mathcal{L}_{v2c} . The modality loss $\mathcal{L}_{modality}$ is the average of these two contrastive loss:

$$\mathcal{L}_{modality} = \frac{1}{2} (\mathcal{L}_{c2v} + \mathcal{L}_{v2c}) \quad (7)$$

3.5 Adaptive Fusion

To facilitate a finer-grained fusion across modalities, we develop an adaptive attention fusion module. This module dynamically weights the importance of different features in two modalities, based on their relevance to the context that connects them. Given the representations $\mathbf{H}_t, \mathbf{H}_c, \mathbf{H}_v$ obtained from Section 3.3, we initially employ linear projection to transform them into a set of matrices: a query matrix $\mathbf{Q}_v \in \mathbb{R}^{n_v \times D}$, a key matrix $\mathbf{K}_t \in \mathbb{R}^{n_t \times D}$, a value matrix $\mathbf{V}_t \in \mathbb{R}^{n_t \times D}$, and a context matrix $\mathbf{C} \in \mathbb{R}^{n_c \times D}$. Subsequently, we calculate the bridging term \mathbf{B} as follows:

$$\mathbf{B} = \text{mean} \left(\frac{\mathbf{C}^\top \mathbf{C}}{\sqrt{D}} \right) \in \mathbb{R}^D \quad (8)$$

This bridging term is then employed to dynamically modify the content of queries Q_v and keys K_t based on their relevance to the bridging term:

$$\begin{aligned} Q_v' &= g_q \odot Q_v + (1 - g_q) \odot B \\ K_t' &= g_k \odot K_t + (1 - g_k) \odot B \end{aligned} \quad (9)$$

where \odot represents the Hadamard product, $g_q \in \mathbb{R}^{n_v \times D}$ and $g_k \in \mathbb{R}^{n_t \times D}$ are gating vectors that are used to capture the relevance between the text (or image) and the bridging context:

$$\begin{aligned} g_q &= \tanh(\text{Linear}_1(Q_v, B)) \\ g_k &= \tanh(\text{Linear}_2(K_t, B)) \end{aligned} \quad (10)$$

Following this, we acquire the image-awared text features $M^t \in \mathbb{R}^{n_t \times D}$ using the gated cross-attention:

$$M^t = \text{CrossAttention}(Q_v', K_t', V_t) \quad (11)$$

3.6 Classifier

In addition to the image-awared text features derived from Eqn. 11, we also incorporate each token's part-of-speech embeddings $M^s \in \mathbb{R}^{n_t \times d_1}$, and positional embeddings $M^p \in \mathbb{R}^{n_t \times d_1}$, to enrich the information available for decoding. For MNER, a widely used CRF layer [1, 21] is employed to predict label sequences. For MRE and MJERE, we propose a word-pair contrastive layer to predict word-pair labels [45].

CRF layer Initially, we employ a multi-layer perceptron to integrate the three channels of features:

$$M = \text{MLP}_1(M^t; M^s; M^p) \in \mathbb{R}^{n_t \times d_2} \quad (12)$$

Subsequently, we feed $M = \{M_1, \dots, M_{n_t}\}$ into a standard CRF layer to derive the final distribution $P(\mathbf{y}|\mathbf{t})$. The training loss for the input sequence \mathbf{t} with gold labels \mathbf{y}^* is measured using the negative log-likelihood (NLL):

$$\mathcal{L}_{main} = -\log P(\mathbf{y}^*|\mathbf{t}) \quad (13)$$

Word-Pair Contrastive layer For each word pair (t_i, t_j) , we initially employ three multi-layer perceptrons to separately obtain the three channels of pair-wise features:

$$X_{i,j}^l = \text{MLP}^l(M_i^t; M_j^t; M_i^l - M_j^l) \in \mathbb{R}^{d_2} \quad (14)$$

where $l \in \{t, s, p\}$ represents the different feature channels. Following this, we use only the text features to generate the initial distribution $P_{i,j}^t$ and incorporate the three channels of features to derive the enhanced distribution $P_{i,j}^{t,s,p}$ over the label set:

$$P_{i,j}^t = \text{Softmax}(\text{MLP}_2(X_{i,j}^t)) \quad (15)$$

$$P_{i,j}^{t,s,p} = \text{Softmax}(\text{MLP}_3(X_{i,j}^t; X_{i,j}^s; X_{i,j}^p)) \quad (16)$$

The final distribution is refined by contrasting the two distributions:

$$P_{i,j}^{final} = \text{Softmax}(P_{i,j}^{t,s,p} + \lambda \log \frac{P_{i,j}^{t,s,p}}{P_{i,j}^t}) \quad (17)$$

where λ is the refinement scale. We use the cross-entropy loss for the input sequence \mathbf{t} and the gold word-pair labels \mathbf{y}^* :

$$\mathcal{L}_{main} = -\sum_{i=1}^{n_t} \sum_{j=1}^{n_t} \mathbf{y}_{i,j}^* \log(P_{i,j}^{final}) \quad (18)$$

3.7 Training

In summary, our framework incorporates two self-supervised learning tasks and one supervised learning task, resulting in three loss functions. Considering the semantic loss $\mathcal{L}_{semantic}$, the modality loss $\mathcal{L}_{modality}$ from Sec. 3.4, and the prediction loss \mathcal{L}_{main} from Sec. 3.6, the final loss function is defined as follows:

$$\mathcal{L} = \alpha \mathcal{L}_{semantic} + \beta \mathcal{L}_{modality} + \mathcal{L}_{main} \quad (19)$$

where α, β are hyperparameters.

4 Experiments

We conduct our experiments on four MIE datasets and compare our method with a number of previous approaches.

4.1 Datasets

Experiments are conducted on 2 MNER datasets, 1 MRE dataset and 1 MJERE dataset: Twitter-15 [48] and Twitter-17 [44] for MNER¹, MNRE² [52] for MRE, and MJERE³ [45] for MJERE, noting that the last dataset and the task share the same name. These datasets contain 4,000/1,000/3,357, 3,373/723/723, 12,247/1,624/1,614, and 3,617/495/474 samples in the training, validation, and test splits, respectively.

4.2 Implementation Details

Model Configuration In order to fairly compare with the previous approaches [13, 17, 40–43, 45, 46, 51], we use BERT-based model with the dimension of 768 as the textual encoder. For the visual encoder, we experiment with the ViTB/32 in CLIP and ResNet152 models as potential alternatives. We find ResNet152 with the dimension of 2048 to provide the most effective and consistent results in our settings. To generate the textual descriptive contexts of images, we use LLaVA-1.5 [26], a newly proposed visual instruction-tuned, large multimodal model. The sampling temperature is set to 1.0. We apply the spaCy library of the en_core_web_sm version to parse the given sentence and obtain each word's part of speech. The dimensions of positional embeddings and part-of-speech embeddings are 100.

Training Configuration Shap-CA is trained by Pytorch on a single NVIDIA RTX 3090 GPU. During training, the model is finetuned by AdamW [29] optimizer with a warmup cosine scheduler of ratio 0.05 and a batch size of 28. We use the grid search to find the learning rate over $[1 \times 10^{-5}, 5 \times 10^{-4}]$. The learning rate of encoders is set to 5×10^{-5} . The learning rates of other modules are set to 3×10^{-4} , 1×10^{-4} , 1×10^{-4} and 1×10^{-4} for Twitter-15, Twitter-17, MJERE and MNRE, respectively. The refinement scale λ in Eqn. 17 is set to 1.0. An early stopping strategy is applied to determine the number of training epochs with a patience of 7. We choose the model performing the best on the validation set and evaluate it on the test set. We report the average results from 3 runs with different random seeds.

¹The datasets are available at <https://github.com/jefferyYu/UMT>, <https://github.com/Multimodal-NER/RpBERT>

²<https://github.com/thecharm/MNRE>

³<https://github.com/YuanLi95/EEGA-for-JMERE>

Table 1: Performance comparison (F1 score) of our approach and state-of-the-art approaches on four MIE datasets. Following [45], on the MJERE dataset, we demonstrate both joint entity-relation extraction and named entity recognition results, denoted as MJERE_j, MJERE_e respectively. T-15: Twitter-15, T-17: Twitter-17. † denotes the results are reproduced by us.

Modality	Method	MNER		MJERE		MRE
		T-15	T-17	MJERE _j	MJERE _e	MNRE
Text	BERT-CRF	71.81	83.44	-	-	-
	MTB	-	-	-	-	60.86
	ChatGPT	50.21	57.50	13.37†	51.74†	35.20
	GPT4	57.98	66.61	21.51†	56.63†	42.11
Text + Image	OCSGA	72.92	-	49.64	76.07	-
	UMGF	74.85	85.51	51.45	76.75	65.29
	MEGA	72.35	84.39	53.18	77.22	66.41
	MAF	73.42	86.25	53.62	76.81	-
	ITA	75.60	85.72	-	-	66.89
	CAT-MNER	75.41	85.99	-	-	-
	MNER-QG	74.94	87.25	-	-	-
	EEGA	-	-	55.29	78.59	-
	MQA	50.6	62.6	-	-	61.6
	Shap-CA w/o Context in Alignment	74.87	86.19	54.07	77.74	66.29
	Shap-CA w/o Context in Fusion	75.24	87.31	53.35	77.49	66.41
	Shap-CA w/o Shapley Value	75.38	86.58	54.14	77.48	65.72
	Shap-CA w/o word-pair Contrastive	-	-	54.73	78.02	67.12
	Shap-CA	76.93	88.32	55.95	79.29	67.94

4.3 Baselines

We compare Shap-CA with previous state-of-the-art methods, which primarily fall into two categories. The first group of methods only consider text input, including BERT-CRF [13], MTB [7], ChatGPT and GPT-4. Secondly, we consider several latest multimodal methods, including OCSGA [42], UMGF [46], MEGA [51], MAF [43], ITA [40], CAT-MNER [41], MNER-QG [17], EEGA [45], and MQA [38].

4.4 Main Results

Table 1 provides a comprehensive comparison of our proposed method with baseline approaches across various modalities, including text-based methods and previous state-of-the-art multimodal methods. Through this comparative analysis, we get several noteworthy findings as follows: (1) Superior Performance of Shap-CA: Our method, Shap-CA, demonstrates significant superiority across all datasets compared to baseline approaches. Notably, in tasks involving entity or relation extraction, such as Twitter-15, Twitter-17, MJERE_e, and MNRE, Shap-CA consistently outperforms the best competitor by substantial margins of 1.33%, 1.07%, 0.7%, and 1.05% in terms of F1 scores, respectively. These results underscore the effectiveness of our proposed Image-Context-Text paradigm in enhancing information extraction tasks. (2) Effective Handling of Complex Tasks: In the most challenging task, MJERE_j, which requires simultaneous extraction of entities and their associated relations, Shap-CA achieves the highest F1 score of 55.95%. This outcome highlights Shap-CA’s efficacy in managing complex MIE scenarios, where accurate identification of both entities and relations is crucial. (3) Remarkable Adaptability: In contrast to other models that are typically specialized in one or two specific tasks,

Shap-CA demonstrates exceptional adaptability by consistently delivering state-of-the-art performance across a diverse range of tasks, which underscores the model’s ability to adapt to various environments and tasks, highlighting its flexibility in managing different information extraction challenges. (4) Enhanced Performance with Visual Information: Incorporating visual information from images generally enhances the performance of MIE when comparing state-of-the-art multimodal methods to their text-only counterparts. This observation suggests the integration of visual information provides a more holistic understanding of the input, underlining its value in improving the accuracy of information extraction tasks, particularly in scenarios where text contents alone may be insufficient for prediction. (5) Performance of Large Models: Contrary to the common belief that larger models possess superior generalization abilities, our experimental results show that methods based on LLMs (e.g., ChatGPT, GPT-4) and LMMs (e.g., MQA) perform less well than our proposed method and other previous multimodal approaches. This suggests that the current large models, despite their extensive capabilities, might not yet be fully optimized for information extraction tasks. This potential discrepancy could arise from their open-ended generative nature and pre-training scenarios that are misaligned with the specifics of MIE.

5 Discussion and Analysis

5.1 Ablation Study

We conduct a comprehensive ablation study to further analyze the effectiveness of our method. The results of these model variants are presented in Table 1 and Table 2.

Table 2: Contribution of images to model performance.

Method	MJERE _j			MJERE _e		
	P	R	F1	P	R	F1
Baseline	50.89	53.93	52.36	74.09	78.75	76.35
w/o Image	51.81	56.29	53.96	74.31	80.30	77.19
Shap-CA	54.03	58.02	55.95	77.19	81.50	79.29

Importance of Bridging Context Our method fundamentally relies on the bridging context to enhance cross-modal comprehension and interpretation. To evaluate its effectiveness, we introduce two variants: (1) Shap-CA w/o Context in Alignment, which directly aligns image-text inputs based on the Shapley value, and (2) Shap-CA w/o Context in Fusion, which simply applies vanilla cross-attention fusion without the context involved. The results show that Shap-CA consistently outperforms these variations across all datasets. For instance, the F1 score decreases from 76.93% to 74.87% on the Twitter-15 dataset when the context in alignment is removed. This highlights that the textual context can effectively bridge the semantic and modality gaps between images and text, demonstrating its value in MIE.


Role of Shapley Value To understand the impact of the Shapley value in alignment, we replace it with InfoNCE [36], a widely used approach in the field of contrastive learning [5, 32, 35]. As shown in Table 1, Shap-CA apparently outperforms the variant without the Shapley Value on all datasets, which validates our proposed alignment method’s ability to construct more coherent multimodal representations for MIE.

Effectiveness of the Word-Pair Contrastive Layer We further delve into the impact of our proposed word-pair contrastive layer by evaluating the performance of Shap-CA w/o word-pair Contrastive. The results show that contrasting the distributions before and after the integration of the three channels can effectively enhance the model’s predictive power.

Contribution of Images Since the context of Shap-CA is generated from images, a natural question that arises is whether the context can completely replace the original image. In Table 2, we compare Shap-CA with its image-removed variant and the baseline on the MJERE dataset. The baseline approach simply concatenates the text and context before feeding it into a BERT-base model. Experimental results demonstrate that while the textual context information derived from the images is beneficial, it cannot fully replace the contribution of the images themselves to the model’s performance.

5.2 Further Analysis

How Alignments Affect Performance In this section, we further discuss the influence of alignments on our model’s performance on the MJERE dataset. Specifically, we examine two key coefficients, α and β in Eqn. 19, which represent context-text alignment and context-image alignment, respectively. As shown in Figure 3, the model’s performance exhibits a consistent pattern of variation in response to changes in α and β . The red line draws the performance trend of changing α when fixing β as 0.4. $\alpha = 0$ means w/o context-text alignment, resulting in the poorest performance due to the

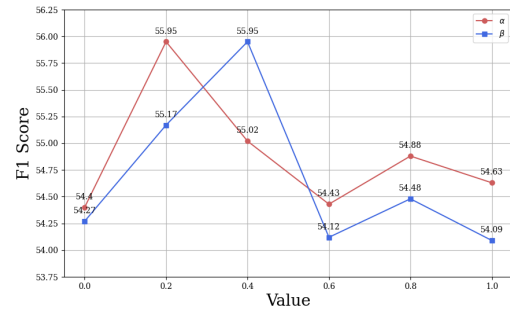**Figure 3: Model performance on MJERE with different α or β** **Table 3: Performance effect from the different context generators.**

Generator	MJERE _j			MJERE _e		
	P	R	F1	P	R	F1
BU	54.11	56.92	55.48	76.57	80.92	78.69
VinVL	53.64	57.86	55.67	77.02	80.73	78.83
BLIP-2	54.50	57.08	55.76	77.33	80.83	79.03
LLaVA-1.5	54.03	58.02	55.95	77.19	81.50	79.29
GPT-4	53.98	58.45	56.13	77.39	81.54	79.41

inability to effectively bridge the semantic gap. When $\alpha = 0.2$, the model reaches its optimal performance. However, when α exceeds 0.2, the alignment task may interfere with the main task, leading to declining performance. The blue line draws the performance trend of β with the fixed value of α (i.e., 0.2), which is similar to that of α . The peak performance is reached when β is 0.4.

Impact of Different Context Generators In practical situations, robustness to a range of contexts from different generators is crucial, as these contexts may vary significantly in quality. To investigate this, we conduct experiments to assess the impact of employing various context generators. Specifically, we examine the results produced by five different context generators when applied to the MJERE dataset. These generators include traditional image captioning models: BU [3] and VinVL [47], and newly developed large multimodal models: BLIP-2 [24], LLaVA-1.5 [26], and GPT-4. As shown in Table 3, the performance disparity across these context generators is minimal. Notably, the use of GPT-4 as a context generator achieves the best overall performance. This observation implies that our method is robust to the variability inherent in different context generators, maintaining consistent performance regardless of the quality of the generated context.

Model Scale The scale of a model is a critical aspect of real-world applications. We present a comparative analysis of the total parameters and performance of our proposed method, Shap-CA, alongside other existing state-of-the-art multimodal approaches, whose results are achieved by their official implementations. As shown in Table 4, Shap-CA, with a parameter count of only 170.7M, is the most lightweight model among those evaluated, suggesting a reduced computational burden.

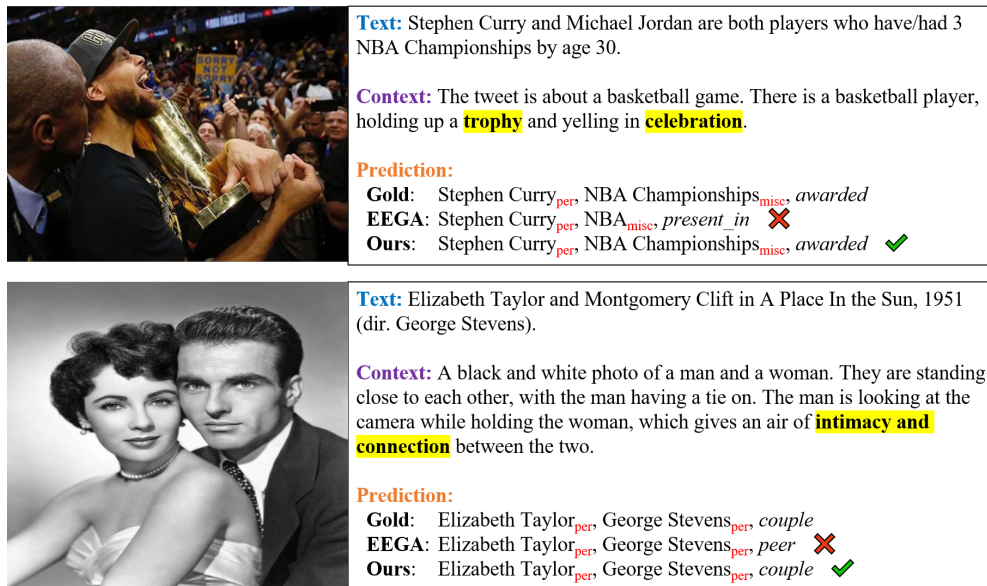


Figure 4: Two cases of the predictions by EEGA and Shap-CA (ours).

Table 4: Model scale comparison. Results are achieved by their official implementations.

Method	Param.	T-15	T-17	MJERE _j	MJERE _e
UMT	206.3M	73.41	85.31	-	-
CAT-MNER	198.5M	75.41	85.99	-	-
EEGA	179.7M	-	-	55.29	78.59
Shap-CA	170.7M	76.93	88.32	55.95	79.29

Table 5: Comparison of the generalization ability. Results of other methods are from Li et al. [25], Wang et al. [41]

Method	T-17→T-15			T-15→T-17		
	P	R	F1	P	R	F1
UMT	64.67	63.59	64.13	67.80	55.23	60.87
UMGF	67.00	62.18	66.21	69.88	56.92	62.74
FMIT	66.72	69.73	68.19	70.65	59.22	64.43
CAT-MNER	74.86	63.01	68.43	70.69	59.44	64.58
Shap-CA	72.79	65.83	69.14	71.27	59.95	65.12

Generalization Table 5 presents a comparison of our method’s generalization ability against several previous state-of-the-art approaches. This experiment is implemented by training on the source dataset while testing on the target dataset. For instance, T-17→T-15 denotes that the model is trained on the Twitter-17 dataset and then tested on the Twitter-15 dataset. As the results show, our method outperforms previous approaches by a very large margin in terms of F1 score, which highlights our method’s strong generalization ability.

Case Study In Figure 4, we present two cases that highlight the effectiveness of our proposed method in bridging both semantic and modality gaps, challenging for EEGA [45] which follows a direct Image-Text interaction paradigm. The first case discusses Stephen Curry’s achievements in the NBA. Although EEGA recognizes the player, it incorrectly extracts “NBA” as an entity, leading to an inaccurate “present_in” relation between “Stephen Curry” and “NBA”. In contrast, our method, utilizing the context featuring a “trophy” and “celebration”, makes an accurate prediction, which denotes the context is helpful in mitigating the semantic and modality gaps. The second case is more nuanced, involving a scene with Elizabeth Taylor and George Stevens. Though EEGA can identify both persons, it fails to infer the intimate relationship implied by the image and text, predicting a mere “peer” relation. However, our method, leveraging the context that emphasizes “intimacy and connection”, accurately predicts the relation “couple” between “Elizabeth Taylor” and “George Stevens”.

6 Conclusion

In this paper, we introduce a novel paradigm of Image-Context-Text interaction to address the challenges posed by the semantic and modality gaps in conventional MIE approaches. In line with this paradigm, we propose a novel method, Shapley Value-Based Contrastive Alignment (Shap-CA). Shap-CA first employs the Shapley value to access the individual contributions of contexts, texts, and images to the overall semantic or modality overlaps, and then applies a contrastive learning strategy to perform the alignment by maximizing the interactive contribution within context-text/image pairs and minimizing the influence across these pairs. Furthermore, Shap-CA incorporates an adaptive fusion module for selective cross-modal fusion. Extensive experiments across four MIE datasets demonstrate that Shap-CA significantly outperforms previous state-of-the-art approaches.

Acknowledgments

We would like to extend our gratitude to the anonymous reviewers for their insightful comments on this paper. This work was partially supported by National Key R&D Program of China (No. 2022YFC3600402).

References

- [1] Alan Akbik, Duncan Blythe, and Roland Vollgraf. 2018. Contextual String Embeddings for Sequence Labeling. In *Proceedings of the 27th International Conference on Computational Linguistics*. Association for Computational Linguistics, Santa Fe, New Mexico, USA, 1638–1649. <https://aclanthology.org/C18-1139>
- [2] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. 2022. Flamingo: a visual language model for few-shot learning. *Advances in Neural Information Processing Systems* 35 (2022), 23716–23736.
- [3] Peter Anderson, Xiaodong He, Chris Buehler, Damien Teney, Mark Johnson, Stephen Gould, and Lei Zhang. 2018. Bottom-up and top-down attention for image captioning and visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 6077–6086.
- [4] Omer Arshad, Ignazio Gallo, Shah Nawaz, and Alessandro Calefati. 2019. Aiding intra-text representations with visual context for multimodal named entity recognition. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*. IEEE, 337–342.
- [5] Alexei Baevski, Yuhao Zhou, Abdelrahman Mohamed, and Michael Auli. 2020. wav2vec 2.0: A framework for self-supervised learning of speech representations. *Advances in neural information processing systems* 33 (2020), 12449–12460.
- [6] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. 2023. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966* (2023).
- [7] Livio Baldini Soares, Nicholas FitzGerald, Jeffrey Ling, and Tom Kwiatkowski. 2019. Matching the Blanks: Distributional Similarity for Relation Learning. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, Florence, Italy, 2895–2905. <https://doi.org/10.18653/v1/P19-1279>
- [8] Javier Castro, Daniel Gómez, and Juan Tejada. 2009. Polynomial calculation of the Shapley value based on sampling. *Computers & Operations Research* 36, 5 (2009), 1726–1730.
- [9] Feng Chen, Jijia Liu, Kaixiang Ji, Wang Ren, Jian Wang, and Jingdong Wang. 2023. Learning Implicit Entity-object Relations by Bidirectional Generative Alignment for Multimodal NER. *arXiv preprint arXiv:2308.02570* (2023).
- [10] Xiang Chen, Ningyu Zhang, Lei Li, Shumin Deng, Chuanqi Tan, Changliang Xu, Fei Huang, Luo Si, and Huajun Chen. 2022. Hybrid transformer with multi-level fusion for multimodal knowledge graph completion. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 904–915.
- [11] Xiang Chen, Ningyu Zhang, Lei Li, Yunzhi Yao, Shumin Deng, Chuanqi Tan, Fei Huang, Luo Si, and Huajun Chen. 2022. Good visual guidance makes a better extractor: Hierarchical visual prefix for multimodal entity and relation extraction. *arXiv preprint arXiv:2205.03521* (2022).
- [12] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Hua Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. 2023. InstructBlip: Towards General-purpose Vision-Language Models with Instruction Tuning. *arXiv:2305.06500* [cs.CV]
- [13] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805* (2018).
- [14] Pradeep Dubey. 1975. On the uniqueness of the Shapley value. *International Journal of Game Theory* 4 (1975), 131–139.
- [15] Amirata Ghorbani and James Zou. 2019. Data shapley: Equitable valuation of data for machine learning. In *International conference on machine learning*. PMLR, 2242–2251.
- [16] Faruk Gul. 1989. Bargaining foundations of Shapley value. *Econometrica: Journal of the Econometric Society* (1989), 81–95.
- [17] Meihuizi Jia, Lei Shen, Xin Shen, Lejian Liao, Meng Chen, Xiaodong He, Zhendong Chen, and Jiaqi Li. 2023. Mner-qg: An end-to-end mrc framework for multimodal named entity recognition with query grounding. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 37. 8032–8040.
- [18] Meihuizi Jia, Xin Shen, Lei Shen, Jinhui Pang, Lejian Liao, Yang Song, Meng Chen, and Xiaodong He. 2022. Query prior matters: a MRC framework for multimodal named entity recognition. In *Proceedings of the 30th ACM International Conference on Multimedia*. 3549–3558.
- [19] Ruoxi Jia, David Dao, Boxin Wang, Frances A Hubis, Nezihe M Gürel, Bo Li, Ce Zhang, Costas J Spanos, and Dawn Song. 2019. Efficient Task-Specific Data Valuation for Nearest Neighbor Algorithms. *Proceedings of the VLDB Endowment* 12, 11 (2019), 1610–1623.
- [20] Ruoxi Jia, David Dao, Boxin Wang, Frances Ann Hubis, Nick Hynes, Nezihe Merve Gürel, Bo Li, Ce Zhang, Dawn Song, and Costas J Spanos. 2019. Towards efficient data valuation based on the shapley value. In *The 22nd International Conference on Artificial Intelligence and Statistics*. PMLR, 1167–1176.
- [21] Jacob Devlin Ming-Wei Chang Kenton and Lee Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of NAACL-HLT*. 4171–4186.
- [22] John D Lafferty, Andrew McCallum, and Fernando CN Pereira. 2001. Conditional Random Fields: Probabilistic Models for Segmenting and Labeling Sequence Data. In *Proceedings of the Eighteenth International Conference on Machine Learning*. 282–289.
- [23] Chunyuan Li, Zhe Gan, Zhengyuan Yang, Jianwei Yang, Linjie Li, Lijuan Wang, and Jianfeng Gao. 2023. Multimodal foundation models: From specialists to general-purpose assistants. *arXiv preprint arXiv:2309.10020* 1, 2 (2023).
- [24] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. 2023. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. *arXiv preprint arXiv:2301.12597* (2023).
- [25] Xiaonan Li, Hang Yan, Xipeng Qiu, and Xuanjing Huang. 2020. FLAT: Chinese NER using flat-lattice transformer. *arXiv preprint arXiv:2004.11795* (2020).
- [26] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. 2023. Improved baselines with visual instruction tuning. *arXiv preprint arXiv:2310.03744* (2023).
- [27] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2023. Visual instruction tuning. *arXiv preprint arXiv:2304.08485* (2023).
- [28] Peipei Liu, Hong Li, Yimo Ren, Jie Liu, Shuaizong Si, Hongsong Zhu, and Limin Sun. 2024. Hierarchical Aligned Multimodal Learning for NER on Tweet Posts. *arXiv:2305.08372* [cs.CL]
- [29] Ilya Loshchilov and Frank Hutter. 2017. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101* (2017).
- [30] Di Lu, Leonardo Neves, Vitor Carvalho, Ning Zhang, and Heng Ji. 2018. Visual Attention Model for Name Tagging in Multimodal Social Media. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, Melbourne, Australia, 1990–1999. <https://doi.org/10.18653/v1/P18-1185>
- [31] Yadong Lu, Chunyuan Li, Haotian Liu, Jianwei Yang, Jianfeng Gao, and Yelong Shen. 2023. An empirical study of scaling instruct-tuned large multimodal models. *arXiv preprint arXiv:2309.09958* (2023).
- [32] Shuang Ma, Zhaoyang Zeng, Daniel McDuff, and Yale Song. 2020. Active Contrastive Learning of Audio-Visual Video Representations. In *International Conference on Learning Representations*.
- [33] Sasan Maleki, Long Tran-Thanh, Greg Hines, Talal Rahwan, and Alex Rogers. 2013. Bounding the estimation error of sampling-based Shapley value approximation. *arXiv preprint arXiv:1306.4265* (2013).
- [34] Seungwhan Moon, Leonardo Neves, and Vitor Carvalho. 2018. Multimodal named entity recognition for short social media posts. *arXiv preprint arXiv:1802.07862* (2018).
- [35] Pedro Morgado, Nuno Vasconcelos, and Ishan Misra. 2021. Audio-visual instance discrimination with cross-modal agreement. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 12475–12486.
- [36] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748* (2018).
- [37] Lin Sun, Jiquan Wang, Kai Zhang, Yindu Su, and Fangsheng Weng. 2021. RpBERT: a text-image relation propagation-based BERT model for multimodal NER. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 35. 13860–13868.
- [38] Yuxuan Sun, Kai Zhang, and Yu Su. 2023. Multimodal Question Answering for Unified Information Extraction. *arXiv preprint arXiv:2310.03017* (2023).
- [39] Xinyu Wang, Jiong Cai, Yong Jiang, Pengjun Xie, Kewei Tu, and Wei Lu. 2022. Named Entity and Relation Extraction with Multi-Modal Retrieval. In *Findings of the Association for Computational Linguistics: EMNLP 2022*. Association for Computational Linguistics, Abu Dhabi, United Arab Emirates, 5925–5936. <https://doi.org/10.18653/v1/2022.findings-emnlp.437>
- [40] Xinyu Wang, Min Gui, Yong Jiang, Zixia Jia, Nguyen Bach, Tao Wang, Zhongqiang Huang, and Kewei Tu. 2022. ITA: Image-Text Alignments for Multi-Modal Named Entity Recognition. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics, Seattle, United States, 3176–3189. <https://doi.org/10.18653/v1/2022.naacl-main.232>
- [41] Xuwu Wang, Jiabo Ye, Zhixu Li, Junfeng Tian, Yong Jiang, Ming Yan, Ji Zhang, and Yanghua Xiao. 2022. CAT-MNER: multimodal named entity recognition with knowledge-refined cross-modal attention. In *2022 IEEE International Conference on Multimedia and Expo (ICME)*. IEEE, 1–6.
- [42] Zhiwei Wu, Changmeng Zheng, Yi Cai, Junying Chen, Ho-fung Leung, and Qing Li. 2020. Multimodal representation with embedded visual guiding objects for named entity recognition in social media posts. In *Proceedings of the 28th ACM International Conference on Multimedia*. 1038–1046.
- [43] Bo Xu, Shizhou Huang, Chaofeng Sha, and Hongya Wang. 2022. MAF: a general matching and alignment framework for multimodal named entity recognition. In *Proceedings of the fifteenth ACM international conference on web search and data mining*. 1215–1223.

- [44] Jianfei Yu, Jing Jiang, Li Yang, and Rui Xia. 2020. Improving Multimodal Named Entity Recognition via Entity Span Detection with Unified Multimodal Transformer. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, Online, 3342–3352. <https://doi.org/10.18653/v1/2020.acl-main.306>
- [45] Li Yuan, Yi Cai, Jin Wang, and Qing Li. 2023. Joint multimodal entity-relation extraction based on edge-enhanced graph alignment network and word-pair relation tagging. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 37. 11051–11059.
- [46] Dong Zhang, Suzhong Wei, Shoushan Li, Hanqian Wu, Qiaoming Zhu, and Guodong Zhou. 2021. Multi-modal graph fusion for named entity recognition with targeted visual guidance. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 35. 14347–14355.
- [47] Pengchuan Zhang, Xiujun Li, Xiaowei Hu, Jianwei Yang, Lei Zhang, Lijuan Wang, Yejin Choi, and Jianfeng Gao. 2021. Vinvl: Revisiting visual representations in vision-language models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 5579–5588.
- [48] Qi Zhang, Jinlan Fu, Xiaoyu Liu, and Xuanjing Huang. 2018. Adaptive co-attention network for named entity recognition in tweets. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 32.
- [49] Bo Zhao, Boya Wu, and Tiejun Huang. 2023. Svit: Scaling up visual instruction tuning. *arXiv preprint arXiv:2307.04087* (2023).
- [50] Gang Zhao, Guanting Dong, Yidong Shi, Haolong Yan, Weiran Xu, and Si Li. 2022. Entity-level Interaction via Heterogeneous Graph for Multimodal Named Entity Recognition. In *Findings of the Association for Computational Linguistics: EMNLP 2022*. Association for Computational Linguistics, Abu Dhabi, United Arab Emirates, 6345–6350. <https://doi.org/10.18653/v1/2022.findings-emnlp.473>
- [51] Changmeng Zheng, Junhao Feng, Ze Fu, Yi Cai, Qing Li, and Tao Wang. 2021. Multimodal relation extraction with efficient graph alignment. In *Proceedings of the 29th ACM International Conference on Multimedia*. 5298–5306.
- [52] Changmeng Zheng, Zhiwei Wu, Junhao Feng, Ze Fu, and Yi Cai. 2021. Mnre: A challenge multimodal dataset for neural relation extraction with visual evidence in social media posts. In *2021 IEEE International Conference on Multimedia and Expo (ICME)*. IEEE, 1–6.
- [53] Changmeng Zheng, Zhiwei Wu, Tao Wang, Yi Cai, and Qing Li. 2020. Object-aware multimodal named entity recognition in social media posts with adversarial learning. *IEEE Transactions on Multimedia* 23 (2020), 2520–2532.