

Self-Supervised Models in Automatic Whispered Speech Recognition

Aref Farhadipour
Department of Computational Linguistics
University of Zurich
Zurich, Switzerland.
aref.farhadipour@uzh.ch

Homa Asadi
Department of Linguistics
University of Isfahan
Isfahan, Iran.
h.asadi@fgn.ui.ac.ir

Volker Dellwo
Department of Computational Linguistics
University of Zurich
Zurich, Switzerland.
volker.dellwo@uzh.ch

Abstract—In automatic speech recognition, any factor that alters the acoustic properties of speech can pose a challenge to the system’s performance. This paper presents a novel approach for automatic whispered speech recognition in the Irish dialect using the self-supervised WavLM model. Conventional automatic speech recognition systems often fail to accurately recognise whispered speech due to its distinct acoustic properties and the scarcity of relevant training data. To address this challenge, we utilized a pre-trained WavLM model, fine-tuned with a combination of whispered and normal speech data from the wTIMIT and CHAINS datasets, which include the English language in Singaporean and Irish dialects, respectively. Our baseline evaluation with the OpenAI Whisper model highlighted its limitations, achieving a Word Error Rate (WER) of 18.8% on whispered speech. In contrast, the proposed WavLM-based system significantly improved performance, achieving a WER of 9.22%. These results demonstrate the efficacy of our approach in recognising whispered speech and underscore the importance of tailored acoustic modeling for robust automatic speech recognition systems. This study provides valuable insights into developing effective automatic speech recognition solutions for challenging speech affected by whisper and dialect. The source codes for this paper are freely available ¹².

I. INTRODUCTION

Recently, self-supervised models have been extensively utilized in various speech processing fields, including speech recognition, speaker recognition, and speaker diarization [1]. These models have notably enhanced the efficiency of such systems, particularly for the English language. The training of these models typically involves large datasets comprising speech from different languages, predominantly normal speech. However, these models exhibit diminished performance when processing abnormal speech types such as whispered, reverberant, and disordered speech, as these variants are not represented in the training data.

Whispered speech is a distinct mode of speech production that most individuals can produce naturally and at their discretion. It is often used for privacy or to avoid disturbing others in environments like libraries. Additionally, whispered speech may be a compulsion for individuals with laryngeal or vocal cord damage. The acoustic properties of whispered speech differ substantially from those of normal speech, presenting

significant challenges for conventional speech processing systems.

Furthermore, the presence of different dialects within a language can adversely impact the performance of automatic speech recognition (ASR) systems trained on standard dialects. Variations in dialect result in significant changes in the acoustic parameters of speech, thereby reducing the accuracy of ASR systems when encountering non-standard dialectal speech.

In this work, we aim to design an ASR system for whispered speech in the Irish dialect using the powerful self-supervised model, WavLM. Among various self-supervised models, WavLM has demonstrated superior performance in different scenarios, particularly in speaker recognition, where the acoustic characteristics of the speaker are more critical than the speech content. Consequently, WavLM has been selected to address the challenge of recognising whispered speech in the Irish dialect.

To illustrate the limitations of conventional speech recognition systems, we will also employ the *Whisper* model introduced by OpenAI [2], a widely acclaimed model in normal speech recognition. In this article, the *Whisper* model developed by OpenAI is italicized to differentiate it easily from the concept of whispered speech.

Developing a speech recognition system necessitates a robust and comprehensive dataset. However, research on whispered speech is limited primarily due to the scarcity of such datasets. Currently, only a few whispered speech datasets, such as wTIMIT [3] and CHAINS [4], are available and primarily cater to the English language. While some processes can effectively address some challenges, such as producing reverberant speech data [5] as a data augmentation method, they have not yet proven suitable for whispered speech conversion. Despite some efforts in the literature to develop methods for automatically converting normal speech to whispered speech, these artificially generated whispered speech samples tend to be unnatural and noisy [6].

To mitigate the impact of data scarcity, fine-tuning self-supervised models presents a viable solution compared to end-to-end (E2E) methods based on conformers and transformers [7], as suggested in several studies. This approach leverages the existing knowledge encoded in pre-

¹GitHub Repository for Whisper transcription.

²GitHub Repository for WavLM fine-tuning.

trained models to enhance performance with limited training data.

Previous work has explored various methods for recognising whispered speech, considering its unique characteristics and the challenge of limited data availability. As one of the first works in whispered speech recognition, [8], designed a system based on hidden Markov model and mel frequency cepstral coefficient features. Some works were also focused on improving the features [9] and adapting the acoustic model [10], [11], [12]. However, Several works focused on improving pre-processing [13], [14] to enhance system performance for whispered speech.

Some studies have addressed the challenge of limited data for whispered speech by employing generative methods and speech conversion techniques. These approaches include recurrent neural networks, Gaussian mixture models, sequence-to-sequence models, and various generative architectures [15], [16], [17]. For example, in [18], the authors proposed approaches based on MelGAN and VQ-VAE, adapted explicitly for whispered speech conversion.[6] focused on low-delayed whisper-to-speech voice conversion, which can be helpful in real-life communication of people.

In [19], an E2E method was proposed that included a frequency-weighted SpecAugment policy and a frequency-divided Convolutional Neural Network (CNN) feature extractor to better capture the high-frequency structures of whispered speech. This approach resulted in a 19.8% reduction in Phoneme Error Rate (PER) and 44.4% in Character Error Rate (CER) on the wTIMIT corpus. In [7], speakers were divided into four categories based on accent and speech type, and the E2E method with the ESPnet toolbox [20] was used. The study found a WER of 36.3% for whispered speech, using pitch and filterbank features without a language model.

Gudepu et al., [21], generated a synthetic whisper corpus from normal speech using CycleGAN, which was then used to augment data for ASR systems. This approach achieved a 23% relative reduction in WER on whispered speech compared to the baseline. Ghaffarzadegan et al., [22], introduced two strategies to generate pseudo-whisper utterances using vector Taylor series and denoising autoencoders. These strategies significantly reduced WER for a TIMIT-trained speech recogniser on whisper recognition tasks.

In [23], a new framework using deep denoising autoencoders and Teager-energy-based cepstral features was proposed. This framework improved whisper recognition accuracy by 31% over traditional methods, achieving a 92.81% word recognition rate in mismatched train/test scenarios.

The remainder of this article is structured as follows: Section II discusses whispered speech and its phonetic differences from normal speech. Section III introduces the datasets and the proposed system. The results and findings are presented in Section IV, and the conclusion is provided in Section V.

II. WHISPERED SPEECH

Whispered speech is a natural communication mode often employed in public situations to protect privacy or when one wishes to avoid being overheard. This form of speech differs significantly from normal speech in both production and acoustic properties. The fundamental difference between whispered and normal speech lies in their generation mechanisms. Whispered speech is produced by exhaling air and adjusting the shape of the pharynx so that the vocal cords do not vibrate [8]. While normal speech involves vocal fold vibrations to produce sound, whispered speech relies on turbulent, aperiodic airflow passing through a relatively small, nearly constant aperture formed between the vocal folds [24], [25].

This results in a breathy quality with less distinct harmonic patterns, making it difficult to identify formants in the spectrogram of whispered speech [7]. In terms of production, physiological measurements using magnetic resonance imaging have shown that during the whispered speech, the supraglottal structures are constricted and shifted downward, attaching to the vocal folds to prevent their vibration [26]. As a result, speakers produce sounds without fully engaging their vocal cords, leading to a hushed, breathy quality. The resonance of whispered speech usually occurs at significantly higher frequencies than normally phonated speech [27].

Thus, whispered sounds tend to have a higher frequency range, primarily due to increased airflow turbulence. This turbulence generates a noisier signal with less defined formant structures, which are crucial for identifying vowels and certain consonants in normal speech. Consequently, whispered speech can be less intelligible, especially in noisy environments. Furthermore, whispered speech has a lower energy contour, reduced overall amplitude, and a less distinct formant structure, particularly in the lower frequencies, along with a flatter spectral slope [28], [27], [7].

The articulation of phonemes is also altered in whispered speech [29], [24]. Research indicates that in whispered speech, the first and second formants shift to higher frequencies, and vowel duration is extended [30], [29], [31].

Additionally, studies have shown that the duration of consonants is prolonged compared to normal speech, with the intensity of voiceless consonants remaining unchanged. In contrast, the intensity of voiced consonants decreases [32]. [33] found that producing whispered speech demands greater physiological exertion than normal speech. Maintaining the necessary vocal fold position can increase tension in the laryngeal muscles, potentially leading to vocal fatigue if sustained for extended periods. These characteristics pose challenges for speech recognition systems, necessitating different approaches for analysis and synthesis compared to normal speech.

Despite these challenges, whispered speech serves important functions in communication, often used for privacy, intimacy, or in situations where normal speech volume is inappropriate. Fig 1 displays the notable differences in the spectrogram

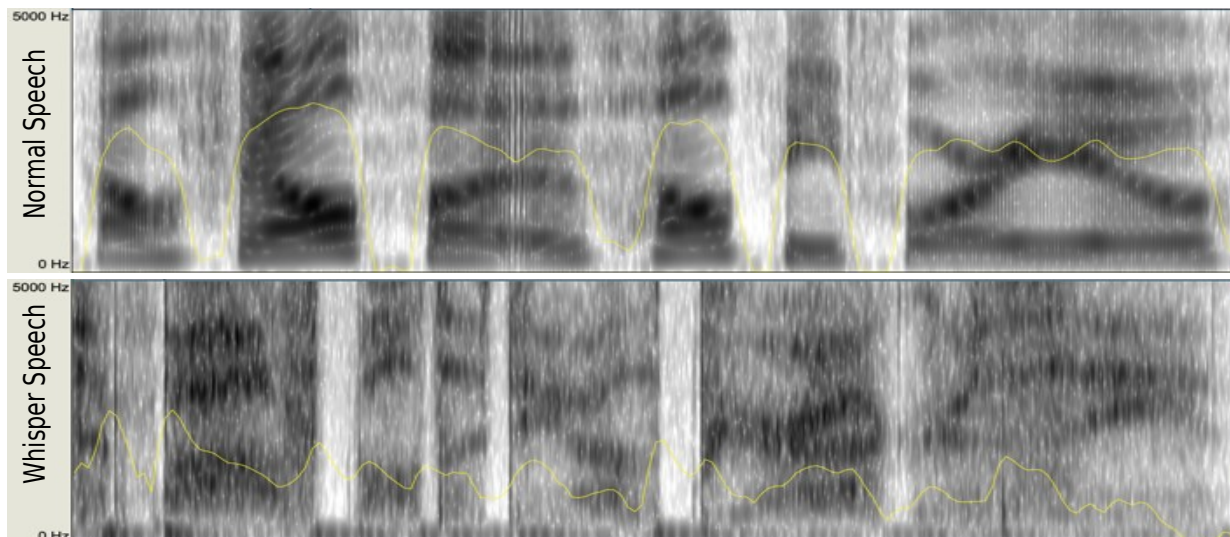


Fig. 1: Spectrogram of normal and whispered speech from the same speaker

characteristics of the speech signals spoken by the same individual in both neutral and whisper modes in Praat software.

As Fig 1 shows, in whispered speech, the waveform exhibits lower amplitude and lacks the regular periodicity observed in normal phonation, which indicates the absence of vocal fold vibrations. The frequency content in whispered speech is more diffuse and less defined, characterized by an evenly distributed energy spectrum and a lack of pronounced harmonic structures. The overall intensity is lower, as evidenced by the lighter grayscale in the spectrogram, and the yellow intensity contour line displays lower and less stable intensity levels compared to normal speech.

Conversely, normal speech is characterized by higher amplitude and regular periodic patterns, with distinct harmonic bands and well-defined speech formants. The spectrogram of normal speech shows higher intensity levels, indicated by darker areas, and the yellow intensity contour line is more stable and reaches higher intensity levels, reflecting concentrated energy at specific frequencies.

III. METHODOLOGY

In this section, the WavLM model as the core of the proposed system and the CHAINS dataset are introduced as the evaluation dataset utilized in this study.

A. WavLM

The WavLM network, a self-supervised learning (SSL) model introduced by Microsoft in 2021, aims to provide a comprehensive solution for various speech processing applications. WavLM was designed and trained for full-stack speech processing differently from other SSL models, achieving superior performance in tasks such as speaker recognition and separation, which demand an efficient understanding of acoustic models. The training process of

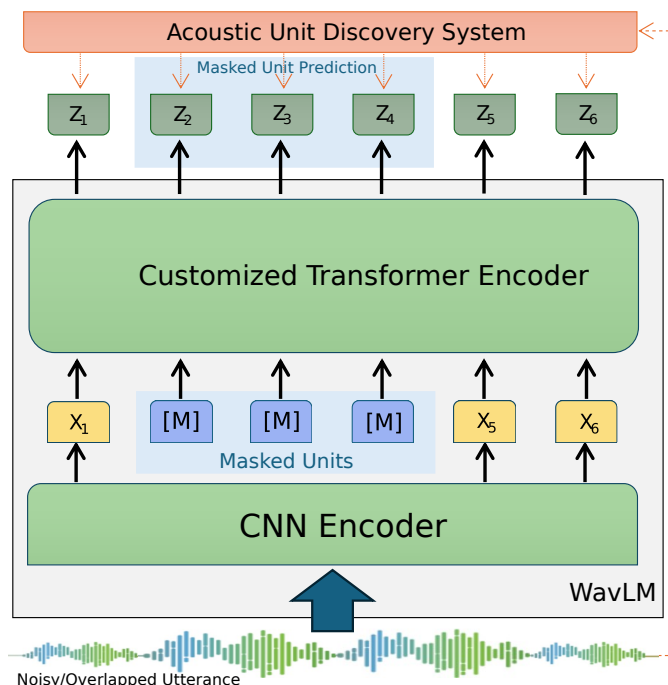


Fig. 2: Architecture of WavLM model

this model involved masked speech prediction and denoising, which were performed jointly. This dual-task training strategy enables the model to predict masked speech content while learning to denoise, thereby equipping it with the ability to handle multiple speech processing scenarios beyond ASR.

WavLM was pretrained on 94,000 hours of speech data, encompassing a variety of speech types, including read and spontaneous speech, allowing it to model a broad spectrum of speech characteristics. According to benchmarks, WavLM outperforms other SSL models across many scenarios. The model architecture incorporates a gated relative position bias

TABLE I: Details of whisper datasets and their application as test and train data

Dataset	Style	#Utter.	#Spkr	Dialect	Dur. (h)	Usage
wTIMIT	whisper	8460	20	Singaporean	11	train
wTIMIT	normal	4652	11	Singaporean	6	train
CHAINS	normal	1332	36	Irish	3	train
CHAINS	whisper	1332	36	Irish	3	test

in the transformer self-attention mechanism to enhance its performance.

As depicted in Fig 2, WavLM consists of a CNN feature encoder and a transformer encoder with gated relative position bias. The CNN encoder comprises seven blocks of temporal convolution, followed by normalization and GELU activation layers, with each convolutional block representing 25 milliseconds of the input signal. The transformer section includes position embedding with a kernel size of 128 and 16 groups at its bottom [34].

By predicting the masked noisy/overlapped parts, the model learns the speaker’s acoustic information from the unmasked segments and estimates the masked parts using the speaker’s characteristics. This strategy significantly enhances the model’s ability to learn and generalize acoustic information.

In this network, let $X = \{x_1, x_2, \dots, x_T\}$ represent a speech utterance with T frames, and let the discovered hidden units be $Z = \{z_1, z_2, \dots, z_T\}$. Let $M \subset [T]$ denote the set of indices to be masked for the length- T sequence X . The corrupted version of X , denoted as $\hat{X} = r(X, M)$, is defined such that x_t is replaced with a mask embedding \hat{x} if $t \in M$ [35].

B. Whisper Dataset

The CHAINS dataset is utilized to evaluate the proposed system. This dataset includes both normal speech, referred to as *solo*, and whispered speech, known as *whsp*. The dataset comprises recordings from 36 speakers, dominantly with Irish dialects. To develop a model capable of accurately capturing the acoustic features of the Irish dialect, the normal speech portion of this dataset is used for system training, while the whispered speech portion is employed for evaluation. Additionally, to improve the model’s performance on a whispered speech by learning its unique acoustic characteristics, the whispered speech portion of the wTIMIT dataset, which includes Singaporean and US dialects, is also used as auxiliary data in the training process.

In this evaluation, only the Singaporean dialect whispered speech from wTIMIT is used for training, ensuring that the system encounters different dialects from those used during pre-training, thereby fostering a more general acoustic model. Each speaker’s evaluation data involves 33 whispered utterances from the CHAINS dataset. Further details of these datasets are presented in Table I.

TABLE II: WER% of pre-trained *Whisper* model for normal and whispered speech style

Pre-trained Model	Normal speech	Whispered speech
OpenAI Whisper	16.69%	18.80%

TABLE III: WER% of fine-tuned WavLM model for whispered speech style with two decoding methods

Fine-tuned Model	Greedy search	Beam search
WavLM	9.28%	9.22%

IV. EXPERIMENTAL RESULTS

According to the results from E2E systems based on conformers and transformers, which typically require substantial amounts of data, the utilization of pre-trained self-supervised models can be an effective strategy to address the data scarcity challenge in whisper ASR. As previously mentioned, conventional systems are inadequate for recognizing whispered speech. To validate this claim, a baseline system utilizing the OpenAI *Whisper* model—one of the most powerful speech recognition systems for the English language—has been employed. No fine-tuning was performed on the *Whisper* model for this work. We evaluated this system using whispered speech from the CHAINS dataset, with transcription performed using the beam search algorithm.

The ASR results using the Large-v2 version of the *Whisper* model as the baseline system are presented in Table II. This system achieved a WER of 16.69% for normal and 18.8% for whispered speech parts of the CHAINS dataset. The speech texts in the dataset are identical for both speech styles. As shown, the system experienced a drop in performance when dealing with whispered speech. In addition, the performance of the Irish dialect was lower than that of the typical English [2]. These results indicate that whispered speech with a different dialect presents substantial modeling complexities for a system trained predominantly on normal speech data, underscoring the need for a dedicated system for whispered speech recognition. In the subsequent step, the proposed system was trained using the Base+ version of WavLM model. This model comprises 94.7 million parameters and was pre-trained over one million steps on 94,000 hours of speech data. The proposed system was fine-tuned using 17 hours of wTIMIT whispered and normal speech with a Singaporean dialect, along with 3 hours of normal speech with an Irish dialect from the CHAINS dataset. This training of WavLM was conducted using the PaddleSpeech toolbox [36] on an NVIDIA A100 80GB GPU over 25 epochs with a batch size of 6 and an adaptive learning rate schedule. SpecAugment [37] with time masking was employed as a data augmentation method, and the AdamW algorithm [38] was used for optimization. Decoding was performed with a beam search size of 1 and a greedy search size of 16. The results of this system are presented in Table III.

The proposed WavLM-based system achieved a WER of

9.28% using the greedy search algorithm and 9.22% based on the beam search algorithm. These results demonstrate that the system effectively learned the acoustic parameters of whispered speech, significantly outperforming the OpenAI *Whisper* model baseline system. This improvement can be attributed to including whispered speech data in the training phase. Additionally, the Irish dialect, which posed a challenge for the baseline system, was effectively addressed during training using normal speech data from the CHAINS dataset. The choice of the WavLM network proved advantageous due to its suitability for training on small datasets and its superior acoustic modeling capabilities.

V. CONCLUSION

In this article, we proposed a system for speech recognition under the challenging conditions of whispered speech and the Irish dialect. To address these challenges, we utilized training data with an acoustic space similar to the test conditions, enabling the system to effectively model the complex acoustic characteristics in the test data. The results demonstrate that the proposed system, with a WER of 9.22%, outperforms the powerful OpenAI *Whisper* system, which served as a baseline. Our findings indicate that the proposed system achieves superior performance on the CHAINS dataset for whispered speech recognition.

REFERENCES

- [1] S.-w. Yang, P.-H. Chi, Y.-S. Chuang, C.-I. J. Lai, K. Lakhotia, Y. Y. Lin, A. T. Liu, J. Shi, X. Chang, G.-T. Lin *et al.*, "Superb: Speech processing universal performance benchmark," *arXiv preprint arXiv:2105.01051*, 2021.
- [2] A. Radford, J. W. Kim, T. Xu, G. Brockman, C. McLeavey, and I. Sutskever, "Robust speech recognition via large-scale weak supervision," in *International conference on machine learning*. PMLR, 2023, pp. 28 492–28 518.
- [3] B. P. Lim, "wtimit whispered timit dataset," 2010. [Online]. Available: http://www.isle.illinois.edu/speech_web_jg/pubs/2010/lim10thesis.pdf
- [4] M. Grimaldi and F. Cummins, "Speaker identification using instantaneous frequencies," *IEEE transactions on audio, speech, and language processing*, vol. 16, no. 6, pp. 1097–1111, 2008.
- [5] T. Ko, V. Peddinti, D. Povey, M. L. Seltzer, and S. Khudanpur, "A study on data augmentation of reverberant speech for robust speech recognition," in *2017 IEEE international conference on acoustics, speech and signal processing (ICASSP)*. IEEE, 2017, pp. 5220–5224.
- [6] A. Avdeeva, A. Gusev, T. Andzhukaev, and A. Ivanov, "Streaming asr encoder for whisper-to-speech online voice conversion," *IEEE Open Journal of Signal Processing*, 2023.
- [7] Z. Lin, T. Patel, and O. Scharenborg, "Improving whispered speech recognition performance using pseudo-whispered based data augmentation," in *2023 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*. IEEE, 2023, pp. 1–8.
- [8] T. Ito, K. Takeda, and F. Itakura, "Analysis and recognition of whispered speech," *Speech communication*, vol. 45, no. 2, pp. 139–152, 2005.
- [9] C.-Y. Yang, G. Brown, L. Lu, J. Yamagishi, and S. King, "Noise-robust whispered speech recognition using a non-audible-murmur microphone with vts compensation," in *2012 8th International Symposium on Chinese Spoken Language Processing*. IEEE, 2012, pp. 220–223.
- [10] B. P. Lim, *Computational differences between whispered and non-whispered speech*. University of Illinois at Urbana-Champaign, 2011.
- [11] P. X. Lee, D. Wee, H. S. Y. Toh, B. P. Lim, N. F. Chen, and B. Ma, "A whispered mandarin corpus for speech technology applications," in *INTERSPEECH*, 2014, pp. 1598–1602.
- [12] A. Mathur, S. M. Reddy, and R. M. Hegde, "Significance of parametric spectral ratio methods in detection and recognition of whispered speech," *EURASIP Journal on Advances in Signal Processing*, vol. 2012, pp. 1–20, 2012.
- [13] S. Ghaffarzadegan, H. Bofil, and J. H. Hansen, "Ut-vocal effort ii: Analysis and constrained-lexicon recognition of whispered speech," in *2014 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2014, pp. 2544–2548.
- [14] J. Galic, S. T. Jovicic, D. Grozdic, and B. Markovic, "Htk-based recognition of whispered speech," in *Speech and Computer: 16th International Conference, SPECOM 2014, Novi Sad, Serbia, October 5-9, 2014. Proceedings 16*. Springer, 2014, pp. 251–258.
- [15] T. Toda and K. Shikano, "NAM-to-speech conversion with Gaussian mixture models," in *Proc. Interspeech 2005*, 2005, pp. 1957–1960.
- [16] H. Lian, Y. Hu, W. Yu, J. Zhou, and W. Zheng, "Whisper to normal speech conversion using sequence-to-sequence mapping model with auditory attention," *IEEE Access*, vol. 7, pp. 130 495–130 504, 2019.
- [17] G. N. Meenakshi and P. K. Ghosh, "Whispered speech to neutral speech conversion using bidirectional lstms," in *Interspeech*, 2018, pp. 491–495.
- [18] D. Wagner, S. P. Bayerl, H. A. C. Maruri, and T. Bocklet, "Generative models for improved naturalness, intelligibility, and voicing of whispered speech," in *2022 IEEE Spoken Language Technology Workshop (SLT)*. IEEE, 2023, pp. 943–948.
- [19] H.-J. Chang, A. H. Liu, H.-y. Lee, and L.-s. Lee, "End-to-end whispered speech recognition with frequency-weighted approaches and pseudo whisper pre-training," in *2021 IEEE Spoken Language Technology Workshop (SLT)*. IEEE, 2021, pp. 186–193.
- [20] S. Watanabe, T. Hori, S. Karita, T. Hayashi, J. Nishitoba, Y. Unno, N. E. Y. Soplin, J. Heymann, M. Wiesner, N. Chen *et al.*, "Espnet: End-to-end speech processing toolkit," *arXiv preprint arXiv:1804.00015*, 2018.
- [21] P. R. Gudepu, G. P. Vadiseti, A. Niranjana, K. Saranu, R. Sarma, M. A. B. Shaik, and P. Paramasivam, "Whisper augmented end-to-end/hybrid speech recognition system-cyclegan approach," in *INTER-SPEECH*, 2020, pp. 2302–2306.
- [22] S. Ghaffarzadegan, H. Bofil, and J. H. Hansen, "Generative modeling of pseudo-whisper for robust whispered speech recognition," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 24, no. 10, pp. 1705–1720, 2016.
- [23] D. T. Grozdic and S. T. Jovicic, "Whispered speech recognition using deep denoising autoencoder and inverse filtering," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 25, no. 12, pp. 2313–2322, 2017.
- [24] S. T. Jovićić and Z. Šarić, "Acoustic analysis of consonants in whispered speech," *Journal of voice*, vol. 22, no. 3, pp. 263–274, 2008.
- [25] Y. Swerdlin, J. Smith, and J. Wolfe, "The effect of whisper and creak vocal mechanisms on vocal tract resonances," *The Journal of the Acoustical Society of America*, vol. 127, no. 4, pp. 2590–2598, 2010.
- [26] K. Tsunoda, Y. Ohta, S. Niimi, Y. Soda, and H. Hirose, "Laryngeal adjustment in whispering: magnetic resonance imaging study," *Annals of Otology, Rhinology & Laryngology*, vol. 106, no. 1, pp. 41–43, 1997.
- [27] M. Matsuda and H. Kasuya, "Acoustic nature of the whisper," in *Sixth European Conference on Speech Communication and Technology*, 1999.
- [28] X. Fan and J. H. Hansen, "Acoustic analysis and feature transformation from neutral to whisper for speaker identification within whispered speech audio streams," *Speech communication*, vol. 55, no. 1, pp. 119–134, 2013.
- [29] H. R. Sharifzadeh, I. V. McLoughlin, and M. J. Russell, "A comprehensive vowel space for whispered speech," *Journal of voice*, vol. 26, no. 2, pp. e49–e56, 2012.
- [30] K. Johnson and M. J. Sjerps, "Speaker normalization in speech perception," *The handbook of speech perception*, pp. 145–176, 2021.
- [31] N. Houle and S. V. Levi, "Acoustic differences between voiced and whispered speech in gender diverse speakers," *The Journal of the Acoustical Society of America*, vol. 148, no. 6, pp. 4002–4013, 2020.
- [32] M. F. Schwartz, "Bilabial closure durations for/p/,/b/, and/m/in voiced and whispered vowel environments," *The Journal of the Acoustical Society of America*, vol. 51, no. 6B, pp. 2025–2029, 1972.
- [33] A. D. Rubin, V. Praneetvatakul, S. Gherson, C. A. Moyer, and R. T. Sataloff, "Laryngeal hyperfunction during whispering: reality or myth?" *Journal of voice*, vol. 20, no. 1, pp. 121–127, 2006.
- [34] S. Chen, C. Wang, Z. Chen, Y. Wu, S. Liu, Z. Chen, J. Li, N. Kanda, T. Yoshioka, X. Xiao *et al.*, "Wavlm: Large-scale self-supervised pre-

- training for full stack speech processing,” *IEEE Journal of Selected Topics in Signal Processing*, vol. 16, no. 6, pp. 1505–1518, 2022.
- [35] W.-N. Hsu, B. Bolte, Y.-H. H. Tsai, K. Lakhota, R. Salakhutdinov, and A. Mohamed, “Hubert: Self-supervised speech representation learning by masked prediction of hidden units,” *IEEE/ACM transactions on audio, speech, and language processing*, vol. 29, pp. 3451–3460, 2021.
- [36] H. Zhang, T. Yuan, J. Chen, X. Li, R. Zheng, Y. Huang, X. Chen, E. Gong, Z. Chen, X. Hu *et al.*, “Paddlespeech: An easy-to-use all-in-one speech toolkit,” *arXiv preprint arXiv:2205.12007*, 2022.
- [37] D. S. Park, W. Chan, Y. Zhang, C.-C. Chiu, B. Zoph, E. D. Cubuk, and Q. V. Le, “Specaugment: A simple data augmentation method for automatic speech recognition,” *arXiv preprint arXiv:1904.08779*, 2019.
- [38] I. Loshchilov and F. Hutter, “Decoupled weight decay regularization,” *arXiv preprint arXiv:1711.05101*, 2017.