

**procedure** GENERATECHARACTER

$I \leftarrow 0$

▷ Initialize image canvas

**while** *true* **do**

$[y_i, x_i] \leftarrow \text{GenerateStroke}(I)$

▷ Sample stroke location & trajectory

$I \leftarrow \text{Render}(y_i, x_i, I)$

▷ Render stroke to image canvas

$v_i \sim p(v \mid I)$

▷ Sample termination indicator

**if**  $v_i$  **then**


break

▷ Terminate sample


**return**  $I$

▷ Return character image


**GenerateStroke( $I$ )**

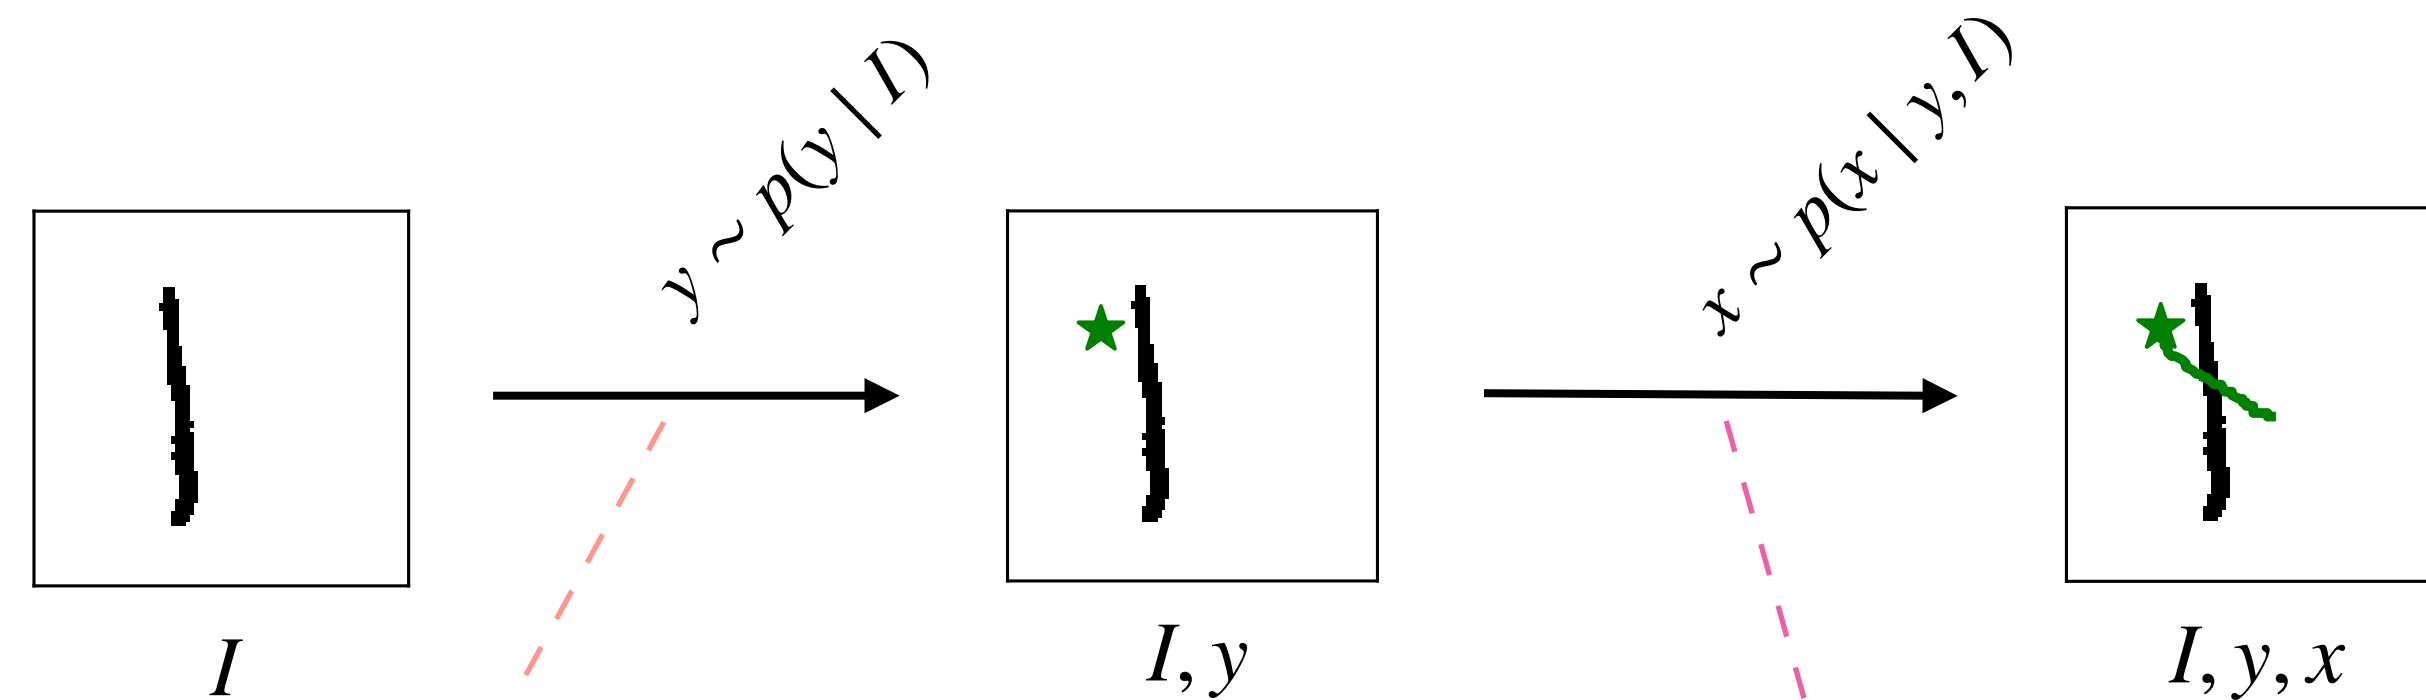

termination model  $p(v \mid I)$

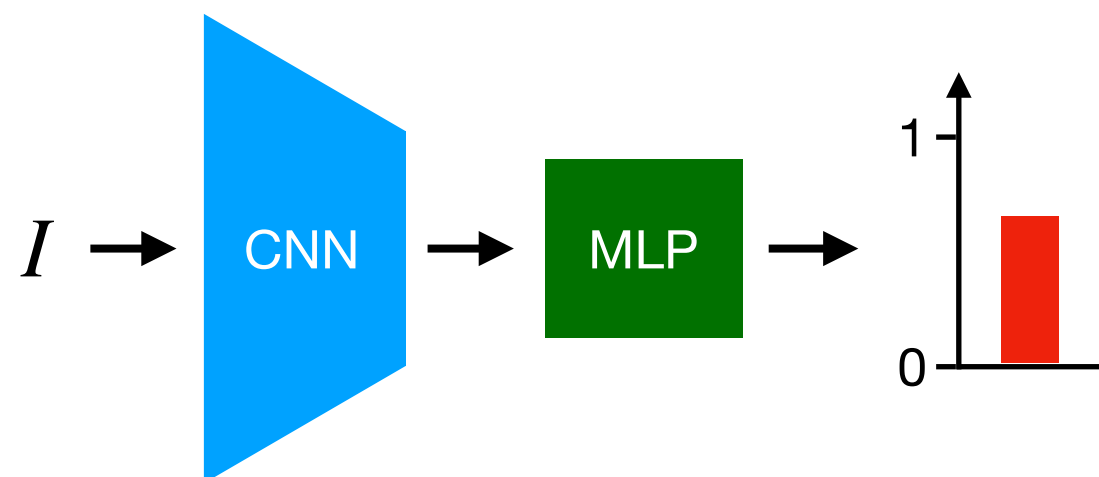

location model  $p(y \mid I)$

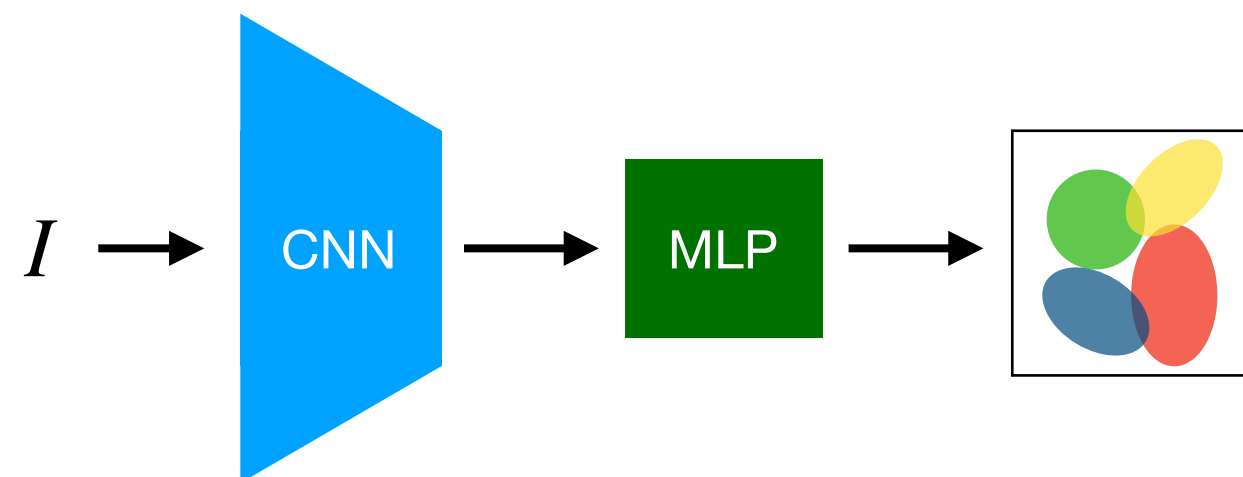

stroke model  $p(x \mid y, I)$

