

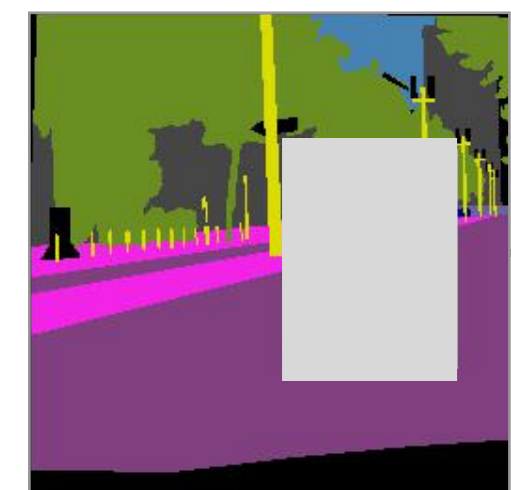


Incomplete image ($\mathbf{x}_{\text{BLANKED}}$)



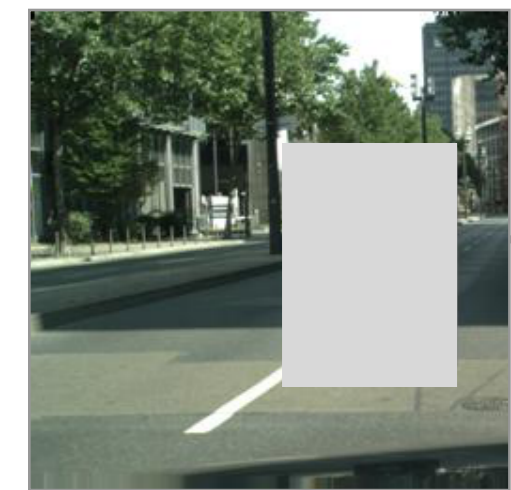


Segmentation ($\mathbf{s}_{\text{BLANKED}}$)


Class (\mathbf{c})




Instance sampled code and class (\mathbf{c})

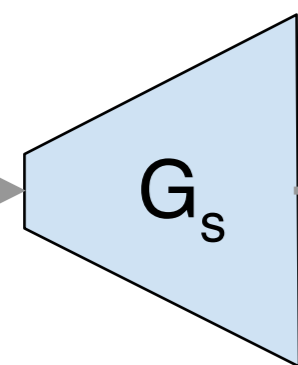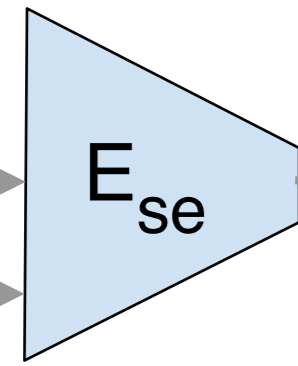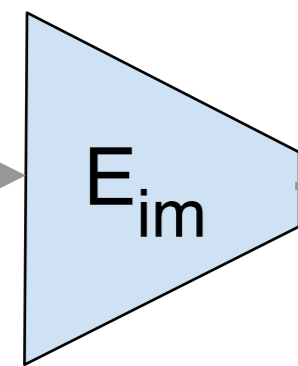


ResBlocks

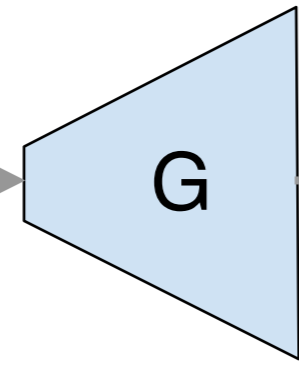


Completed image ($\mathbf{x}_{\text{FILLED}}$)

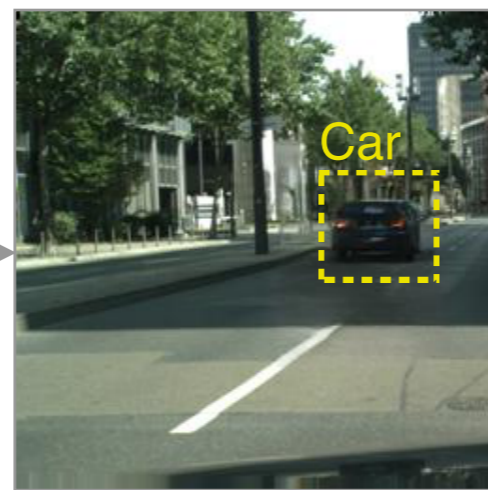


Instance inserted

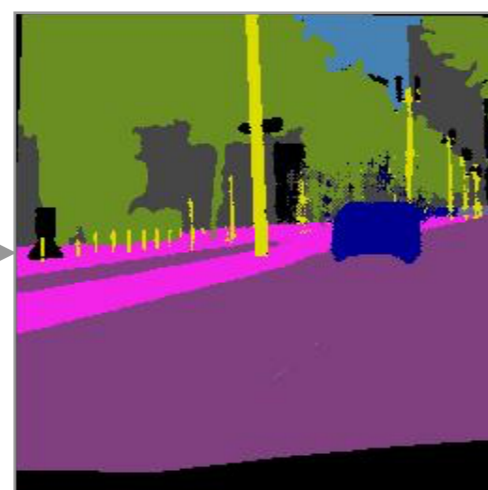

Completed segmentation ($\mathbf{s}_{\text{FILLED}}$)

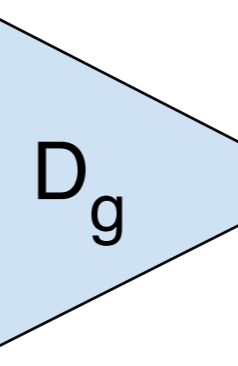

real / fake

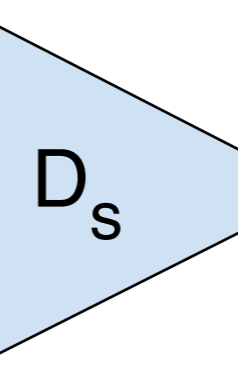

real / fake

Generated instance ($\hat{\mathbf{m}}_s$)



Our Decoder Block (inside the G)

