


```

(:predicates ; input features
  (image [return_type=vector[float32], input] ?o - item)
)
(:derived
  (color [return_type=vector[float32]] ?o - item)
  (??f (image ?o))
)
(:derived
  (is-yellow ?o - item) ; parameter and type
  (??f (color ?o)) ; function body
)

```

(a) A PDSketch definition of an input feature of each objects: (image ?o), and two derived feature/predicates: (color ?o) and (is-yellow ?o).

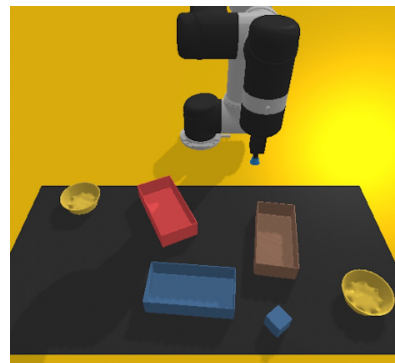


Raw Observation  
(Image)

image ?o  
(per-obj.)

color ?o  
(per-obj.)

is-yellow ?o  
(per-obj. score)

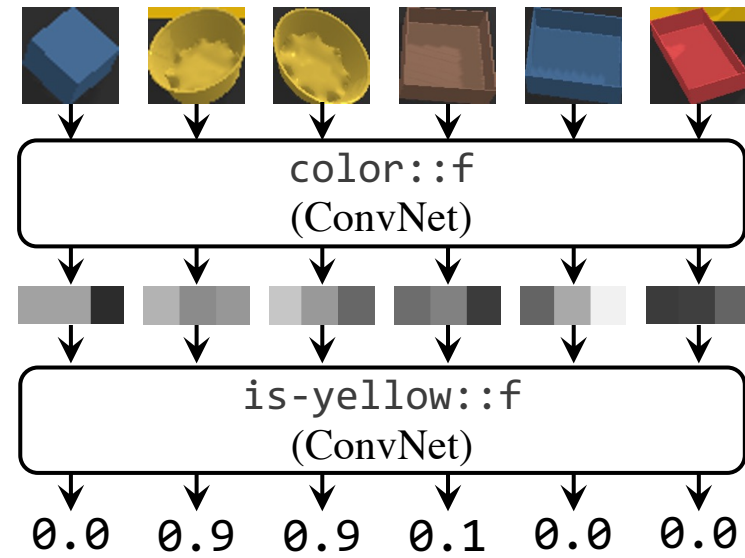

(b) The corresponding “computation graph” induced by the definitions. color::f and is-yellow::f are customizable CNNs that are applied identically to each object in the input state.