

# 英語でCommitを 書こう

@pwim

# 自己紹介

- ポール (@pwim)
- **mobalean** で  Doorkeeper
- Tokyo Rubyist Meetupの主催者

# Standard Commit Format

Add example about git format-patch

git-format patch is a tool that lets you generate a patch email from a commit.

```
# Please enter the commit message for your changes. Lines starting
# with '#' will be ignored, and an empty message aborts the commit.
# On branch master
# Changes to be committed:
#   (use "git reset HEAD^1 <file>..." to unstage)
#
#   modified:   README.md
#
```

# git format-patch

```
From 607164edbae4fe3d9a6068d6f87c72e66d2a140c Mon Sep 17 00:00:00 2001
From: Paul McMahon <paul@mobalean.com>
Date: Thu, 26 Jul 2012 17:47:17 +0900
Subject: [PATCH] Add example about git format-patch

git-format patch is a tool that lets you generate a patch email from a
commit.
---
 README.md | 3 +++
 1 file changed, 3 insertions(+)

diff --git a/README.md b/README.md
index 0051a10..e2f1441 100644
--- a/README.md
+++ b/README.md
@@ -9,5 +9,8 @@ By convention, a commit message in git is divided into two parts: a subject and
 an optional body. Although git itself doesn't place any restrictions on how you
 write commits, many git tools rely on this convention.

+`git format-patch` is one such tool. It allows you to generate a patch email
+like the one below.
+
 [tokyu05]: http://regional.rubykaigi.org/tokyu05

--
1.7.11.3
```

Write subject in  
imperative (命令法)

Fix *not* Fixed  
Add *not* Added  
Change *not* Changed

```
Revert "Add example about git format-patch"
```

```
This reverts commit 0c459302f0dca9dbc7a55e87e4459ddefd3d412c.
```


```
# Please enter the commit message for your changes. Lines starting  
# with '#' will be ignored, and an empty message aborts the commit.  
# On branch master  
# Your branch and 'origin/master' have diverged,  
# and have 1 and 1 different commit each, respectively.  
#  
# Changes to be committed:  
#   (use "git reset HEAD <file>..." to unstage)  
#  
#   modified:   README.md  
#
```

Start subject with a  
capital letter, don't end  
with a period



Git subject is like email  
subject

# Let's take a look at some commits

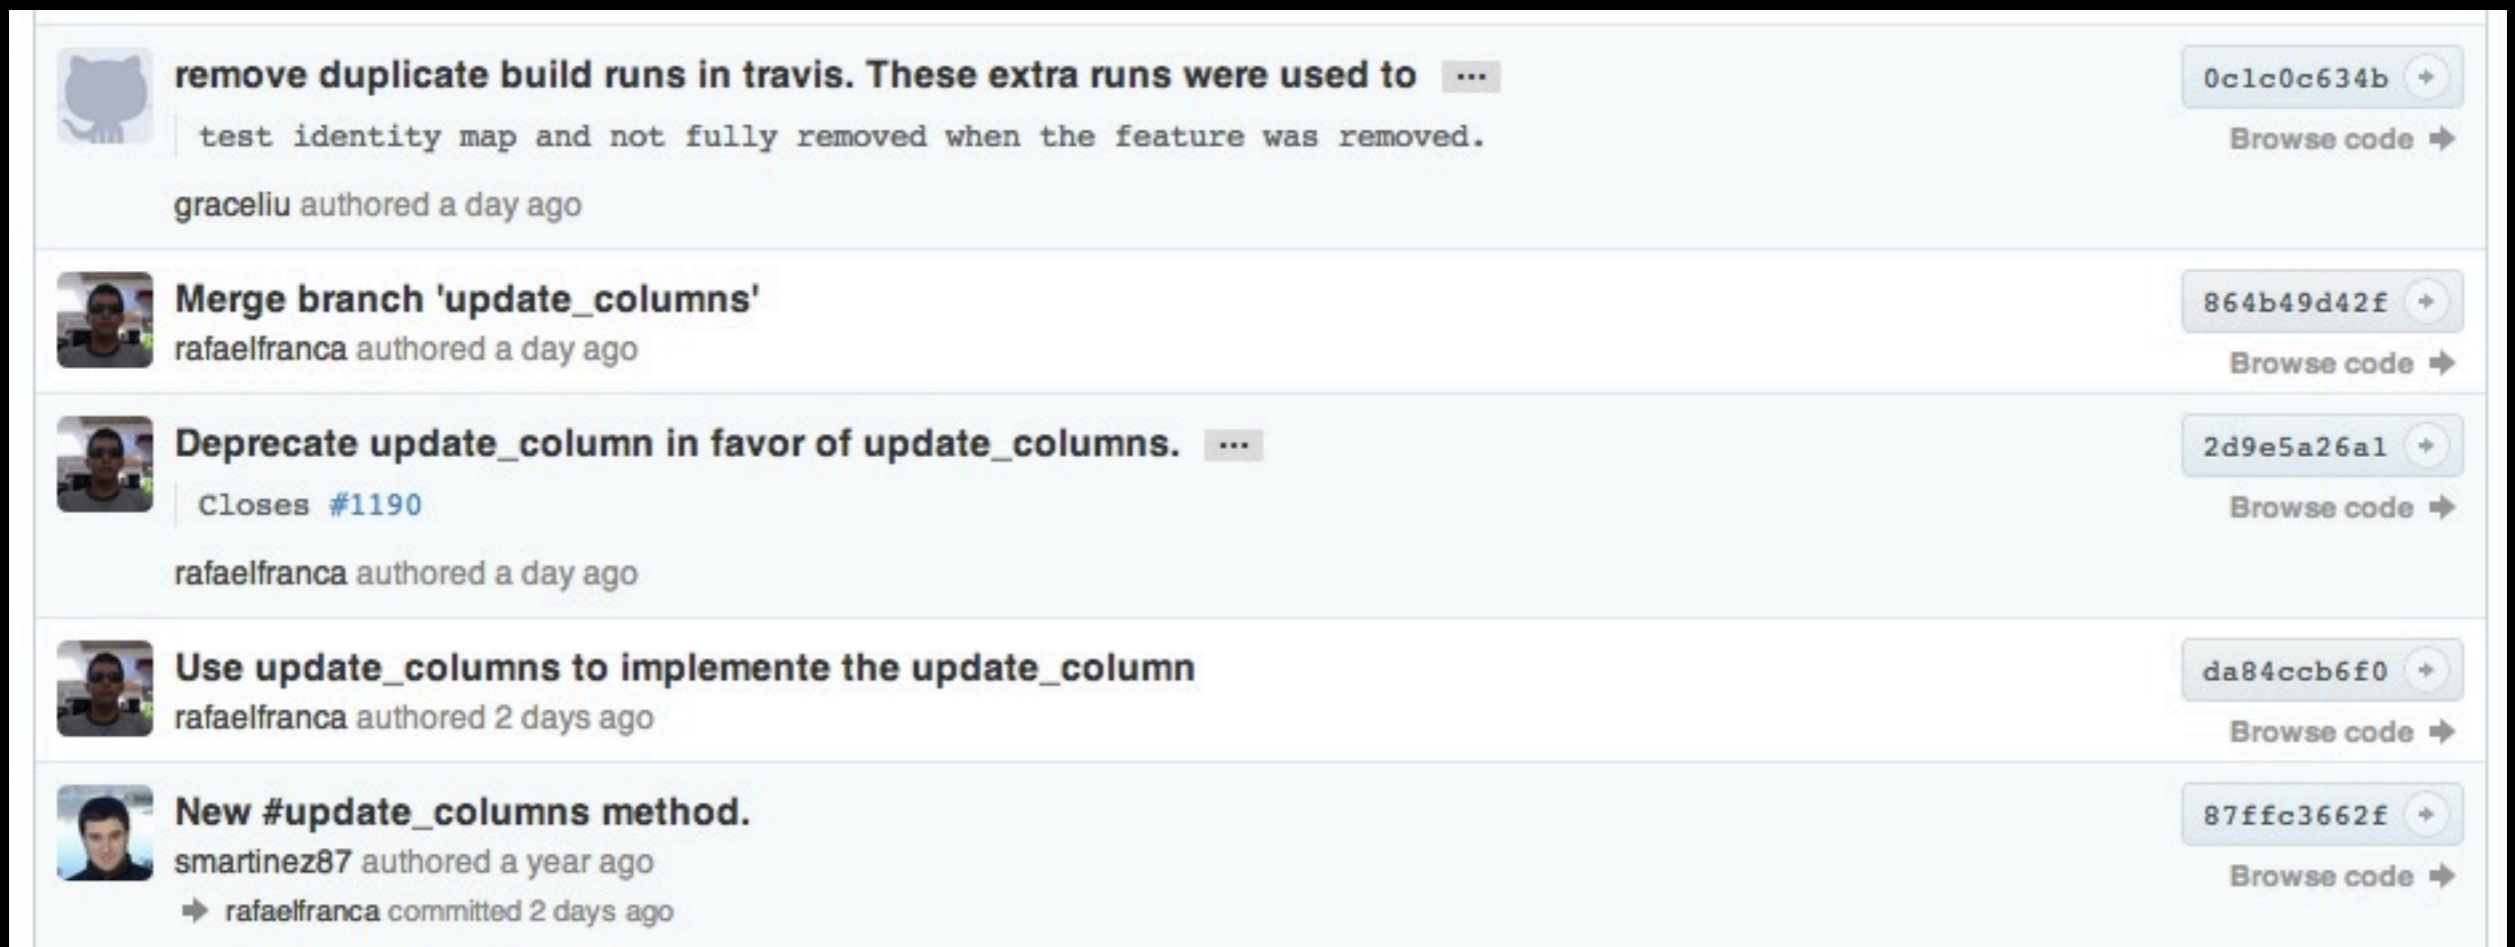

A screenshot of a GitHub commit history page. It displays five commit entries, each with a profile picture, a commit message, the author's name, the time since authored, a commit hash, and a 'Browse code' link. The commit messages describe changes to Travis CI build runs, merging a branch, deprecating a method, and implementing a new method.

Commit Message	Author	Time	Hash	Action
remove duplicate build runs in travis. These extra runs were used to test identity map and not fully removed when the feature was removed.	graceliu	a day ago	0c1c0c634b	Browse code
Merge branch 'update_columns'	rafaelfranca	a day ago	864b49d42f	Browse code
Deprecate update_column in favor of update_columns. Closes #1190	rafaelfranca	a day ago	2d9e5a26a1	Browse code
Use update_columns to implemente the update_column	rafaelfranca	2 days ago	da84ccb6f0	Browse code
New #update_columns method.	smartinez87	a year ago	87ffc3662f	Browse code
→ rafaelfranca committed 2 days ago				

## Add support for optional root segments containing slashes

[Browse code](#)

Optional segments with a root scope need to have the leading slash outside of the parentheses, otherwise the generated url will be empty. However if the route has non-optional elements then the leading slash needs to remain inside the parentheses otherwise the generated url will have two leading slashes, e.g:

```
Blog::Application.routes.draw do
  get '/(category)', :to => 'posts#index', :as => :root
  get '/(category)/author/:name', :to => 'posts#author', :as => :author
end
```

```
$ rake routes
root GET /(:category)(.:format)          posts#index
author GET (/:category)/author/:name(.:format) posts#author
```

This change adds support for optional segments that contain a slash, allowing support for urls like /page/2 for the root path, e.g:

```
Blog::Application.routes.draw do
  get '/(page/:page)', :to => 'posts#index', :as => :root
end
```

```
$ rake routes
root GET /(page/:page)(.:format) posts#index
```

Fixes [#7073](#)

 pixeltrix authored 9 days ago

1 parent [939f014bdf](#) commit [d8745decaf59aad32aa2f09abdba99b8d0e48b31](#)

# 使っていないmethodを消す

```
4 ■■■■ | activerecord/lib/active_record/reflection.rb View file @ 45285f5
```

```
...  ... @@ -116,10 +116,6 @@ def ==(other_aggregation)
116 116     active_record == other_aggregation.active_record
117 117     end
118 118
119     - def sanitized_conditions #:nodoc:
120     -   @sanitized_conditions ||= klass.send(:sanitize_sql, options[:conditions]) if options[:conditions]
121     -   end
122     -
123 119   private
124 120     def derive_class_name
125 121       name.to_s.camelize
```

## remove unused method

[Browse code](#)

jonleighton authored 6 days ago

1 parent [df0b7a8227](#) commit [45285f56f4993e3910df59e7e68b465a287ef089](#)

Showing 1 changed file with 0 additions and 4 deletions.

[Show Diff Stats](#)

4 ■■■■ | activerecord/lib/active\_record/reflection.rb

[View file @ 45285f5](#)

```
...   ... @@ -116,10 +116,6 @@ def ==(other_aggregation)
116 116     active_record == other_aggregation.active_record
117 117     end
118 118
119     - def sanitized_conditions #:nodoc:
120     -   @sanitized_conditions ||= klass.send(:sanitize_sql, options[:conditions]) if options[:conditions]
121     -   end
122     -
123 119     private
124 120     def derive_class_name
125 121     name.to_s.camelize
```

# 誤植をなおす

```
6 ■ ■ ■ ■ | activerecord/lib/active_record/relation.rb View file @ 11d488d
```

```
...   ... @@ -75,7 +75,7 @@ def insert(values)
75   75     binds)
76   76     end
77   77
78   -   # Initializes new record from relation while maintaing the current
78   +   # Initializes new record from relation while maintaining the current
79   79     # scope.
80   80     #
81   81     # Expects arguments in the same format as +Base.new+.
...   ... @@ -99,7 +99,7 @@ def initialize_copy(other)
99   99
100  100     alias build new
101  101
102  -   # Tries to +create+ a new record with the same scoped attributes
102  +   # Tries to create a new record with the same scoped attributes
103  103     # defined in the relation. Returns the initialized object if validation fails.
104  104     #
105  105     # Expects arguments in the same format as +Base.create+.
...   ... @@ -252,7 +252,7 @@ def any?
252  252     end
253  253     end
254  254
255  -   # Returns true if there are more than one records.
255  +   # Returns true if there is more than one records.
256  256     def many?
257  257         if block_given?
258  258             to_a.many? { |*block_args| yield(*block_args) }
```

## Fix typos

[Browse code](#)

oscaredelben authored 7 days ago

1 parent [69879667dc](#) commit [11d488dd7a5adflc5c5044ee2cdd96e127e67cd4](#)

Showing 1 changed file with 3 additions and 3 deletions.

[Show Diff Stats](#)

6 ■ ■ ■ | activerecord/lib/active\_record/relation.rb

[View file @ 11d488d](#)

```
...   @@ -75,7 +75,7 @@ def insert(values)
75   75     binds)
76   76     end
77   77
78   - # Initializes new record from relation while maintaing the current
78   + # Initializes new record from relation while maintaining the current
79   79     # scope.
80   80     #
81   81     # Expects arguments in the same format as +Base.new+.
...   @@ -99,7 +99,7 @@ def initialize_copy(other)
99   99
100  100     alias build new
101  101
102  - # Tries to +create+ a new record with the same scoped attributes
102  + # Tries to create a new record with the same scoped attributes
103  103     # defined in the relation. Returns the initialized object if validation fails.
104  104     #
105  105     # Expects arguments in the same format as +Base.create+.
...   @@ -252,7 +252,7 @@ def any?
252  252     end
253  253     end
254  254
255  - # Returns true if there are more than one records.
255  + # Returns true if there is more than one records.
256  256     def many?
257  257         if block_given?
258  258             to_a.many? { |*block_args| yield(*block_args) }
```

Hello Paul,  
*not*  
Hello, Paul



Thanks!